



Oregon

Theodore R. Kulongoski, Governor

Department of Transportation
Technical Services
Roadway Engineering Section
355 Capitol Street NE, Room 222
Salem, OR 97301-3871
Telephone 503-986-3714
FAX 503-986-3749

DATE: April 16, 2009

Addenda No. 1

TO: PLAN HOLDERS

PREPARED BY: Bobby L. Staggs
Bobby L. Staggs

APPROVED BY: Carol Cartwright, P.E.
Carol A. Cartwright

SUBJECT: I-5: Santiam Hwy. O'Xing (Albany) Section
Pacific Highway
Linn County
Grading, Paving, and Signing Project
(Bids to be opened and read April 23, 2009)

The following changes are made to the Project Bid Booklet:

1. The following changes are made to the Project Bid Items:

a. Quantity changes:

<u>Number</u>	<u>Item</u>	<u>Quantity</u>	
		<u>Original</u>	<u>New</u>
0050	Temporary Concrete Barrier, Reflectorized	3926	4065
0060	Moving Temporary Concrete Barrier	4985	4845

Make a copy of and use the new attached Bid Sheets. A Bid **not** including these new Bid Sheets **will be rejected as non-responsive**.

The following changes are made to the Project Special Provisions:

1. Section **00331 Subgrade Stabilization** - This Section is replaced with the following Section **00331**.

SECTION 00331 - SUBGRADE STABILIZATION

Comply with Section 00331 of the Standard Specifications modified as follows.:

00331.10 Materials - Replace this subsection with the following:

00331.10 Materials - Furnish materials meeting the following requirements:

Aggregate Base.....	02630
Subgrade Geotextile, Certification Level B.....	02320
Water.....	00340

The following changes are made to the Project Plans:

1. Plan sheet 2C-12 is replaced with revised plan sheet 2C-12.

These changes will be included in the Contract for this Project. It is understood that your Bid will be submitted accordingly.

Make copies of the new Bid Sheets to replace the Special Provisions Bid Schedule Sheets.

BLS:bls

Attachments: New Bid Sheets
Revised Plan Sheet

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
SECTION 0001 TEMPORARY FEATURES AND APPURTENANCES				
0010	0210-0100000A MOBILIZATION	LS ALL		
0020	0225-0100000A TEMPORARY PROTECTION AND DIRECTION OF TRAFFIC	LS ALL		
0030	0225-0102000J TEMPORARY SIGNS	SQFT 1,530.00		
0040	0225-0105000E TEMPORARY BARRICADES, TYPE III	EACH 8.00		
0050	0225-0126000F TEMPORARY CONCRETE BARRIER, REFLECTORIZED	FOOT 4,065.00		
0060	0225-0132000F MOVING TEMPORARY CONCRETE BARRIER	FOOT 4,845.00		
0070	0225-0133000E TEMPORARY IMPACT ATTENUATOR	EACH 3.00		
0080	0225-0136000E MOVING TEMPORARY IMPACT ATTENUATORS	EACH 3.00		
0090	0225-0138000E TEMPORARY IMPACT ATTENUATOR, TRUCK MOUNTED	EACH 1.00		
0100	0225-0140000F TEMPORARY GLARE SHIELDS	FOOT 400.00		
0110	0225-0141100E REFLECTIVE BARRIER PANELS	EACH 64.00		
0120	0225-0141200E REPAIR TEMPORARY IMPACT ATTENUATOR	EACH 4.00		

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0130	0225-0141400E REPAIR TEMPORARY IMPACT ATTENUATOR, TRUCK MOUNTED	1.00 EACH		
0140	0225-0145000E TEMPORARY PLASTIC DRUMS	200.00 EACH		
0150	0225-0148000E TEMPORARY REFLECTIVE PAVEMENT MARKERS	480.00 EACH		
0160	0225-0149000E TEMPORARY FLEXIBLE PAVEMENT MARKERS	250.00 EACH		
0170	0225-0150000F TEMPORARY REMOVABLE TAPE	2,400.00 FOOT		
0180	0225-0153000F TEMPORARY STRIPING	12,000.00 FOOT		
0190	0225-0154000F STRIPE REMOVAL	700.00 FOOT		
0200	0225-0162000E SEQUENTIAL ARROW SIGNS	1.00 EACH		
0210	0225-0164000E PORTABLE CHANGEABLE MESSAGE SIGNS	2.00 EACH		
0220	0225-0168000T FLAGGERS	2,240.00 HOUR		
0230	0225-0168100E FLAGGER STATION LIGHTING	4.00 EACH		
0240	0225-0169000E TRAFFIC CONTROL SUPERVISOR	50.00 EACH		
0250	0280-0100000A EROSION CONTROL	ALL LS		

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0260	0280-0104000R TEMPORARY MULCHING	1.00 ACRE		
0270	0280-0106000E CHECK DAM	40.00 EACH		
0280	0280-0110000E CONSTRUCTION ENTRANCE	1.00 EACH		
0290	0280-0111000E TIRE WASH FACILITY	1.00 EACH		
0300	0280-0114000E INLET PROTECTION	6.00 EACH		
0310	0280-9Z90000F COMPOST FILTER BERM	2,200.00 FOOT		
0320	0290-0100000A POLLUTION CONTROL PLAN	ALL LS		
0330	0470-0313000E CONCRETE INLETES, TYPE G-1, TEMPORARY	2.00 EACH		
0340	0641-0102000M TEMPORARY AGGREGATE BASE	4,000.00 TON		

SECTION 0002 ROADWORK

0350	0305-0100000A CONSTRUCTION SURVEY WORK	ALL LS		
0360	0310-0106000A REMOVAL OF STRUCTURES AND OBSTRUCTIONS	ALL LS		
0370	0320-0100000A CLEARING AND GRUBBING	ALL LS		

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0380	0330-0105000K GENERAL EXCAVATION	10,200.00 CUYD		
0390	0331-0106000J 12 INCH SUBGRADE STABILIZATION	6,085.00 SQYD		
0400	0340-0100000Q WATERING	50.00 MGAL		
0410	0350-0101000J DRAINAGE GEOTEXTILE, TYPE 2	850.00 SQYD		
0420	0350-0105000J SUBGRADE GEOTEXTILE	2,725.00 SQYD		
0430	0350-9Z90000J BI-AXIAL GEOGRID	8,375.00 SQYD		

SECTION 0003 DRAINAGE AND SEWERS

0440	0430-0100040F 4 INCH DRAIN PIPE	1,150.00 FOOT		
0450	0430-0101000E SUBSURFACE DRAIN OUTLETS	3.00 EACH		
0460	0445-035018AF 18 INCH STORM SEWER PIPE, 5 FT DEPTH	34.00 FOOT		
0470	0445-035030AF 30 INCH STORM SEWER PIPE, 5 FT DEPTH	138.00 FOOT		
0480	0470-0106000E CONCRETE MANHOLES, LARGE PRECAST	2.00 EACH		
0490	0470-0321000E CONCRETE INLETS, TYPE M-E	1.00 EACH		

SECTION 0004 BRIDGES

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0500	0599-9Z90000A REMOVE AND REINSTALL CONCRETE SLOPE PAVING	LS ALL		

SECTION 0005 BASES

0510	0620-0120000J COLD PLANE PAVEMENT REMOVAL, 2 INCHES DEEP	SQYD	2,000.00	
0520	0641-0102000M AGGREGATE BASE	TON	10,050.00	

SECTION 0006 WEARING SURFACES

0530	0745-0402000M LEVEL 4, 1/2 INCH DENSE HMAC	TON	2,800.00	
0540	0745-0441000M LEVEL 4, 1/2 INCH DENSE HMAC IN TEMPORARY	TON	1,650.00	
0550	0745-0640000M PG 70-22 ASPHALT IN HMAC	TON	290.00	
0560	0749-0100000E EXTRA FOR ASPHALT APPROACHES	EACH	1.00	
0570	0755-0107000J CONTINUOUSLY REINFORCED CONCRETE PAVEMENT 11 INCH THICK	SQYD	3,322.00	

SECTION 0007 PERMANENT TRAFFIC SAFETY AND GUIDANCE DEVICES

0580	0811-0101000F CABLE BARRIER, TEST LEVEL 3	FOOT	252.00	
0590	0811-0104000E CABLE BARRIER GUARDRAIL CONNECTIONS	EACH	4.00	

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0600	0820-0127000F CONCRETE BARRIER, TALL	475.00 FOOT		
0610	0830-9Z90000E REMOVE AND REINSTALL IMPACT ATTENUATOR	1.00 EACH		
0620	0840-0102000E DELINEATORS, TYPE 2	4.00 EACH		
0630	0857-0101000L CONTINUOUS RUMBLE STRIPS	0.78 MILE		
0640	0865-0103000F THERMOPLASTIC, PROFILE, 120 MILS, EXTRUDED	650.00 FOOT		
0650	0865-0107000F THERMOPLASTIC, NON-PROFILE, 120 MILS, EXTRUDED	7,000.00 FOOT		

SECTION 0008 PERMANENT TRAFFIC CONTROL AND ILLUMINATION SYSTEMS

0660	0905-0100000A REMOVE EXISTING SIGNS	ALL LS		
0670	0910-0100000K WOOD SIGN POSTS	152.00 FBM		
0680	0920-0100000A SIGN SUPPORT FOOTINGS	ALL LS		
0690	0930-0106000A EXIT NUMBER SIGN MOUNTS	ALL LS		
0700	0930-0111000A MULTI-POST BREAKAWAY SIGN SUPPORTS	ALL LS		
0710	0930-0112000A TRIANGULAR BASE BREAKAWAY SIGN SUPPORTS	ALL LS		

BID SCHEDULE

CONTRACT ID: 14005
PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
ADDENDUM NUMBER: 1

ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0720	0940-0102000J TYPE "B" SIGNS IN PLACE	4.00 SQFT		
0730	0940-0113000J TYPE "G" SIGNS IN PLACE	274.50 SQFT		
0740	0940-0124000J TYPE "W1" SIGNS IN PLACE	9.00 SQFT		
0750	0940-0134000J TYPE "Y1" SIGNS IN PLACE	36.00 SQFT		
0760	0970-0105000A SWITCHING, CONDUIT, AND WIRING	ALL LS		

SECTION 0009 RIGHT-OF-WAY DEVELOPMENT AND CONTROL

0770	1030-0102000E SEEDING MOBILIZATION	1.00 EACH		
0780	1030-0103000R TEMPORARY SEEDING	1.00 ACRE		
0790	1030-0108000R PERMANENT SEEDING	1.50 ACRE		
0800	1040-0107000K SOIL CONDITIONER	170.00 CUYD		
0810	1040-0112000E CONIFER TREES, 4 FT HEIGHT	5.00 EACH		
0820	1040-0149000E DECIDUOUS TREES, NO. 3 CONTAINER	3.00 EACH		
0830	1040-0153000E SHRUBS, NO. 1 CONTAINER	150.00 EACH		

BID SCHEDULE

CONTRACT ID: 14005
 PROJECT KEY: 14953

PROJECT: I-5: SANTIAM HWY O'XING (ALBANY)
 ADDENDUM NUMBER: 1



ITEM NO	ITEM DESCRIPTION	QUANTITY AND UNITS	UNIT PRICE (IN FIGURES)	BID AMOUNT (IN FIGURES)
0840	1040-0154000E SHRUBS, NO. 2 CONTAINER	25.00 EACH		
0850	1040-0190000K BARK MULCH	40.00 CUYD		
	TOTAL BID			


STAGE II

42V-44

UNDER TRAFFIC

- • • 28" TUBULAR MARKERS ON 40' MAX. SPACING
- ○ ○ TEMP. PLASTIC DRUMS ON 40' MAX. SPACING

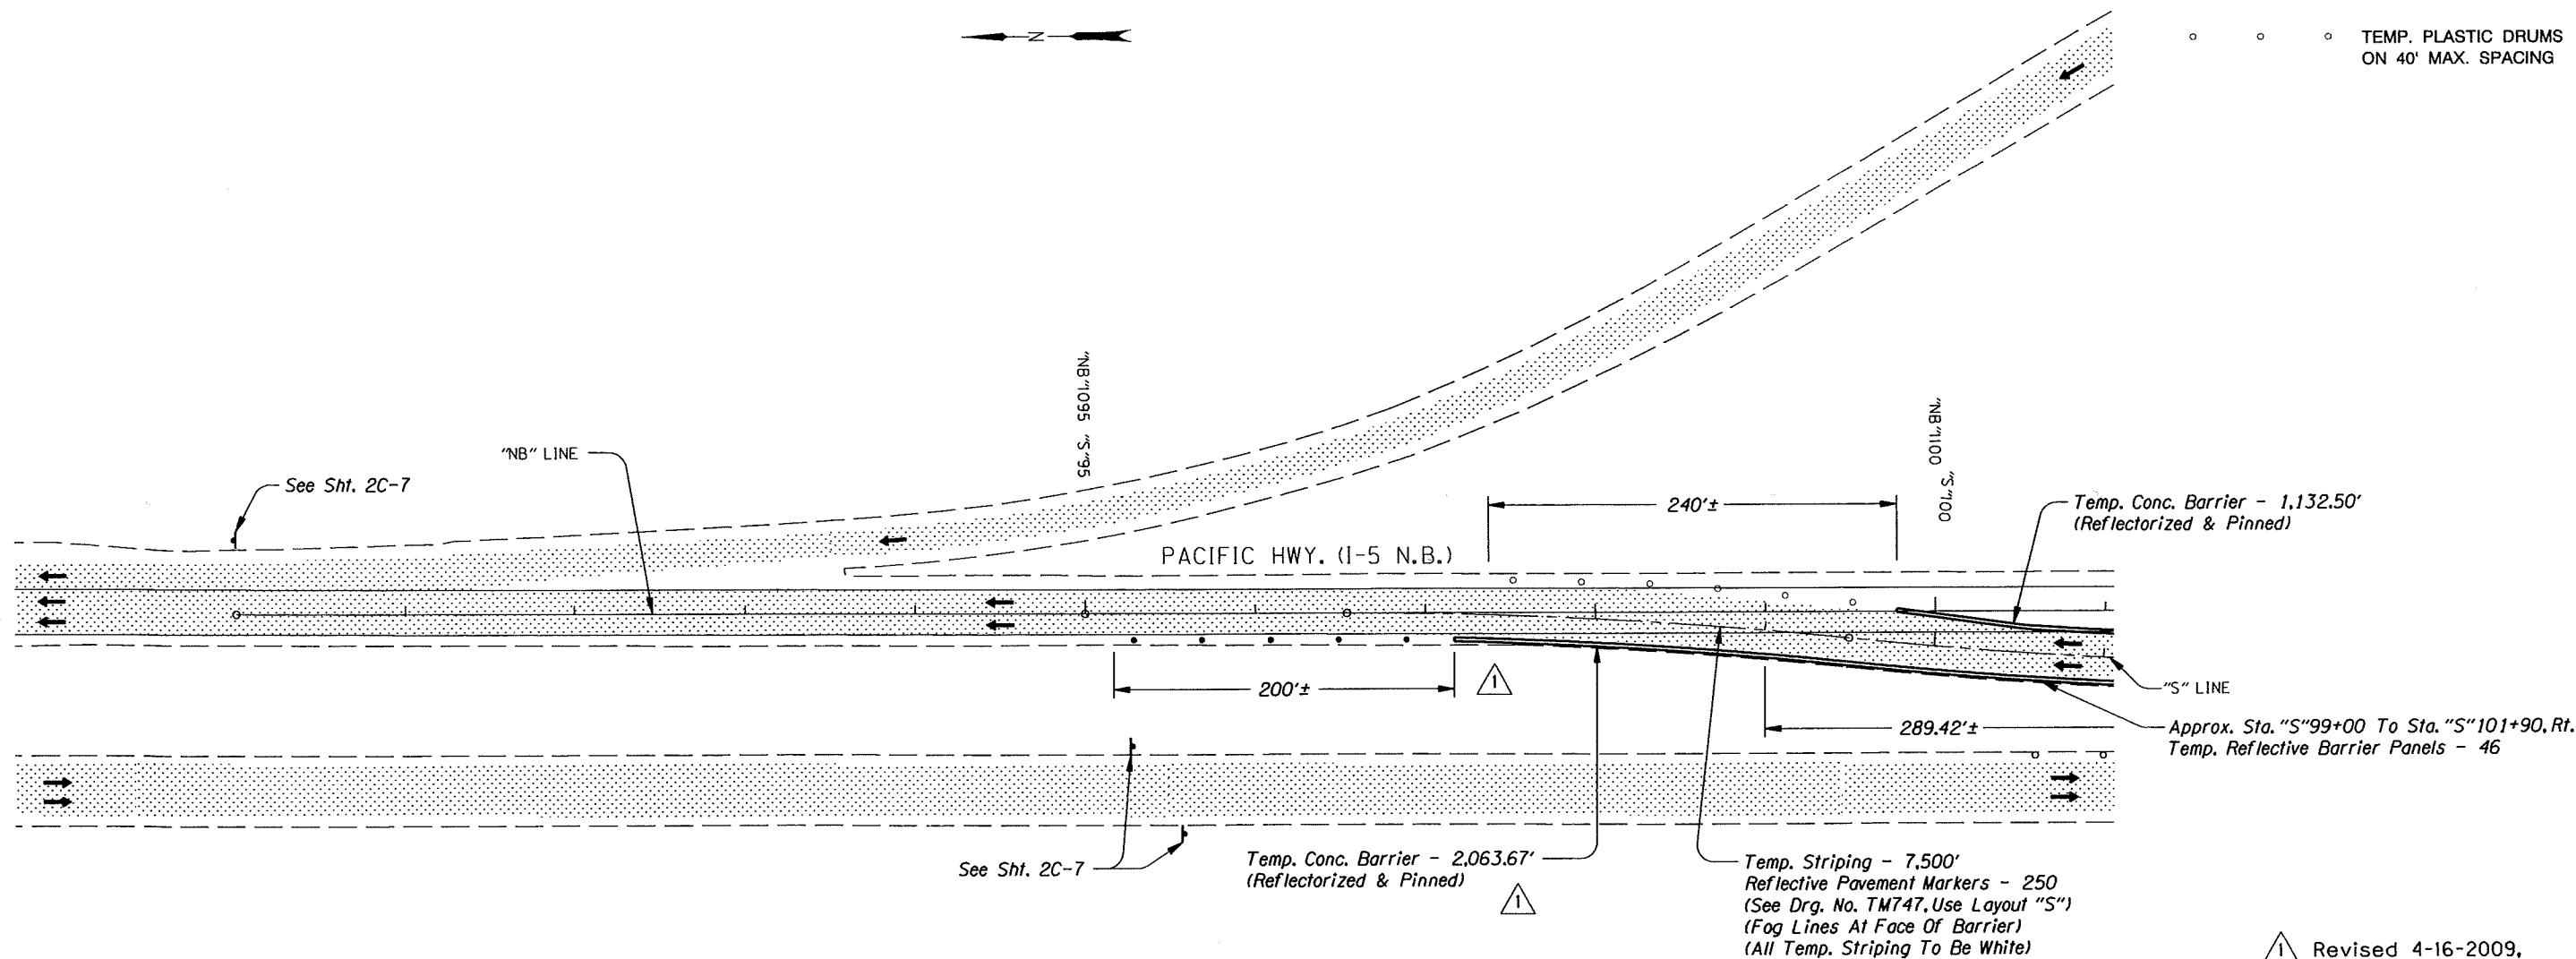

 OREGON DEPARTMENT OF TRANSPORTATION	
REGION 2 TECH CENTER	
I-5: SANTIAM HWY. O'XING (ALBANY) SEC. PACIFIC HIGHWAY LINN COUNTY	
Traffic Control Plans Designer - Don Morris Alignment & Staging Designer - Kathy Fry Drafter - Jeff Larson	
TRAFFIC CONTROL PLAN	SHEET NO. 2C-12

REGISTERED PROFESSIONAL ENGINEER
18,544
Angela J. Kargel
OREGON
JULY 10, 1996
ANGELA J. KARGEL
RENEWS: 6-30-2009