
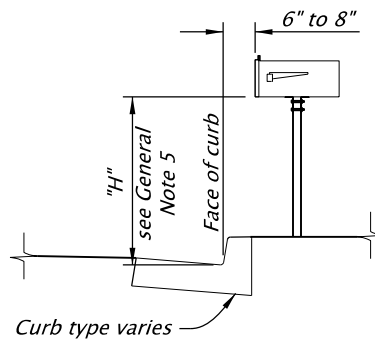
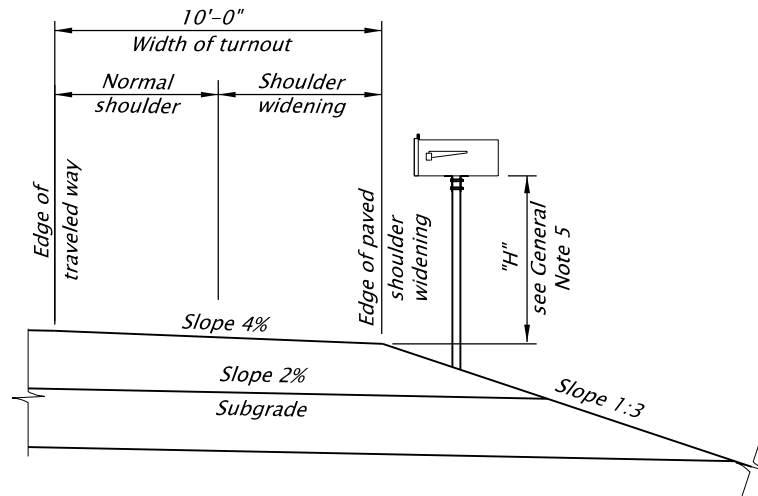
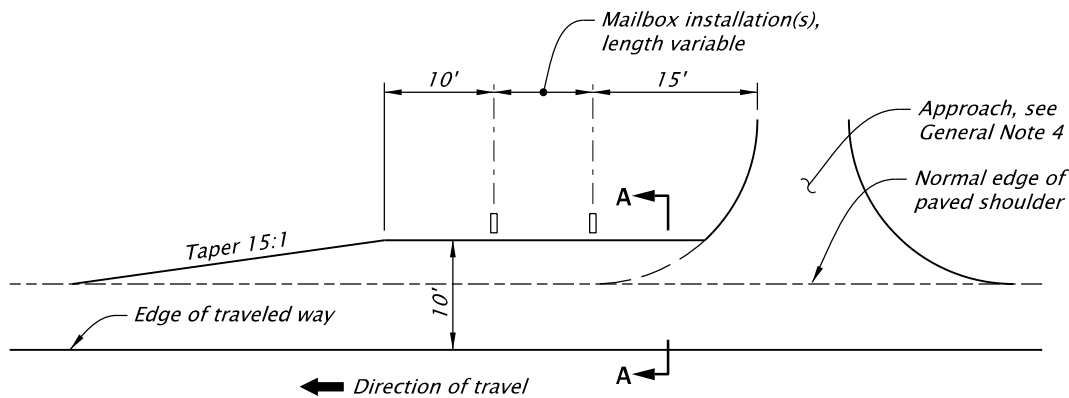
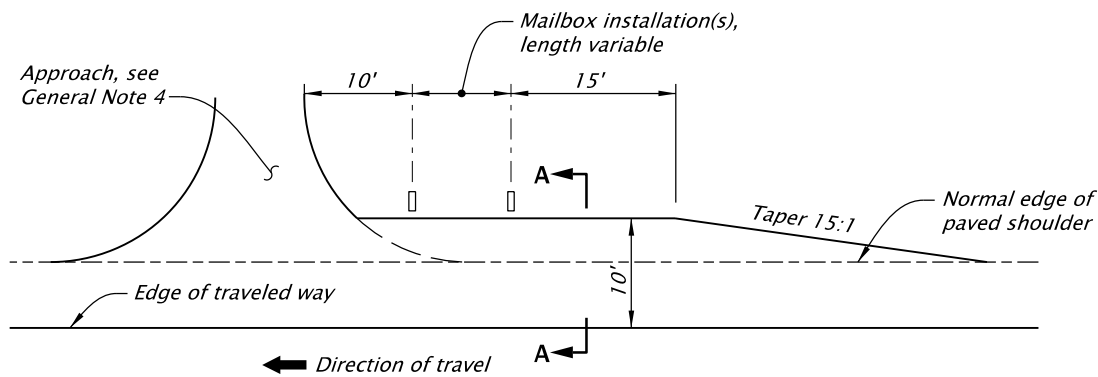
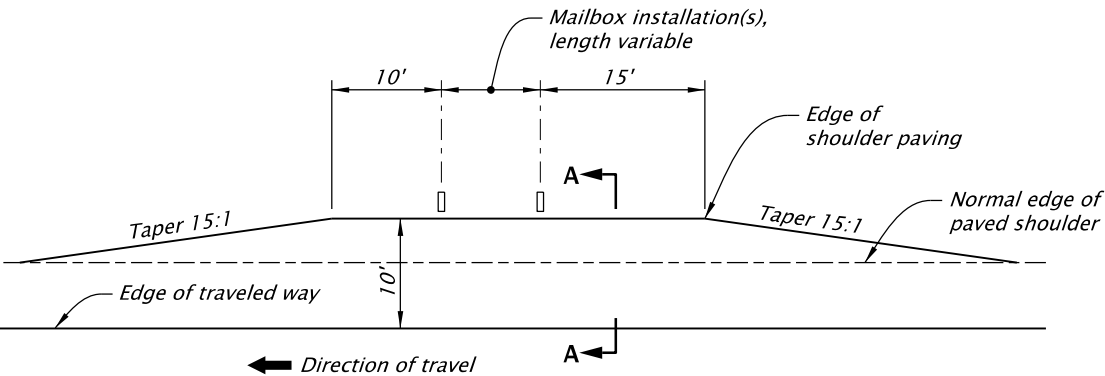
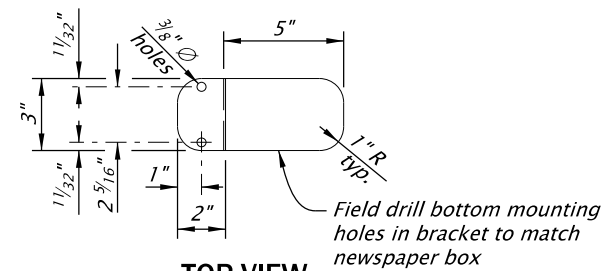
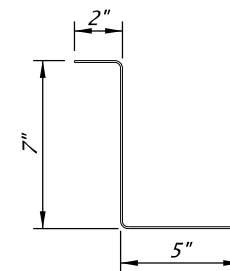


CURBED SECTION

NON-CURBED SECTION

TYPICAL MAILBOX INSTALLATIONS

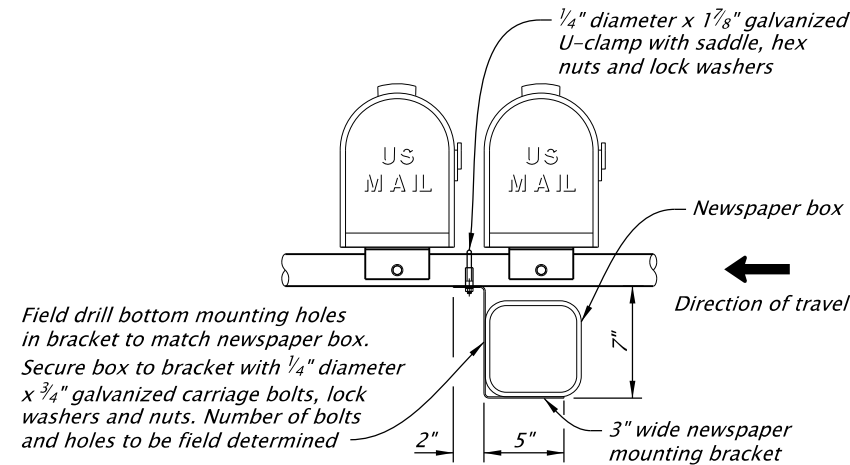


FRONT VIEW

TOP VIEW

NEWSPAPER BOX MOUNTING BRACKET

(14 ga.)

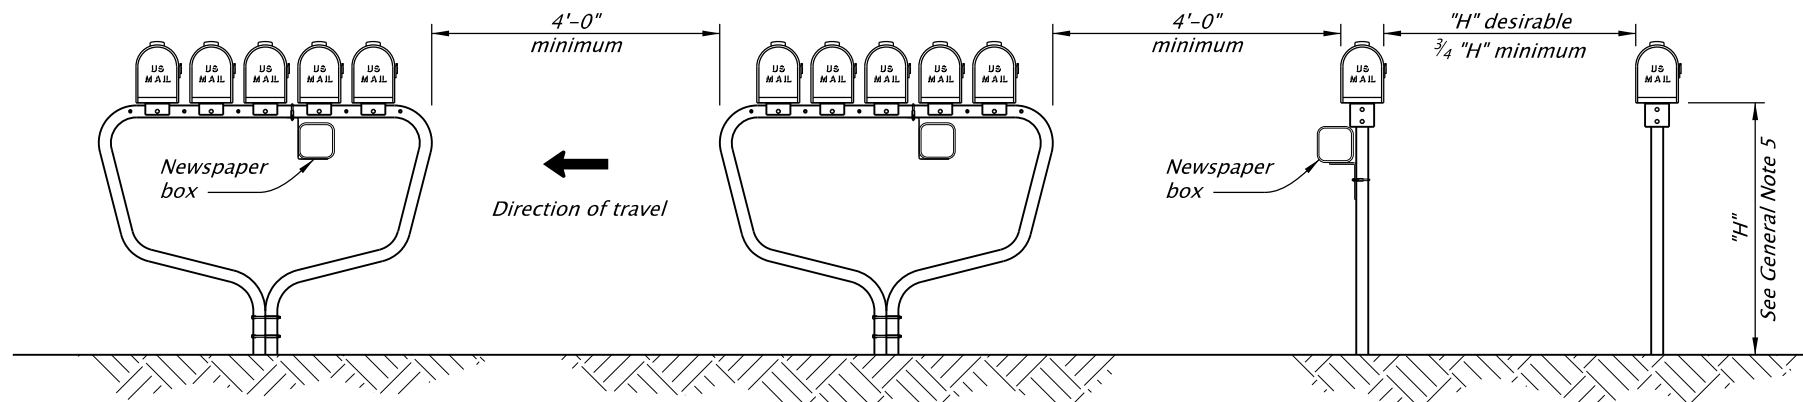

GENERAL NOTES FOR ALL DETAILS ON THIS SHEET:

1. All holes in the tube support frame are to be predrilled by the manufacturer.
2. Other proprietary products available as listed in ODOT's QPL.
3. For mailbox support details, see Std. Dwg. RD100.
4. For approach details, see Std. Dwg. RD715.
5. Mounting height ("H") shall be from 41 inches minimum to 45 inches maximum (42 inches nominal), measured from vehicle driving surface.
6. See project plans for details not shown.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.

OREGON STANDARD DRAWINGS

MAILBOX
INSTALLATION

2024

DATE	REVISION	DESCRIPTION
01-2024	REVISED NOTES AND DETAILS, UPDATED DRAWING CAD STANDARDS	
CALC. BOOK NO.	N/A	SDR DATE

19-JAN-2024

RD101

Effective Date: June 1, 2026 – November 30, 2026