
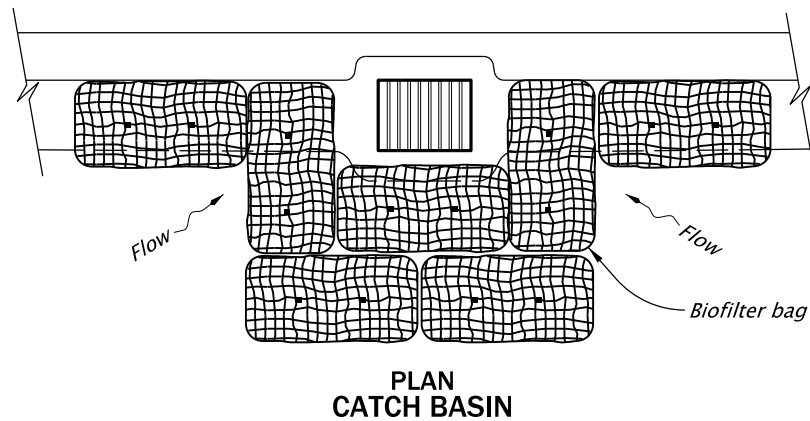
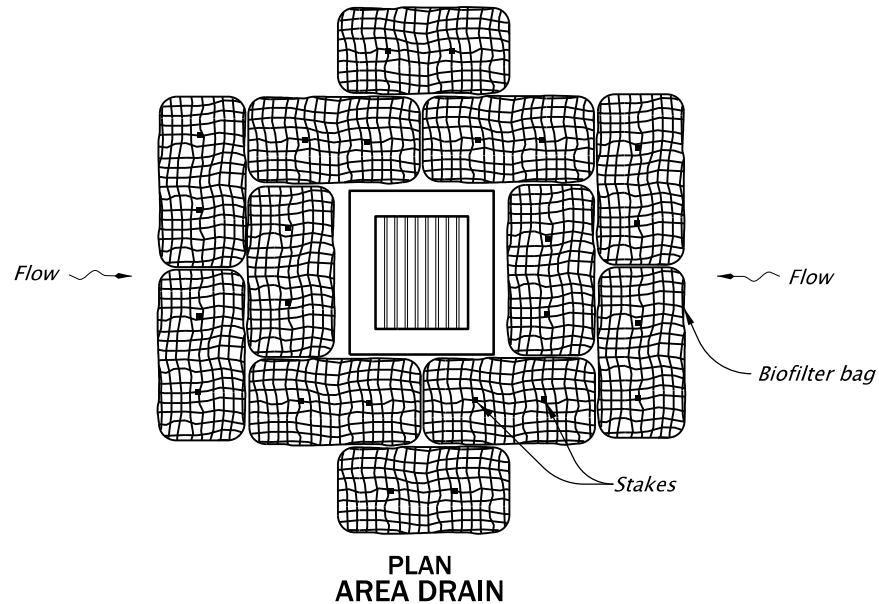
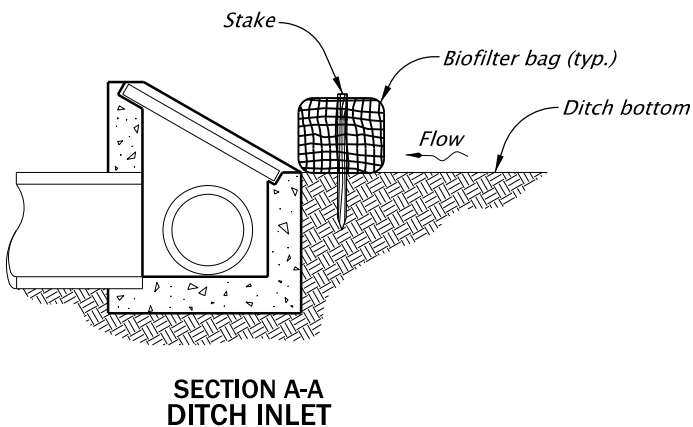


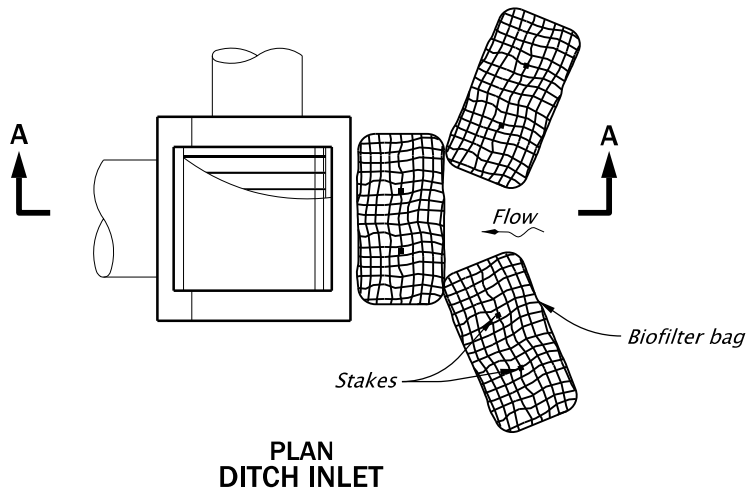

BIOFILTER BAGS - TYPE 4
NOT TO SCALE

- NOTES:
- 1. Stake biofilter bags with 2"x2"x36" wood stakes, and use a minimum 2 stakes per bag. Drive stakes a minimum of 6" into the ground and flush with the top of the bags.
 - 2. Omit stakes when bags are placed on pavement surface.
 - 3. Overlap all bag joints 6".

- 4. Biofilter bags used on active roadways are easily displaced and made ineffective if struck by vehicles. If struck by a cyclist, falls with injury could result. On active roadways alternative inlet protection should be considered.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.			
OREGON STANDARD DRAWINGS			
INLET PROTECTION TYPE 4			
2024			
DATE	REVISION DESCRIPTION		
01-2021	REMOVED CALC BOOK NUMBERS		
CALC. BOOK NO.	N/A	SDR DATE	20-JAN-2021
RD1015			