



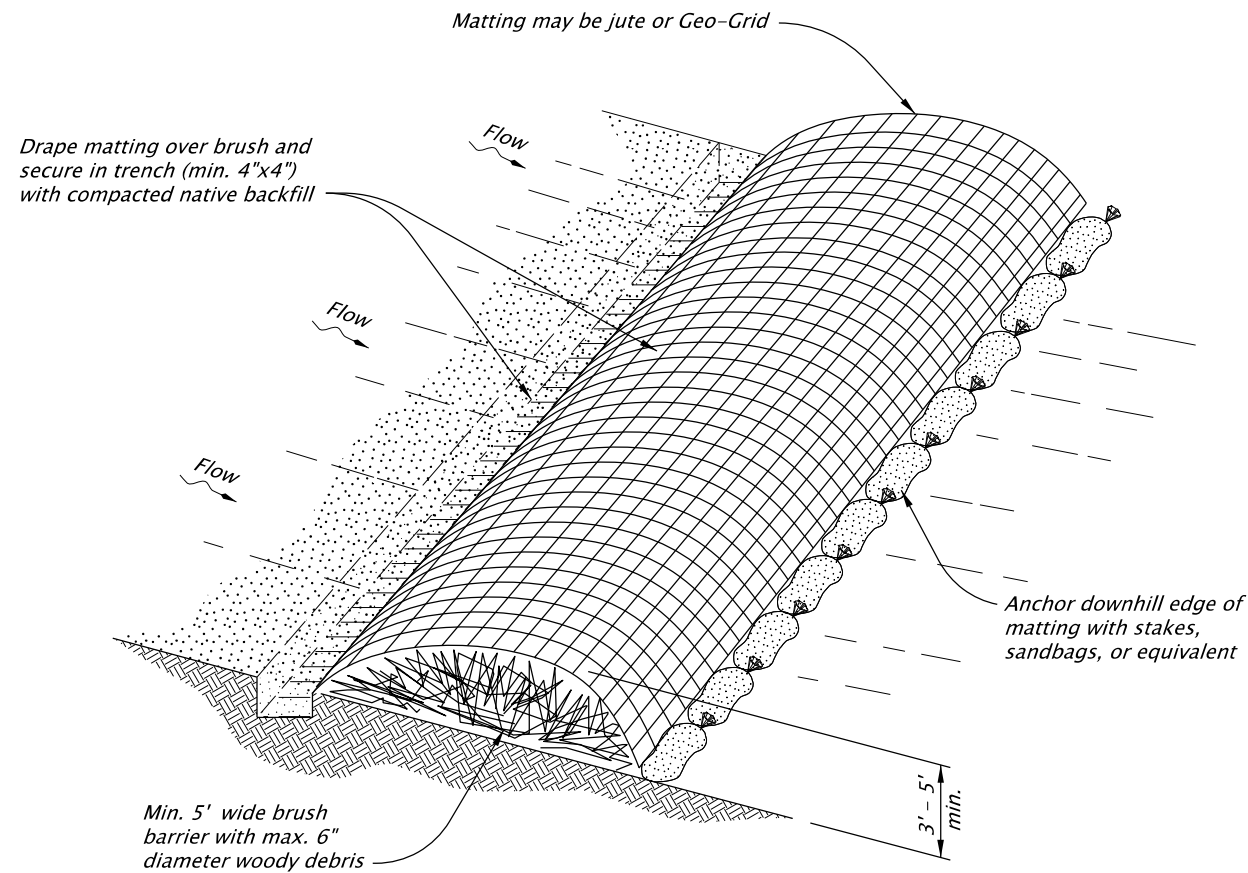

BRUSH BARRIER - TYPE 5
NOT TO SCALE

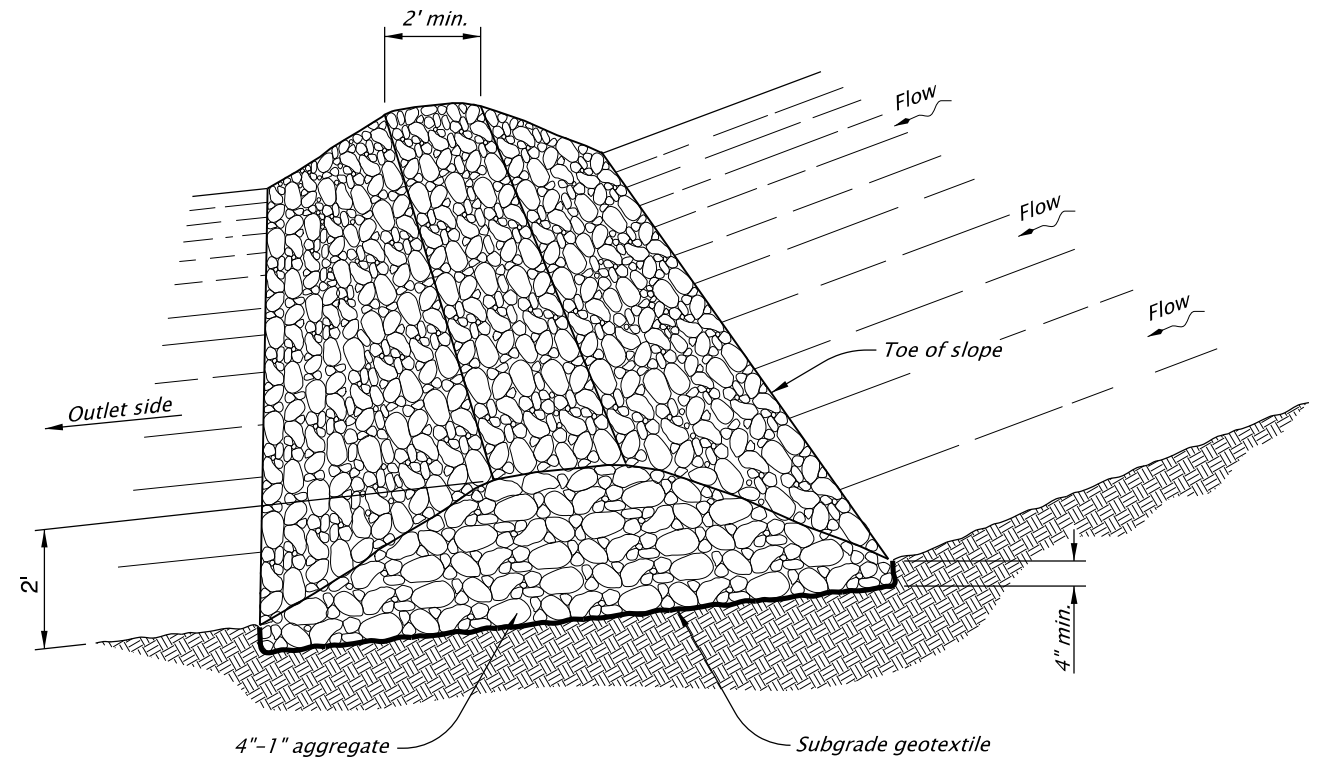

AGGREGATE BARRIER - TYPE 6
NOT TO SCALE

NOTES:

1. Direct diverted flows from the outlet side of the rock filter berm/dams onto a stabilized area, such as vegetation and or rock, or into a sediment trapping facility.
2. Embed barrier a min. of 4" into the existing ground/embankments.
3. Use 1:3 or flatter side slope. Within the safety clear zone, use 1:6 or flatter side slopes.
4. Use 4"-1" clean aggregate.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.

OREGON STANDARD DRAWINGS

**SEDIMENT BARRIER
TYPE 5 AND 6**

2024

DATE	REVISION	DESCRIPTION
01-2021	REMOVED	CALC BOOK NUMBERS
CALC. BOOK NO.	N/A	SDR DATE

20-JAN-2021

RD1031

Effective Date: June 1, 2026 – November 30, 2026