

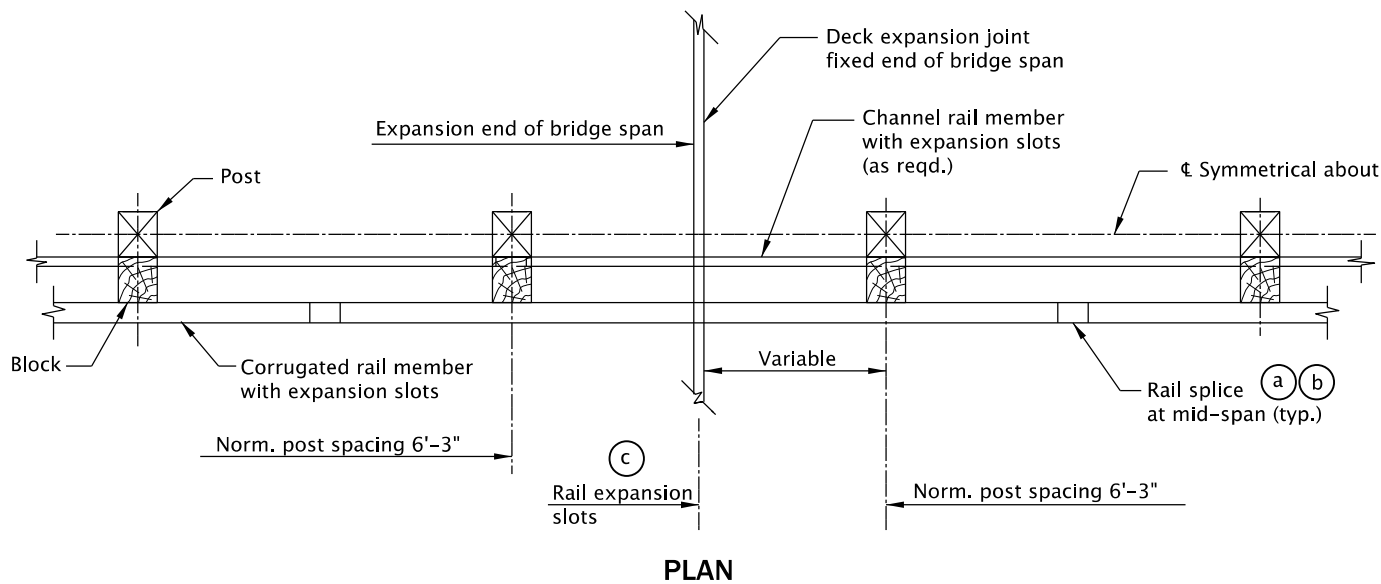
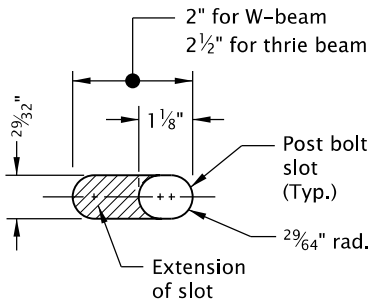


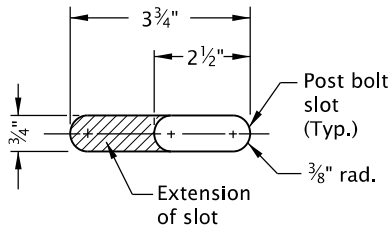

NOTES:

- (a) Place 2 - 1/32" polytetrafluoroethylene (TFE) sheets between corrugated rail members. The sheets shall be 12 1/2"x1'-7".
- (b) Adjust nuts to provide a sliding fit and set threads to prevent loosening.
- (c) Extension of slot toward bridge deck expansion joint.

GUARDRAIL INSTALLATION
AT BRIDGE DECK EXPANSION JOINT

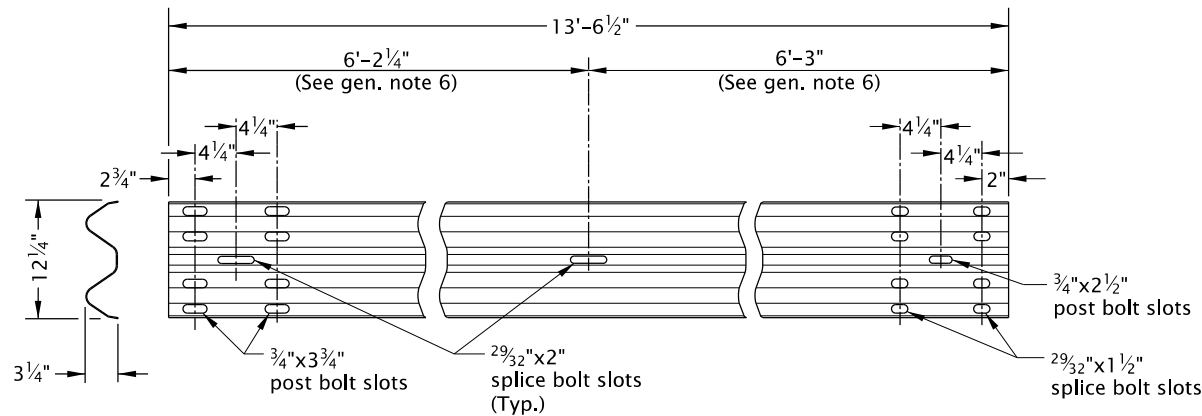

GENERAL NOTES FOR ALL DETAILS ON THIS SHEET:

1. See appropriate guardrail standard drawing(s) for details not shown.
2. Median barrier post spacing shall be 6'-3" on centers.
3. Lap guardrail in direction of adjacent traffic.
4. Wood blocks shall be toe-nailed to post with 16d galvanized nails to prevent block rotation.
5. Wood blocks shown. Blocks of an approved alternate material may be used. See ODOT's QPL.
6. Spacing may vary depending on application.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.

OREGON STANDARD DRAWINGS
MIDWEST GUARDRAIL SYSTEM
INSTALLATION AT BRIDGE DECK
EXPANSION JOINT

2024

DATE	REVISION	DESCRIPTION

CALC. BOOK NO. - - - -	N/A - - - -	SDR DATE - 13-JAN-2020 -	RD412
---------------------------	-------------	-----------------------------	-------