


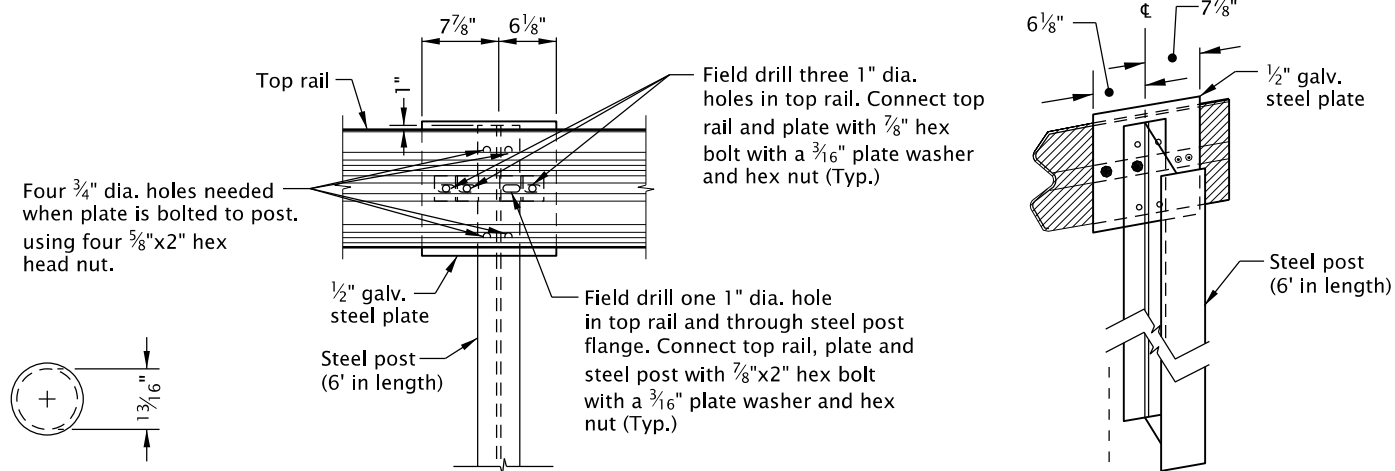





FRONT
REAR
TOP RAIL ANCHOR POST/PLATE ATTACHMENT




PIPE SLEEVE SPACER




TOP VIEW



TOP VIEW




TOP VIEW

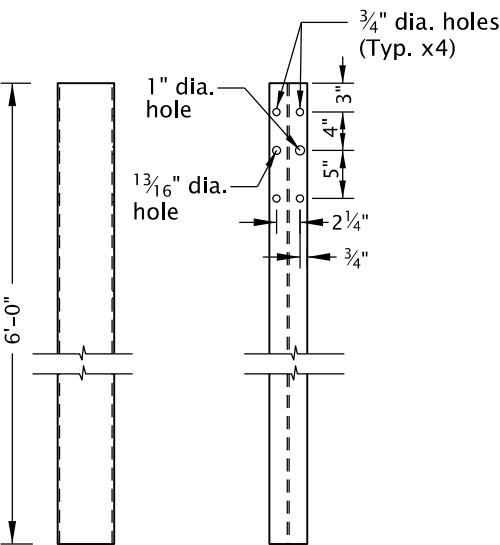

SIDE

FRONT

6' - 0" LENGTH
(Post 1-3)

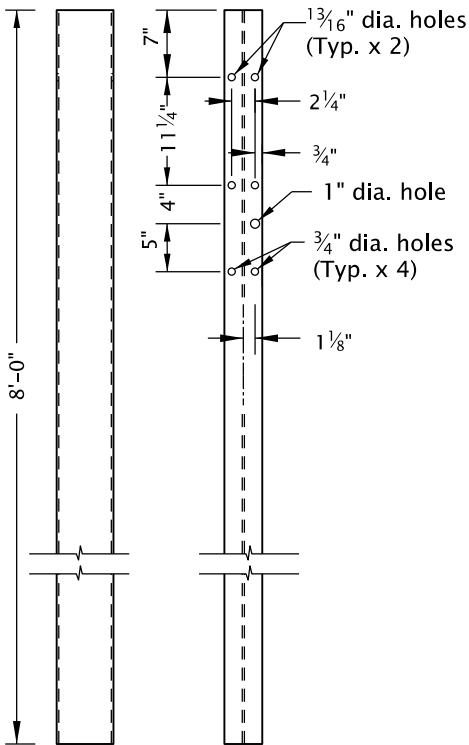


SIDE

FRONT

8' - 0" LENGTH
(Post 4)


WIDE-FLANGE STEEL POST
(W6 x 9 or W6 x 8.5)

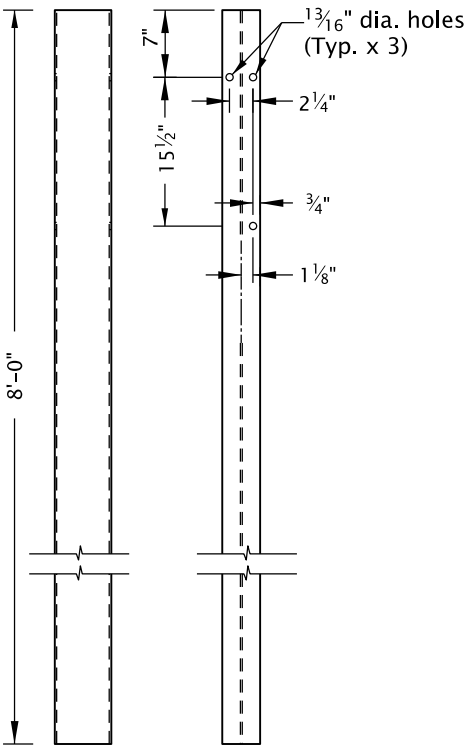


SIDE

FRONT

8' - 0" LENGTH

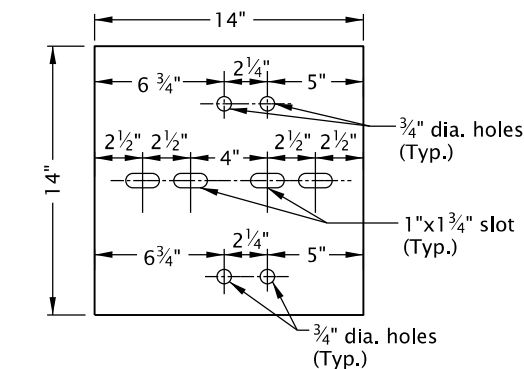


FRONT



SIDE


BURIED IN BACKSLOPE STEEL ANCHOR PLATE

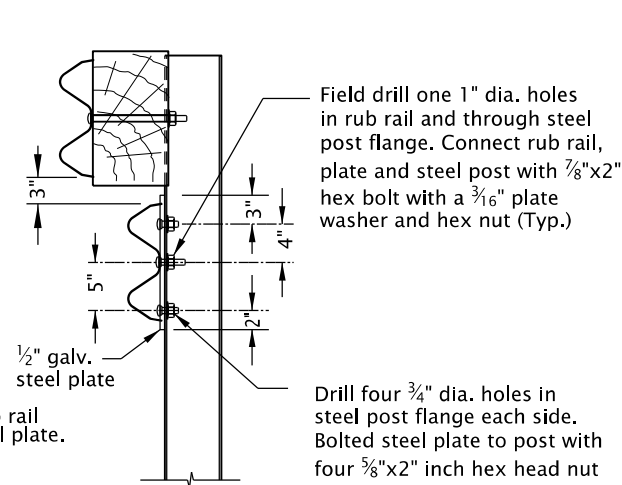

FRONT

SIDE

RUB RAIL ANCHOR POST/PLATE ATTACHMENT

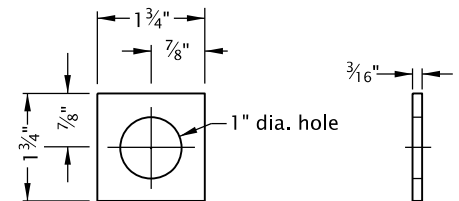

FRONT

SIDE

PLATE WASHER

GENERAL NOTES FOR ALL DETAILS ON THIS SHEET

1. See appropriate guardrail standard drawing(s) for details not shown.
2. Use 1/2" steel plate meeting requirements of ASTM A36.
3. Galvanizing required for plate and hardware.
4. Use zinc rich paint to coat field drilled holes.
5. Hex head bolts are ASTM A307.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.			
OREGON STANDARD DRAWINGS			
MIDWEST GUARDRAIL SYSTEM			
BURIED IN BACKSLOPE			
TERMINAL ANCHOR PARTS			
2024			
DATE	REVISION DESCRIPTION		
CALC. BOOK NO.	N/A	SDR DATE	20-JUL-2020
RD437			