




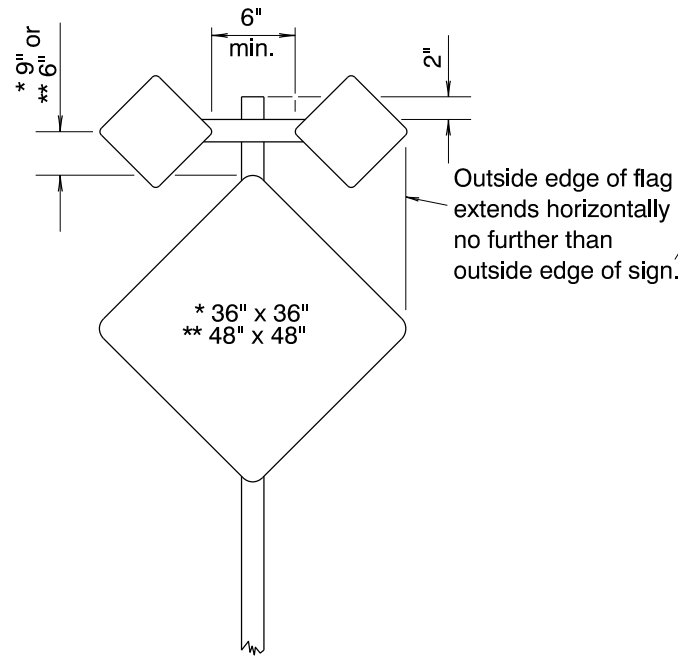


WARNING

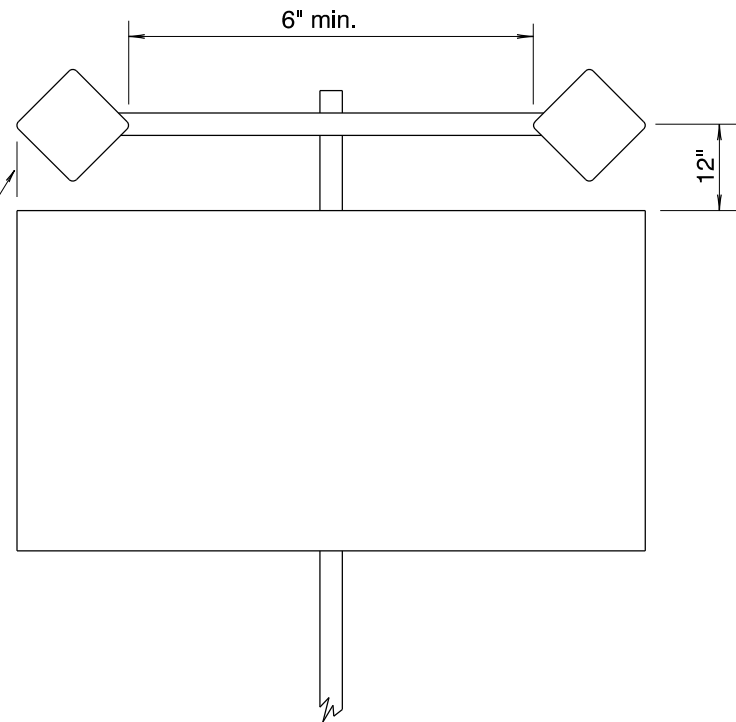


REGULATORY OR GUIDE SIGN
(1 POST)

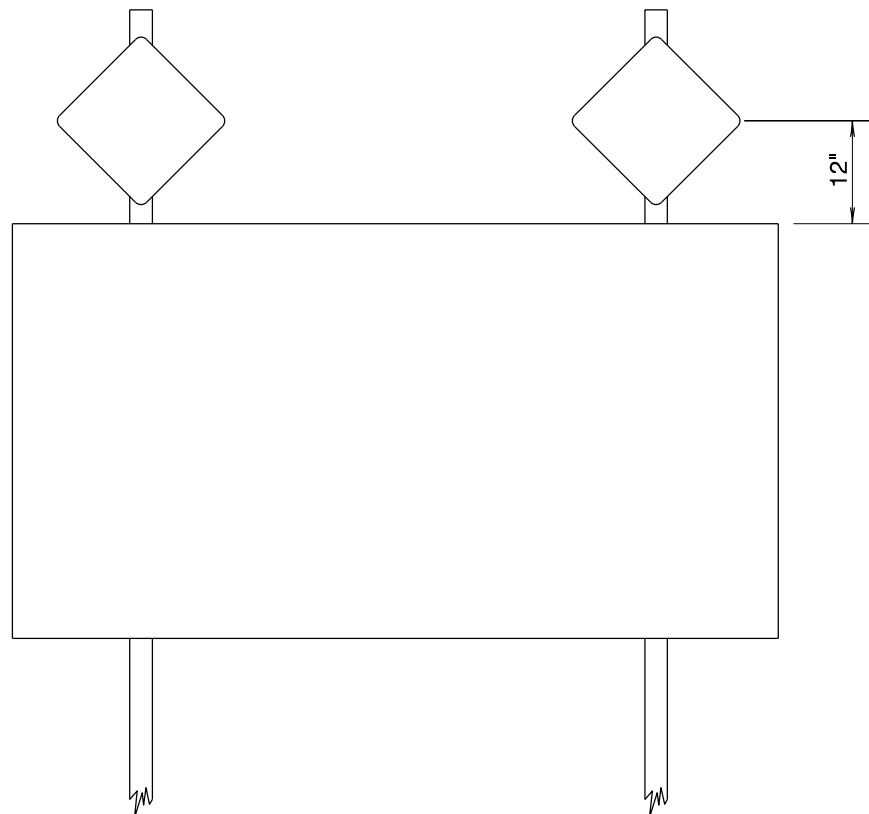


GUIDE SIGN
(2-POSTS)

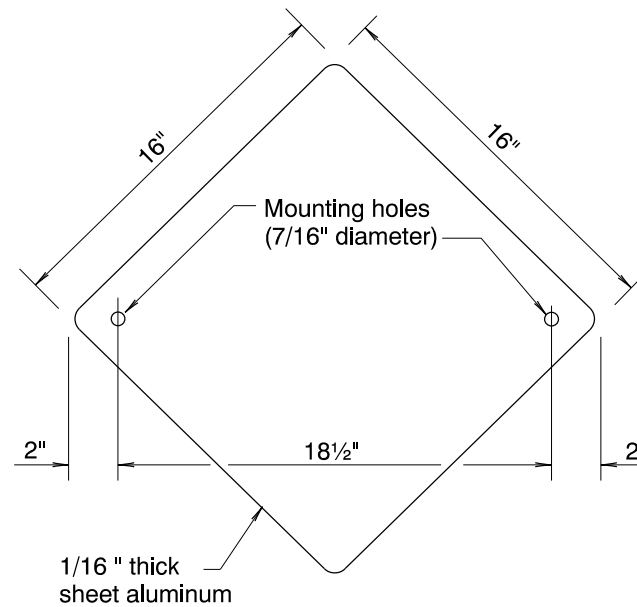

FLAG DETAILS

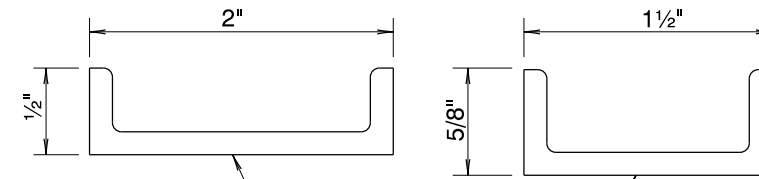


C" CHANNELS

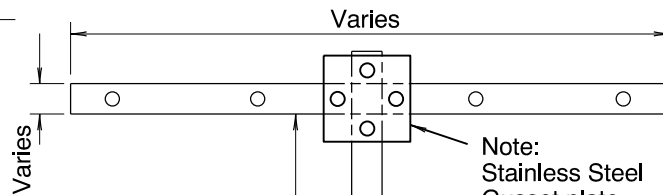


"C" CHANNEL WITH EXTENSION

Note:
Stainless Steel
Gusset plate.
4"x4" square.
1/4" to 1/2" thick.
Drill holes in plate to align with
bolt holes in extension and bar.

Note:
Mount extension to post in
such a manner as to provide
the required vertical clearance
between sign and flags.

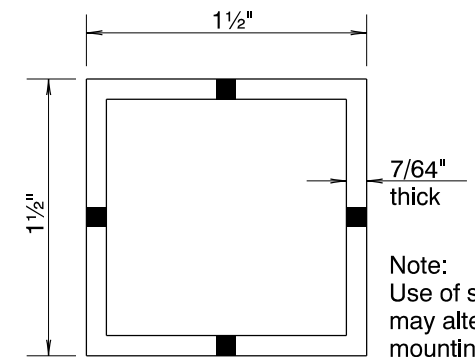


SQUARE TUBING

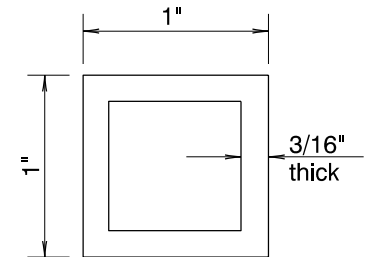

SQUARE TUBING

OPTIONAL MOUNTING
BAR MATERIALS

Note:
All mounting holes (to post and to flags)
are to be 7/16" diameter.
Use 3/8" x 3" lag bolts to mount bar to
wood post.
Use manufacturer recommended
fasteners to mount bar to metal post.
Mount flag(s) to bar using
3/8" drive rivets.

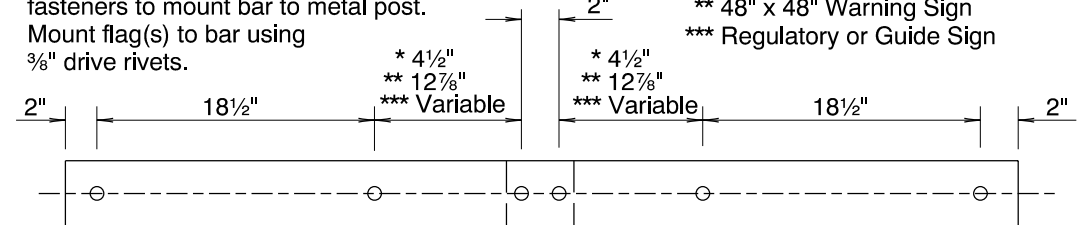

MOUNTING BAR DETAIL

*The selection and use of this
Standard Drawing, while
designed in accordance with
generally accepted engineering
principles and practices, is the
sole responsibility of the user
and should not be used without
first consulting a Registered
Professional Engineer.*

All materials shall be in accordance with
the current Oregon Standard Specifications.

OREGON STANDARD DRAWINGS

FLAG BOARD
MOUNTING DETAILS

2024

DATE	REVISION	DESCRIPTION
CALC. BOOK NO.	N/A	SDR DATE

10 DEC 2009

TM204

Effective Date: June 1, 2026 – November 30, 2026