


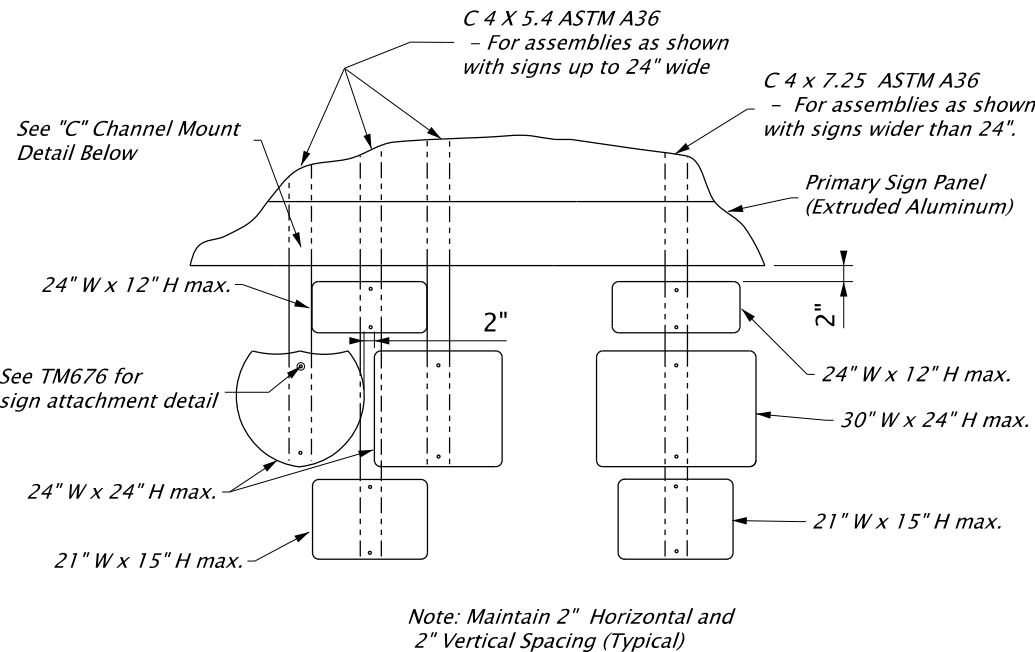


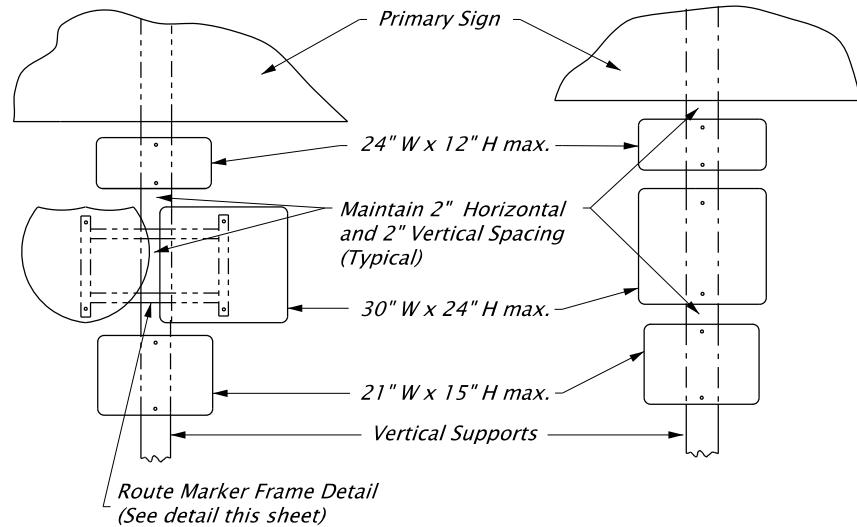

ROUTE MARKERS MOUNTED TO EXTRUDED PANELS
No Scale

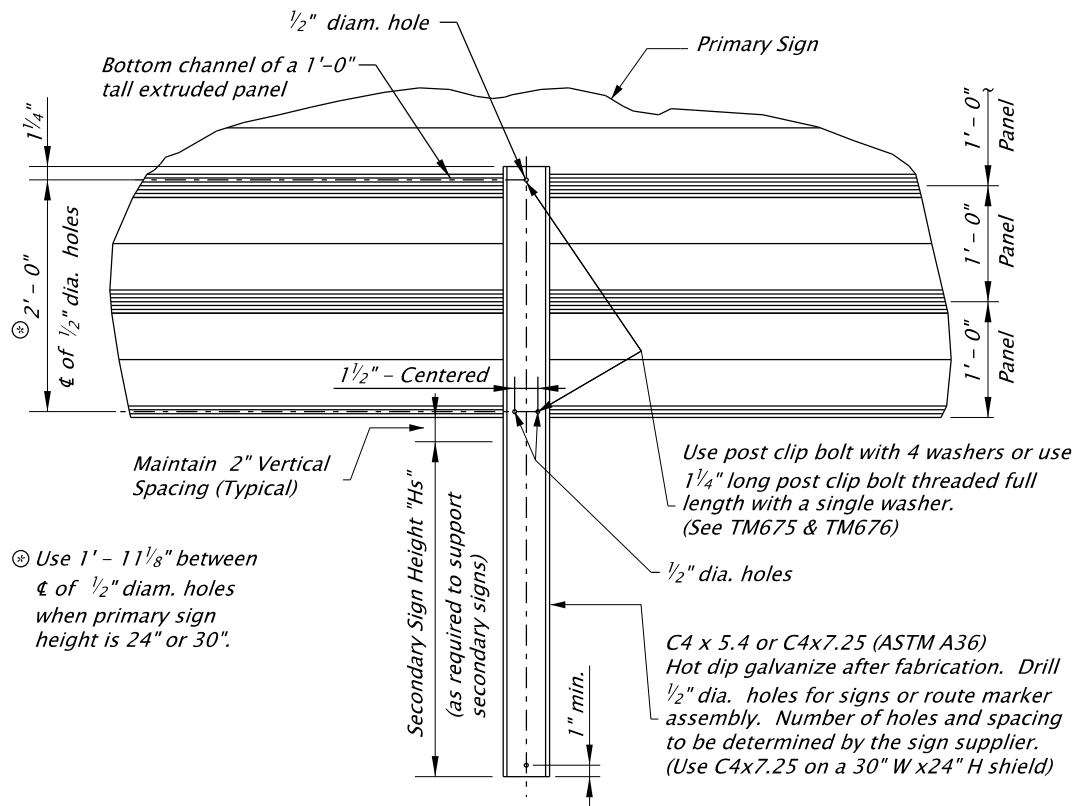

ROUTE MARKERS MOUNTED TO VERTICAL SUPPORTS
No Scale

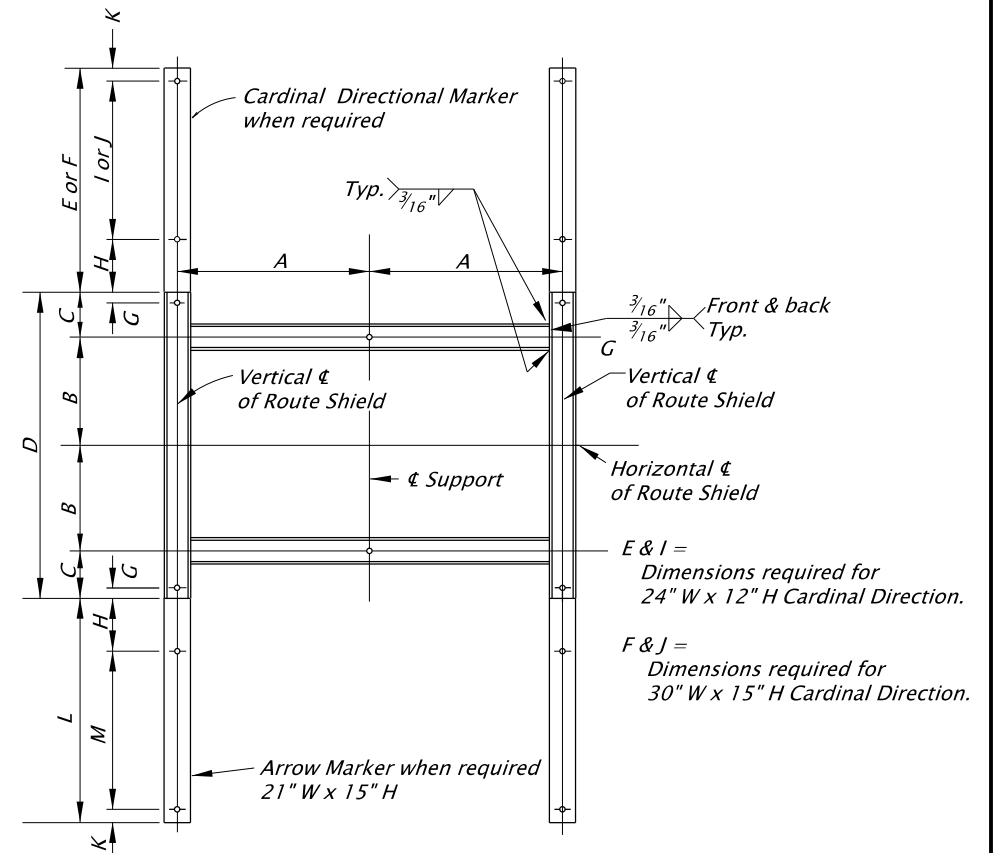

"C" CHANNEL CONNECTION DETAIL
No Scale

- GENERAL NOTES:
- W = Width of sign.
 - H = Height of sign.

Shield Sizes	A	B	C	D	E	F	G	H	I	J	K	L	M
2 - 24" x 24"	13	8	3 1/2	23	14	17	3/4	4	9	12	1	17	12
1 - 24" x 24" & 1-30" x 24"	16	8	3 1/2	23	14	17	3/4	4	9	12	1	17	12
2 - 30" x 24"	16	8	3 1/2	23	14	17	3/4	4	9	12	1	17	12
2 - 36" x 36"	19	12	5 1/2	35	14	17	1 3/8	4	9	12	1	17	12
1 - 36" x 36" & 1-45" x 36"	23 1/2	12	5 1/2	35	14	17	1 3/8	4	9	12	1	17	12
2 - 45" x 36"	23 1/2	12	5 1/2	35	14	17	1 3/8	4	9	12	1	17	12

Note: Route Marker frames shall be constructed from 2" x 2" x 3/16" ASTM A53 GR B tubing, galvanized after fabrication. Provide 7/16" holes, 3/8" galvanized steel bolts, washers, and lock-nuts for mounting route marker frame to post. For sign attachments see TM676. Dimensions are in inches and signs are shown in width and height.

ROUTE MARKER FRAME DETAIL
No Scale

Accompanied by dwgs. TM675, TM676

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.

OREGON STANDARD DRAWINGS

SECONDARY SIGN
MOUNTING DETAILS

2024

DATE	REVISION	DESCRIPTION
01-2022	REVISED "C" CHANNEL DETAILS AND ADDED 30" SIGN TO CUSTOM HOLE SPACING	
07-2024	SECOND ROW A DIMENSION WAS 14 1/2, FIFTH ROW A DIMENSION WAS 21 1/2,	
	UPDATED ALL SIGNS TO WIDTH BY HEIGHT, DEFINED W, AND DEFINED H	

CALC. BOOK NO.	N/A	SDR DATE	12-JUL-2024	TM678
----------------	-----	----------	-------------	-------

Effective Date: June 1, 2026 – November 30, 2026