NOTE:
Install reflectors only on median barrier at 2'-6"± intervals

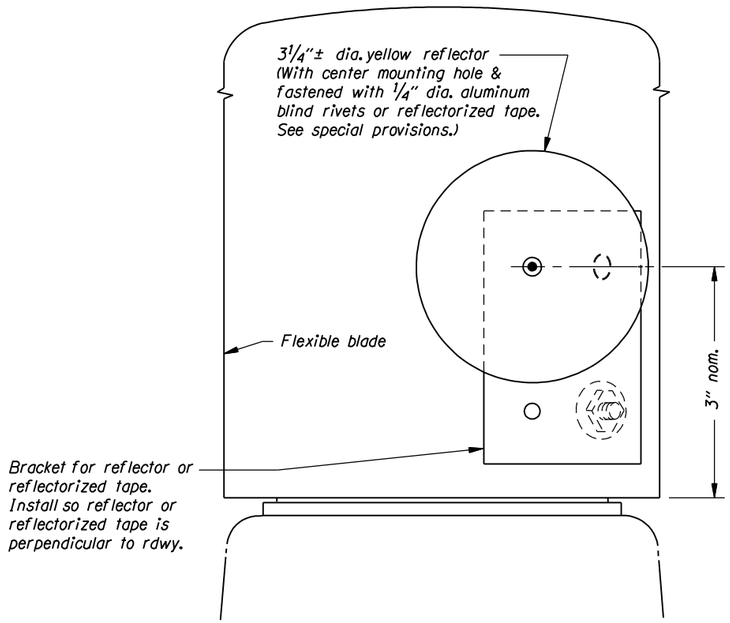

REFLECTOR DETAIL

NOTE:
All blades to be installed perpendicular to the plane of the barrier top

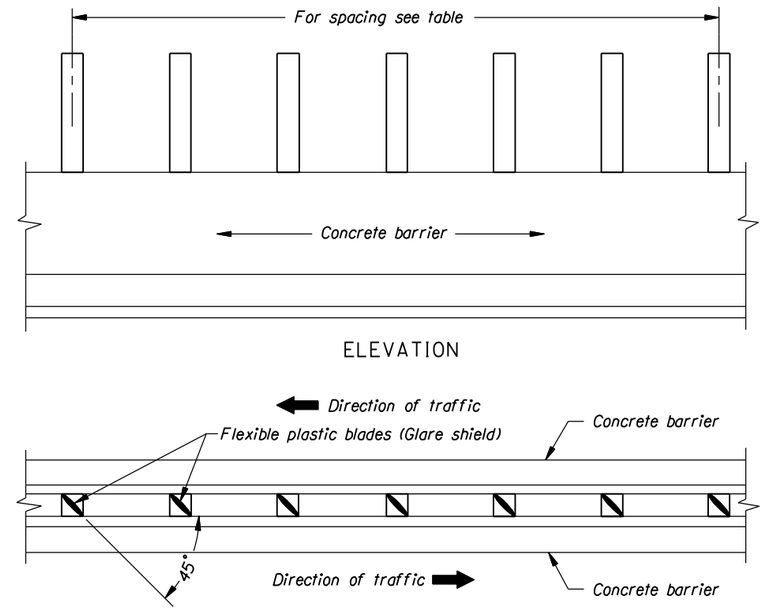

MEDIAN STA. TO STA.	* FLEXIBLE PLASTIC BLADES SPACING = CENTER TO CENTER	

* Spacing is based on 9½" blade width.
If narrower blades are used, spacing will be reduced.

GLARE SHIELD INSTALLATION DETAIL

The selection and use of this detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

OREGON DEPARTMENT OF TRANSPORTATION
TECHNICAL SERVICES
DETAILS

GLARE SCREEN (MEDIAN)

DETAIL NO. DET1585

DET1585.dgn 10-AUG-2006

DET1585