


TEMPORARY INTERCEPTOR DIKE
TYPE 2

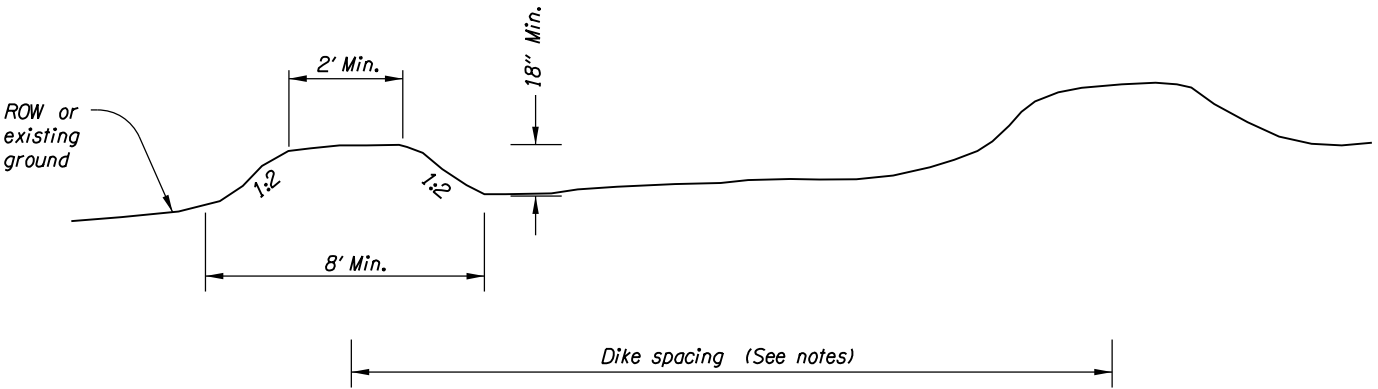


SECTION

- Notes:
- 1. Compact dike material to 95% modified proctor.
 - 2. Maximum 5% grade with positive drainage to a suitable outlet (such as a sedimentation trap).

Dike Spacing

Slope	Spacing
3-5%	300'
5-10%	200'
10-25%	100'
25-50%	50'

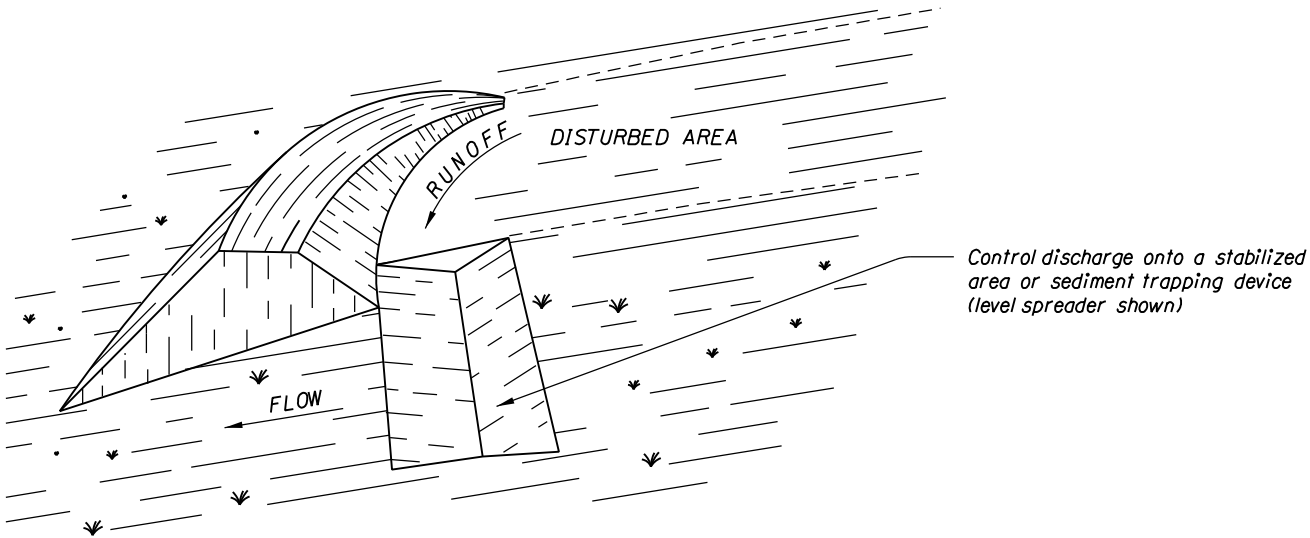

PERIMETER DIKE

The selection and use of this detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

 OREGON DEPARTMENT OF TRANSPORTATION
TECHNICAL SERVICES
DETAILS

TEMPORARY
INTERCEPTOR DIKE
TYPE 2

DETAIL NO.
DET6008