


det6010.dgn 10-Feb-2010

DET6010


TEMPORARY INTERCEPTOR SWALE
TYPE 1

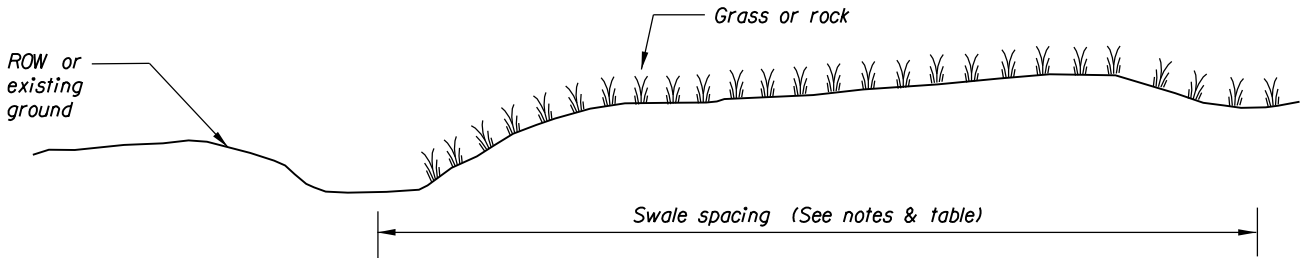

SECTION

Swale Spacing	
Slope	Spacing
3-5%	300'
5-10%	200'
10-25%	100'
25-50%	50'

- Notes:
- Bottom width = 24" minimum at a 0% grade.
 - Depth = 12" minimum
 - Side slope = 1:2 or flatter
 - Grade = maximum 5 percent with positive drainage to a suitable outlet (such as sedimentation pond)

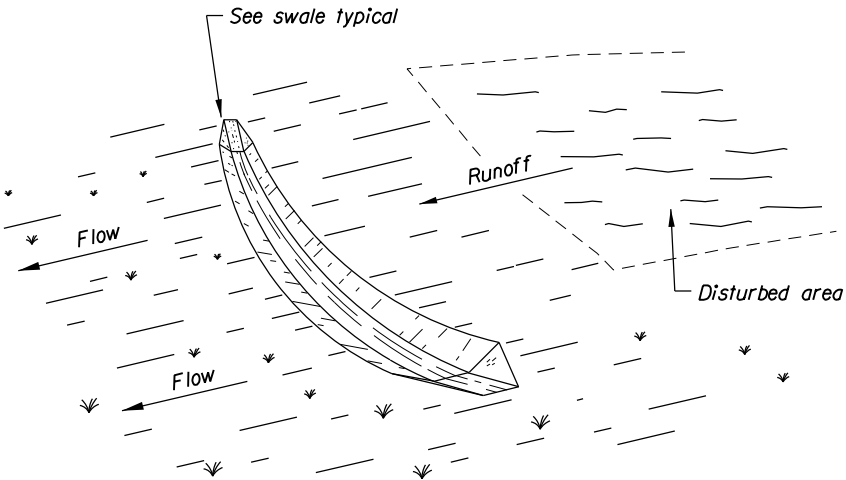

- Notes:
- Discharge onto undisturbed area or alternate sediment trapping device

The selection and use of this detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.		
OREGON DEPARTMENT OF TRANSPORTATION TECHNICAL SERVICES DETAILS		
TEMPORARY INTERCEPTOR SWALE TYPE 1		DETAIL NO. DET6010