


det6011.dgn 10-Feb-2010

DET6011

TEMPORARY INTERCEPTOR DIKE/SWALE
TYPE 3

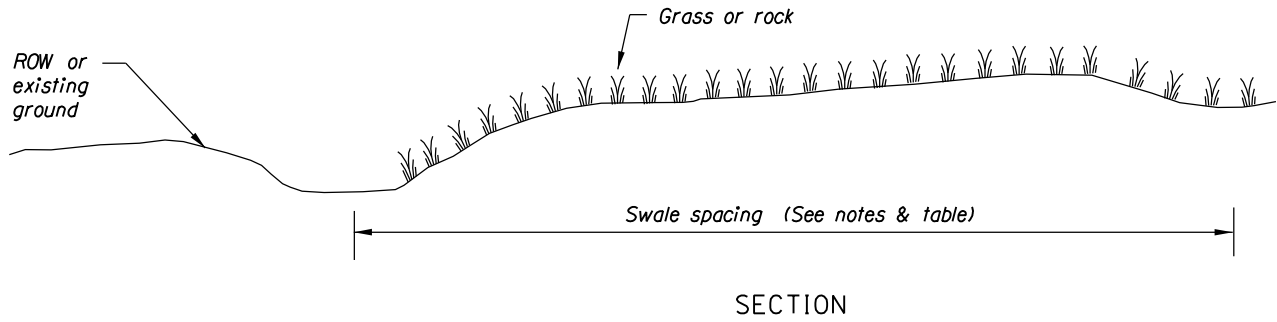

Swale Spacing	
Slope	Spacing
3-5%	300'
5-10%	200'
10-25%	100'
25-50%	50'


Notes:

Bottom width = 24" minimum at a 0% grade.

Depth = 12" minimum

Side slope = 1:2 or flatter

Grade = maximum 5 percent with positive drainage to a suitable outlet (such as sedimentation pond)

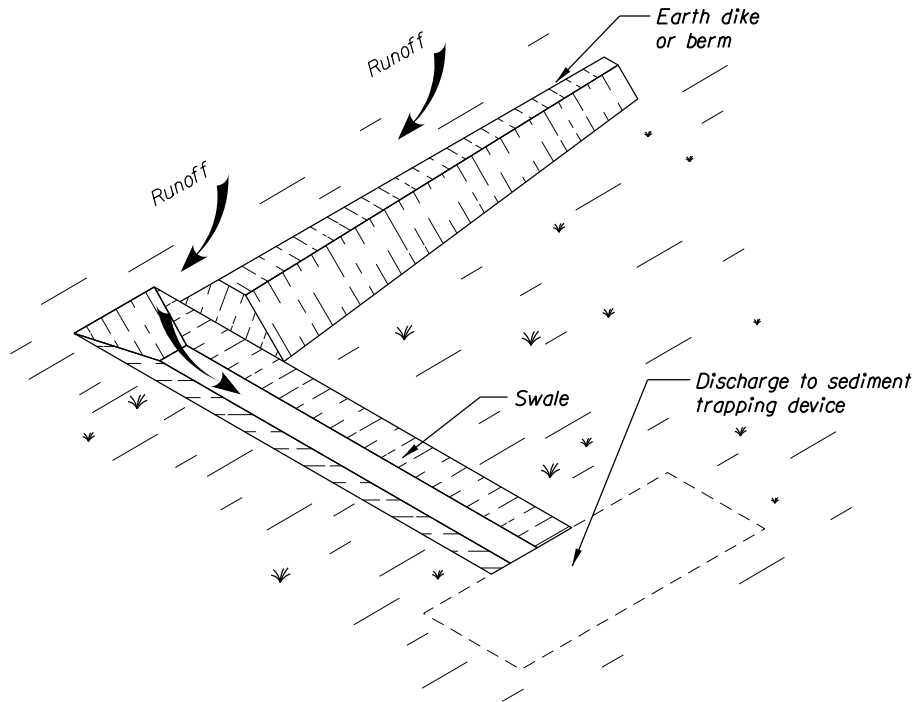

DIVERSION DIKE/SWALE

The selection and use of this detail, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.	OREGON DEPARTMENT OF TRANSPORTATION TECHNICAL SERVICES DETAILS	
	TEMPORARY INTERCEPTOR DIKE/SWALE TYPE 3	DETAIL NO. DET6011