



Oregon

Theodore R. Kulongoski, Governor

OREGON DEPARTMENT OF TRANSPORTATION
Traffic-Roadway Section
4040 Fairview Industrial Drive SE
Salem, OR 97302-1142
Telephone (503) 986-3568
FAX (503) 986-3749

December 8, 2011

All Holders of "Sign Policy and Guidelines for the State Highway System"

RE: DEC. 2011 REVISIONS TO SIGN POLICY & GUIDELINES FOR THE STATE HIGHWAY SYSTEM

Enclosed with this cover letter are the most recent revisions to the "Sign Policy and Guidelines for the State Highway System."

Sign No.	Page No.	Legend/Section	Revision
-----	0-002	Index	Added references to alternative electric vehicle charging station signing.
-----	0-003	Contents	Added and removed applicable sheets as needed for this revision to the guidelines.
-----	1-002 through 1-003	Sign Types	Revised – Updated contact information for the OTE and Outdoor Advertising
-----	1-8	Standard Signing For Passing or Climbing Lanes	Revised – Added tables, changed signing to new standard.
-----	3-001 through 3-003	Chapter 3: Regulatory Signs	Deleted sections 2B.21, 2B.22 and item 4 & 5 from 2B.32. Renumbered the remainder of section 2B.32
OR3-7L & OR3-7R	3-33	LEFT/RIGHT LANE MUST TURN LEFT/RIGHT	Removed
OR4-15	3-58	SLOW MOVING VEHICLE TURNOUT	Removed
OR5-3B	3-71	NON-MOTORIZED VEHICLES PROHIBITED BEYOND THIS POINT	Removed
OR7-3A	3-88	NO PARKING	Removed
OR7-3B	3-90	NO PARKING ANYTIME	Removed
OR10-4bR & OR10-4bL	3-105	PUSH BUTTON FOR (ped symbol & arrow)	Revised – Added notes referring to new sign available in MUTCD.
OR10-15a	3-106	TURNING VEHICLES (yield) TO (bike & ped)	Added
OR10-15b	3-107	TURNING VEHICLES (yield) TO (bike)	Added
OR12-5a	3-111	WEIGHT LIMITS	Removed
OR12-5b	3-112	WEIGHT LIMITS	Removed
OR12-5c	3-113	WEIGHT LIMITS	Removed
OR16-3	3-126	UNLAWFUL TO PASS SCHOOL BUS OR WORKER TRANSPORT BUS WHEN RED LIGHTS FLASH	Removed

OR16-6	3-129	UNLAWFUL TO THROW AWAY BURNING MATERIAL	Revised – Removed dollar amount of fine
OR17-5 & OR17-6	3-134	LEFT/RIGHT TURN YIELD TO PEDS	Removed
OR19-6	3-145	PATROLLED BY AIRCRAFT	Removed
OR20-4	3-150	RAMP SIGNAL ON	Removed
OR20-5	3-151	FORM 2 LINES	Removed
OR22-14	3-179	RIGHT TURN YIELD TO PEDS ON GREEN (w/ ball)	Removed
OR22-15	3-181	NO LANE CHANGES AHEAD	Removed
-----	4-001 through 4-003	Warning Signs	Revised – Changed language in 2C.33 from "shall" to "may"
OW1-10R	4-14	Modified Curve Warning	Removed
OW1-11R	4-15	Modified Curve Warning	Removed
OW6-4 & OW6-4a	4-20	END FREEWAY x MILE	Removed
OW6-5 & OW6-5a	4-22	END EXPRESSWAY x MILE	Removed
OW6-6	4-24	Traffic Separator Symbol	Removed
OW11-3	4-45	DEER	Removed
OW11-4	4-46	ELK	Removed
OW11-6	4-48	Steer Symbol	Removed
OW11-8	4-50	LIVESTOCK	Removed
OW12-4	4-57	LOW CLEARANCE ON SHOULDER _FT_IN	Removed
OW15-5	4-69	LOG TRUCKS	Removed
OW15-13	4-77	ICE	Removed
OW15-16	4-81	OVERSIZE LOAD	Revised – Added "Motor Carrier Only" banner
OW15-17	4-82	LONG LOAD	Revised – Added "Motor Carrier Only" banner
OW15-17a	4-83	LONG LOAD	Revised – Added "Motor Carrier Only" banner
OW15-18	4-84	WIDE LOAD	Revised – Added "Motor Carrier Only" banner
OW18-1	4-100	Weight Specific Signing	Removed
OW19-1	4-105	Obstruction Markers	Removed

OW20-1	4-110	STOPPED VEHICLES AHEAD	Removed
OW22-15	4-125	NO LANE CHANGES AHEAD	Created from regulatory sign (OR22-15)
-----	5-001 through 5-006	Guide Signs	Revised – Changes to Rural Fire District signing guidelines, Signing of Named Highways and General Information.
-----	5-008	Banners Located on State Highway Right-Of-Way Signing Guidelines	Revised
-----	5-021	Alternative Electric Vehicle Charging Symbol Signing Guidelines	Added
OD9-11b (Alternate)	5-22	Alternative Electric Vehicle Charging Symbol	Added
-----	5-35	Miscellaneous Recreational Symbols	Removed
ORW-141	5-38	BEACH ACCESS Symbol & Plaque	Removed
ORM-172L & ORM-172R	5-40	WILDLIFE VIEWING AREA w/ Arrow	Removed
ORM-174L & ORM-174R	5-41	WILDLIFE VIEWING AREA LEFT/RIGHT ¼ MILE	Removed
OD-411A	5-45	Entering City	Revised – Changed legend to Upper/Lower font
OD-412	5-46	Entering County	Revised – Changed legend to Upper/Lower font
OD-413	5-47	Entering City (w/ Logo)	Revised – Changed legend to Upper/Lower font
OD-414	5-49	Entering County (w/ Logo)	Revised – Changed legend to Upper/Lower font
D-434	5-60	Oregon State Park Shield	Revised – Changed background from reflective to Retroreflective
D-435	5-61	Parks Advance Directional Signing	Revised – Miscellaneous changes to new standard, changed sign number from D-434 to D-435
-----	5-62	Parks Turn Direction Sign	Revised – Miscellaneous changes to new standard
-----	5-63	Parks Directional Signing	Revised – Miscellaneous changes to new standard
-----	5-64	Parks Advance Directional Assembly	Removed
-----	5-65	Parks Advance Directional Assembly	Removed
-----	5-66	Parks Advance Directional Assembly	Removed
-----	5-67	Parks Turn Direction Signing	Revised – Added Willamette Greenway Signing
-----	5-68	Parks Advance Directional Assembly	Revised – Miscellaneous changes to new standard
-----	5-69	Parks Route Marker	Revised – Miscellaneous changes to new standard
D445	5-74	LIGHTS ON FOR SAFETY	Removed

OD-448	5-77	TRAFFIC FINES DOUBLE	Removed
CW8-8	6-41	STEEL PLATE (w/ Symbol)	Removed
CW8-13	6-46	GROOVED PAVEMENT	Removed
CW15-4	6-53	TRUCKS + XXX FEET Rider	Removed
CW20-10	6-68	TRAFFIC CONTROL CHANGE AHEAD	Removed
CW23-4	6-98	LANE NARROWS / LANES NARROW	Removed
OS3-2	7-18	SCHOOL BUSS TURN AROUND	Revised – Added "NOT FOR USE ON STATE HIGHWAY" banner and note for sign S3-2
OS5-4	7-27	SCHOOL SPEED 20	Removed
-----	8-7	RAILROAD CROSSING & Assembly	Removed
OBR10-11	8-16	BIKES CROSS ON WALK SIGNAL ONLY	Removed
OBR10-14	8-19	ORS 811.435 \$250 MAX FINE	Removed
OBR10-15	8-20	PUSH BUTTON AHEAD (w/ Bike Symbol)	Removed
OBW1-5	8-30	ON ROADWAY	Removed
OBW1-6	8-31	XING	Removed
OBW1-7	8-32	ON BRIDGE ROADWAY	Removed
OBW1-10	8-35	BIKE LANE ENDS	Removed
OBW8-20	8-50	Bike Railroad Crossing Symbol	Removed
OBW8-21	8-51	USE CAUTION	Removed
OBW8-22	8-52	Bike/Ped Warning Symbol	Revised – Added "NOT FOR USE ON STATE HIGHWAY" banner and note for sign W11-15
OBW12-3	8-66	NARROW w/ Arrows	Removed
OBD1-3c	8-76	Bike Directional Sign	Revised – Corrected legend
OBD11-1	8-79	Bike Destination Sign	Removed

If you have any revisions, changes, or comments, please send them to:

Heidi Shoblom, Sign Engineer
ODOT, Traffic-Roadway Section, MS #5
4040 Fairview Industrial Dr. SE
Salem, Oregon 97302-1142
Ph: (503) 986-3603 Fax: (503) 986-3749
e-mail: Heidi.E.SHOBLOM@odot.state.or.us



Heidi Shoblom, P.E.
Sign Engineer

OREGON DEPARTMENT OF TRANSPORTATION

TRAFFIC-ROADWAY SECTION

Sign Policy and Guidelines

INDEX

	<u>Page</u>
Introduction	1-1
Sign Types	1-2
Signs Not Installed on the State Highway System	1-4
US Forest Service Signing Agreement	1-5
Standard Signing for Passing or Climbing Lanes	1-8
Standard Signing for Slow Moving Vehicle Turnouts	1-9
Standard Speed Zone Signing	1-10
Standard Signing for Safety Corridors	1-11
General Standards	2-1
Regulatory Signs	3-1
Warning Signs	4-1
Comfortable Safe Speeds On Horizontal Curves (Ball-Bank Indicator Method)	4-4
Policy for Use of Sign Flag Boards	4-5
Guide Signs – Conventional Roads	5-1
Intersection Guide Sign Guidelines	5-2
Recreational-Cultural Interest Area Signs	5-4
General Service and General Info Signs	5-5
Rural Fire District Signing Guidelines	5-6
Banners Located on State Highways	5-8
Temporary Event Signing Guidelines	5-9
Private Drive Signs on State Right-of-Way	5-10
Recreational Symbol Signs on State Highways	5-11
Travel Advisory Radio Signing Guidelines	5-12
Historic Trail Signing Guidelines	5-15
Information Center Signing Guidelines	5-17
Alternative Electric Vehicle Charging Symbol	5-21
Guide Signs - Expressways	5-170
Guide Signs - Freeways	5-180
Freeway Interchange Guide Sign Guidelines	5-184
Criteria for Signing Freeway Traffic Generators	5-189
Construction and Maintenance Signs	6-1
Motorist Service Signing in Construction Projects	6-2
School Area Signs	7-1
Bicycle Signs	8-1
Rev. 3-23-2007	

<u>SIGN LEGEND or PURPOSE</u>	<u>PAGE</u>	<u>SIGN NO.</u>
-A-		
ABRUPT EDGE	6-81	CW21-7
Abrupt Edge Riders	6-82	CW21-8a, b, c
ABRUPT EDGE roll-up sign	6-83	CW21-9
ADOPT-A-HIGHWAY	5-52	OD-417
ADOPT-A-LANDSCAPE	5-53	OD-418
Airport	5-5	I-5
ALL TRUCKS OVER 20,000 GVW NEXT RIGHT	3-168	OR22-4
APPLEGATE TRAIL, TRAIL SITE	5-106	OI7-8,9
APPLEGATE TRAIL INFO. CTR., INTERP. CTR.	5-107	OI7-10,11
Armory	5-3	---
ARRA Pictograph	6-13a,6-13,6-13b	ARRA
Auditoriums	5-3	---
-B-		
Ball Fields	5-3	---
Banners	5-8	---
BARLOW ROAD ROUTE	5-104	OI7-6
Bicycle Symbol / EVENT AHEAD	6-58	CW15-15a
Bicycle Symbol / EVENT ROUTE	6-19	CG20-21
BICYCLE RACE AHEAD	8-72	OBW16-2
BICYCLE RACE IN PROGRESS	6-59a	CW17-1
BICYCLE RIDE IN PROGRESS	6-59b	CW17-2
Bicycle Signs	8-1	---
Bicycle Symbol / CROSSING ROADWAY	6-51	CW11-1a
Bicycle Symbol / ON ROADWAY	6-50	CW11-1
Bicycle Symbol w/STOP	8-4	OBR1-1
Bicycle Symbol w/YIELD	8-5	OBR1-2
Bike Centennial	8-1	---
Bike Directional (Multiple Directions)	8-76	OBD1-3c
Bike Lane Ends Symbol	8-34	OBW1-9
Bike/Ped Crossing	8-52	OBW8-22
Bike/RR Xing	8-48	OBW8-19
BIKE IN TUNNEL...	8-33	OBW1-8
Bridge Weight Limit...	3-116	OR12-6
BRIDGE WORK AHEAD	6-84	CW21-10
Bus Station Symbol	5-5	I-6
BUSINESS ACCESS	6-15	CG20-11
Business Park	5-3, 5-189	---
BYPASS PHOTO ENFORCED	4-90	OW16-10
-C-		
CALIFORNIA TRAIL	5-96	OI6-1
CHAIN-UP AREA SIGNS	4-120 to 123	OW 22-1 to 22-6
CHANNEL 9 MONITORED	5-5	---
Clam Digging Symbol	5-35	ODRW-062
Colleges	5-2,3	---
CONGESTION	4-70	OW15-6
CONSTRUCTION VEHICLE DO NOT FOLLOW	6-110	CW23-14
Crabbing Symbol Sign	5-35	ODRW-063
Criteria for Signing...Interstate Highways	5-189	---
CROSSWALK CLOSED	3-172	OR22-7

<u>SIGN LEGEND or PURPOSE</u>	<u>PAGE</u>	<u>SIGN NO.</u>
CROSSWALK CLOSED w/Arrow	3-173	OR22-8
Curve	4-1	W1-4
-D-		
DETOUR w/Vert, Arrow	6-10	CG20-6
Detour Signing	6-1	M4-8
Disabled Parking	3-92	OR7-8
Distance Rider for Recreational Signs	5-103	017-5a
Divided Highway	4-1	W6-1
DIVING OR JUMPING FROM BRIDGE PROHIBITED	3-162	OR21-2a
DO NOT ENTER	3-3,	R5-1
DO NOT PASS	3-2	R4-1
DO NOT PASS SNOWPLOWS ON THE RIGHT	3-174	OR22-9
DON'T LITTER MAX. FINE \$6250	3-163	OR21-3a
Dual Lane Reversing Curve Symbol	6-6b & 6c	---
-E-		
Electric Vehicle Charging Symbol	5-22	OD9-11b (Alt)
Emergency Medical Services	5-5	09-13
Emergency Parking Signs	3-3	R8-4
END DETOUR	6-9	CG20-5
END ROAD WORK	6-6	CG20-2a
END SAFETY CORRIDOR	5-78	OD-449
END SPEED ZONE	3-21	OR2-6a
Engine Braking	3-175, 176	OR22-10,11
ENTERING City	5-45	OD-411a
ENTERING XX COUNTY	5-46	OD-412
ENTERING WINTER RECREATION...	3-138	OR18-1
ENTERING WINTER RECREATION...	5-25	OD11-1
EROSION CONCERNS	6-14	CG20-10
EVENT AHEAD	6-57	CW15-15
EXCEPT BUS	3-34	OR3-7a
Exposition Center	5-3	---
-F-		
Fairgrounds	5-3	---
Flag board policy	4-5,6	---
Flagger Ahead Symbol	6-96	CW23-2
FLAGGER NEXT MILE roll-up sign	6-65	CW20-7b
Forest Service, USDA	1-5 to 1-7	---
-G-		
Geological Marker	5-73	D-424a
Golf Course	5-6	---
-H-		
HELMETS REQUIRED	3-166	OR22-2
Heritage Site	5-70	ORG-010
HIGH WATER	4-76	OW15-12
Highway Advisory Radio Sign	4-124	OW22-7
Historical Marker Ahead	5-72	D-424
Horizontal Clearance Symbol	6-86	CW21-12
Hydrant Marker	5-79	OD-450

<u>SIGN LEGEND or PURPOSE</u>	<u>PAGE</u>	<u>SIGN NO.</u>
-I-		
Impact Attenuator	4-105	OW19-1
Industrial Park	5-3	---
INTERMITTENT ROAD WORK	6-17	CG20-13
Intersection Guide Signs	5-2	---
Intersection Symbol Signs	4-1	W2-1,W2-5
-L-		
Landmarks	5-3	---
Lane Restriction Signs	3-3	OR5-11
Lane Use Control Signs	3-25 to 3-31	OR3-5, 3-6
Left & Right Arrow	3-28	OR3-5TD
LEFT LANE BUS ONLY	3-38	OR3-11b
LEFT LANE BUS & LEFT TURN ONLY	3-39	OR3-11c
Left Turn ONLY	3-25	OR3-5L
LEFT TURN LANE CLOSED AHEAD	6-108	CW23-12
LEFT TURN LANE CLOSED	6-109	CW23-13
LEFT TURN YIELD TO ONCOMING TRAFFIC	3-130	OR17-1
LEFT TURN YIELD TO PEDS & BIKES	3-135	OR17-6a
LEFT TWO LANES CLOSED AHEAD	6-63	CW20-5a
Length Restriction Symbol Sign	3-117	OR12-8
LEWIS AND CLARK TRAIL	5-95	OI5-1
LOGO, Interstate	5-125 to 5-139	---
LOGO, OFF-INTERSTATE	5-112 to 5-124	---
LONG LOAD	4-82 & 83	OW15-17
LOOSE GRAVEL XX MPH	6-60	CW8-7a
Low Clearance Sign	4-55	OW12-2P
-M-		
MAX WIDTH (Horizontal Clearance)	6-86	CW21-12
Memorial Highways	5-6	---
Motor Carrier Pilot Car STOP Marker	3-119	OR14-6
MOTORCYCLISTS....	3-165	OR22-1
-N-		
NARROW BRIDGE	3-3, 4-1	W5-2
NEXT GASOLINE	5-5	---
NO FISHING FROM BRIDGE	3-160	OR21-1
NO LANE CHANGES AHEAD	4-125	OW22-15
NO LANE CHANGES NEXT FT.	3-182	OR22-16
NO LANE CHANGES NEXT 1/2 MILE	3-182	OR22-17
NO LEFT TURN	3-22	OR3-2
NO OVERNIGHT PARKING	3-85	OR7-1
NO PARKING FOR UNATTENDED VEHICLES	3-103	OR8-4a
NO PARKING FOR UNATTENDED VEHICLES w/dates	3-139	OR18-2
NO PARKING VEHICLES OVER X FEET HIGH	3-100	OR7-20
NO RIGHT TURN	3-22	OR3-1
NON-MOTORIZED ...EXIT	3-70	OR5-3a
-O-		
ONE VEHICLE PER GREEN (PTR Sign Option)	3-147	OR20-1
ONE WAY TRAFFIC FOR TRUCKS AND BUSES	3-3, 3-75	OR5-11
OPEN/CLOSED	5-181	---
OPEN RANGE	4-49	OW11-7

<u>SIGN LEGEND or PURPOSE</u>	<u>PAGE</u>	<u>SIGN NO.</u>
Oregon Coast Bike Route	8-81	OBD11-3
Oregon Historic Route	5-151	D-485
Oregon Scenic Byway	5-143 to 5-147	D480- to 483
OREGON THANKS YOU...	5-81	OD-461
Oregon Tour Route	5-150	D-484
Oregon Trail Signs	5-97 to 5-105	OI7-1 to 7
OVERSIZE LOAD	4-81	OW15-16
-P-		
PARKING...	3-92	OR7-8
PARKS, City (Public Agency)	5-3	---
County (Public Agency)	5-2, 5-3	---
State	5-2, 5-60 to 5-63 & 5-67 to 5-69	D-434, D-435
Parks, Federal	5-2,3,4	---
PASS WITH CARE	3-2	R4-2
PASSING LANE CLOSED AHEAD	6-100	CW23-6
PASSING LANE 1 MILE	3-52	OR4-10
Pavement Width Transition	4-1	W4-2
Pedestrian Symbol / EVENT ROUTE	6-18	CG20-20
Pedestrian Symbol / EVENT AHEAD	6-59	CW15-15b
Pedestrian Symbol / ON ROADWAY	6-52	CW11-2
Pedestrian Symbol / CROSSING ROADWAY	6-52a	CW11-2a
POINT OF INTEREST	5-105	OI7-7
POPULATION	5-48	OD-413a
PREPARE TO STOP WHEN LIGHTS FLASH	4-78	OW15-14
PRIVATE DRIVE	4-63, 5-10	OW14-3
Project I.D.	6-12	CG20-8
PUBLIC ACCESS	5-38	ORW-141
Public Agencies	5-3	---
Public Schools	5-3	---
PULL OUT	5-29	OD12-1
PULL OUT X MILE	5-30	OD12-2
PUSH BUTTON FOR PEDESTRIANS (SYMBOL)	3-105	OR10-4bR
PUTTING OREGON BACK TO WORK	6-13, 6-13a	CG20-8s
PUTTING OREGON BACK TO WORK	6-13a, 6-13b	CG20-8su
-R-		
Racetracks	5-3	---
RAMP CLOSED	3-184	OR22-18
Recreational/Cultural Interest Areas	5-4	---
Recreational Symbol Policy	5-11	---
Red Cross Center	5-3	---
Resort Areas	5-4,5-6	---
RIGHT LANE ENDS	3-2	W9-1R
Right Turn ONLY	3-25	OR3-5R
RIGHT TURN YIELD TO PEDS & BIKES	3-135	OR17-5a
RIVER ROUTE	5-100	OI7-4
ROAD CLOSED...	3-109	OR11-4a
ROAD WORK NEXT XX MILES	6-4	CG20-1
ROAD WORK XX MPH	6-60	CW20-1a
Rural Fire District	5-6	---

<u>SIGN LEGEND or PURPOSE</u>	<u>PAGE</u>	<u>SIGN NO.</u>
S		
Safe Speeds	4-4	---
SAFETY BELTS...	3-167	OR22-3
SAFETY CORRIDOR	5-76	D-447
Safety Corridor (Standard Layout)	1-11	---
SCENIC BIKEWAY ROUTE	8-82	OBM1-8, 8a
Scenic Byway	5-144 to 5-147	---
Scenic Byway Motorist Services	5-140,141	---
SCHOOL BUS TURN AROUND	7-18	OS3-2
School Crossing Signs	7-1, 7-4	S2-1
SCHOOL DAYS rider	7-2, 7-21	OS4-8
SCHOOL IN SESSION	7-22	OS4-9
SCHOOL SPEED	7-2, 7-28	OS5-5
School Zone Signing Details	7-9 thru 7-16	
Shopping Centers	5-3, 5-189	---
SIDEWALK USERS WALK BIKES	8-18	OBR10-13
SIGNAL WORK AHEAD	6-84	CW21-11
SLIDES	4-85	OW15-19
SLOW	4-65	OW15-1
SLOW (For Bikes)	8-70	OBW15-1
SLOW MOVING VEHICLE TURNOUT 1/2 MILE	3-56	OR4-13
SLOW TRUCKS	4-29	OW7-4
SNO PARK AHEAD 1/4 MILE	5-26	OD11-2
SNO-PARK PARKING...	3-140	OR18-3
SNO-PARK PARKING...	3-141	OR18-4
SNOW LANE CONTROL	3-37	OR3-10a,b
SNOW ZONE	4-79	OW15-15
Regulatory Riders	3-122	OR15-15
Snowmobile Crossing Signs	4-2	W11-6
Speed Reduction	4-17	OW3-5
SPEED XX	3-14	OR2-1
SPEED ZONE AHEAD	3-1	R2-5C
Sports And Recreation Centers	5-3	---
Auditoriums, Ball Fields, Fairgrounds		---
State Capitol	5-3	---
State Government Offices	5-3	---
STATE LAW, MOVE OVER.....EMERGENCY VEHICLES	3-62	OR4-20
STATE LAW, TRUCKS-CAMPERS-TRAILERS...4 lanes, 6 lanes	3-61	OR4-18,19
STOP AHEAD	4-115	OW21-1
STOP Roll-up Sign	6-20	CR1-1
-T-		
Technical Schools	5-3	---
Temporary Event Signing	5-9	---
Through, Left & Right Arrow	3-29	OR3-5TT
TOUR ROUTE	5-101	OI7-4a
Tour Route, State Entrance	5-150	D-484
Tourist Information Centers	5-17 to 5-21	---
XX TON BRIDGE WEIGHT LIMIT	3-116	OR12-6
TODS	5-110,111	---
TRAIL SITE	5-99	OI7-3
TRAVEL INFO (Travel Advisory Radio Signing)	5-14	---

<u>SIGN LEGEND or PURPOSE</u>	<u>PAGE</u>	<u>SIGN NO.</u>
Travel Information Centers	5-17 to 5-20	---
Train Stations	5-5	I-7
TRUCKS ENTERING....	6-101	CW23-7
TRUCKS LEAVING....	6-102	CW23-8
TRUCKS RIGHT TWO LANES ONLY	3-47	OR4-5
TRUCKS, CAMPERS, TRAILERS, BUSES...4 Lane, 6 Lane	3-59	OR4-16,17
TRUCK WEIGHING AHEAD	4-30	OW7-5
Tsunami Signs	5-82 to 5-86	OD-462 to OD-466
TUNNEL	4-75	OW15-11
Turn	4-1	W1-1
TURNING VEHICLES yield TO bikes & peds	3-106	OR10-15a
TURNING VEHICLES yield TO bikes	3-107	OR10-15b
-U-		
U-TURN PERMITTED	3-41	OR3-12
Unincorporated Communities	5-3	---
Universities	5-3	---
UNLAWFUL TO IMPEDE	3-64	OR4-21
UNLAWFUL TO THROW AWAY BURNING MATERIAL	3-129	OR16-6
UNMUFFLED ENGINE BRAKING	3-175	OR22-10
UNMUFFLED ENGINE BRAKING	3-176	OR22-11
-V-		
Visitors Information Signs	5-17 to 5-20	---
-W-		
WAIT FOR PILOT CAR	6-21	CR4-20
Warning Sign Placement	4-1	---
WEIGHT LIMIT REDUCED	3-110	OR12-5
Weight Limits	3-114 & 3-115	OR12-5d & e
Welcome Center Signs	5-17 to 5-20	---
WELCOME TO XX - City	5-47	OD-413
WELCOME TO XX - County	5-49	OD-414
WELCOME TO OREGON	5-80	OD-460
Whale Watching Symbol Sign	5-35	ODRW-061
WHEELCHAIR USER ONLY	3-95	OR7-8c
WIDE LOAD	4-84	OW15-18
Wildlife Refuge	5-3	---
Wine Tour Symbol Sign	5-35	ODRG-121
Winter Recreation Area Signs	3-138, 5-25	---
WRECK AHEAD	6-56	CW15-10
-Y-		
YIELD (For Bikes)	8-5	OBR1-2
YIELD CENTER LANE TO OPPOSING TRAFFIC	3-53	OR4-11a
YIELD CENTER LANE TO UPHILL TRAFFIC	3-53	OR4-11
YIELD TO ONCOMING TRAFFIC	3-171	OR22-6
Youth Camps	5-3	---
- # -		
24-HOUR FLAGGING AHEAD	6-67	CW20-9

SIGN TYPES

1. REGULATORY:

Colors: Black, red, or green letters on white background.
Types: Black letters - requires person to follow regulation on sign.
Red letters - prohibits action listed on sign.
Red circle and slash (symbol signs) prohibits action depicted on sign.
Green circle (symbol signs) allows action depicted on sign.
Green letters - Allows action listed on sign.
Exceptions: STOP and YIELD signs, disabled person's parking sign.

2. WARNING

Colors: Black letters or symbol on yellow background.
Type: Warns driver of existing or anticipated condition.
Exceptions: STOP, YIELD, and SIGNAL AHEAD signs.

3. CONSTRUCTION

Colors: Black letters or symbol on orange background.
Type: Gives direction or warning in construction or maintenance areas.
Exception: Regulatory and warning signs may also be posted in construction zones (i.e., STOP signs).

4. DESTINATION GUIDE SIGNS

Colors: White letters or symbol on green background.
Type: Identifies city, town, or destination.

5. RECREATIONAL GUIDE SIGNS

Colors: White letters or symbol on brown background.
Type: Identifies recreational opportunities or destination.

6. MOTORIST SERVICE SIGNS

Colors: White letters on blue background.
Type: Can be either word message or a symbol identifying services such as food, gas, lodging, camping, police, viewpoint, phone, hospital, diesel, tourist, and rest areas.

7. LOGO SIGNS*

Colors: White letters on blue background with business logo.
Type: Gas, food, lodging, camping.

8. TOURIST ORIENTED DIRECTIONAL SIGNS (TODS*)

Colors: White letters on blue background.
Type: Business identification and direction information for tourist-oriented businesses and services. Identifies cultural and historical features. Used only on the primary and secondary systems, not the interstate.

9. HISTORICAL and CULTURAL SIGNS

Colors: White letters on brown background, if single destination.
White letters on green background, if used with other destinations.
White letters on blue background, if off interstate. *
Type: Identifies historical or cultural features available on the interstate system. **




* Refer requests for signing to: Cheryl Gribkov, Director, Oregon Travel Experience, 1500 Liberty Street SE, Salem, Oregon 97302 (503) 378-4508.

** Refer requests for signing to: Outdoor Advertising Sign Permits, ODOT Right-of-Way Project Administration, 4040 Fairview Industrial Dr., Salem, Oregon 97302 (503) 986-3650.

STANDARD SIGNING FOR PASSING OR CLIMBING LANES

Guide for sign layout

Posted or 85th percentile speed (mph)	"d" (feet).
25	325
30	460
35	565
40	670
45	775
50	885
55	990
60	1100
65	1200

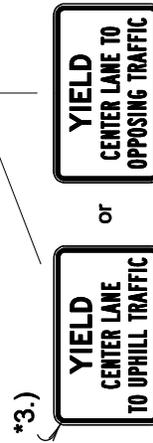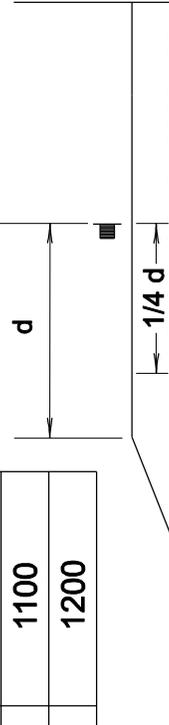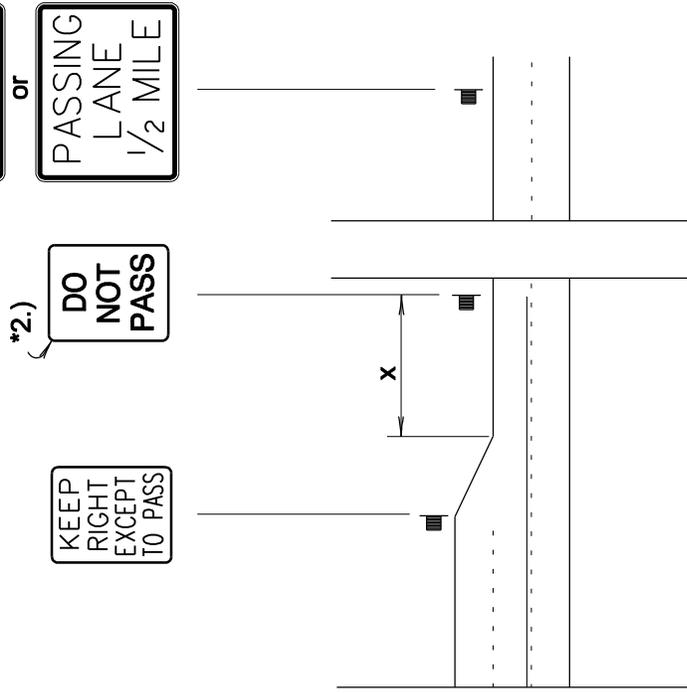

General Notes:

- 1) "Do Not Pass" sign may be omitted if section is already a no passing zone.
- 2) Sign no. OR4-11 and OR4-11a optional. Install as per pg. 3-53 of this manual.
- 3) See Traffic Line Manual for Striping Standards.

NO PASSING ZONE TABLE

Posted or 85th percentile speed (mph)	25	30	35	40	45	50	55	60	65	70
"x" (feet).	450	500	550	600	700	800	900	1000	1100	1200

Chapter 3: Regulatory Signs

2B.13 Speed Limit Sign (R2-1)

All signs posting the designated speed or speed limit per ORS 811.105 and ORS 811.111 may use the SPEED XX (OR2-1) sign. This includes truck speed restrictions, school speed zones, and other special speed restrictions allowed by law as well as the designated speed or speed limit by statute, rule, or written order.

Minimum size of SPEED XX sign on State Highways 30" x 36"
Except 24" x 30" with S4-2, S4-3 & OS4-8 may be used in school zones

In keeping with legislative changes which establish speeds on interstate highways as speed limits (see ORS 810.180), all speed signs installed on Oregon interstates shall be SPEED LIMIT XX (R2-1) signs. This applies only to interstates (I-5, I-82, I-84, I-105, I-205 and I-405) and not to other state highways.

On state highways all speed signs installed at school zones shall be SPEED LIMIT 20 (R2-1) signs.

2B.32 Slow Moving Traffic Lane Signs (R4-5, R4-6)

The normal signing where an extra lane has been constructed to provide opportunities to pass is as follows:

1. PASSING LANE ONE MILE (OR4-10) may be installed to advise motorists of a passing lane approximately the designated distance ahead. It should not be used in advance of a slow moving vehicle turnout.
Minimum Size 60" x 48"
2. DO NOT PASS (R4-1) should be installed approximately 1000 feet in advance of the taper that begins the passing lane.
Minimum Size 36" x 48"
3. KEEP RIGHT EXCEPT TO PASS (R4-16) should be installed where the passing lane attains full width or at the beginning of the first skip stripe.
Minimum Size 36" x 48"
4. PASS WITH CARE (R4-2) may be installed in the two-lane section approximately 1000 feet beyond the end of the taper (if sight distance is adequate to permit passing).
Minimum Size 24" x 30"
5. YIELD CENTER LANE TO UPHILL TRAFFIC (OR4-11) may be installed facing downhill traffic at the point where the downhill no passing zone ends. A DO NOT PASS (R4-1) may be installed, on each side of the roadway if necessary, facing downhill traffic at the beginning of the next downhill no passing zone.
Minimum Size 60" x 36"

6. YIELD CENTER LANE TO OPPOSING TRAFFIC (OR4-11A) may be installed on level two-lane, two-way roadways with a passing lane for one direction. When used, the sign shall face the direction of travel opposite that of the passing lane. Additional signs may be installed throughout the section but not closer together than ½ mile.

Minimum Size 60" x 36"

Slow Moving Vehicle Turnouts

Slow moving vehicle turnouts shall be signed only as shown and as listed below. The normal signing for a slow moving vehicle turnout is as follows:

1. SLOW MOVING VEHICLE TURNOUT 1/2 MILE (OR4-13) is used at approximately the designated distance in advance of the turnout.

Minimum Size 48" x 60"

2. SLOW VEHICLES MUST USE TURN-OUT AHEAD (R4-13) is used approximately 500 feet in advance of the turnout.

Minimum Size 72" x 36"

3. SLOW MOVING VEHICLE TURNOUT with a 45° arrow (OR4-15) is used at the beginning of the turnout.

Minimum Size 48" x 60"

2B.34 DO NOT ENTER Sign (R5-1)

Minimum Size 36" x 36"

Lane Restriction Signs

ONE WAY TRAFFIC FOR TRUCKS OR BUSES (OR5-11) should be ahead of or at the start of a narrow section of roadway which is not wide enough to permit two large vehicles to pass in opposite directions but will allow one large vehicle and a car or other small vehicle to pass.

The ONE WAY TRAFFIC FOR TRUCKS OR BUSES may be used as a rider under the NARROW BRIDGE (W5-2) sign.

Minimum Size 36" x 36"

2B.37 One Way Signs (R6-1, R6-2)

The horizontal ONE WAY arrow (R6-1) should be used for signing one-way streets and roads. The vertical rectangular ONE WAY (R6-2) should be used for interior illuminated signs.

2B.42 Emergency Restriction Signs (R8-4, R8-7, R8-8)


EMERGENCY PARKING ONLY (R8-4) and EMERGENCY STOPPING ONLY (R8-7) may be used to reserve the shoulder for emergency use.

Minimum Size 48" x 36"

2B.45 Traffic Signal Signs (R10-1 thru R10-21)

The LEFT ON GREEN ARROW ONLY Sign (R10-5) and the EMERGENCY SIGNAL Sign (R10-13) shall be placed next to the signal head(s) to which they refer. Each sign requires either interior illumination or ASTM Type IX sheeting background. The borders on these signs can be eliminated if interior illumination is used.

OR10-4bL

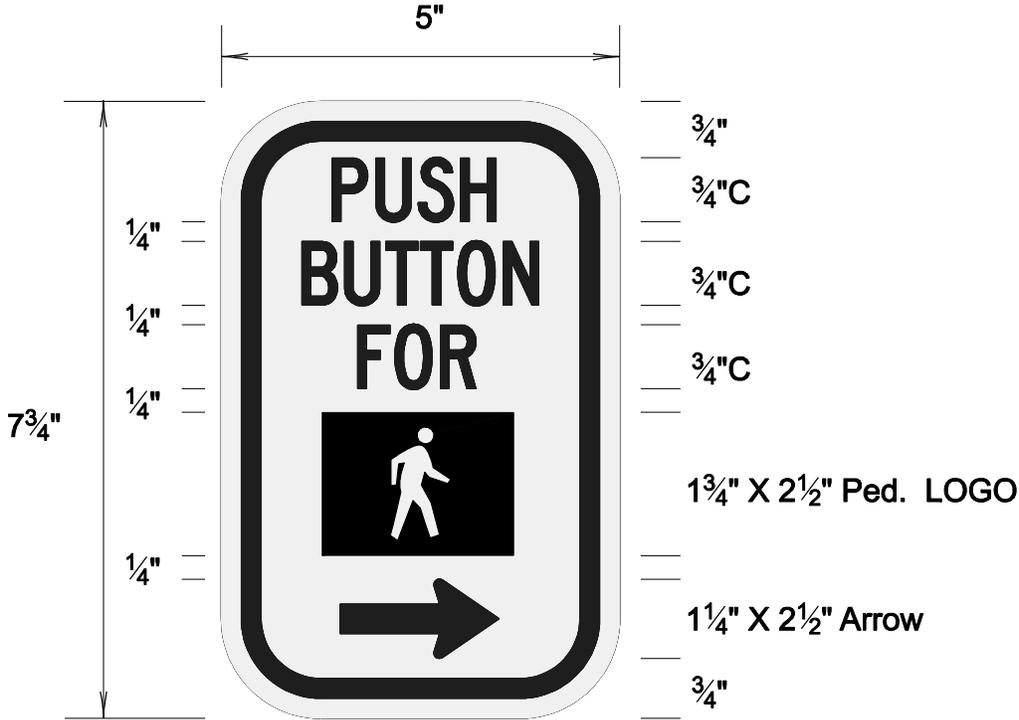

1/4" border, 1/4" inset, 1" radius

Sign Background: White, Retro-Reflective sheeting or enamel paint

Sign Legend: Black, Non-reflective sheeting or enamel paint
(White Pedestrian on Black Background)

SIGNSTDPG.F11

Not for use on new installations. R10-3 shall be used for all new installations per the 2009 MUTCD. Existing signs may remain in place until no longer servicable.


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date:12/11

Publication Date: 12/11

Sign No. OR10-15a

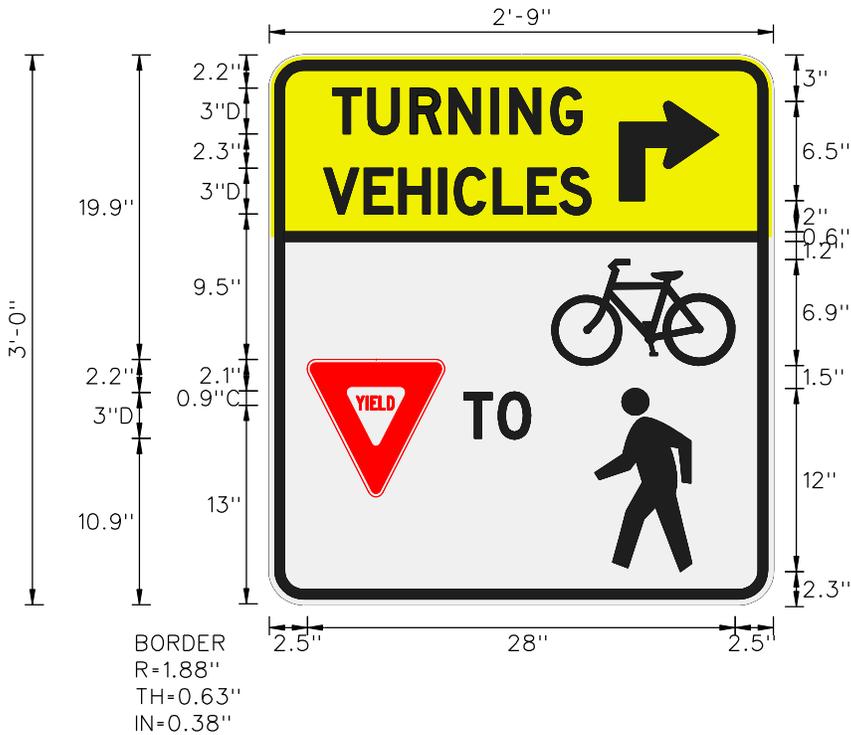

Sign Background: White, Retroreflective sheeting

Sign Legend: Black, Non-reflective
Red, Retroreflective

SIGNSTDP.F11


The TURNING VEHICLES yield TO bikes & peds symbol sign may be used at a signalized intersection to alert right (left) turning motorists of a possibly obscured pedestrian crossing.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 12/11

Publication Date: 12/11

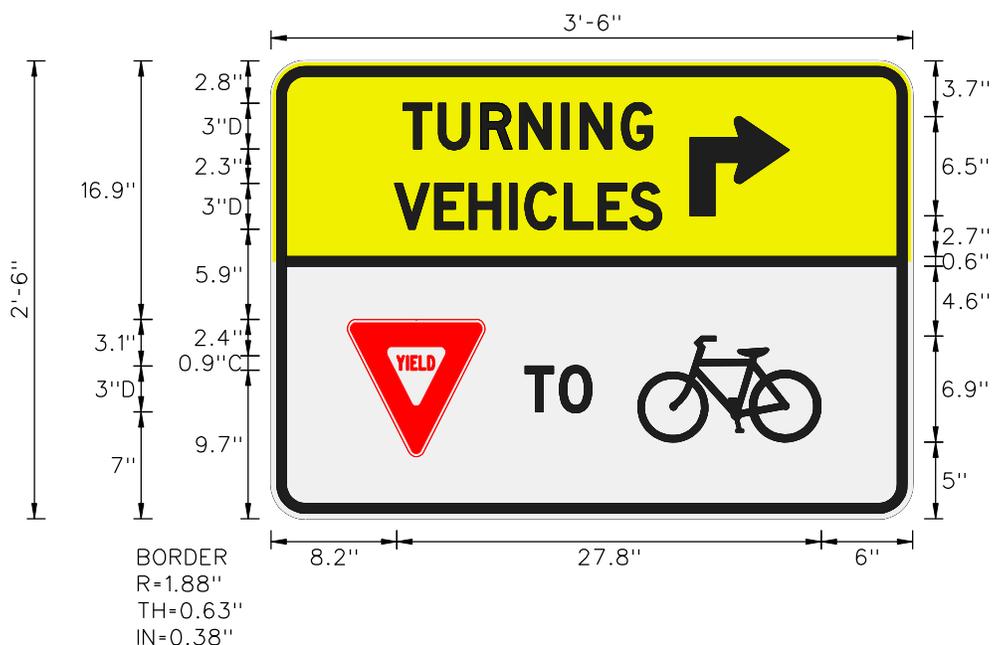

Sign Background: White, Retroreflective sheeting

Sign Legend: Black, Non-reflective
Red, Retroreflective

SIGNSTDP.F11

The TURNING VEHICLES yield TO bikes symbol sign may be used at a signalized intersection to alert right (left) turning motorists of a possibly obscured pedestrian crossing.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 12/11

Publication Date: 12/11

Sign No. OR16-6



Sign Background: White, Retro-reflective sheeting

Sign Legend: Black, Non reflective

SIGNSTDP.F11

The UNLAWFUL TO THROW AWAY BURNING MATERIAL sign may be used at various intervals along any highway where fire hazards are especially prevalent to remind motorists of ORS 476.715 which prohibits throwing away any burning material on any forest land, private road, or public highway within the state.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/90

Publication Date: 12/11

Chapter 4: Warning Signs

2C.03 Design of Warning Signs

Use Engineering Judgment in the selection and installation of different sizes of standard or special warning signs. Normally, all new installations of warning signs on the State Highway System will be 36" or larger.

2C.05 Placement of Warning Signs

Table 2C-4 in the MUTCD lists suggested sign placement distances for two conditions. This table is provided as an aid for determining warning sign locations.

The critical factor in warning sign placement is visibility, adequate warning to the driver so they can react to the situation, and use of the proper warning sign. Different situations will require warning sign placement that does not comply with the suggested placement distances set forth in Table 2C-4. The table was designed using 30" warning signs; if the road agency uses larger signs, the distance listed can be reduced. The use of high performance sheeting on signs also allows different sign placement distances.

Table 2C-4 was designed for a single warning placement. When the road authority uses two or more warning signs for the same condition in sequence, the table is no longer valid. Use of other warning devices plays an important role in relaying the warning to the driver; such as adding Chevrons to a curve.

2C.06 Horizontal Alignment Signs (W1--1 through W1-5, W1-11, W1-15)

All Turn, Curve, Reverse Turn, and Reverse Curve signs shall have an Advisory Speed Plate when the comfortable safe speed on the curve is 10 mph or more below the posted speed.

2C.18 Divided Highway (Road) Sign (W6-1)

The Divided Highway Symbol sign (W6-1) should be used only where there is a physical barrier separating opposing traffic. The Traffic Separator Symbol sign (OW6-6) should be used in advance of a painted median or painted island within a two-lane, two-way roadway where traffic is required to keep to the right. A DO NOT PASS (R4-1) should be placed approximately 250 feet downstream (depending on prevailing speed) from the Traffic Separator symbol sign.

Minimum Size (OW6-6) 36" x 36"

2C.19 Divided Highway (Road) Ends Sign (W6-2)

On two lane highways at the end of a painted island or traffic separation, a Two Way Traffic sign (W6-3) should be used.

2C.24 Speed Hump Sign (W17-1)

Speed hump signs or markings shall be placed on a public roadway to identify its location. When several speed humps are placed in a series along a roadway between intersections, a single SPEED HUMP sign with a rider indicating the series of humps ahead may be posted for the series.

2C.30 Speed Reduction Signs (W3-5, W3-5a)

Where advance notice is needed for an approaching speed zone which is posted with a SPEED XX (OR2-1) sign, the Speed Reduction sign (OW3-5) shall be used in lieu of W3-5. The speed limit displayed on the sign shall be identical to that displayed on the subsequent SPEED XX sign. The Speed Reduction sign (OW3-5) shall not be used on the interstate system. On the interstate a REDUCED SPEED AHEAD sign (OR2-5) shall be used instead of a Speed Reduction Sign (W3-5 or W3-5a).

2C.33 Lane Ends Signs (W4-2, W9-1, W9-2)

The Pavement Width Transition sign (W4-2) shall be used in advance of a lane drop and the RIGHT (LEFT) LANE ENDS sign (W9-1) may be used in advance of the Pavement Width Transition sign. The LANE ENDS MERGE LEFT (RIGHT) sign (W9-2) should not normally be used.

2C.37 Intersection Warning Signs (W2-1 through W2-6)

The educational TRAFFIC CIRCLE plaque (W16-12p) shall not be used with the Circular Intersection symbol sign (W2-6).

The Circular Intersection symbol sign (W2-6) shall be used in advance of a roundabout intersection to inform motorists that they are approaching the roundabout. The sign is usually accompanied by an appropriate speed rider.

2C.41 Nonvehicular Signs (W11 Series)

The Snowmobile Crossing sign (W11-6) may be installed on state highways under the following conditions:

1. The operator or owner of the snowmobile trail shall install STOP signs on the trail, outside the highway right-of-way.
2. The crossing shall be located, as nearly as possible, at 90 degrees to the highway.
3. The region traffic office will conduct a traffic investigation of the proposed crossing to insure the safety of the crossing.
4. The Oregon Department of Transportation shall make initial installation of snowmobile crossing signs.

2C.43 Use of Supplemental Plaques

The Distance Ahead Plaques (W16-2 and W16-3 Series) or the AHEAD Plaque (W16-9p) may accompany any of the Vehicular Traffic Signs or Nonvehicular Signs (W11 Series) as secondary riders for installations used in advance of an actual crossing area, marked or unmarked. On the State Highway System, the AHEAD Plaque (W16-9p) is the preferred rider.

MOTOR CARRIER ONLY

Sign No. OW15-16

TOWING OR HAULING VEHICLE:



* Reduce Intra letter spacing 30%

PILOT VEHICLE:



SIGNSTDPG.F12

Sign Background: Yellow

Sign Legend: Black

The OVERSIZE LOAD sign shall be used to warn motorists of a vehicle, including load, which is wider or longer than the legal limit and is operating over state or county highways or city streets, by written permit of the authority having jurisdiction over the highway or street.

To enhance visibility of signs; borders, larger legend, and/or reflective background is allowed.

Signs used on hauling vehicles between sunset and sunrise shall be made of reflectorized material.

Reference OAR 734-075-0035, 734-075-0045, 734-076-0135, 734-076-0165, 734-078-0030, 734-078-0035, 734-082-0035, 734-082-0037

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/90

Publication Date: 12/11

MOTOR CARRIER ONLY

Sign No. OW15-17



SIGNSTDPG.F12

Sign Background: Yellow

Sign Legend: Black

Warning signs for vehicle combinations exceeding 75' in overall length, excluding combinations of vehicles authorized by the Surface Transportation Assistance Act of 1982.

Warning sign is to be displayed on the back of the rearmost trailer or semitrailer.

The sign shall be positioned at such height as to be readily visible to following drivers and it shall be kept in good repair, free from dirt, grease and "road film" in order that it may be clearly readable to following drivers.

Signs made of mesh or other materials that do not provide a continuous background are not permitted.

Signs used on hauling vehicles between sunset and sunrise shall be made of reflectorized material.

Reference OAR 734-074-0060

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 3/94

Publication Date: 12/11

MOTOR CARRIER ONLY

Sign No. OW15-17a

TOWING OR HAULING VEHICLE:



PILOT VEHICLE:



SIGNSTDPG.F12

Sign Background: Yellow

Sign Legend: Black

Warning sign for vehicles transporting loads which are not over 8'-6" wide, if the vehicle and overhang are not over 80 feet in total length. county highways or city streets, by written permit of the authority having jurisdiction over the highway or street.

To enhance visibility of signs; borders, larger legend, and/or reflective background is allowed.

Signs made of mesh or other materials that do not provide a continuous background are not permitted.

Signs used on hauling vehicles between sunset and sunrise shall be made of reflectorized material.

Reference OAR 734-074-0060, 734-076-0135, 734-076-0165, 734-078-0030, 734-082-0037

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 3/94

Publication Date: 12/11


MOTOR CARRIER ONLY

Sign No. OW15-18

TOWING OR HAULING VEHICLE:



PILOT VEHICLE:

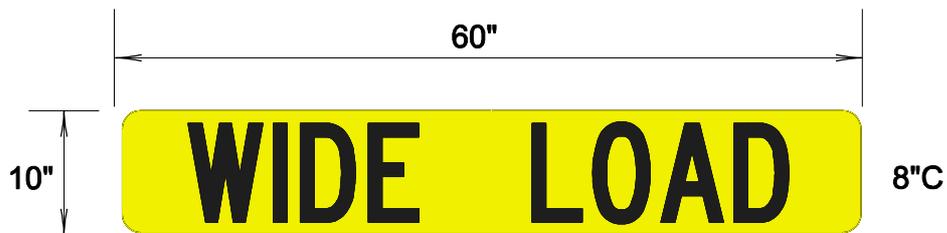

SIGNSTDPG.F12

Sign Background: Yellow

Sign Legend: Black

Warning sign for vehicles transporting loads which are wide only and under 80 feet long.

To enhance visibility of signs; borders, larger legend, and/or reflective background is allowed.

Signs made of mesh or other materials that do not provide a continuous background are not permitted.

Signs used on hauling vehicles between sunset and sunrise shall be made of reflectorized material.

Reference OAR 734-076-0135, 734-082-0037

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 3/94

Publication Date: 12/11

Sign No. OW22-15



SIGNSTDPG.F12

Sign Background: Yellow, Retro-reflective sheeting

Sign Legend: Black, Non-reflective

Use the NO LANE CHANGES AHEAD sign to direct motorists that a no lane change area is approaching. Size shown is for freeway use, use 6"C letters on a 36" x 36" sign for non-freeway applications.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 12/11

Publication Date: 12/11

Chapter 5: Guide Signs - Conventional Roads

2D.08 Arrows

The directional arrows on guide signs should be determined by the height of legend. Use 4" x 6" arrows for 4" legend, 5" x 7" arrows for 5" legend, 6" x 9" arrows for 6" legend, and 8" x 12" arrows for 8" legend. The length of the arrow may be increased if the sign layout allows a longer arrow.

2D.11 Design of Route Signs

Route markers incorporated into guide sign legends shall have a minimum size of 18" x 18". Route markers installed elsewhere shall be a minimum of 24" x 24" except county route shields that may be 18" x 18".

2D.37 Destination Signs (D1 Series)

A white line shall separate all destinations in different directions. All destinations in a given direction shall share one directional arrow. Legend size and style shall be governed by the importance of the sign. All legends on a single sign shall be the same size and style. Not more than 4 destinations should be shown on a conventional road destination sign. Mileage should be shown, except in urban areas.

2D.40 Location of Destination Signs

Prioritize guide signs using the listing on page 5-2.

2D.48 General Information Signs (I Series)

The BUS STATION symbol sign (I - 6) shall be used on state highways to indicate the location of a bus stop on the state highway. When used the BUS STATION symbol sign should be accompanied by a supplemental plaque below the sign to identify the bus service that stops there. The BUS STATION symbol sign shall not be used on state highways as a guide sign to direct drivers to bus stations that are located off of the state highway.

Intersection Guide Sign Guidelines

1. Definitions:

Rural – The area outside the Urban Growth Boundary of any incorporated city.

Urban – The area inside the city limits and extending to the Urban Growth Boundary of any incorporated city.

Advance Guide Sign – Guide signs placed prior to an intersection that include next left, next right, distance, direction, or arrow direction.

Guide Sign – Sign giving direction that may be green, brown, or blue background depending on legend content.

2. A maximum of three destinations per direction may be shown on rural guide signs with a maximum of four total destinations per sign.

Route shields and related plaques are not to be counted as a destination.

Symbol signs such as airport, train station, watchable wildlife, etc., are not to be considered as a destination.

Street name signs (at intersecting streets) are not considered to be a destination and shall be separated by a white line if the street name is incorporated into the guide sign.

3. The priority of destinations to be shown on intersection guide signs shall be as follows:

- A. Closest major city (population over 50,000).
- B. Closest city or community.
- C. National park, state park, fairgrounds, college, or university.
- D. Major traffic generator, publicly owned. *
- E. Major traffic generator, privately owned. *
- F. Community college, private college.
- G. County park, fairgrounds.

* Major traffic generators must meet attendance requirements on page 5-189.

4. Destinations shown on Advance Guide signs shall be consistent with the destinations shown on the Intersection Guide sign.

Public schools, landmarks, armories, Red Cross centers, unincorporated communities, wildlife refuges, youth camps

Full name or approved abbreviation may be signed to publicly owned or nonprofit public agencies or operations permanently located off the highway being signed. May be signed on primary and secondary highways (not on freeways) at the closest access point. If distance to the site is more than one mile, the mileage may be added to the legend.

Auditoriums, ball fields, exposition centers, parks, fairgrounds, race tracks

May be signed on primary and secondary highways at the closest access point. To qualify for signing there must be a significant activity at least weekly.

State Capitol, State Police, PUC, DMV., DEQ

May be signed on freeways, primary, and secondary highways.

Colleges, Universities, Technical Schools

Accredited higher education facilities may be signed on freeways and primary or secondary highways. The school pays for the original sign and installation; ODOT installs and maintains.

Shopping centers may be signed on freeways and primary or secondary highways under the following conditions:

1. At least 46,500 square meters of usable floor space (500,000 square feet).
2. At least 18,000 daily vehicle trips (two-way).
3. Contain at least two and preferably three major retail outlets (Penneys, Sears, etc.).
4. Any required follow-up signing must be in place before highway signing is completed. Written assurance must be provided before highway signing is started.
5. All installation and maintenance costs shall be the responsibility of the center. ODOT will install and maintain the signs.

Business and Industrial Parks may be signed on freeways and primary or secondary highways under the following conditions:

1. At least 46,500 square meters of usable floor space (500,000 square feet).
2. At least 18,000 daily vehicle trips (two-way).
3. The destination must be within one mile of the exit from the state highway.
4. Any required follow-up signing must be in place before highway signing is completed. Written assurance must be provided before highway signing is started.
5. All installation and maintenance costs shall be the responsibility of the Park. ODOT will install and maintain the signs.

Recreational-Cultural Interest Area Signs

Federal Parks - Parks maintained by the federal government may be signed on freeway and primary or secondary highways.

State Parks – If the park is the only destination listed on the freeway sign use the brown recreational guide sign. If the exit leads to other destinations, park is included on the green destination sign.

Resort Areas – The brown recreational guide sign may be mounted under a guide sign under the following conditions:

1. Resort is in a rural area where the highway is either in a scenic area or passes through public land where normal advertising signs are not allowed. Resorts not in public or scenic areas may be signed under TODS program.
2. Resort must be open full-time throughout the appropriate tourist season and offer at least one significant recreational activity such as swimming, boating, skiing, fishing, hunting, rock hounding, etc. The resort must also offer two of the following services:
 - A. Restaurant
 - B. Lodging
 - C. Gasoline and automotive services
3. The resort area should also be at least 25 miles away from areas offering services of a like nature, to limit unfair competition with like services owned and operated on private land.

When a resort sign is used, a gas symbol sign may be allowed, due to the essential nature of gas in remote rural areas. Gas symbols should only be allowed if a service station is available with continuous operation for 12 hours a day and is located within a complex where other services are available to the traveler (such as food, lodging, or camping). The brown and white symbol sign should be installed under the brown and white resort area sign, with or without other recreational symbol signs.

The use of TODS and logos signs will not be allowed for businesses within resort areas wherever brown and white resort signs (with or without recreational riders) have been provided.

2D.45 General Service Signs (D9 Series) State and City Police, Sheriff, DMV, and DEQ are considered motorist services and will be signed under this section with Blue background, white legend signs.

General motorist service signs may be appended to interchange guide signs.

The CHANNEL 9 MONITORED sign shall not be used on State Highways.

NEXT GASOLINE sign may be used on primary and secondary highways at some point leaving the last location where gasoline is available and the next available gasoline is at least 50 miles. This sign is generic but care should be taken in the placement to avoid its being construed as advertising.

Minimum Size 36" x 24"

Emergency Medical Services (EMS) - All requests for installation of the Emergency Medical Services (EMS) symbol sign shall be submitted to the Health Division of the Oregon Department of Human Resources for certification that the requester satisfies the State's established criteria for facilities included in the EMS system. EMS signing will not normally be used in conjunction with Hospital signing.

Minimum Size (D9-13 symbol) 24" x 24"

Tourist Information Centers - Tourist Information Centers may be signed on freeways and primary and secondary highways. The Center must have easy permanent access with adequate parking where local tourist information is available. An attended facility is not required. See page 5-17.

2D.48 General Information Signs (I Series)

Commercial Airports may be signed on freeways and primary and secondary highways if they offer commercial or charter airline service, plane rental, or flying lessons. Use of the horizontal plane symbol sign is preferred over the vertical plane symbol sign.

Minimum Size 24" x 24", Freeway 30" x 30"

Bus Station/Train Station symbol signs (I-6/I-7), may be used on freeways (symbol only) and primary and secondary highways (symbol with rider) at the appropriate exit or the closest access point. May also be used as trailblazers.

Minimum Size Symbol 24" x 24"

Minimum Size Rider 24" x 6"

Rural Fire District Signing Guidelines

Rural fire district sign permits may be written using the following criteria:

1. No signs allowed on the interstate system.
2. Fire district must be rural in nature.
3. Signs will be furnished by the fire district.
4. Replacement signs will be furnished by the fire district upon request, or the remaining signs for the fire district will be removed.
5. Signs will be placed outside the normal operating right-of-way (far side of ditch).
6. Signs will be green background, white legend, reflectorized, in accordance with Section 2H.02 of the MUTCD.
7. No logos will be allowed, word message only.
8. 9-1-1 should not appear on the legend as the State of Oregon now has border to border use of this number.
9. Fire district boundary signs should not be required when the boundary is coincident with city or county boundaries.

2D.53 Signing of Named Highways

Memorial highways may be signed in rest areas, scenic turnouts, or similar places where the motorist can safely park their vehicle to read the marker or sign.

General Information

All requests for signing resort areas, museums, and golf courses should be sent to Oregon Travel Experience, 1500 Liberty Street SE, Suite 150, Salem, Oregon, 97302
Phone (503) 378-4508.

All requests for signing tour or scenic routes should be sent to the Oregon Scenic Byway Program, 555 13th Street NE, Salem, OR 97301-3871
Phone (503) 986-4261.

Community identification signs as allowed in ORS 377.510 are to be placed outside of highway right-of-way.

Banners Located on State Highway Right-Of-Way Signing Guidelines

The purpose of these guidelines is to allow for the temporary placement of banners within the state highway right-of-way to inform the travelling public of local event.

1. Definitions:
 - “Banner(s)” are flags or pennants made of plastic, cloth, or similar material suspended over or spanning the roadway to provide information to motorists on an event occurring in the general area.
 - “Event” is the celebration of a legal holiday, fair, rodeo, roundup, exposition, and other civic event.
2. The District Manager may allow for the placement of banners where the following criteria are met:
 - The event is sponsored or endorsed by a city, county, or state agency.
 - The event is two weeks or shorter in duration and open to the general public.
 - The banner contains no more than the name, logo, date, time and general location of the event.
3. The banner(s) and supports must:
 - Be located within a five-mile radius of the event
 - Have a vertical clearance of at least 20 feet over the roadway and 8 feet over a sidewalk.
 - Be made from a durable material and constructed to withstand wind pressure of 20 pounds per square foot (89N) of exposed surface.
4. The banner(s) and supports must not:
 - Be placed on an interstate highway.
 - Include any advertising, commercial message, brand or product name, or other information about the event such as cost, directions, or contact information.
 - Interfere with, imitate, or resemble any official traffic control device or attempt or appear to attempt to direct the movement of traffic
 - Prevent the driver of a motor vehicle from having a clear and unobstructed view of official traffic control devices and approaching or merging traffic.
 - Have any lighting, unless such lighting is shielded to prevent light from being directed at the highway or is of such low intensity or brilliance as not to cause glare or to impair the vision of the driver of a motor vehicle.
 - Be located such that it is a roadside safety or traffic hazard.
 - Be attached to any official sign, post, signal pole, or any other traffic control device or support.
5. If any banner(s) are allowed, the District Manager will determine the number and type, the date of installation and removal, and any other conditions necessary to protect the safety of the roadway and motoring public.

Alternative Electric Vehicle Charging Symbol Signing Guidelines

An interim approval has been issued for the optional use of a General Service symbol sign that provides road users direction to electric vehicle charging facilities that are open to the public.

Jurisdictions using the sign under this Interim Approval must agree to comply with the technical conditions listed below, supply the Oregon Department of Transportation an inventory list of all locations where the signs are installed, and to comply with Item D in Paragraph 18 of Section 1A.10 of the 2009 MUTCD, which requires:

“An agreement to restore the site(s) of the Interim Approval to a condition that complies with the provisions in this Manual within 3 months following the issuance of a Final Rule on this traffic control device; and terminate use of the device or application installed under the interim approval at any time that it determines significant safety concerns are directly or indirectly attributable to the device or application. The FHWA’s Office of Transportation Operations has the right to terminate the interim approval at any time if there is an indication of safety concerns.”

The use of the alternative Electric Vehicle Charging symbol sign is optional. However, if an agency opts to use this sign under FHWA Interim Approval, the following design and installation requirements shall apply and shall take precedence over any conflicting provisions of the MUTCD.

Installation and use of the alternative Electric Vehicle Charging symbol sign shall conform to the general provisions for General Service signs in accordance with MUTCD Chapter 2I.

Agencies may also continue to use ELECTRIC VEHICLE CHARGING (D9-11bP) plaque as an educational message mounted below the alternative Electric Vehicle Charging symbol sign in a Directional Assembly.


Agencies may use the alternative Electric Vehicle Charging symbol sign in General Services (D9-18 Series) guide signs.

Sign Design and Size:

- a. The design of the alternative Electric Vehicle Charging symbol sign shall be as shown on page 5-22.
- b. The minimum size of the alternative Electric Vehicle Charging symbol sign shall be 24 inches in width by 24 inches in height.
- c. The size of the alternative Electric Vehicle Charging symbol sign shall otherwise be in accordance with those of other D9-11 series signs.

Except as otherwise provided above, all other provisions of the MUTCD applicable to signs shall apply to the alternative Electric Vehicle Charging symbol sign.

Sign No. OD9-11b (Alternate)

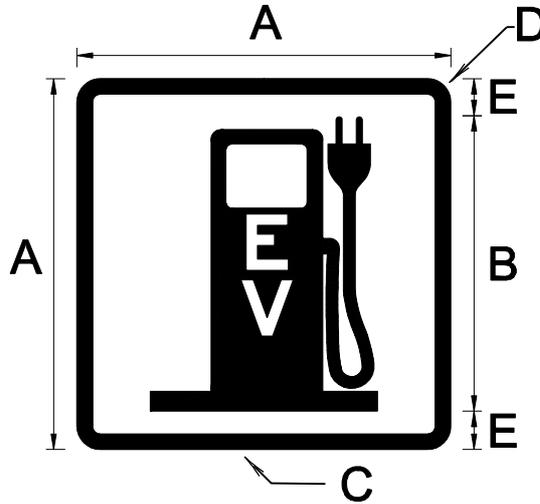

Sign Background: Blue, Retro-reflective sheeting

Sign Legend: White, Retro-reflective

SIGN	DIMENSIONS (INCHES)								
	A	B	C	D	E				
MIN.	24	20	1½	1½	2				
STD.	30	25	¾	1⅞	2½				

The EV (Electric Vehicle) CHARGING symbol sign (D9-11b (Alternate)) may be used to provide direction to road users to electric vehicle charging stations.

Directional Arrow Auxiliary sign (M6-1 or M6-3) may be used in the assembly with the same sign background and sign legend color.

For additional signing information on Electric Vehicle Charging signs, see page 5-21.

SIGNSTDPG.F13


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 12/11

Publication Date: 12 /11

Sign No. OD-411A

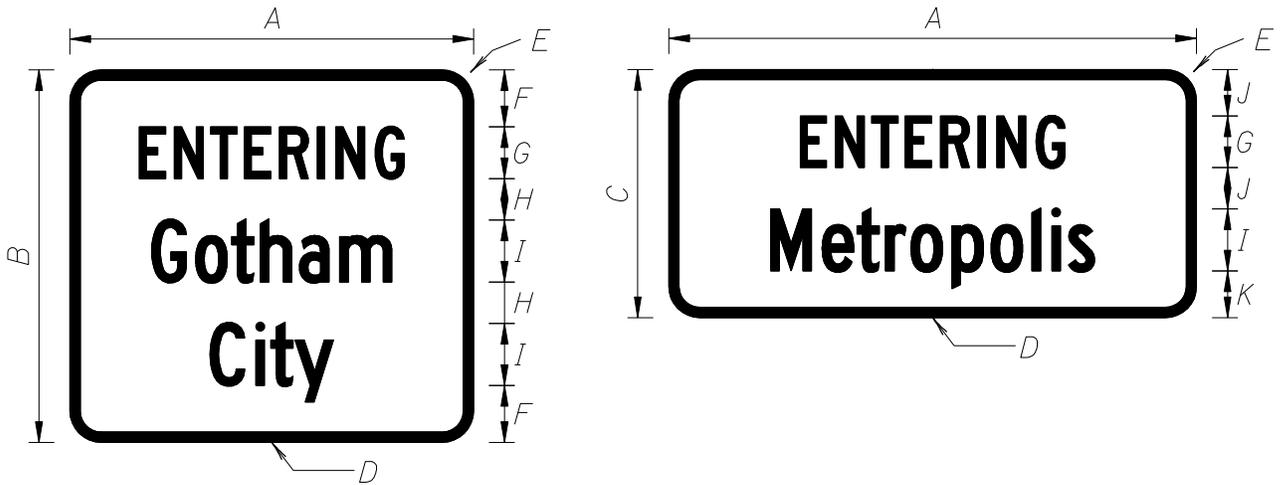

Sign Background: Green, Retro-reflective sheeting

Sign Legend: White, Retro-reflective sheeting

SIGN	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	I	J	K
STANDARD	VAR.	36	24	1	3	5	5C*	4	6C**	4	4
FWY./EXPWY.	VAR.	48	36	1	6	7	6EM*	6	8-6EM**	7	8

* All Upper Case

** Upper Case - Lower Case

The ENTERING CITY sign may be used at the entrances to all incorporated cities.

An approved city logo rider (24"x24") may be installed below the ENTERING CITY Sign. The city logo shall conform to the criteria outlined for the WELCOME TO XX (OD-413) Sign. An additional logo for an approved statewide or national program (e.g. Tree City USA, Preserve America) may also be installed below the ENTERING CITY Sign. A POPULATION Sign (OD-413A) may also be installed below the ENTERING CITY Sign. However, the number of additional signs installed below the ENTERING CITY Sign shall not be more than two.

ENTERING CITY Signs installed on the interstate highway system shall not have any signs installed below them.

SIGNSTDPG.F13


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/92

Publication Date: 12/11

Sign No. OD-412

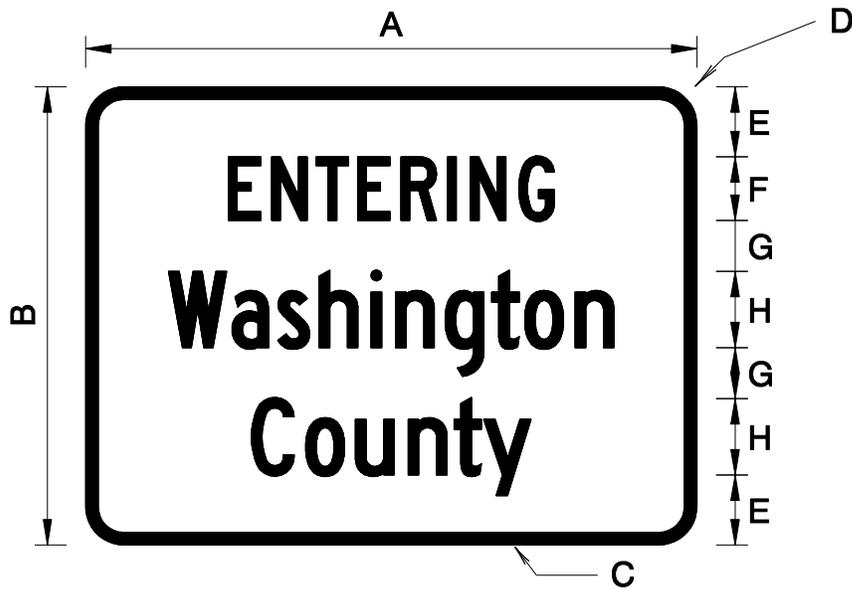

Sign Background: Green, Retro-reflective sheeting

Sign Legend: White, Retro-reflective sheeting

SIGN	DIMENSIONS (INCHES)							
	A	B	C	D	E	F	G	H
STANDARD	VAR.	36	1	3	5.5	5C*	4	6C**
FWY./EXPWY.	VAR.	48	1	6	7	6EM*	6	8-6EM**

* All Upper Case

** Upper Case - Lower Case

The ENTERING XX COUNTY sign may be used to indicate county boundaries crossed by State highways.

An approved county logo rider (24"x24") may be installed below the ENTERING XX COUNTY Sign. The county logo shall conform to the criteria outlined for the WELCOME TO XX COUNTY Sign (OD-414). An additional logo for an approved statewide or national program (e.g. Tree City USA, Preserve America) may also be installed below the ENTERING XX COUNTY Sign. However the number of additional signs installed below the ENTERING XX COUNTY Sign shall not be more than two.

ENTERING XX COUNTY Signs installed on the interstate highway system shall not have any signs installed below them.

SIGNSTDPG.F13


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/90

Publication Date: 12/11

Sign No. OD-413

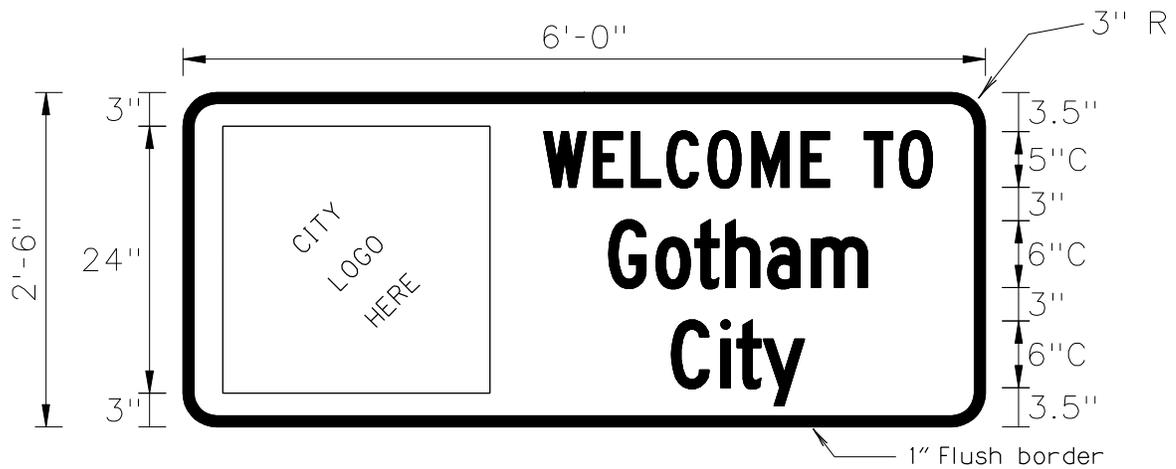

Sign Background: Green, Retro-reflective sheeting

Sign Legend: White, Retro-reflective

The WELCOME TO XX sign may be used as a replacement to the ENTERING XX (OD-411a) sign. The sign shall be erected on the right-hand side of the roadway at or as near the city limits as practicable. This sign should not be placed on the interstate system.

The city's logo (24"x24") shall be installed on the face of the sign. The logo shall be furnished by the city. The logo may have different colors and shapes, but should be simple and dignified, devoid of any advertising. The logo used on the sign shall be approved by the Traffic Engineer.

The WELCOME TO XX signs shall be provided by the State if the existing ENTERING XX sign is due for replacement. If not, the city requesting the sign shall pay total cost of fabrication.

An additional logo for an approved statewide or national program (e.g. Tree City USA, Preserve America) may also be installed below the WELCOME TO XX Sign. A POPULATION Sign (OD-413A) may also be installed below the WELCOME TO XX Sign. However, the number of additional signs installed below the WELCOME TO XX Sign shall not be more than two.

SIGNSTDPG.F.13


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/90

Publication Date: 12/11

Sign No. OD-414

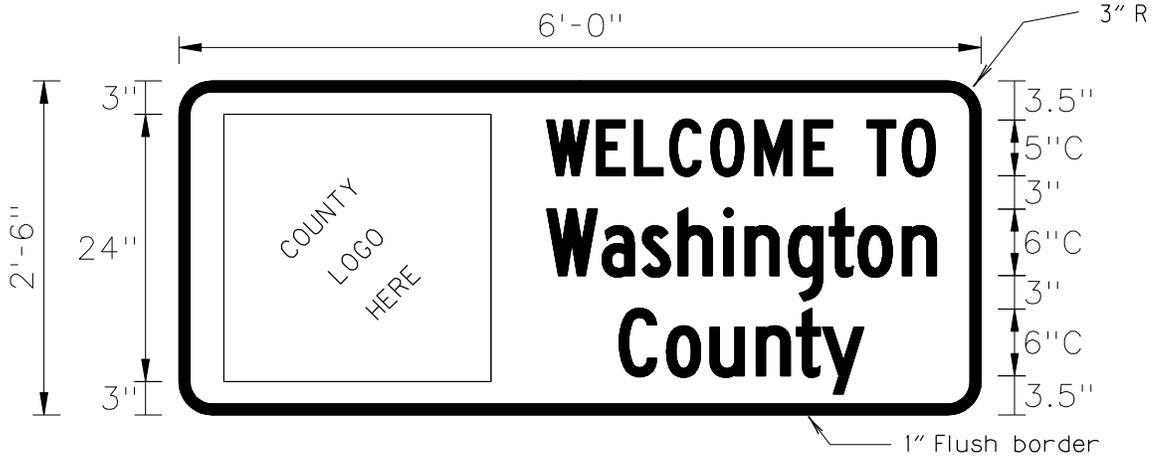

Sign Background: Green, Retro-reflective sheeting

Sign Legend: White, Retro-reflective

The WELCOME TO XX COUNTY sign may be used as a replacement to the ENTERING XX COUNTY (OD-412) sign. The sign shall be erected on the right-hand side of the roadway at or as near the county line as practicable. This sign should not be placed on the interstate system.

The county's logo (24"x24") shall be installed on the face of the sign. The logo shall be furnished by the county. The logo may have different colors and shapes, but should be simple and dignified, devoid of any advertising. The logo used on the sign shall be approved by the Traffic Engineer.

The WELCOME TO XX COUNTY signs shall be provided by the State if the existing ENTERING XX COUNTY sign is due for replacement. If not, the county requesting the sign shall pay total cost of fabrications.

An additional logo for an approved statewide or national program (e.g. Tree City USA, Preserve America) may also be installed below the WELCOME TO XX COUNTY Sign. However, the number of additional signs installed below the WELCOME TO XX COUNTY Sign shall not be more than two.

SIGNSTDPG.F.13

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/90

Publication Date: 12/11

Sign No. D-434



Sign Background: Silver-White Retroreflective sheeting

Sign Legend: Black, Blue, and Green

SIGNSTD.PG.F.13

- *State Parks shields or decals are to be provided by Oregon State Parks and Recreation. Please contact their Sign Coordinator at (503) 986-0707 for more information.*

Minimum Size 33"x36"


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: O.T.C.

Date: 1/90

Publication Date: 12/11

Sign No. D-435

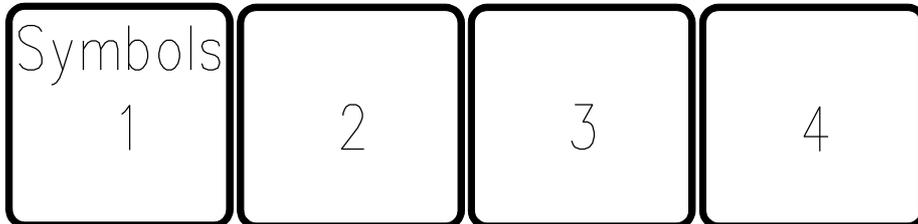

Sign Background: Brown, Retroreflective sheeting

Sign Legend: White, Retroreflective

Advance directional signs for state parks are designed for use at collector points on state highways. They are not to be used at property entrances. Design parameters include:

- Minimum 6 inch letters.*
- Minimum 18 inch shield. (optional)*
- Maximum four recreation symbols.*
- Symbols 24x24 (min. 18" x 18") inches white on brown. As appropriate.*

** State Parks shields or decals are to be provided by Oregon State Parks and Recreation. Please contact their Sign Coordinator at (503) 986-0707, for more information.*


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 5/97

Publication Date: 12/11

SIGNSTD.PG.F.13

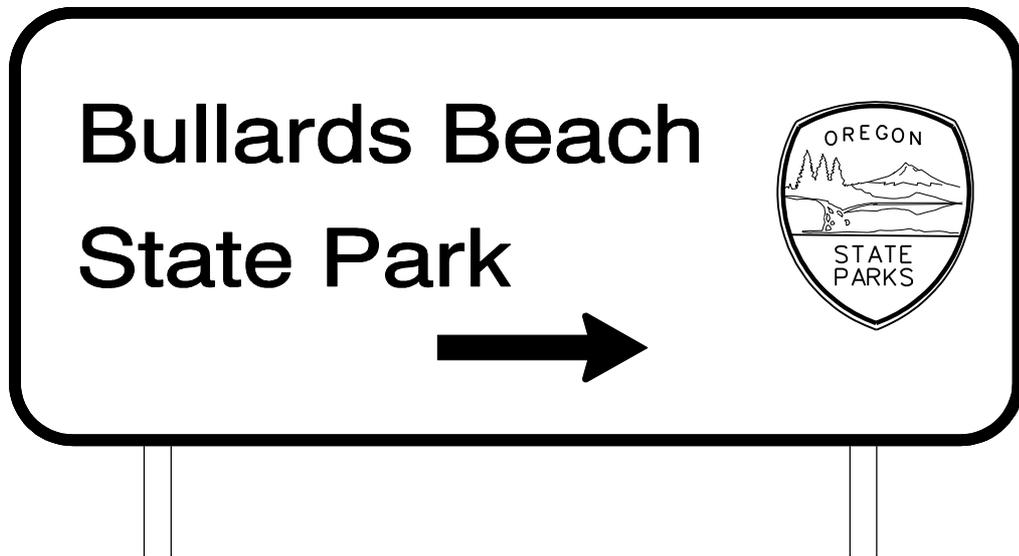

Sign Background: Brown, Retroreflective sheeting

Sign Legend: White, Retroreflective

Turn direction sign.


- *18" minimum shield*
- *Six inch minimum letter size.*
- *No recreation symbols or other signs.*
- *Omit arrow if not needed.*
- *Flip down sign may be used with turn direction sign if it is determined to be safer than on the advance direction sign.*

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 5/97

Publication Date: 12/11

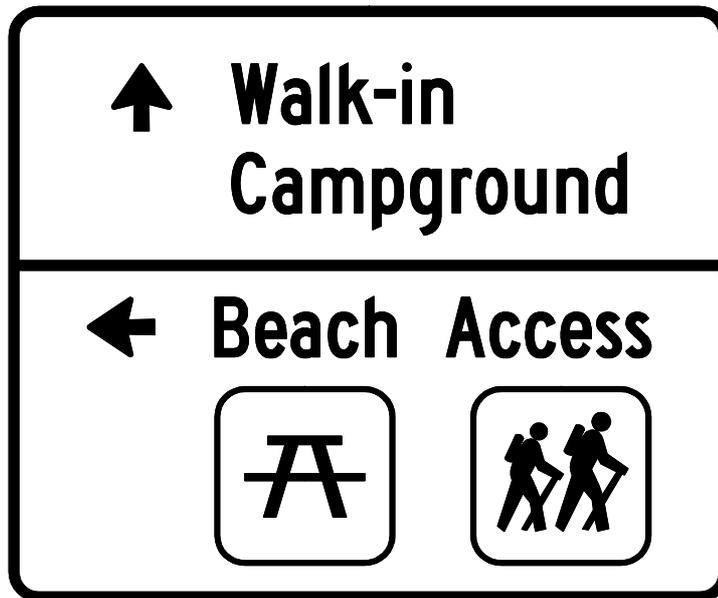

Sign Background: Brown, Retroreflective sheeting

Sign Legend: White, Retroreflective

Advance Direction Sign for park with through traffic.

Size of text will vary with speed of vehicles.

SIGNSTDPG.F13

OREGON DEPARTMENT OF TRANSPORTATION



Approved By: S.T.E.

Date: 5/97


Publication Date: 12/11



Property Name

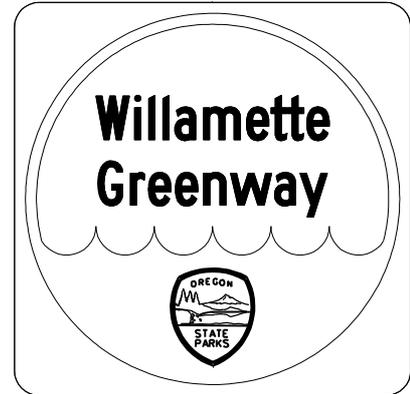

Property Name



Sign Background: Brown, Retroreflective sheeting

Sign Legend: White, Retroreflective

Turn direction sign.

- *36" OPRD shield.*
- *Property Name, 6 inch letters, Upper & Lower Case, White on Brown, 36"x12".*
- *Arrow, white on brown, 21"x15".*

SIGNSTDPG.F.13

OREGON DEPARTMENT OF TRANSPORTATION


Approved By: S.T.E.

Date: 5/97


Publication Date: 12/11



Required

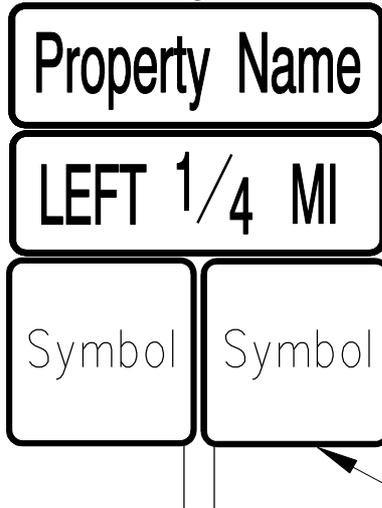

Optional

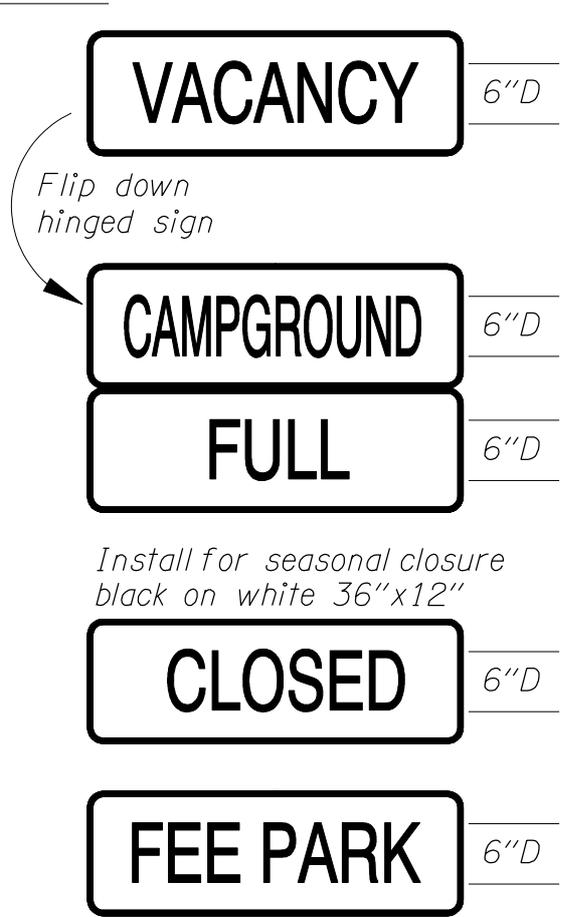

Install for seasonal closure
black on white 36"x12"

Sign Background: Brown, Retroreflective sheeting

Sign Legend: White, Retroreflective

SIGNSTDPG.F.13


- 36" OPRD shield.
- Property Name, 6 inch letters, Upper & Lower Case, White on Brown, 36"x12".
- LEFT or RIGHT in 1/4, 1/2, or 1 MI. Five inch letters, White on brown, 36"x12".
- One, 24" Recreation Symbol or maximum two 18"x18" recreation symbols side by side.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 5/97

Publication Date: 12/11

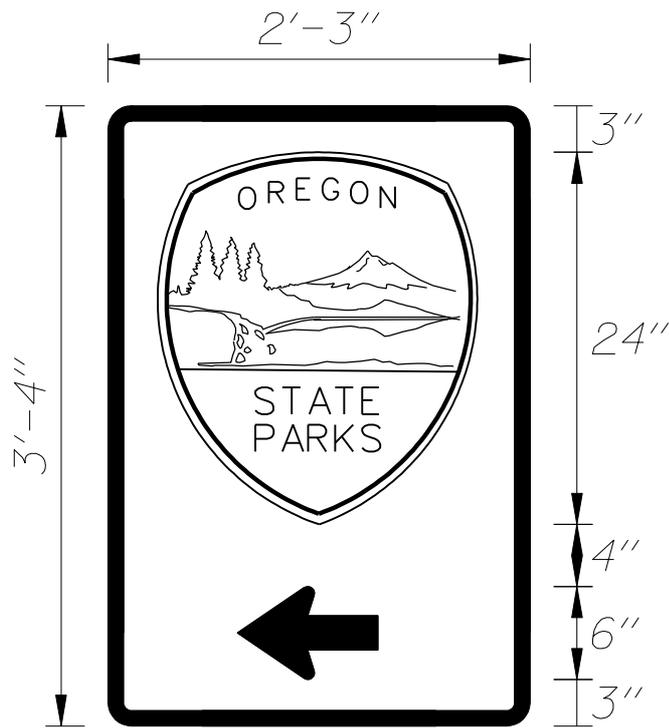

Sign Background: Brown, Retroreflective sheeting

Sign Legend: White, Retroreflective

- *Route Marker*
- *State Parks shields or decals are to be provided by Oregon State Parks and Recreation. Please contact their Sign Coordinator at (503) 986-0707 for more information.*

SIGNSTDPG.F13

OREGON DEPARTMENT OF TRANSPORTATION


Approved By: S.T.E.

Date: 5/97

Publication Date: 12/11

**NOT FOR USE ON
STATE HIGHWAY**

Sign No. OS3-2

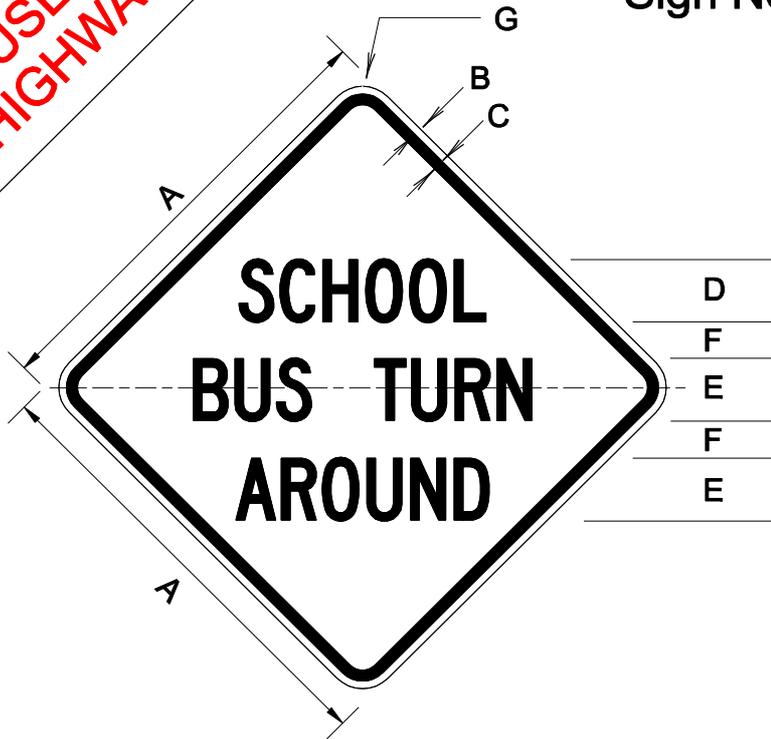

Sign Background: Yellow or Fluorescent Yellow-Green
Retroreflective sheeting

Sign Legend: Black, Non-reflective

SIGN	DIMENSIONS (INCHES)						
	A	B	C	D	E	F	G
MIN.	30	1/2	3/4	4C	4C	2 1/2	1 7/8
STD.	36	5/8	7/8	5C	5C	3	2 1/4
SPEC.	48	3/4	1 1/4	7C	7C	4	3

The SCHOOL BUS TURN AROUND sign may be used to warn motorists that school buses may be turning around and re-entering the roadway.

For state highways use MUTCD sign S3-2.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 1/00

Publication Date: 12/11

SIGNSTDPG.F15

**NOT FOR USE ON
STATE HIGHWAY**

Sign No. OBW8-22



Sign Background: Yellow, Retroreflective sheeting

Sign Legend: Black, Non-reflective

Available in 30", 36", and 48" sizes

SIGNSTDPG.F15

The Bike/Ped Warning sign may be interchanged with the Bike Warning sign (W11-1) at, and in advance of, crossing locations where it is likely that crossing activities will include pedestrians or cyclists. When used at the crossing location, the sign shall be accompanied by the diagonal downward pointing arrow. When used in advance of the crossing, it shall be accompanied by a supplemental plaque containing the legend AHEAD or XXX FEET.

For state highways use MUTCD sign W11-15.


OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.


Date: 3/96

Publication Date: 12/11


Sign No. OBD1-1c

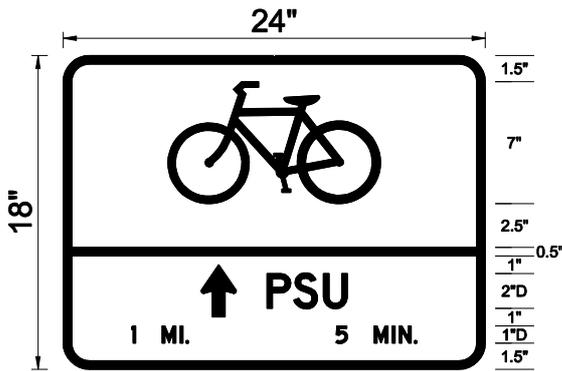

Sign No. OBD1-3c

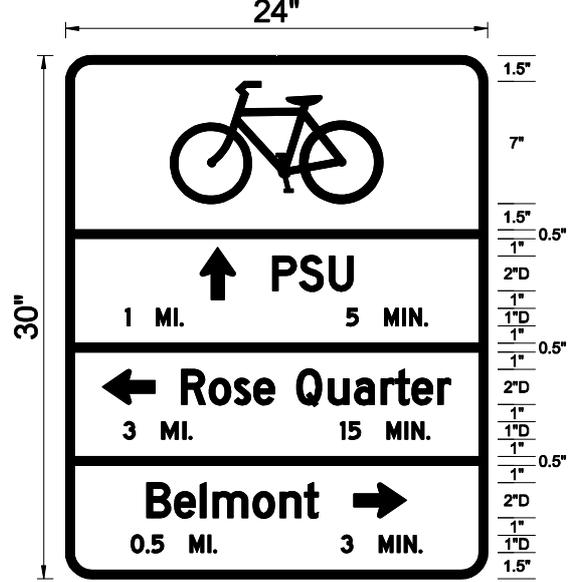

Sign No. OBD1-2c

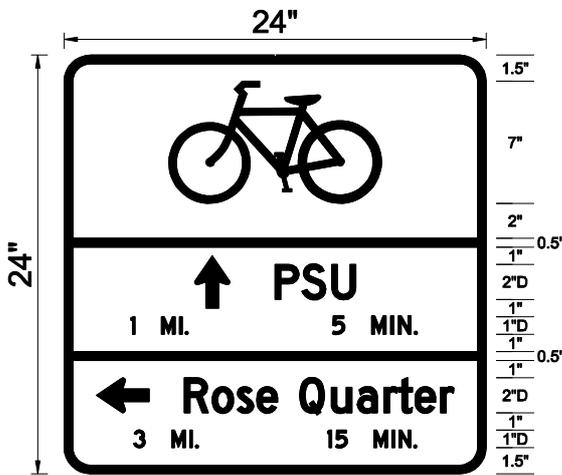

Border = 1/2"
 Radius = 1 1/2"
 2" x 3" Arrows

Sign Background: Green, Retro-Reflective

Sign Legend: White, Retro-Reflective

SIGNSTDPG.F.15

The bike directional signs can be used as a replacement for the D1-1c, D1-2c and D1-3c signs shown in the MUTCD.

OREGON DEPARTMENT OF TRANSPORTATION

Approved By: S.T.E.

Date: 7/08

Publication Date: 12/11