

# ADA Curb Ramp New Construction Inspection Form (End of Walk)

Project Name (Section)

Construction Contract No. Highway No.  
Year

MP Cross Street Name

**Calibration Date**


(mm/dd/yy)

*See Exhibit A for more corner styles*

Ramp Style

Use the End of Walk style inspection form where sidewalk ends at locations that are not intersections. Turning Space may be measured at either the top or bottom of the ramp run.

*See also Standard Drawings to assess provisions not shown: (inlets, alignment, etc.)*

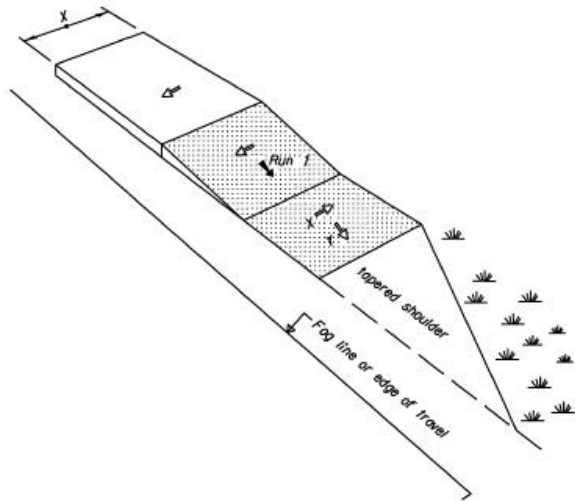

- Pedestrian access route (To measure clear width)
- Cross slope (design to 1.5% max. to achieve 2.0% finish grade)
- Running slope (design to 7.5% max to achieve 8.3% finish grade)
- Level area (X & Y) (design to 1.5% max to achieve 2.0% finish grade / 4' x 4' min.)


| RAMP RUN 1         | Pass   | Fail   | DE |
|--------------------|--------|--------|----|
| Running Slope 1    | ≤ 8.3% | > 8.3% |    |
| Length 1           |        |        |    |
| Cross Slope 1      | ≤ 2.0% | > 2.0% |    |
| Detectable Warning |        |        |    |
| Lip Height         | 0"     | > 0"   |    |

**Functional Condition Description:**  
**Good (G)** = all applicable boxes pass OR a Design Exception addresses criteria that do not pass.  
**Poor (P)** = any applicable box fails

**Physical Condition Description:**  
**Good (G)** = the concrete within the Pedestrian Circulation Area (includes flares and path back to existing sidewalk) contains no cracks or deformations  
**Poor (P)** = any part of the concrete within the Pedestrian Circulation Area (includes flares and transition panels) contains cracks or deformations

| TURN SPACE/LANDING | NEITHER | Pass   | Fail | DE |
|--------------------|---------|--------|------|----|
| Width X            | ≥ 4.0'  | < 4.0' |      |    |
| Length Y           | ≥ 4.0'  | < 4.0' |      |    |
| Slope X            | ≤ 2.0%  | > 2.0% |      |    |
| Slope Y            | ≤ 2.0%  | > 2.0% |      |    |

| MISCELLANEOUS Traversable | Pass   | Fail   | DE |
|---------------------------|--------|--------|----|
| Flare Slope 1             | ≤ 10%  | > 10%  |    |
| Flare Slope 2             | ≤ 10%  | > 10%  |    |
| Clear Width (feet)        | ≥ 4.0' | < 4.0' |    |
| Slope of the Road         |        |        |    |
| Design Ex. Control Number |        |        |    |

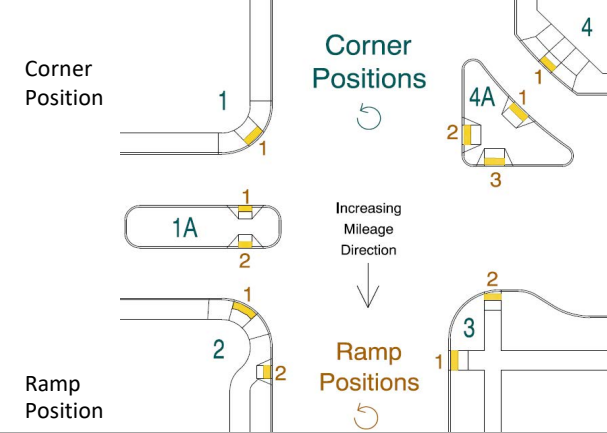

Physical Condition (G,P)

Functional Condition (G,P)

|     | Fail | DE |            | Fail | DE |
|-----|------|----|------------|------|----|
| CRK |      |    | ICRR       |      |    |
| DO  |      |    | INLET XING |      |    |
| GB  |      |    | STR        |      |    |
|     |      |    | FT BT DR   |      |    |

Comment:

*See also Standard Comments for full list of acceptable comments*

Inspector's Signature \_\_\_\_\_ Date \_\_\_\_\_

Print name clearly \_\_\_\_\_ Certification No. \_\_\_\_\_

Company/Agency \_\_\_\_\_ Crew No. (ODOT) \_\_\_\_\_



## ADA Curb Ramp Images

Attached photos must be in .pdf format in order to be placed