

STATE OF OREGON  
 DEPARTMENT OF GEOLOGY AND MINERAL INDUSTRIES  
 910 State Office Building Portland, OR 97201

WELL SUMMARY REPORT

(In compliance with rules and regulations pursuant to ORS 520)

DAMON PETROLEUM CORP, INC LONGVIEW FIBRE LV #3  
 (Company or operator) (Lease) (Well No.)

Sec. NE 1/4 21, T. 9 S, R. 11 W W.B. & M. Surveyed Coordinates: APPROX 1190' E.  
DFW. LINE; 1915' S. OF NORTH LINE

Wildcat: YES (or) Field Name: \_\_\_\_\_ County: LINCOLN

Elevation of ground above sea level is 240 feet. All depth measurements are taken from \_\_\_\_\_  
 \_\_\_\_\_, which is \_\_\_\_\_ above ground.

Date: 1-13-'86 Signature: Robert W. Monty  
 Position: PRESIDENT


Commenced drilling: OCT 1, 1985 Completed drilling: NOV 14, 1985 P&A: NOV 16TH 1985

Total depth: 3040 Redrill depth: \_\_\_\_\_

Logs run: YES, CYBARLOOK, INDUCTION, SONIC

CASING RECORD

Size of hole	Size of casing	Wt. in lbs. per ft.	Grade Type	Depth	Amount of cement
<u>11 5/8</u>	<u>8 5/8</u>	<u>7 WALL</u>	<u>3218 H 40</u>	<u>308'</u>	<u>120 SACKS</u>
<u>6" HOLE TO T.D.</u>					

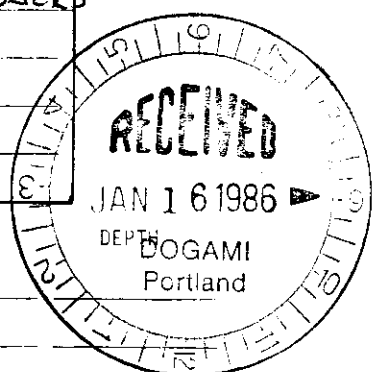

GEOLOGICAL MARKER

Plugs 100' CEMENT PLUG 950 TO 1050'  
103 " " 350' TO 247'

Junk NO JUNK -

PERFORATIONS OR LINER

Size of casing	From	To	Shots/ft.	Method of Perforating		
				Jet	Bullet	Slotted Liner

INITIAL PRODUCTION

Date	Clean Oil bbl/day	Gravity	Percent Water	Gas MMcf/day	F.T.P.	F.C.P.	S.I.T.P.	S.I.C.P.