

WELL LONGVIEW FIBER 42-22

COMPANY REICHHOLD ENERGY CORP.

AREA S. MIST


LOCATION N89°04'19"W 562.82 FT & NO°55'41"E 260.54 FT FRM E X CORN. SEC. 22; T6N; R 5W; W8&M COUNTY, STATE COLUMBIA Co. OR.

- W E G E -

WESTERN GEO-ENGINEERS

"A SERVICE TO THE OIL AND GAS INDUSTRY"

LITHOLOGY SYMBOLS



REMARKS

WELL ELEV. GL. 755.03 KB. 766.43

SALINITY IN PPM FILTRATE IN CC/30 MIN. MUD LIGNOSULFONATE (BEAVER DRILLING FLD) TAYLOR DRILLING RIG #5

CASING 8 5/8" TO 436.8'

MUD DATA

W WEIGHT V VISCOSITY F FILTRATE FC FILTER CAKE SD SAND IN %

LEGEND

S SALINITY R RESISTIVITY RF FILTRATE RESISTIVITY BIT DATA NB NEW BIT RRB RERUN BIT


OTHER DATA

CB CORE BIT WLCB WIRE LINE CB CR CIRCULATE RETURNS NR NO RETURN DST DRILL STEM TEST

OTHER DATA

TC TRIP GAS CG CONNECTION GAS C CARBIDE GAS DST INTERVAL [ ] CORE INTERVAL

DATE 1/11/85 to 1/16/85 DEPTH 30' to 2278' ENGINEERS R. BUTLER B. PORTWOOD

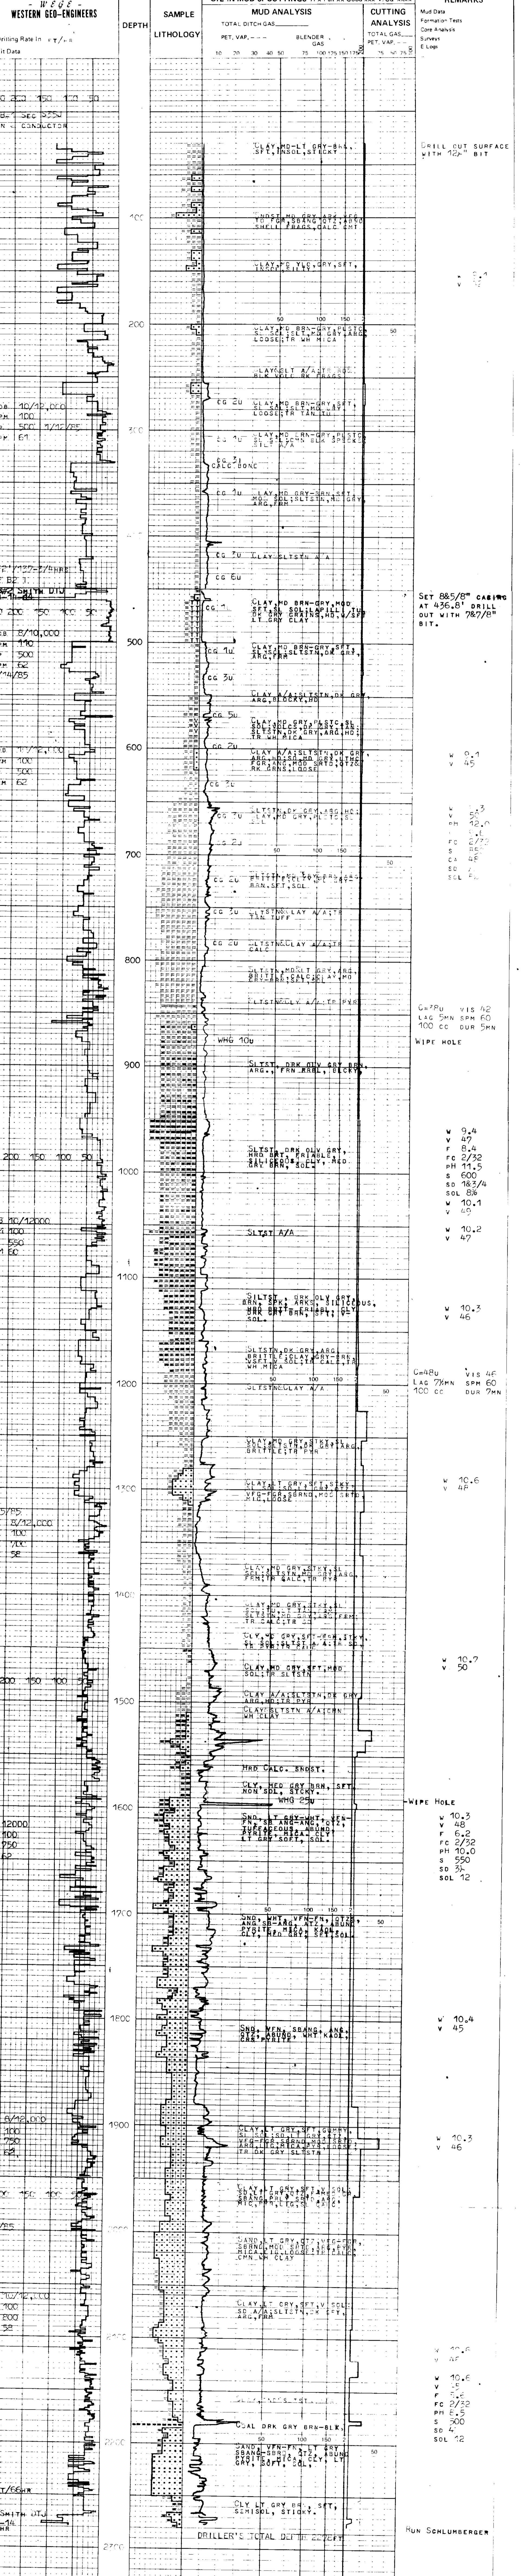

Drilling Rate in ft/hr

Bit Data

300 200 150 100 50

NB-1 SEC 3750 IN CONDUCTOR

WOB 10/12,000 RPM 100 PP 500 SPM 67

WOB 8/10,000 RPM 110 PP 500 SPM 62 7/14/85

WOB 11/7,000 RPM 100 PP 500 SPM 62

WOB 10/12,000 RPM 100 PP 500 SPM 60

WOB 10/12,000 RPM 100 PP 500 SPM 62

WOB 10/12,000 RPM 100 PP 500 SPM 60

WOB 8/12,000 RPM 100 PP 750 SPM 62

WOB 12,000 RPM 100 PP 750 SPM 62

WOB 8/12,000 RPM 100 PP 750 SPM 62

WOB 10/12,000 RPM 100 PP 750 SPM 62

WOB 10/12,000 RPM 100 PP 750 SPM 62

WOB 10/12,000 RPM 100 PP 750 SPM 62

WOB 10/12,000 RPM 100 PP 750 SPM 62

WOB 10/12,000 RPM 100 PP 750 SPM 62

REICHHOLD ENERGY CORP., LONGVIEW FIBER #42-22; SEC. 22, T6N, R5W, W8&M, COLUMBIA COUNTY, OR.