

## Chapter 17

### FIRE SIGNAL PLAN (EMERGENCY TRAFFIC SIGNAL)

#### Contents

<b>17</b>	<b>Fire Signal Plan (EMERGENCY TRAFFIC SIGNAL).....</b>	<b>17-1</b>
17.1	General.....	17-1
17.2	Operational Approval.....	17-1
17.3	Fire Signal Located at an Intersection.....	17-1
17.4	Fire Signal Located at Mid-Block Access .....	17-2
17.4.1	Operation.....	17-2
17.4.2	Controller and Service .....	17-2
17.4.3	Signal Head Type and Layout.....	17-3
17.4.4	Signs.....	17-6
17.4.5	Tattle-tail Indicators .....	17-8
17.4.6	Preemption Devices.....	17-9
17.4.7	Detection .....	17-11
17.4.8	Pedestrian Accommodation .....	17-11
17.5	Emergency-Vehicle Hybrid Beacon .....	17-11

## **17 FIRE SIGNAL PLAN (EMERGENCY TRAFFIC SIGNAL)**

### **17.1 General**

A fire signal is a special type of traffic control signal that assigns the right-of-way to an authorized emergency vehicle (typically fire trucks). This type of signal is usually installed at a location that doesn't meet other traffic signal warrants, such as the access for the emergency vehicle. They are not used at roundabouts.

### **17.2 Operational Approval**

A fire signal requires an STRE Operational Approval.

### **17.3 Fire Signal Located at an Intersection**

When a fire signal is located at the intersection of a public road, a standard fully actuated signal shall be provided. While the purpose signal is to help enable emergency vehicles access the mainline, a standard fully actuated signal is not technically a fire signal and Chapters 5 and 6 of this manual should be consulted for design information.

## 17.4 Fire Signal Located at Mid-Block Access


Fire signals are typically located at a mid-block access used only by emergency vehicles and help them access the highway. The following section discusses specific design requirements for mid-block fire signals.

### 17.4.1 Operation

The operation of a fire signal located mid-block will remain green on mainline until the emergency vehicle preempts the signal. In the past, flashing yellow was commonly used, but is no longer allowed unless it is documented in the STRE Operational Approval. The preemption can be either a manual input (i.e. push button at the fire station) that is pre-timed or a standard preemption detector unit that will wirelessly provide and hold the input until the emergency vehicle has cleared the access.

The mainline phases are 2 and 6. The preemption phase is phase 4 on Channel B. The normal phase rotation and fire preemption operation should be shown on the plan sheet. See Figure 17-1.

Figure 17-1 | Phase Rotations for Fire Signal

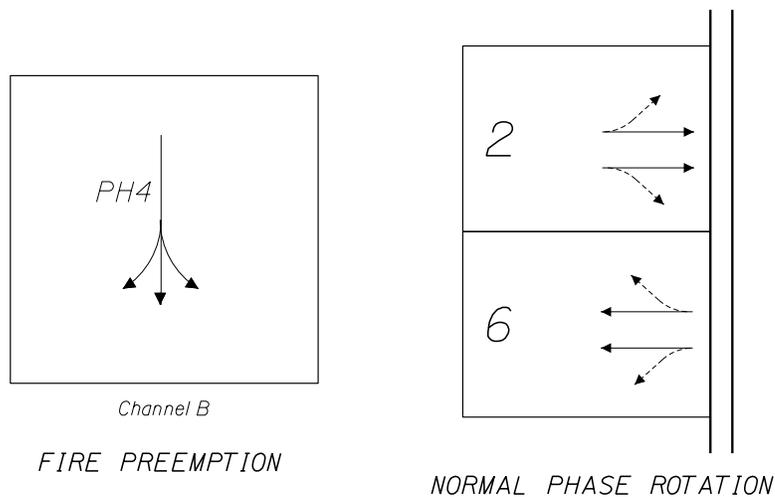


### 17.4.2 Controller and Service

A 332S controller cabinet with a Base Mounted Service (BMC) should be used.

### 17.4.3 Signal Head Type and Layout

The mainline approach is required to have at least two Type 2 Signal heads. See Figure 17-2.

Figure 17-2 | Signal Head Layout for Mid-Block Fire Signal

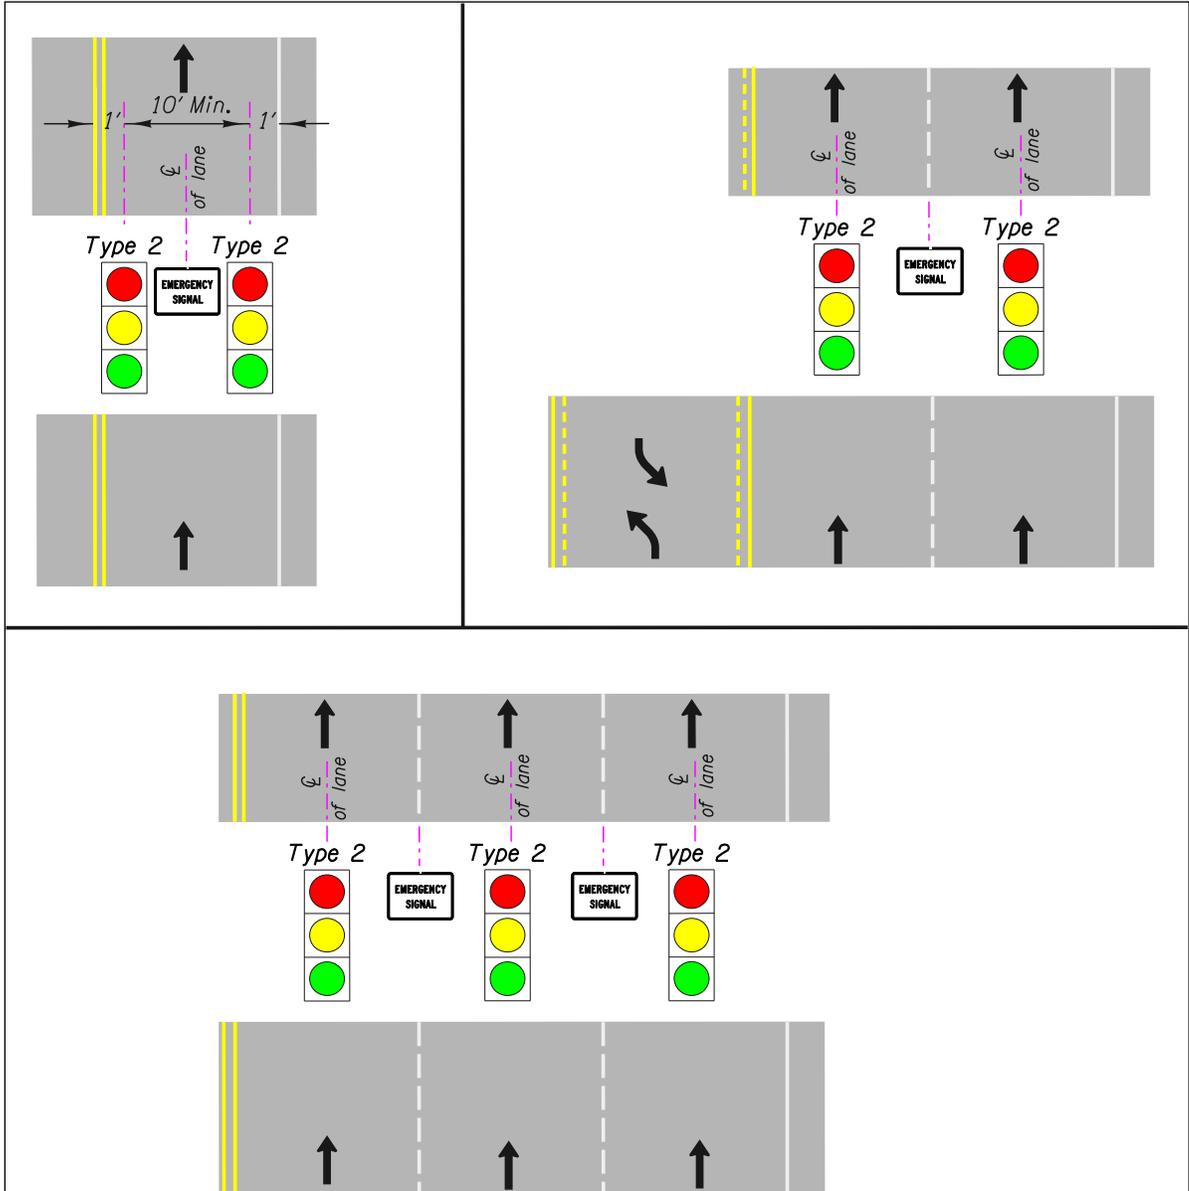

The default standard is NO signal indications for emergency access approach. This is because it is important for the emergency vehicle driver to watch traffic, not a signal indication when accessing the mainline. This is especially true at a fire signal, where the mainline phase is normally green (driver's don't expect the signal to change). However, if the fire department requests a form of preemption confirmation on the access approach, a tattle-tail indicator may be used. See Section 17.4.5 for more information.

The tattle-tail indicator can clearly inform the fire department that the preemption is working (the tattle-tail will be ON when the mainline indications are RED) by a simple, direct hardwire vs. more complex systems that have been used in the past that required additional phases/outputs in a controller cabinet (i.e. Type 2 signal Head, a single green circular indication, and flood lights). As such, these more complex systems are no longer allowed. See Figure 17-3 thru Figure 17-5.

**Figure 17-3 | Confirmation Indication – NO LONGER ALLOWED**



Figure 17-4 | Confirmation Indication – NO LONGER ALLOWED



Figure 17-5 | Confirmation Indication – NO LONGER ALLOWED




#### 17.4.4 Signs

Several specific signs are required for a fire signal. Coordinate with the sign designer for any ground mounted signs.

An emergency vehicle sign (W11-8) with an EMERGENCY SIGNAL AHEAD supplemental plaque (W11-12p) is required to be installed in advance of the fire signal. A warning beacon may be used to supplement this advance warning sign if deemed necessary by the Operational Approval.

Figure 17-6 | Emergency Vehicle Sign (W11-8) with Emergency Signal Ahead Plaque (W11-12p)

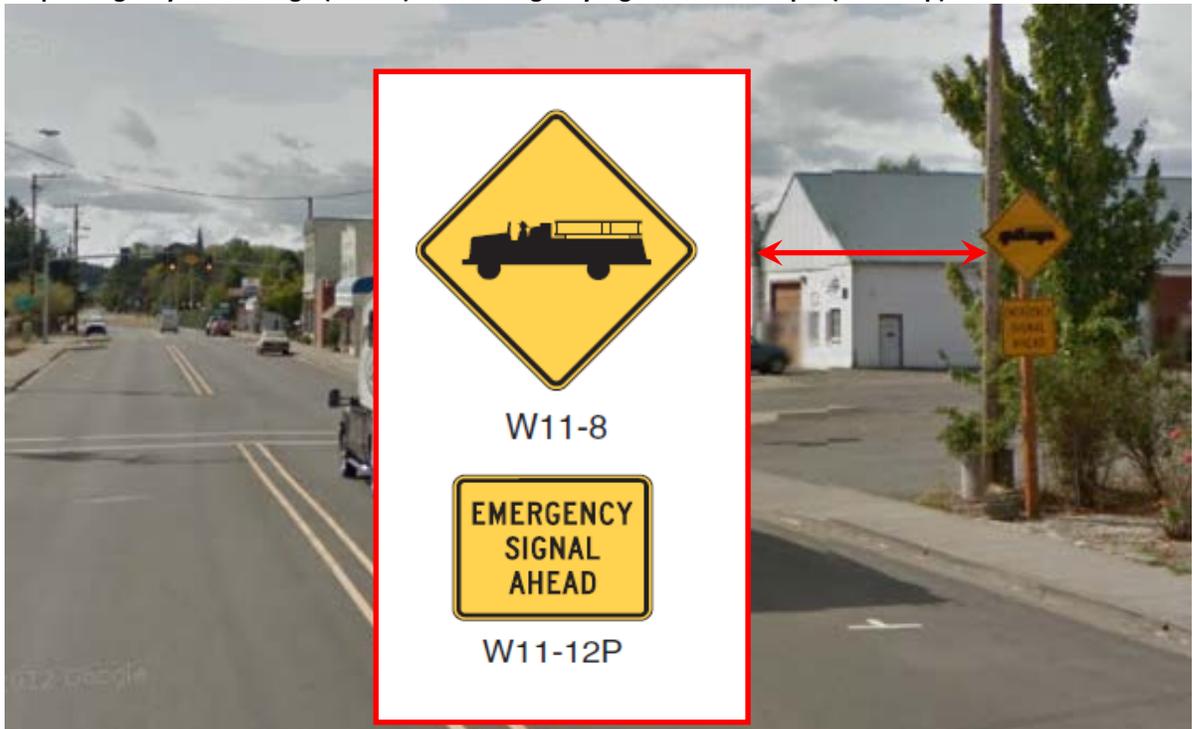

An EMERGENCY SIGNAL sign (R10-13) shall be mounted overhead, typically between the two signal heads.

Figure 17-7 | Emergency Signal Sign (R10-13)



A STOP HERE ON RED sign (R10-6) shall be mounted near the stop line.

Figure 17-8 | Stop Here on Red Sign (R10-6)



#### 17.4.5 Tattle-tail Indicators

Tattle-tail indicators are typically used at the request of law enforcement to aid in enforcing red light running violations by clearly indicating a RED indication is active from certain viewing angles. The tattle-tail light is directly hardwired to the RED indication. This simple direct hard-wire design also works well for fire signal confirmation indication. If a confirmation indication is requested, use Standard Detail DET4400 and coordinate with the fire department to determine the best placement for the tattle-tail, as it is a directional device.


### 17.4.6 Preemption Devices

Two types of preemption can be used:

- Push Button located inside the fire station
- Preemption detection devices

Push buttons are not as common anymore due to the invention of preemption detection devices and their widespread use. However, this is the only option if the fire department is not using the standard preemption detection devices or the wish to maintain their legacy preemption system. Coordination with the fire department is critical to determine the proper location and mounting for the push button and the conduit routing to the push button. Multiple push buttons may also be needed. See Figure 17-9.

Figure 17-9 | Push Button Preemption – Placement and Conduit Routing Example

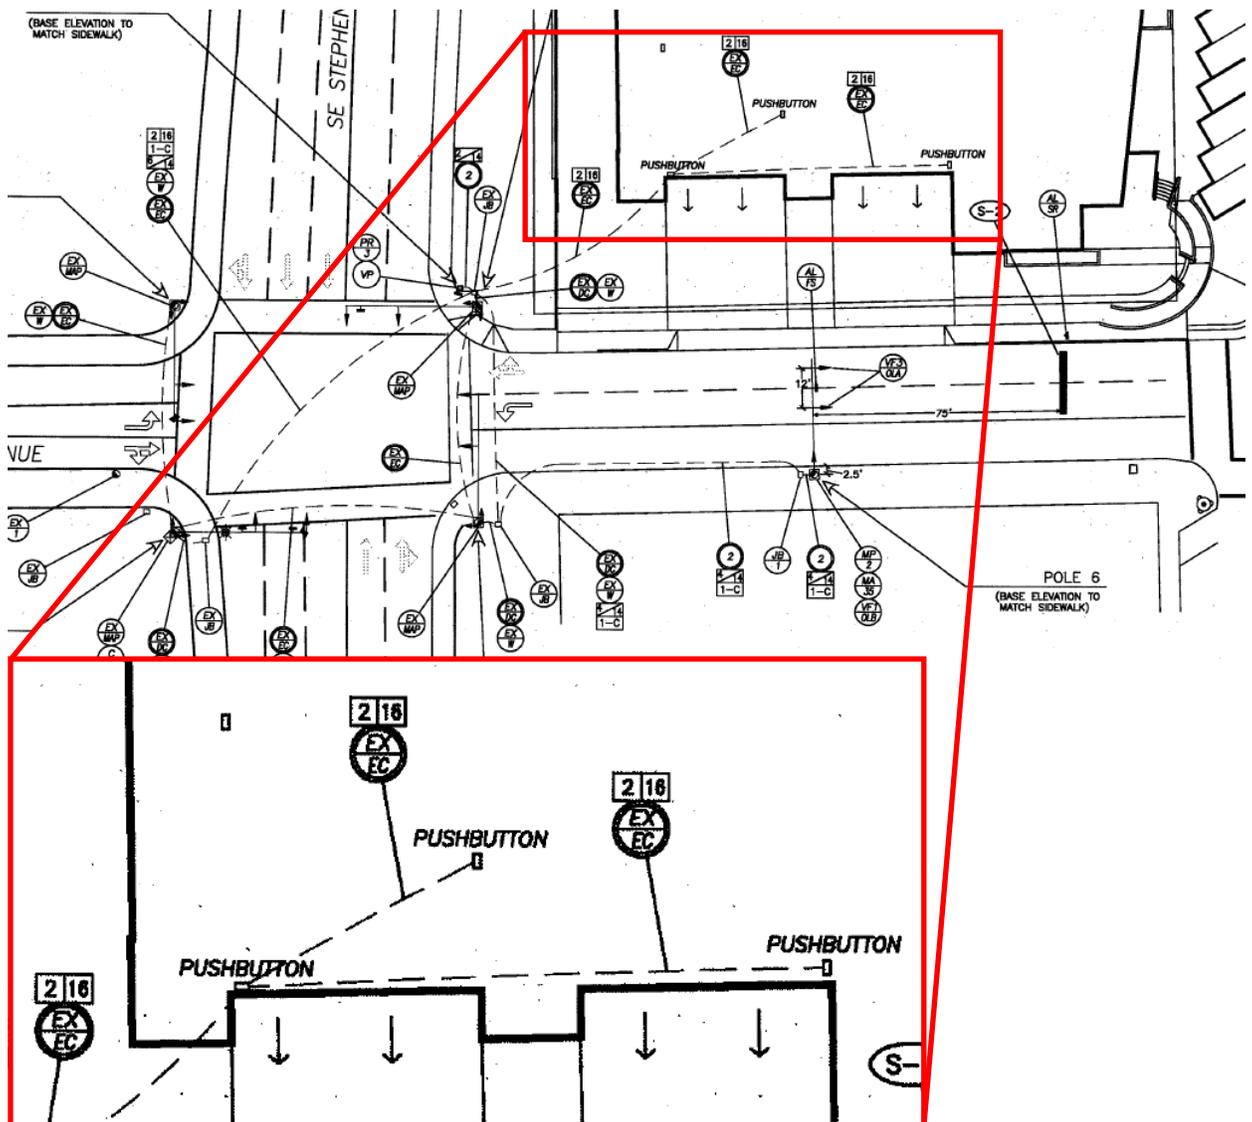

Installation of push buttons, conduit and wiring is allowed to be installed off of right-of-way via Intergovernmental Agreement (IGA) for this type of preemption. The IGA is with the associated City or County, who then have an agreement with the Fire Department. Typically the Region Electrical crew will maintain the entire installation, including the equipment that is located off right-of-way. Therefore, it is necessary to show the conduit, wire, junction boxes and push button(s) located off right-of-way on the plan sheet.

Preemption detection devices are the most common type of preemption used for a newly installed fire signal. The device should be placed such that emergency vehicle leaving the station will activate it as soon as possible. This will depend on the configuration of the property and the typical path of the emergency vehicle when it uses the access approach. Multiple devices may be used at different locations to properly hold the preemption input, or a single preemption device may be used in conjunction with a pre-set time if the device would lose the input too soon. Coordinate with the fire department and region signal timer to determine the best preemption operation.

**Figure 17-10 | Preemption Detection Device – Placement Example**



Loop detection (or any alternative vehicle detection) shall NOT be used as a preemption device. This is due to the fact that if a loop fails, the fire signal will remain preempted

until it is fixed. This would cause enormous traffic back-ups and disrespect for the fire signal.

#### **17.4.7 Detection**

Vehicle detection is not needed for a fire signal.

#### **17.4.8 Pedestrian Accommodation**

Pedestrian phases shall not be used for a fire signal.

### **17.5 Emergency-Vehicle Hybrid Beacon**

Emergency-vehicle hybrid beacons shall not be used as an emergency traffic signal.