


SECTION C-C

NOTE:

All reinforcement to be placed 2" clear of nearest face of concrete unless shown or noted otherwise

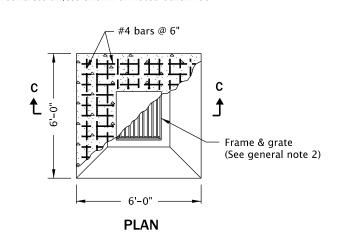

TYPE G-2MA


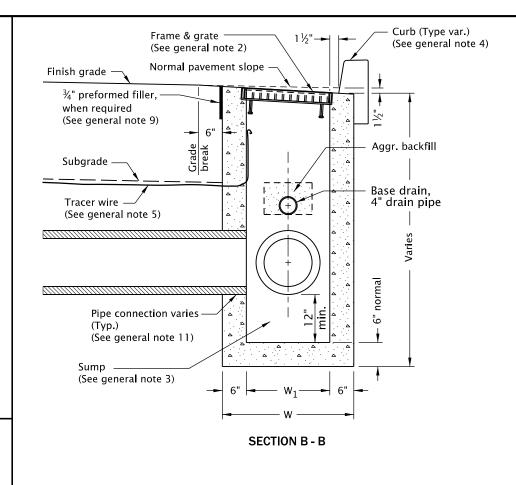


TABLE A		
INLET TYPE	W	W_1
G-1		1'-8%"
G-2, G-2M, G-2MA	3'-3%"	2'-3%"

3/4" preformed filler, Slope 1:12 nom. when required Top of curb -(Typ.) (See general note 9) Normal gutter Base drain. Depressed gutter 4" drain pipe (Typ.) Aggr. backfill (Typ.) Subgrade -Tracer wire (Typ.) (See general note 5) Pipe connection varies Pipe connection varies (Typ.) (Typ.) (See general note 11) (See general note 11) Sump (See general note 3) Pay limit for conc. inlet (See general note 10) **SECTION A - A**

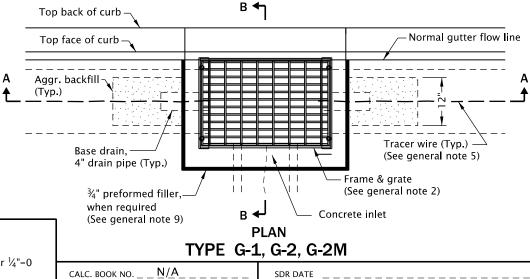

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

OREGON STANDARD DRAWINGS

the current Oregon Standard Specifications

All material and workmanship shall be in accordance with

CONCRETE INLETS
TYPE G-1, G-2, G-2M, & G-2MA

2021

DATE REVISION DESCRIPTION

GENERAL NOTES FOR ALL DETAILS ON THIS SHEET:

- 1. Where precast inlets are used as an alternate to cast-in-place inlets, a 4" compacted leveling bed of sand or $\frac{1}{4}$ "-0 crushed aggregate shall be provided. All precast inlets shall conform to requirements of ASTM C913.
- 2. Graphics show G-1 inlet with Type 2 grate. See Table A for inlet dimensions.

 Type 1 grate allowed only in locations not subject to bicycle or pedestrian use.

For frame and grate details, see Std. Dwg. RD365.

- 3. Provide sump only where shown on plans, and allowed by jurisdiction. See Detail A for inlet without sump.
- 4. For curb details, see Std. Dwgs. RD700 & RD701.
- 5. See Std. Dwg. RD336 for tracer wire details, or approved alternate.
- 6. Max. pipe diameter varies with pipe material.
- 7. Location, elevation, diameter, slope, and number of pipe(s) varies, see project plans.
- 8. All concrete shall be commercial grade concrete.
- 9. ¾" preformed filler (in concrete pavement or gutter only) to extend through thickness of concrete.
- 10. See Std. Dwg. RD363 for gutter transition section, when curb and gutter are required.
- 11. See Std. Dwg. RD339 for pipe to structure connections.