


CC 01

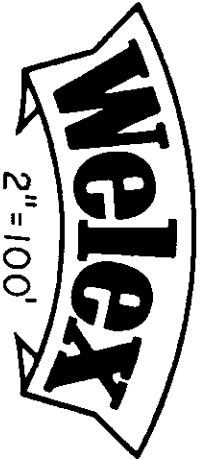

INDUCTION • ELECTRIC LOG

COMPANY REICHOLD ENERGY CORPORATION
 WELL COLUMBIA COUNTY NO. 1 R/D NO. 1
 FIELD NEHALEM BASIN
 COUNTY COLUMBIA STATE OREGON
 Location 310' NORTH AND 812' WEST FROM THE CENTER OF:
 Sec. 11 Twp. 6N Rge. 5W
 Permament Datum G.L. Elev. 1021
 Log Measured From K.B. OR 10.5 Ft. Above Perm. Datum
 Drilling Measured From K.B. Elev. K.B. 1031.5
 D.F. 1021
 G.L. 1021

Date	4-27-79
Run No.	ONE
Depth—Driller	3105
Depth—Welex	3105
Btm. Log Inter.	3099
Top Log Inter.	361
Casing—Driller	7 @ 360
Casing—Welex	361
Bit Size	6 1/4
Type Fluid in Hole	CLAY BASE
Dens. Visc.	7.6 52
pH Fluid Loss	10 3.2 ml
Source of Sample	CIRCULATED
R _m @ Meas. Temp.	3.4 @ 70 °F
R _{ml} @ Meas. Temp.	2.9 @ 65 °F
R _{mc} @ Meas. Temp.	4.3 @ 65 °F
Source R _{ml} R _{mc}	MEASURED
R _m @ BHT	N/A @ 119°F
Time Since Circ.	3 HRS
Max. Rec. Temp.	119°F @ T.D.
Equip. Location	9017 BKFD.
Recorded By	MR. GARZA
Witnessed By	MR. MCBURNIE, MR. CLARE, MR. BRUER


Fold Here

Service Ticket No. 044493 Remarks:


Change in Mud Type or Additional Samples				SCALE CHANGES			
Date	Sample No.	Type Log	Depth	Scale Up Hole	Scale Down Hole		
Dens.	Visc.						
ph	Fluid Loss						
Source of Sample				EQUIPMENT DATA			
R _m @ Meas. Temp.	@ °F	@ °F	Run No.	Tool Type and No.	Pad Type	Tool Position	Other
R _{ml} @ Meas. Temp.	@ °F	@ °F	ONE	IEL 15249		FREE	6 1/4 HOLE
R _{mc} @ Meas. Temp.	@ °F	@ °F					
Source: R _{ml} R _{mc}							
R _m @ BHT	2.1 @ 119°F	@ °F					
R _{ml} BHT	1.8 @ 110°F	@ °F					
R _{mc} BHT	2.5 @ 119°F	@ °F					


Welex does not guarantee the accuracy of any interpretation of log data. Conversion of log data to physical rock parameters, or recommendations which may be given by Welex personnel or which may appear on the log or in any other form. Any user of such data, interpretations, conversions, or recommendations agrees that Welex is not responsible, except where due to gross negligence or willful misconduct, for any loss, damages, or expenses resulting from the use thereof.

2" = 100'

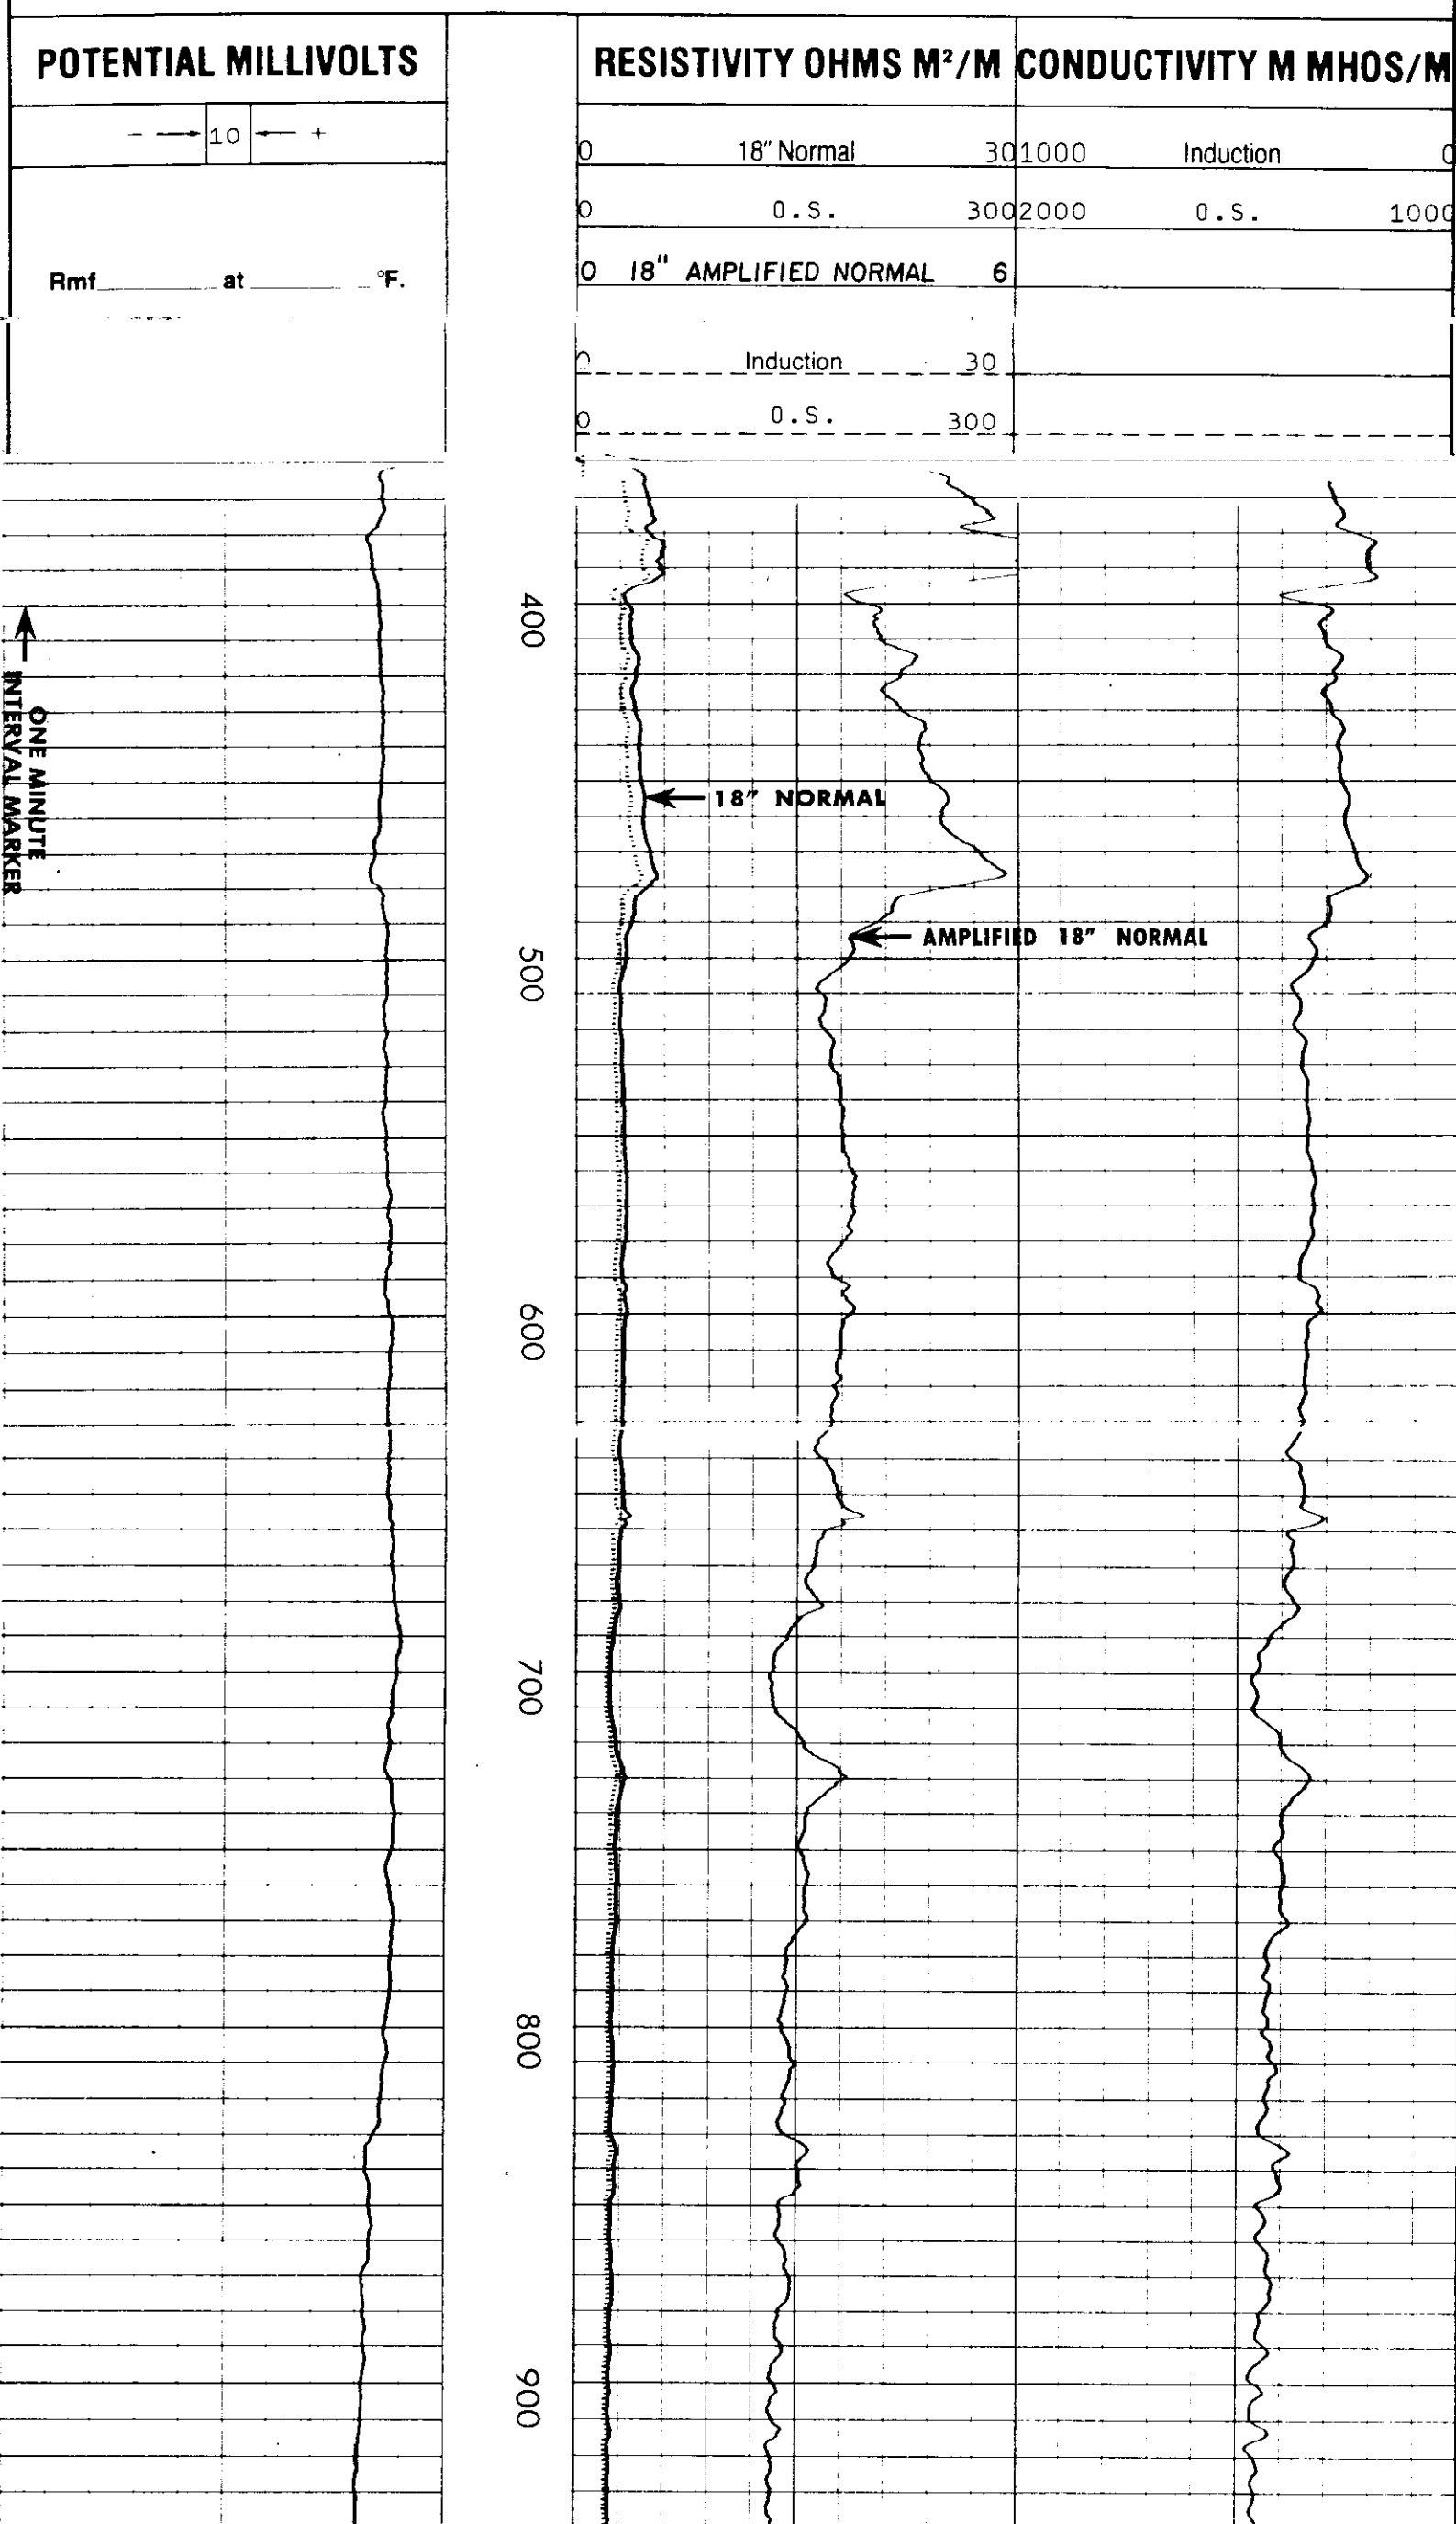

ONE MINUTE INTERVAL MARKER

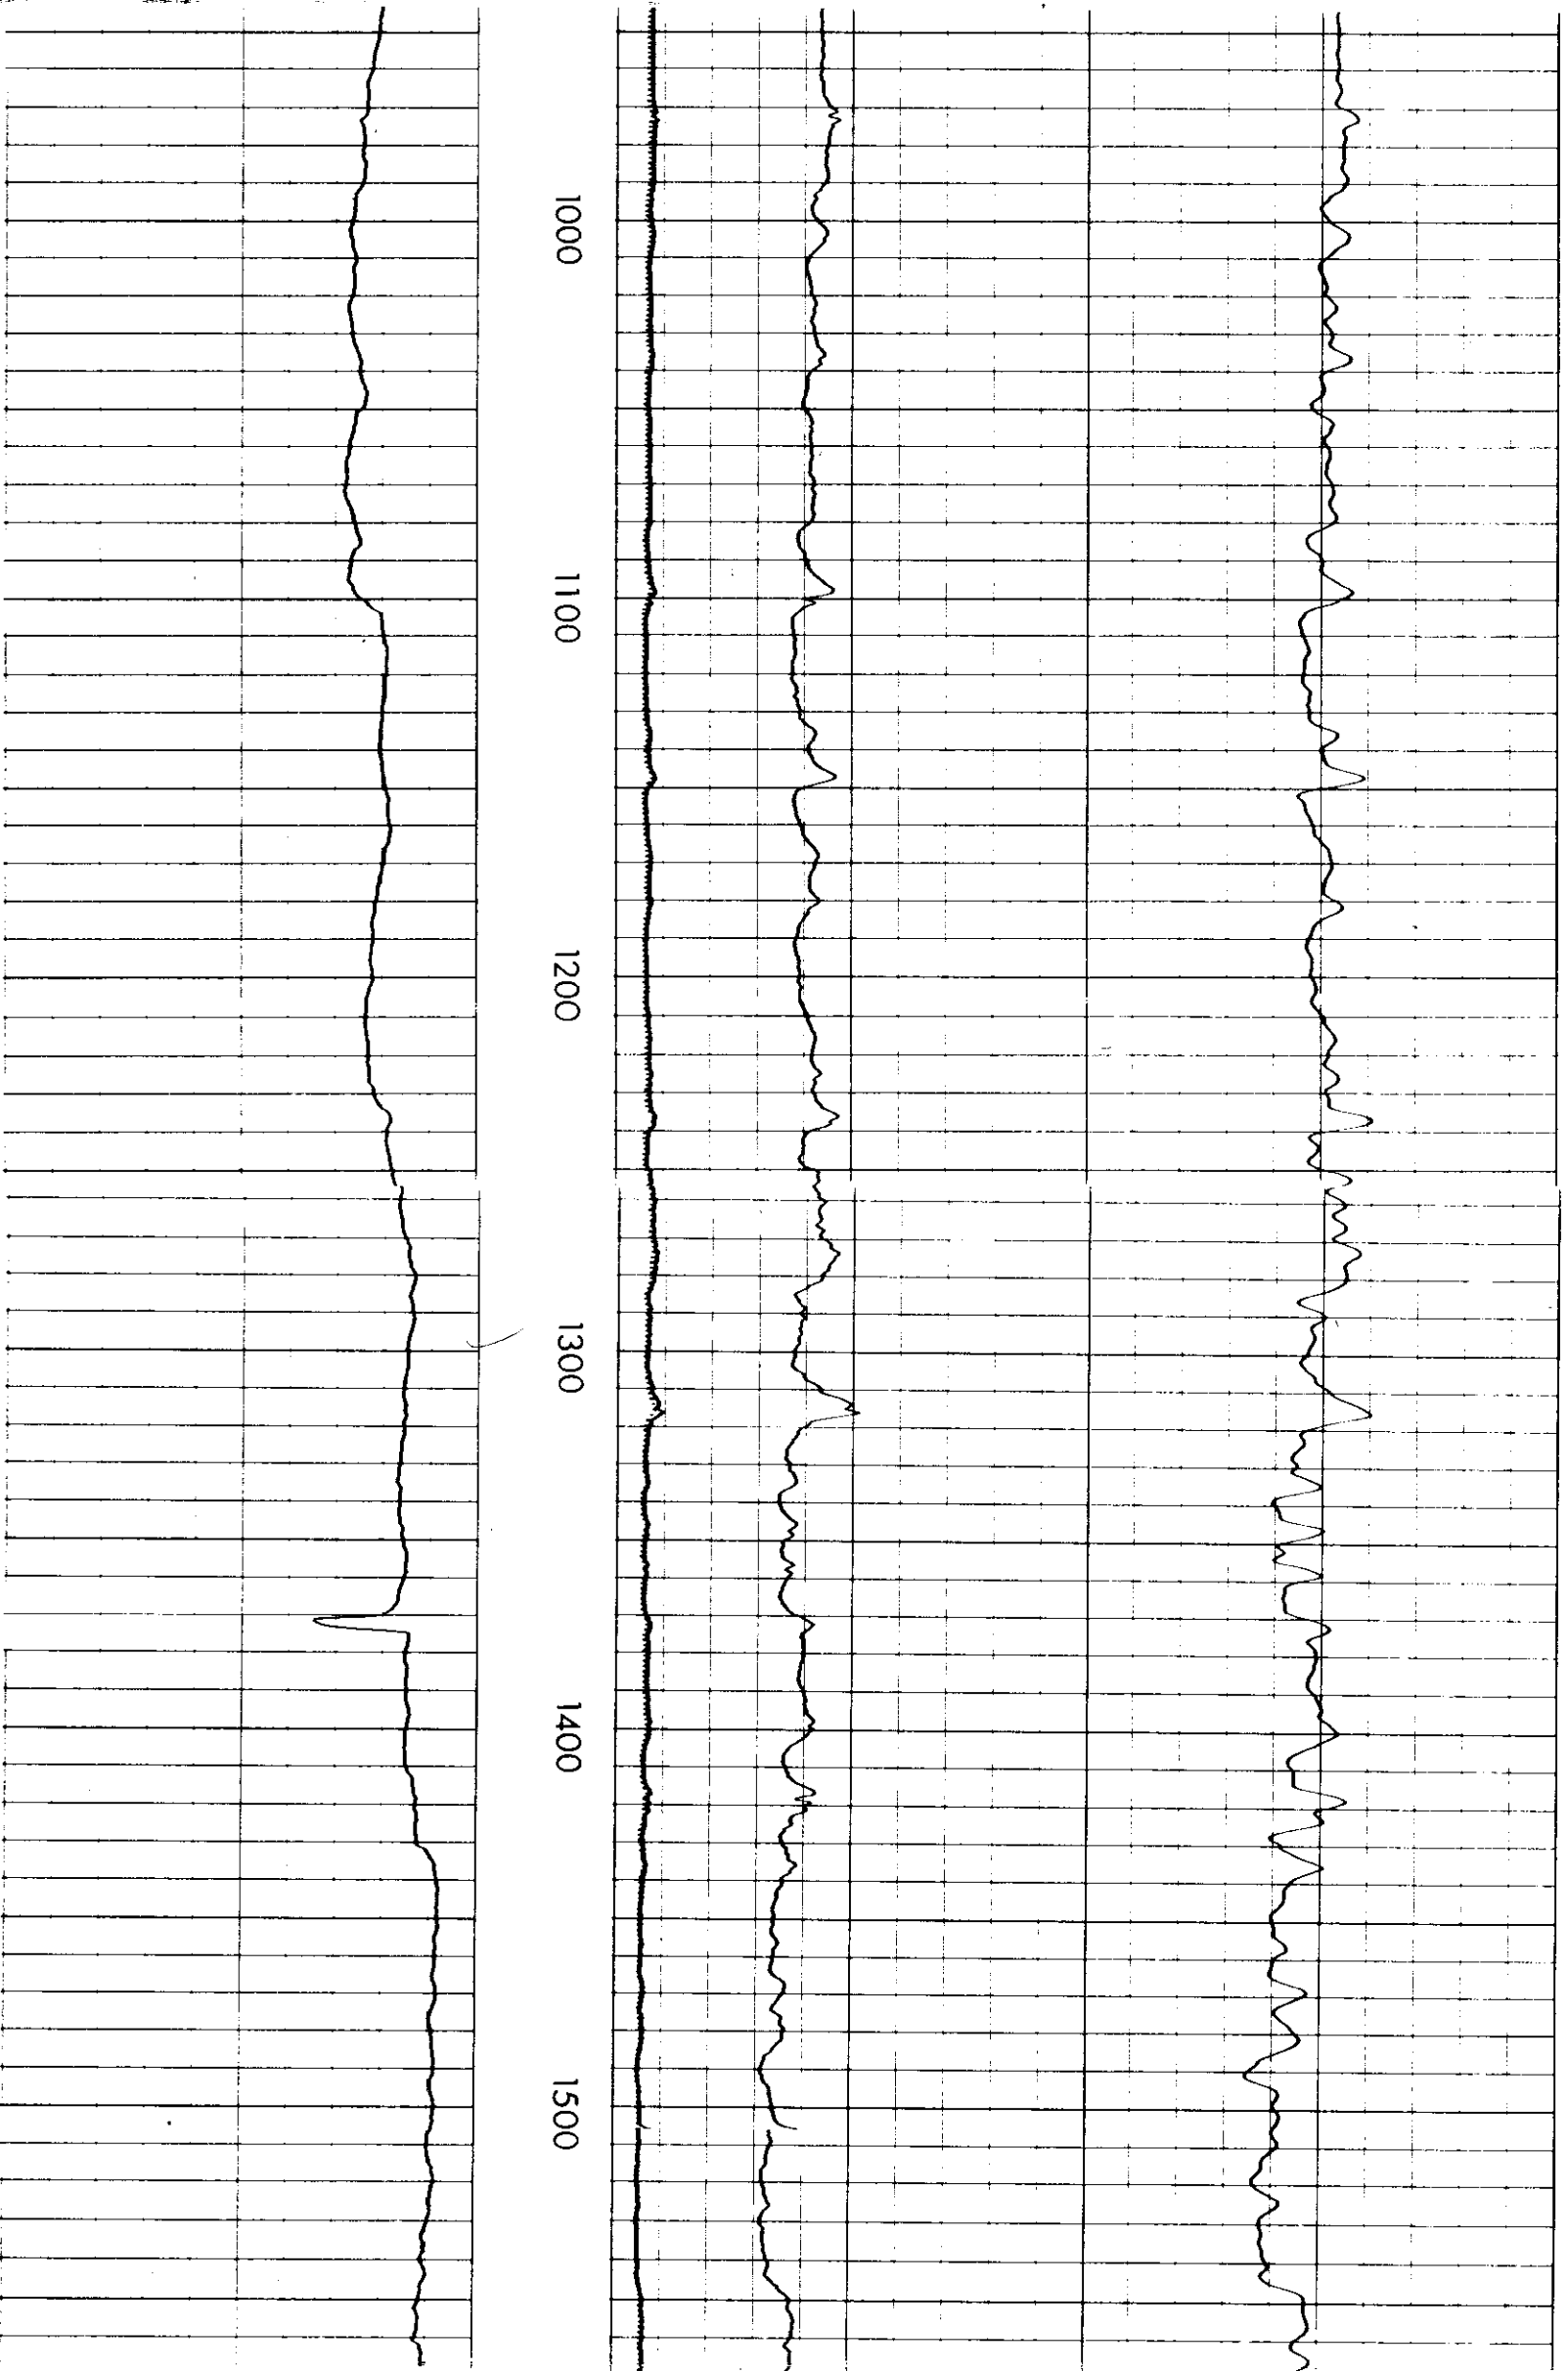

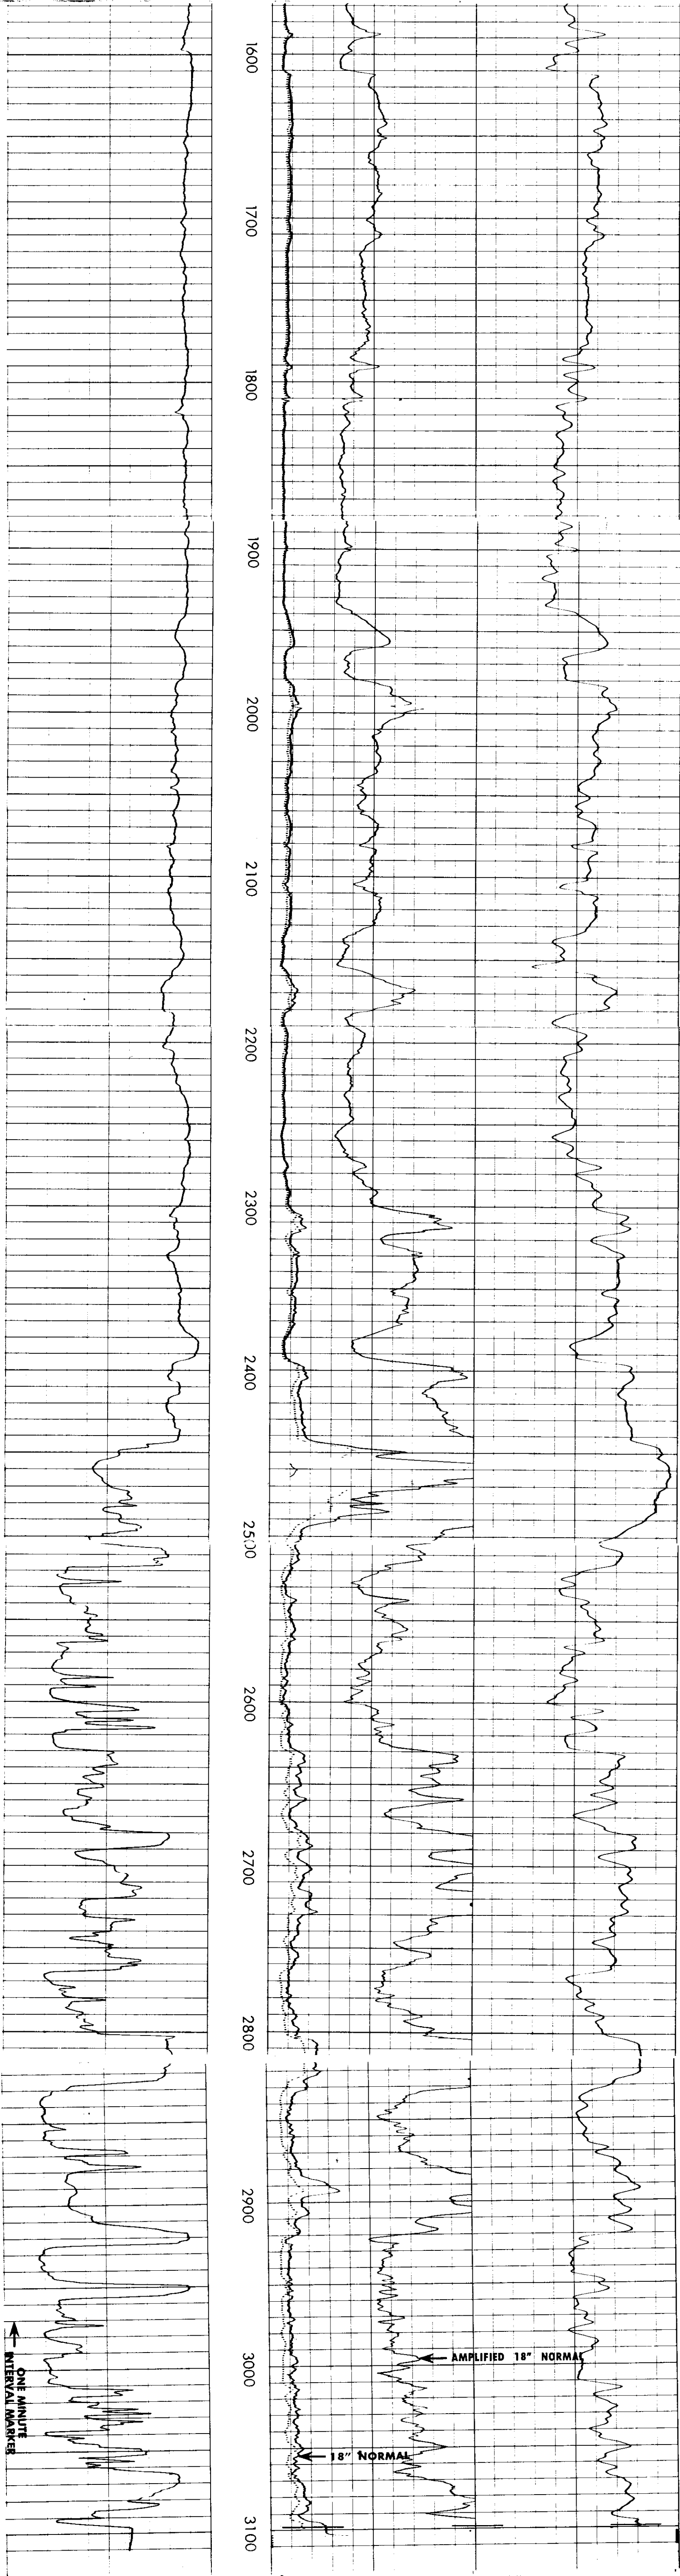

Rmf	at	°F.	0	Induction	30			
			0	0.S.	300			
			0	18" Normal	30			
			0	0.S.	300	1000	Induction	
			0	18" AMPLIFIED NORMAL	6	2000	0.S.	
							1000	
			POTENTIAL MILLIVOLTS		RESISTIVITY OHMS M²/M		CONDUCTIVITY M MHOS/M	

REICHHOLD ENERGY CORPORATION
 COLUMBIA COUNTY NO. 1 REDRILL NO. 1
 NEHALEM BASIN
 COLUMBIA COUNTY, OREGON

T.D. LOGGED 361
 T.D. DRILLER 3105
 T.D. WELEX 3105
 ELEV. G.L. 1021.K.B. 1031.5

REPEAT SECTION

