Crown Zellerbach O2 2"

FIELD PRINT

Welex

INDUCTION • ELECTRIC LOG

COMPANY

WELL

FIELD

County State CALIF.

COMPANY REICHHOLD ENERGY CORP.

WELL NNG-CZ NO. 2

FIELD PITTSBURG PROSPECT

COUNTY COLUMBIA STATE OREGON

Location FROM W/4 CORNER 159'S & 427'E WB&M

Sec. 8 Twp 4N Rge 3W

Other Services: CAVL-TDI

Permanent Datum G.L. Elev. 675'

Log Measured From K.B. OR 14 Ft. Above Perm. Datum

Drilling Measured From K.B.

Elev.: K.B. 689'

D.F.

G.L. 675'

Date	10-30-75			
Run No.	ONE			
Depth—Driller	5805'			
Depth—Welex	5806'			
Btm. Log Inter.	5801'			
Top Log Inter.	565'			
Casing—Driller	9⅝" @ 565'	@	@	@
Casing—Welex				
Bit Size	8 3/4"			
Type Fluid in Hole	LIGNOSULFONATE			
Dens. | Visc.	79 | 56	|	|	|
pH | Fluid Loss	10. | 5.8 ml	| ml	| ml	| ml
Source of Sample	CIRC.			
R_m @ Meas. Temp.	1.22 @ 119 °F	@ °F	@ °F	@ °F
R_{mf} @ Meas. Temp.	1.16 @ 62 °F	@ °F	@ °F	@ °F
R_{mc} @ Meas. Temp.	2.44 @ 64 °F	@ °F	@ °F	@ °F
Source R_{mf} R_{mc}	MEASURED	|	|	|
R_m @ BHT	@ °F	@ °F	@ °F	@ °F
Time Since Circ.	3 HRS.			
Max. Rec. Temp.	°F @ T.D.	°F @	°F @	°F @
Equip. | Location	8586 | WDLND	|	|	|
Recorded By	MR. FRANKLIN			
Witnessed By	MR. BREWER			

Fold Here

Service Ticket No. 120264 Remarks:

Change in Mud Type or Additional Samples

Date | Sample No.	|	|
Depth—Driller		
Type Fluid in Hole		
Dens. | Visc.	|	|
ph | Fluid Loss	| ml	|
Source of Sample		
R_m @ Meas. Temp.	@ °F	@ °F
R_{mf} @ Meas. Temp.	@ °F	@ °F
R_{mc} @ Meas. Temp.	@ °F	@ °F
Source: R_{mf} | R_{mc}	|	|
R_m @ BHT	@ °F	@ °F
R_{mf} BHT	@ °F	@ °F
R_{mc} BHT	@ °F	@ °F

SCALE CHANGES

Type Log	Depth	Scale Up Hole	Scale Down Hole

EQUIPMENT DATA

Run No.	Tool Type and No.	Pad Type	Tool Position	Other
ONE	TEL - 13552	-	S.O. 1½"	

Welex does not guarantee the accuracy of any interpretation of log data, conversion of log data to physical rock parameters, or recommendations which may be given by Welex personnel or which may appear on the log or in any other form. Any user of such data, interpretations, conversions, or recommendations agrees that Welex is not responsible, except where due to gross negligence or wilful misconduct, for any loss, damages, or expenses resulting from the use thereof.

= 100'

POTENTIAL MILLIVOLTS

– → 10 ← +

Rmf________ at ________°F.

RESISTIVITY OHMS M²/M

0 18" Normal 30

0 O.S. 300

0 18" AMPL NORMAL 6

0 Induction 30

0 O.S. 300

CONDUCTIVITY M MHOS/M

1000 Induction 0

RESISTIVITY OHMS M²/M

0 16' LATERAL 30

0 O.S. 300

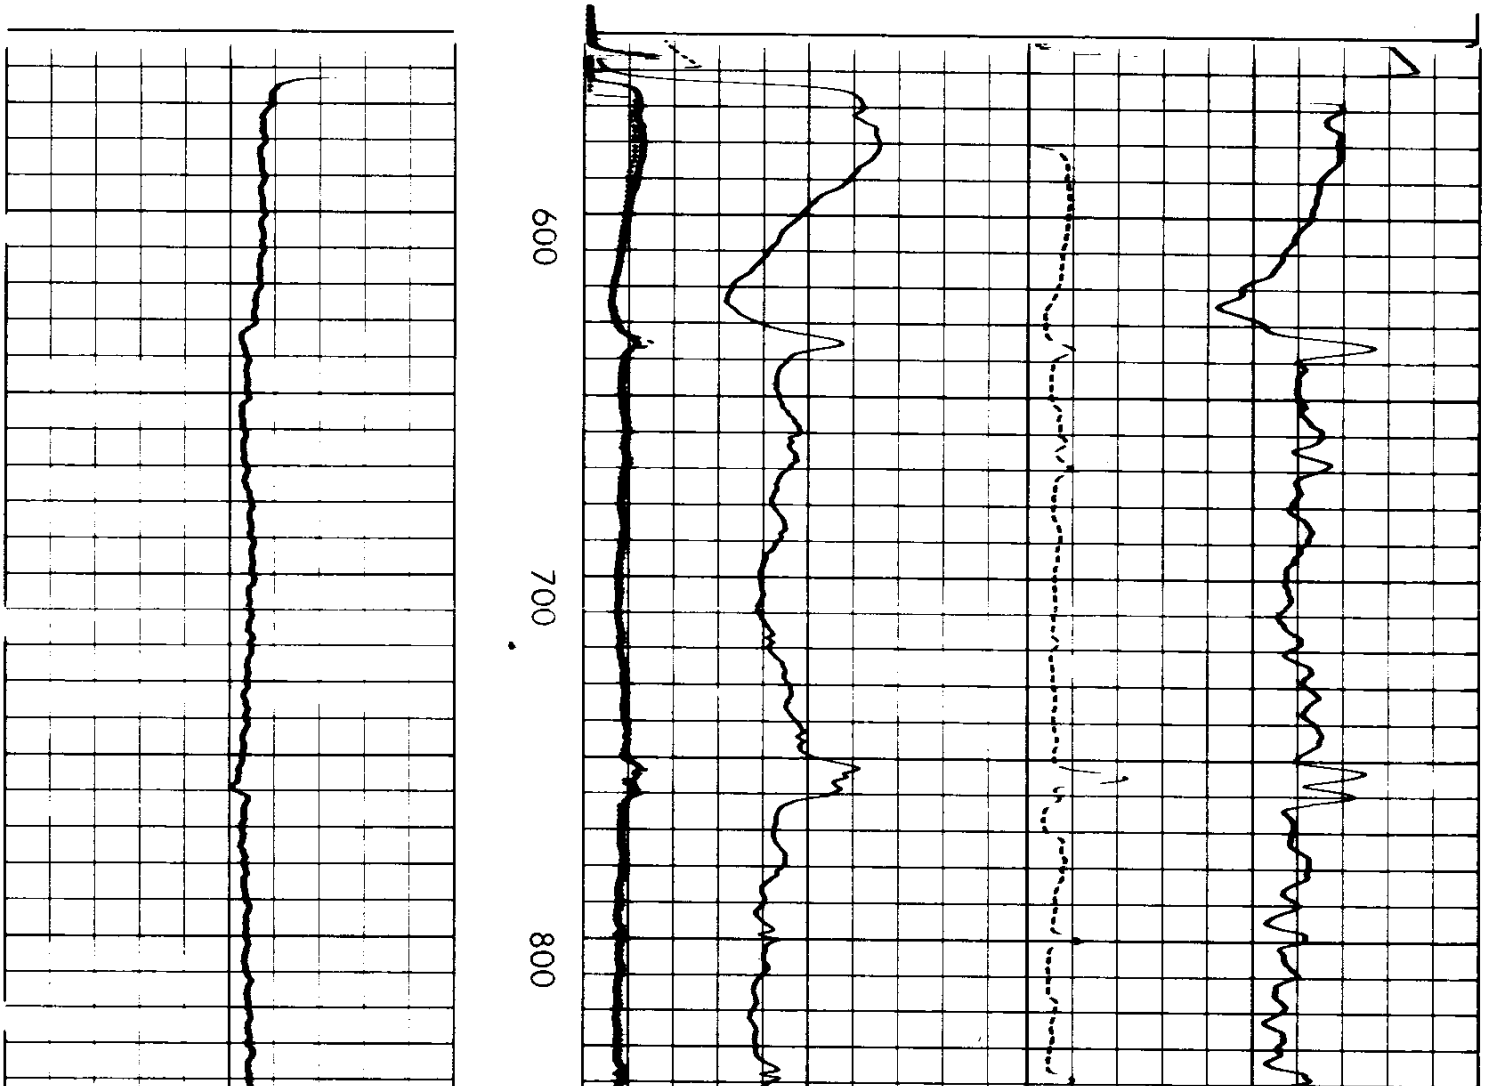

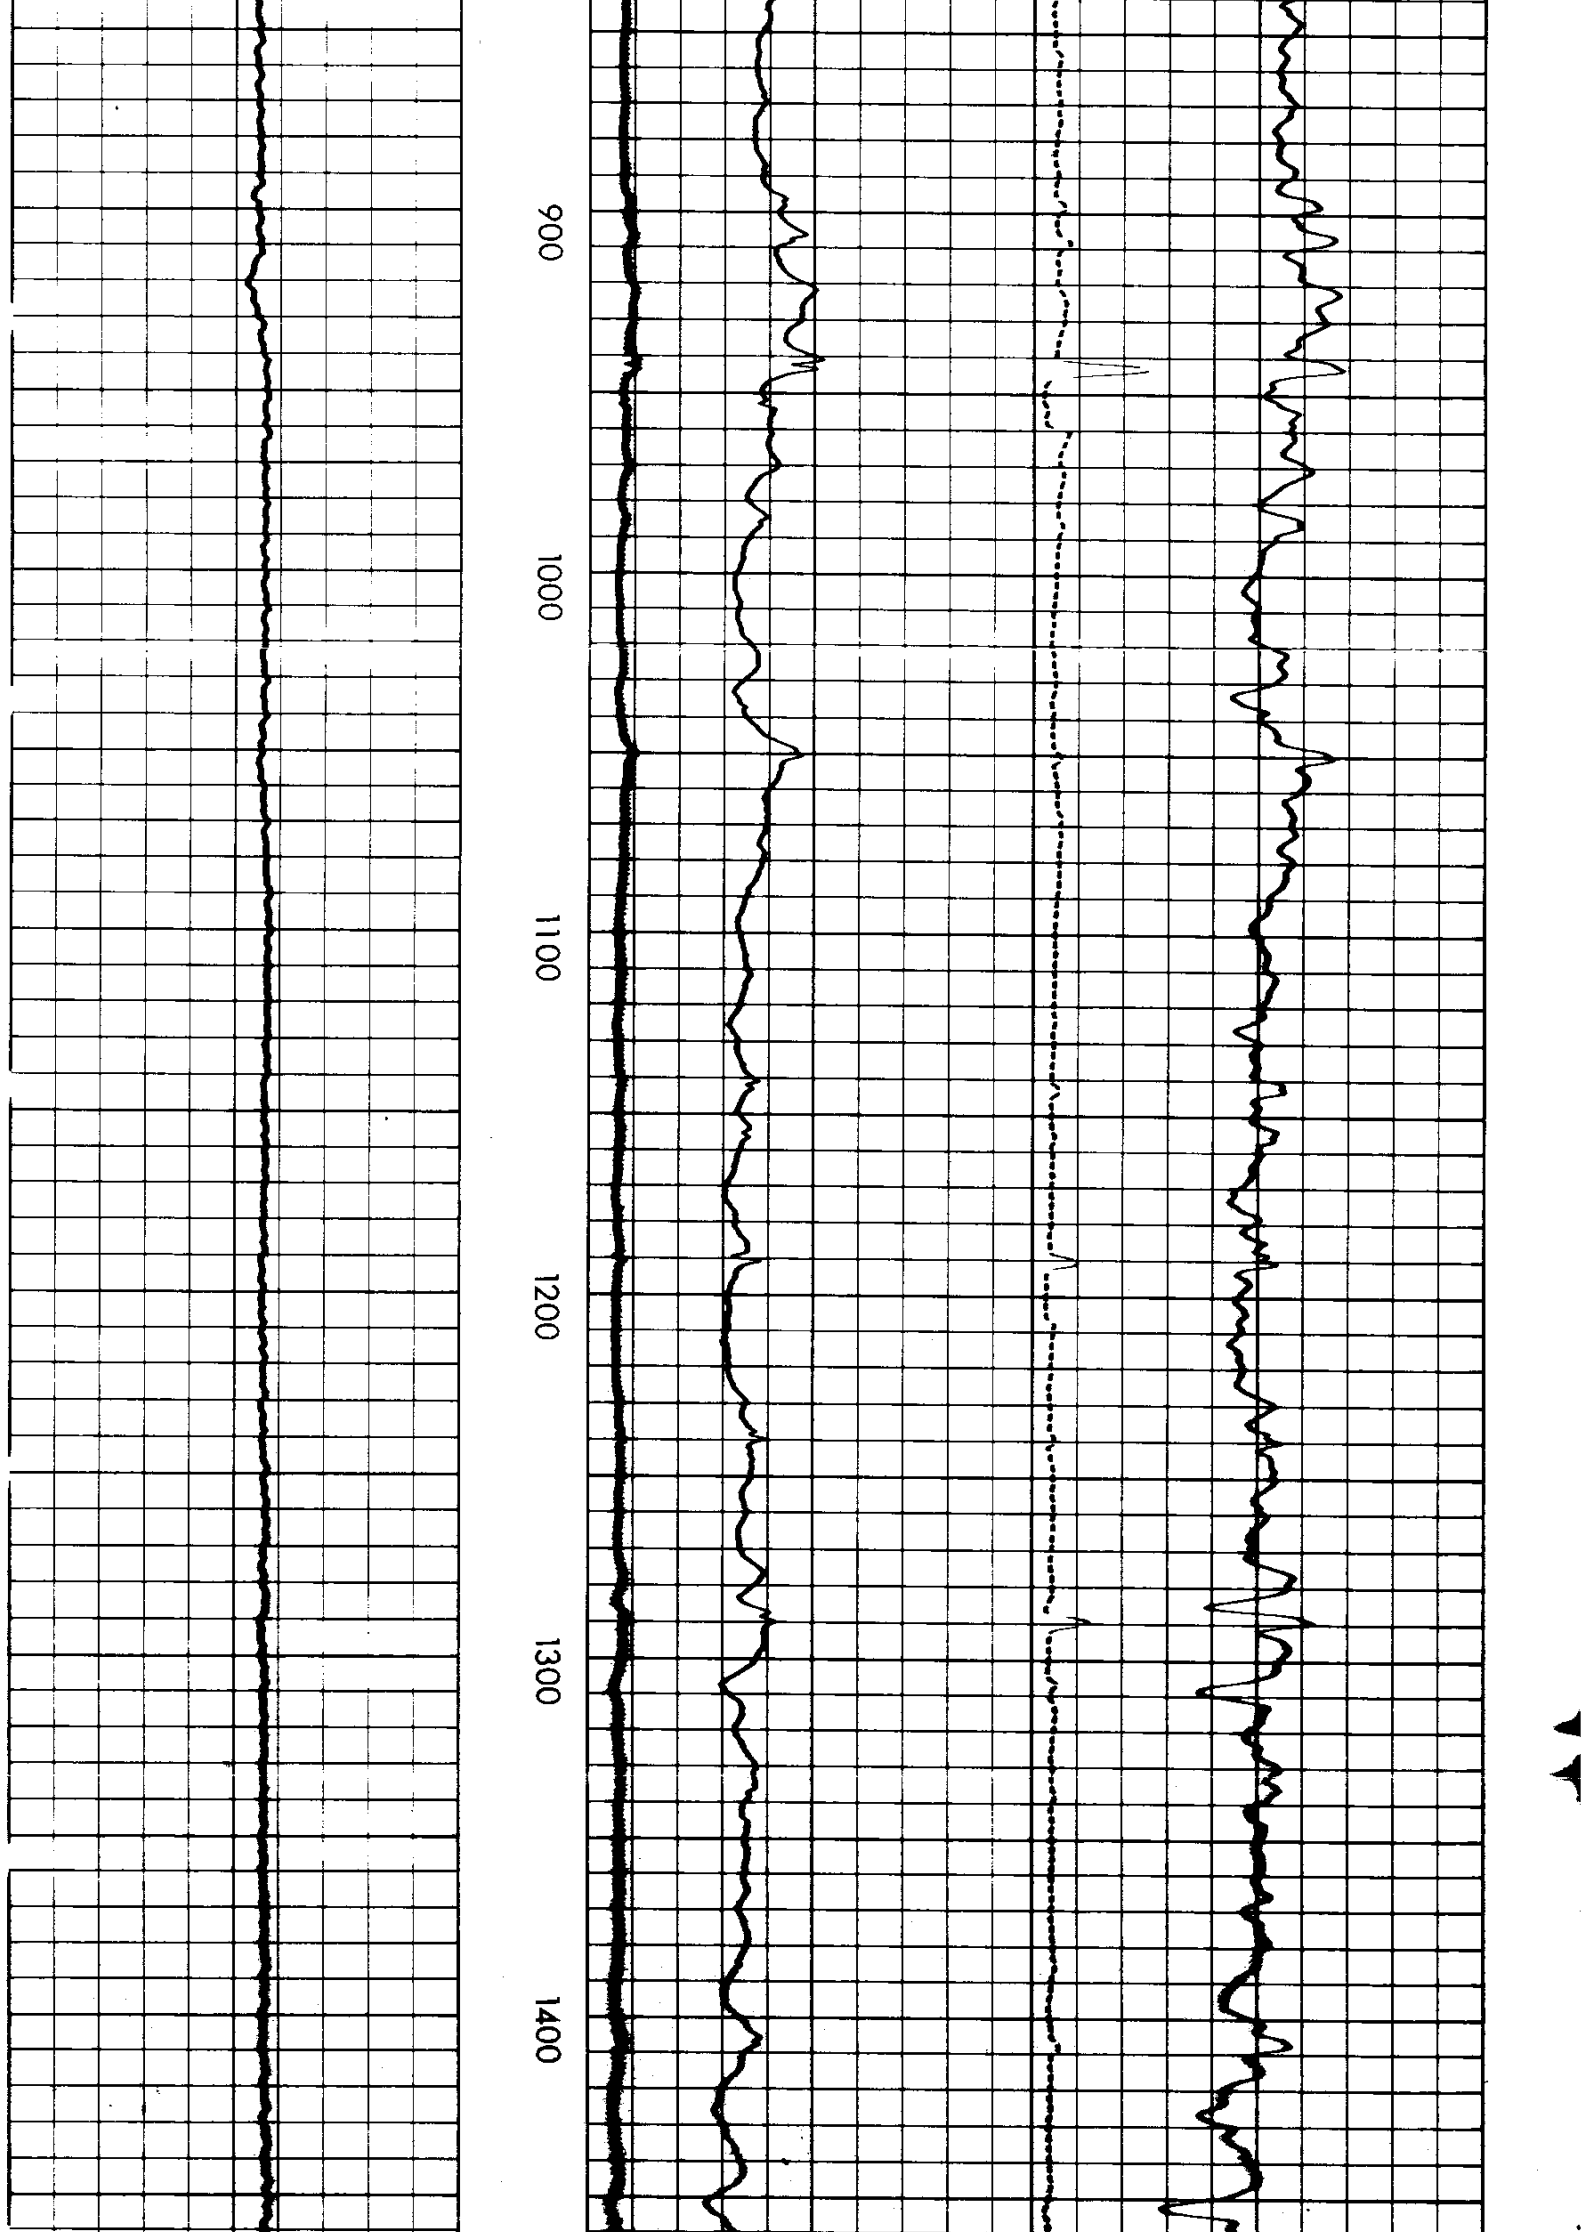

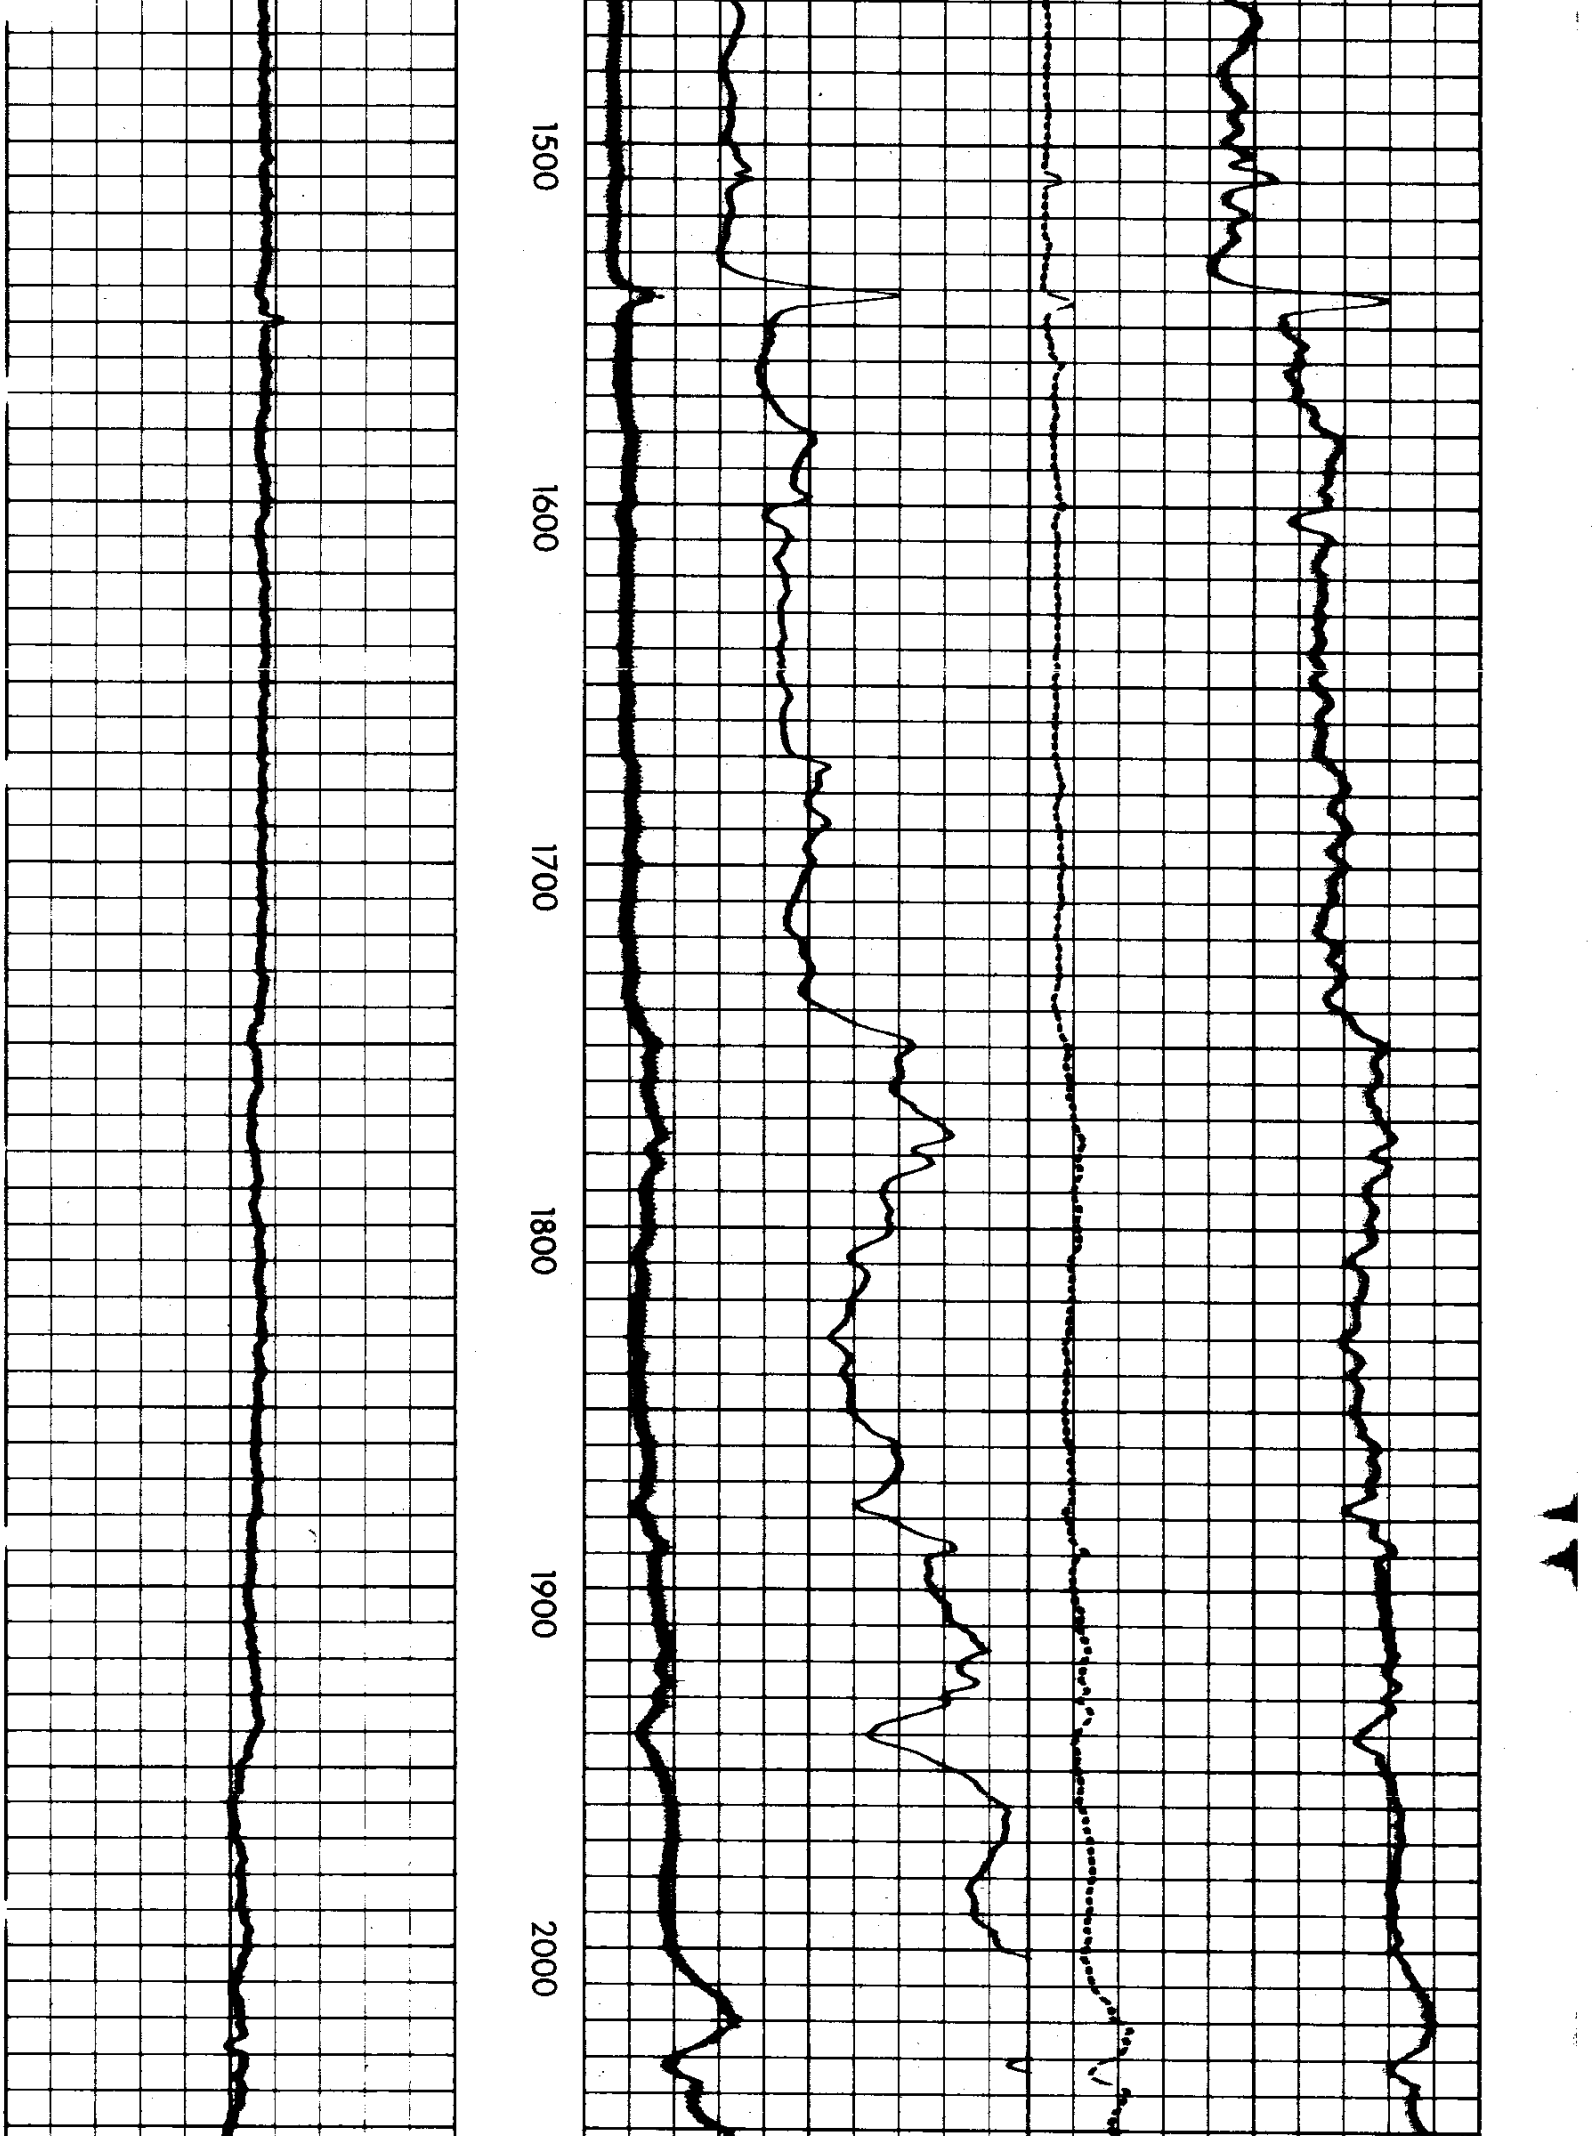

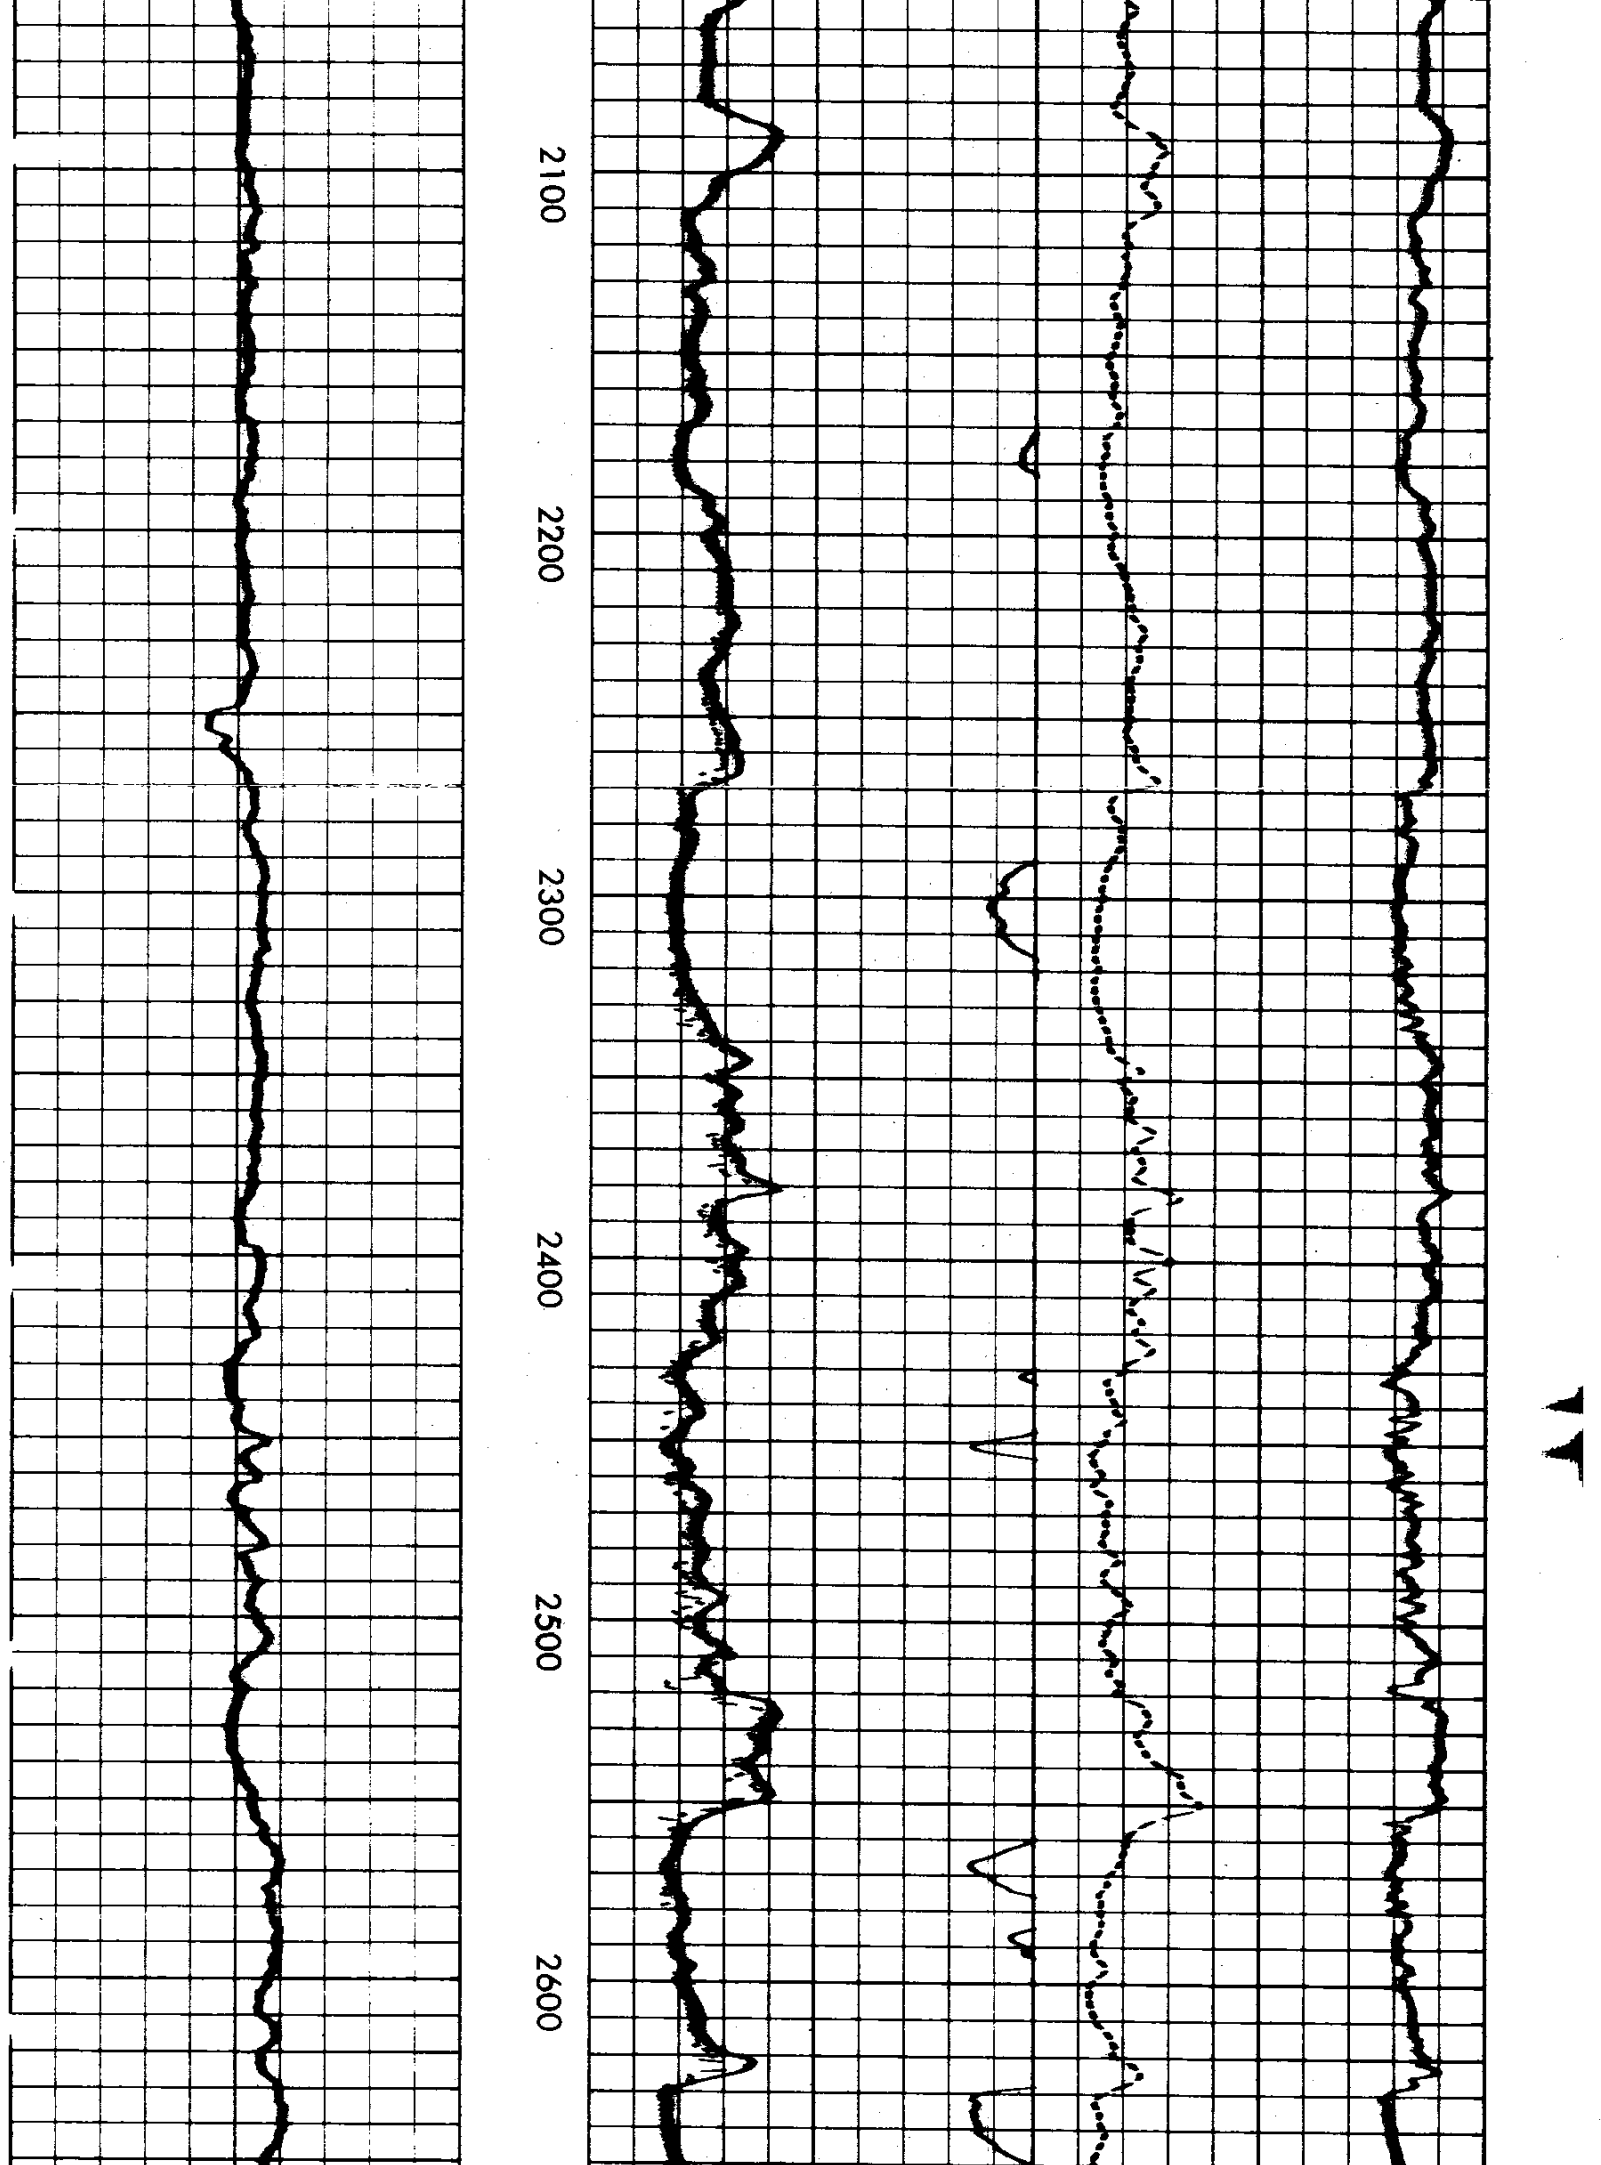

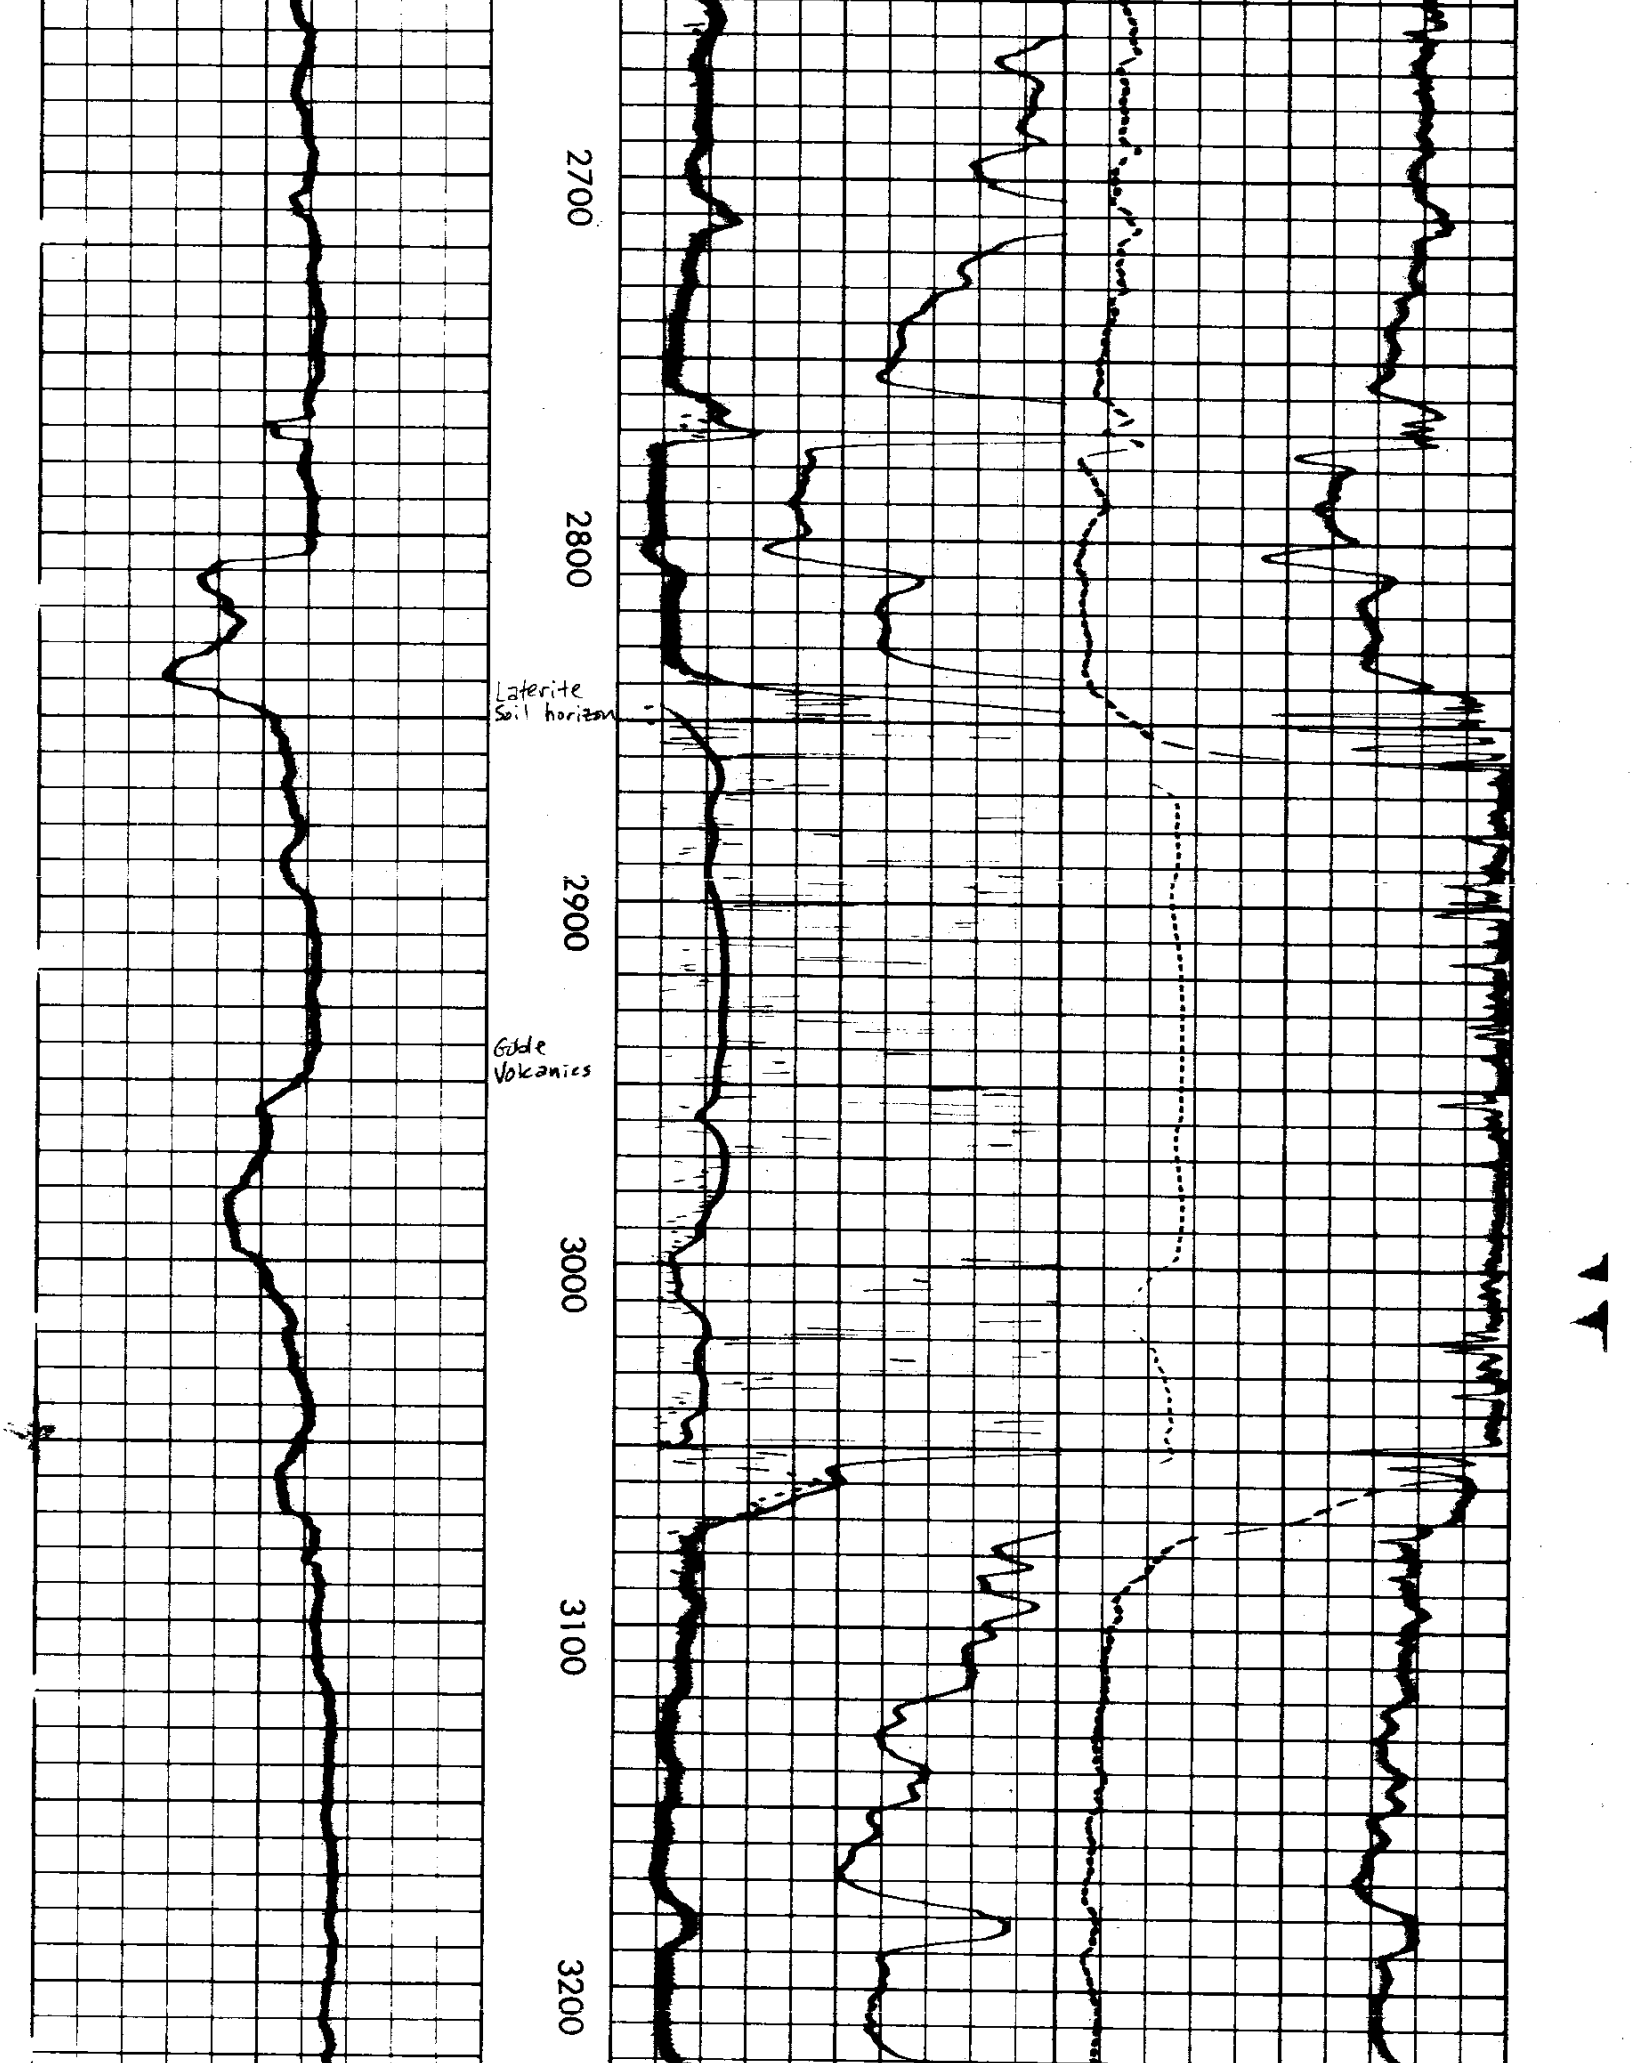

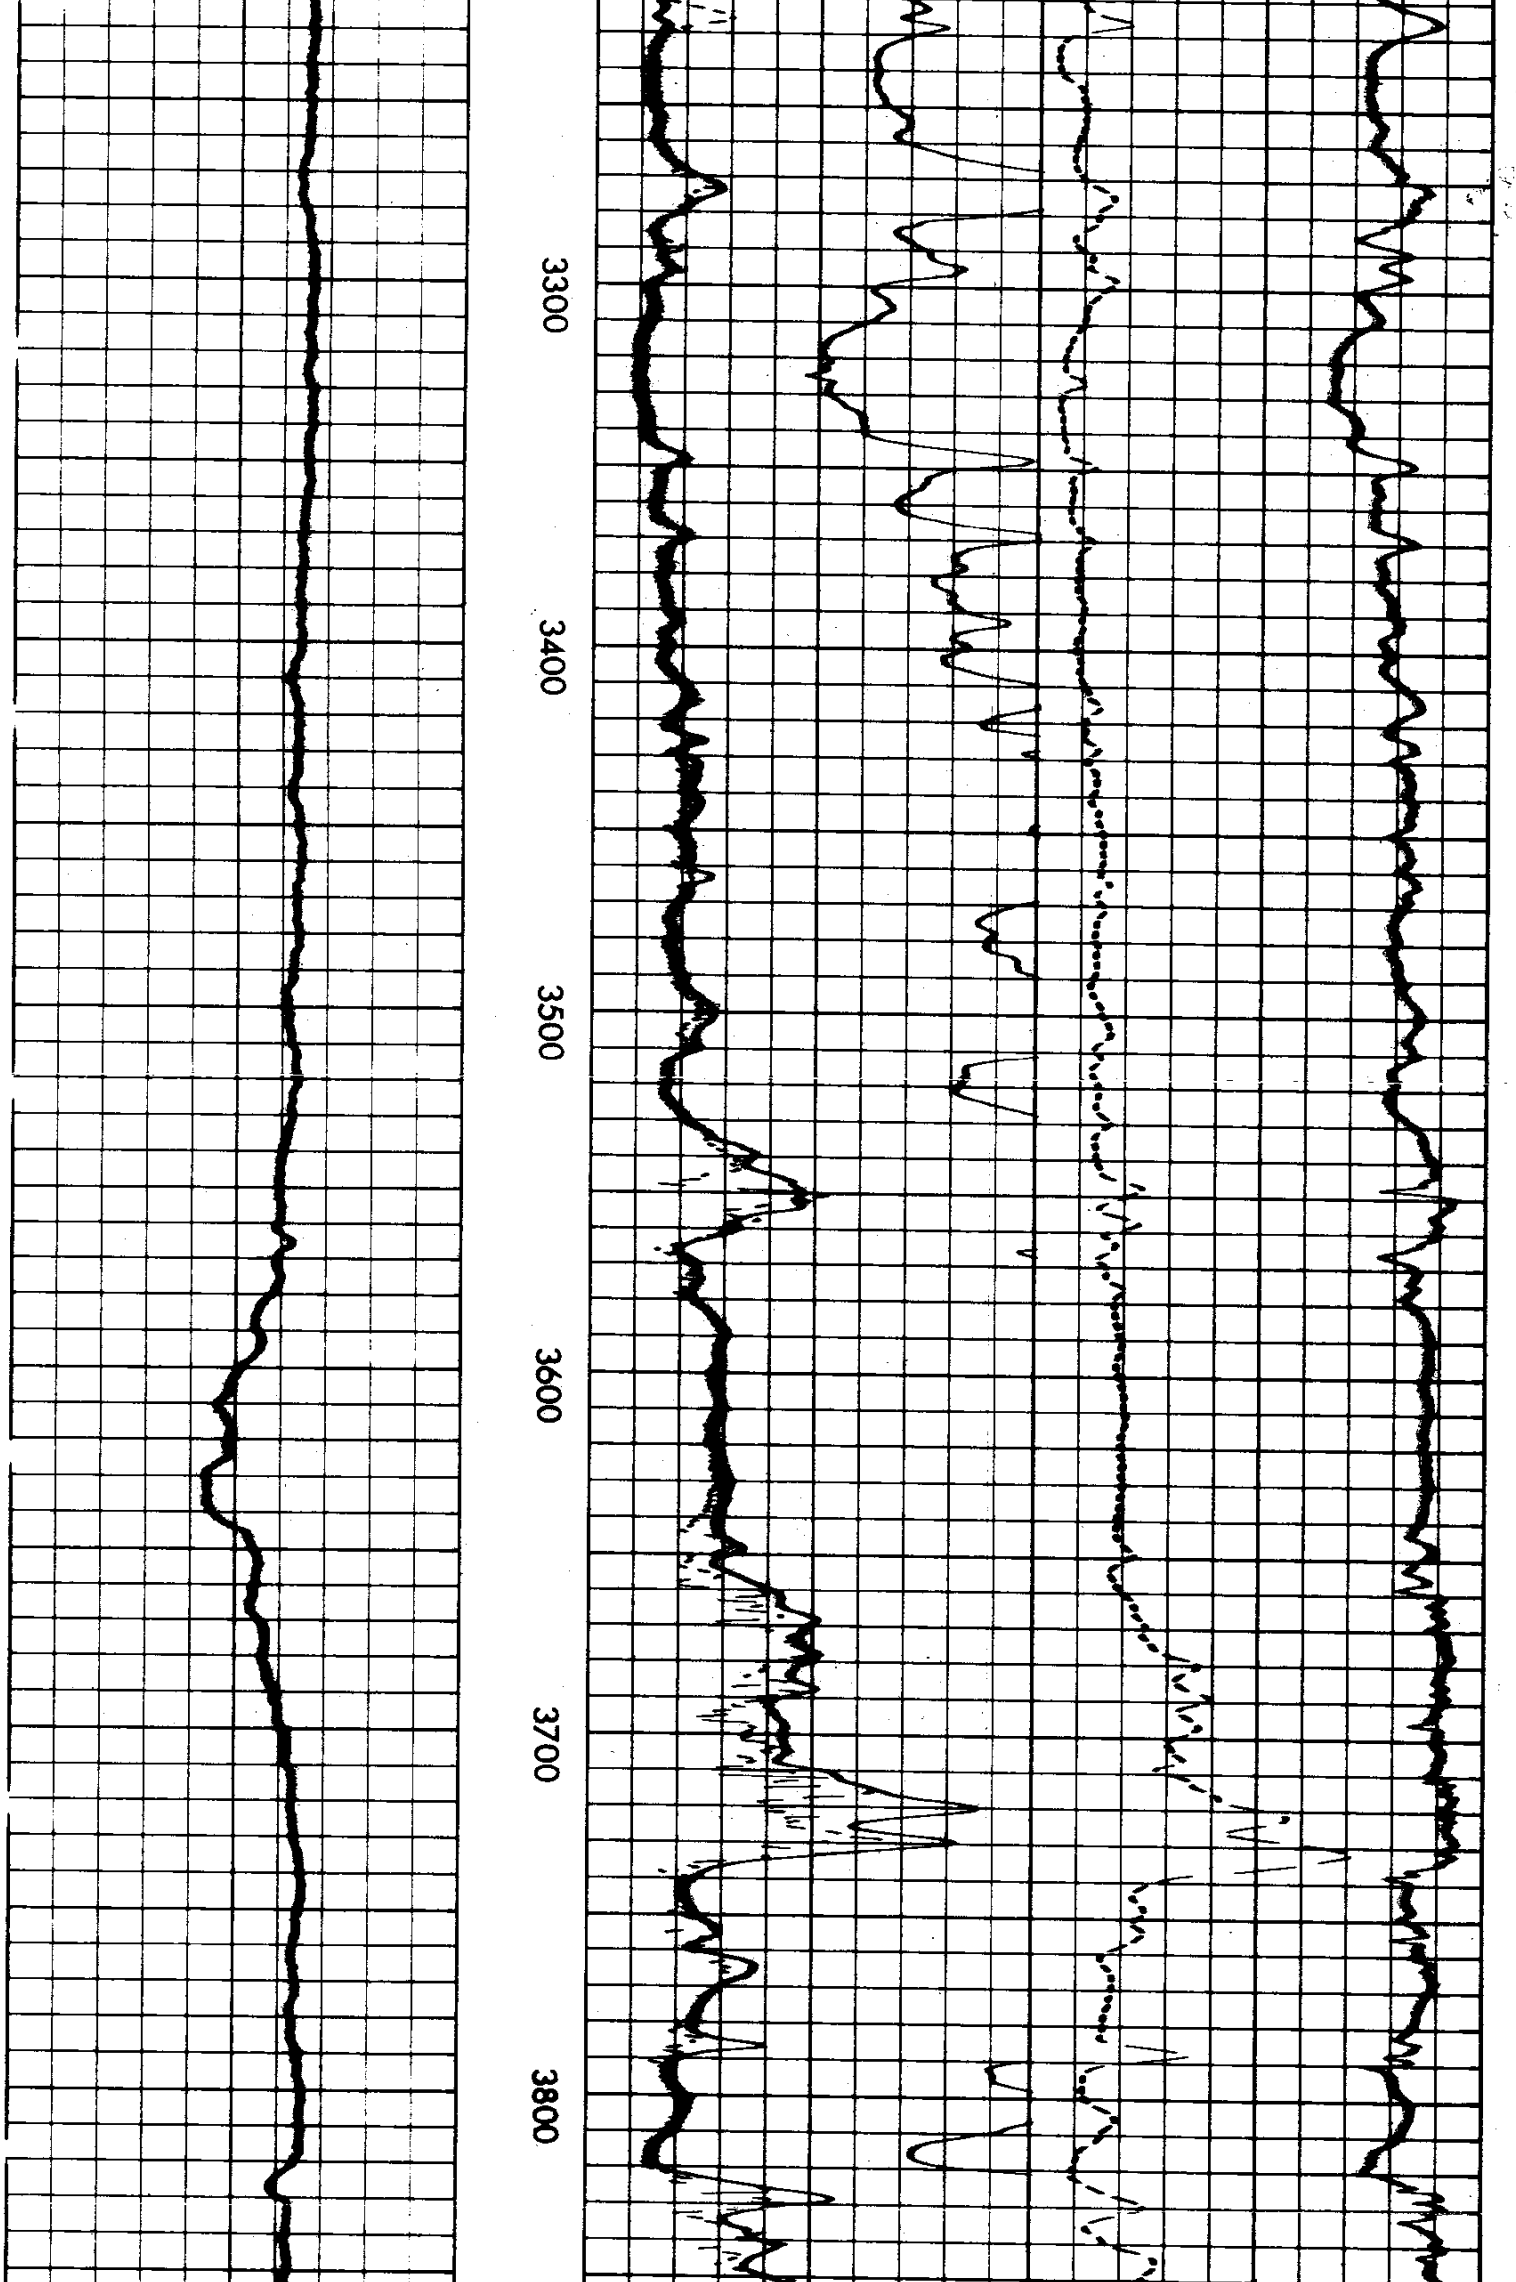

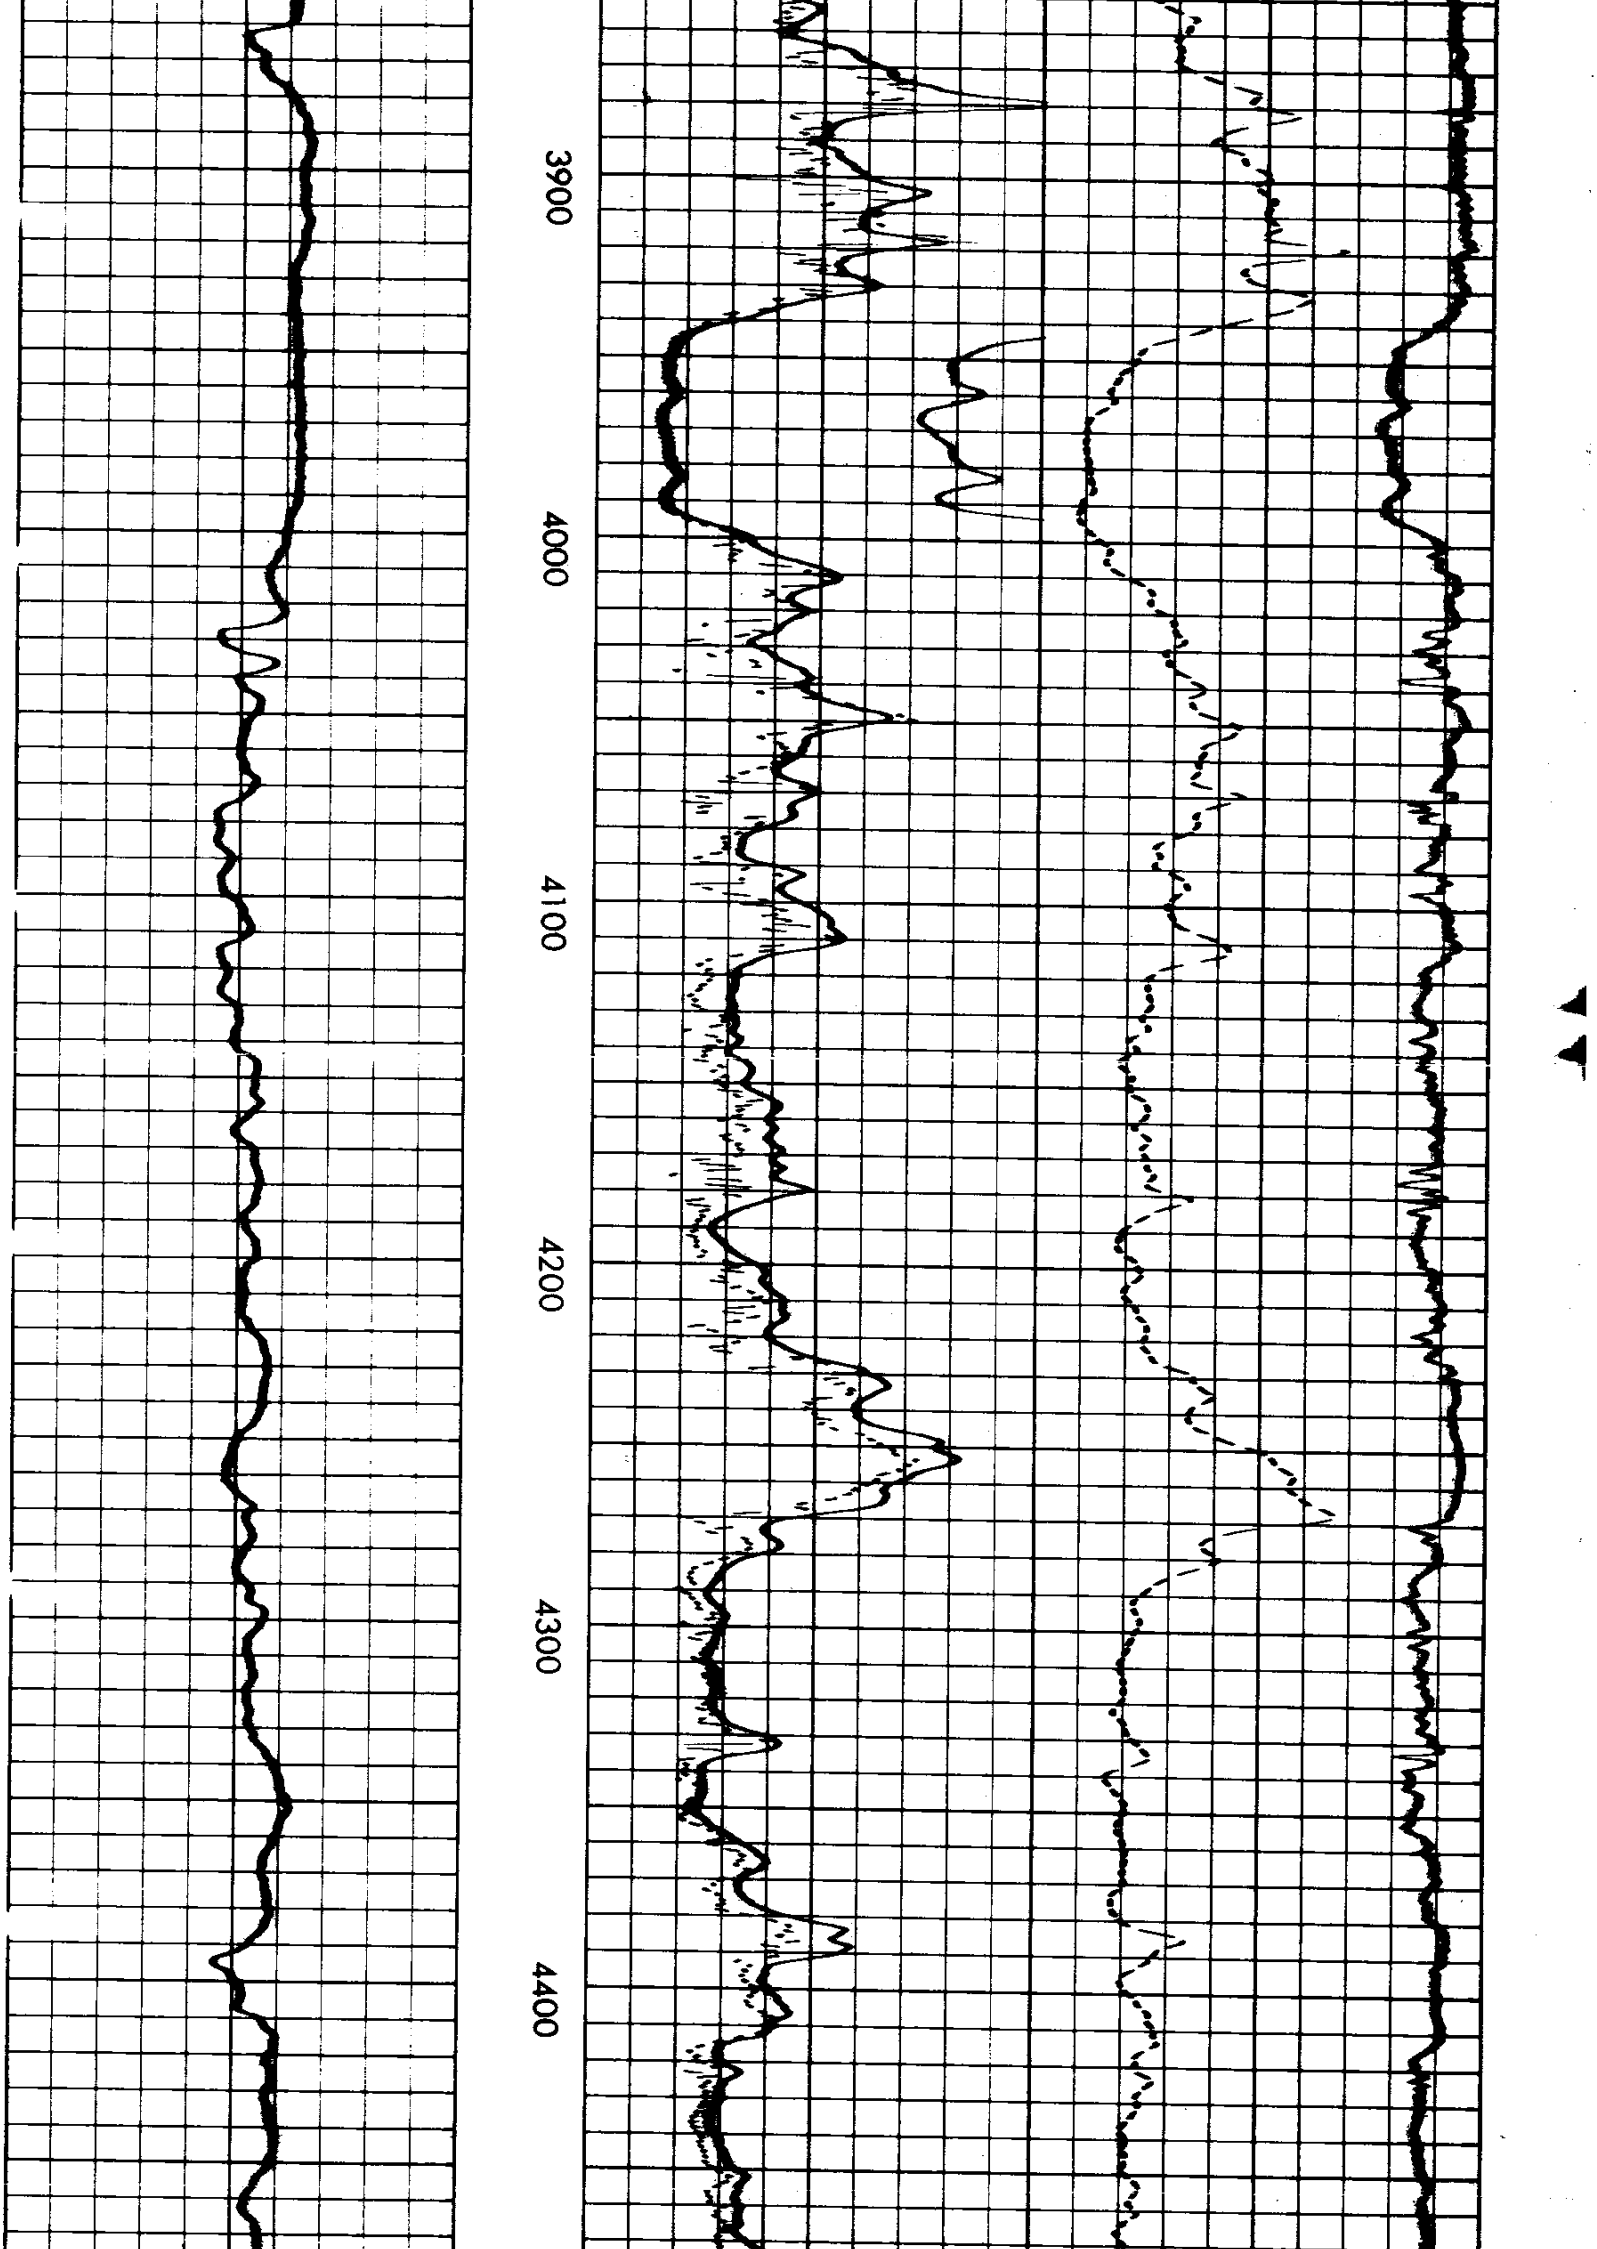

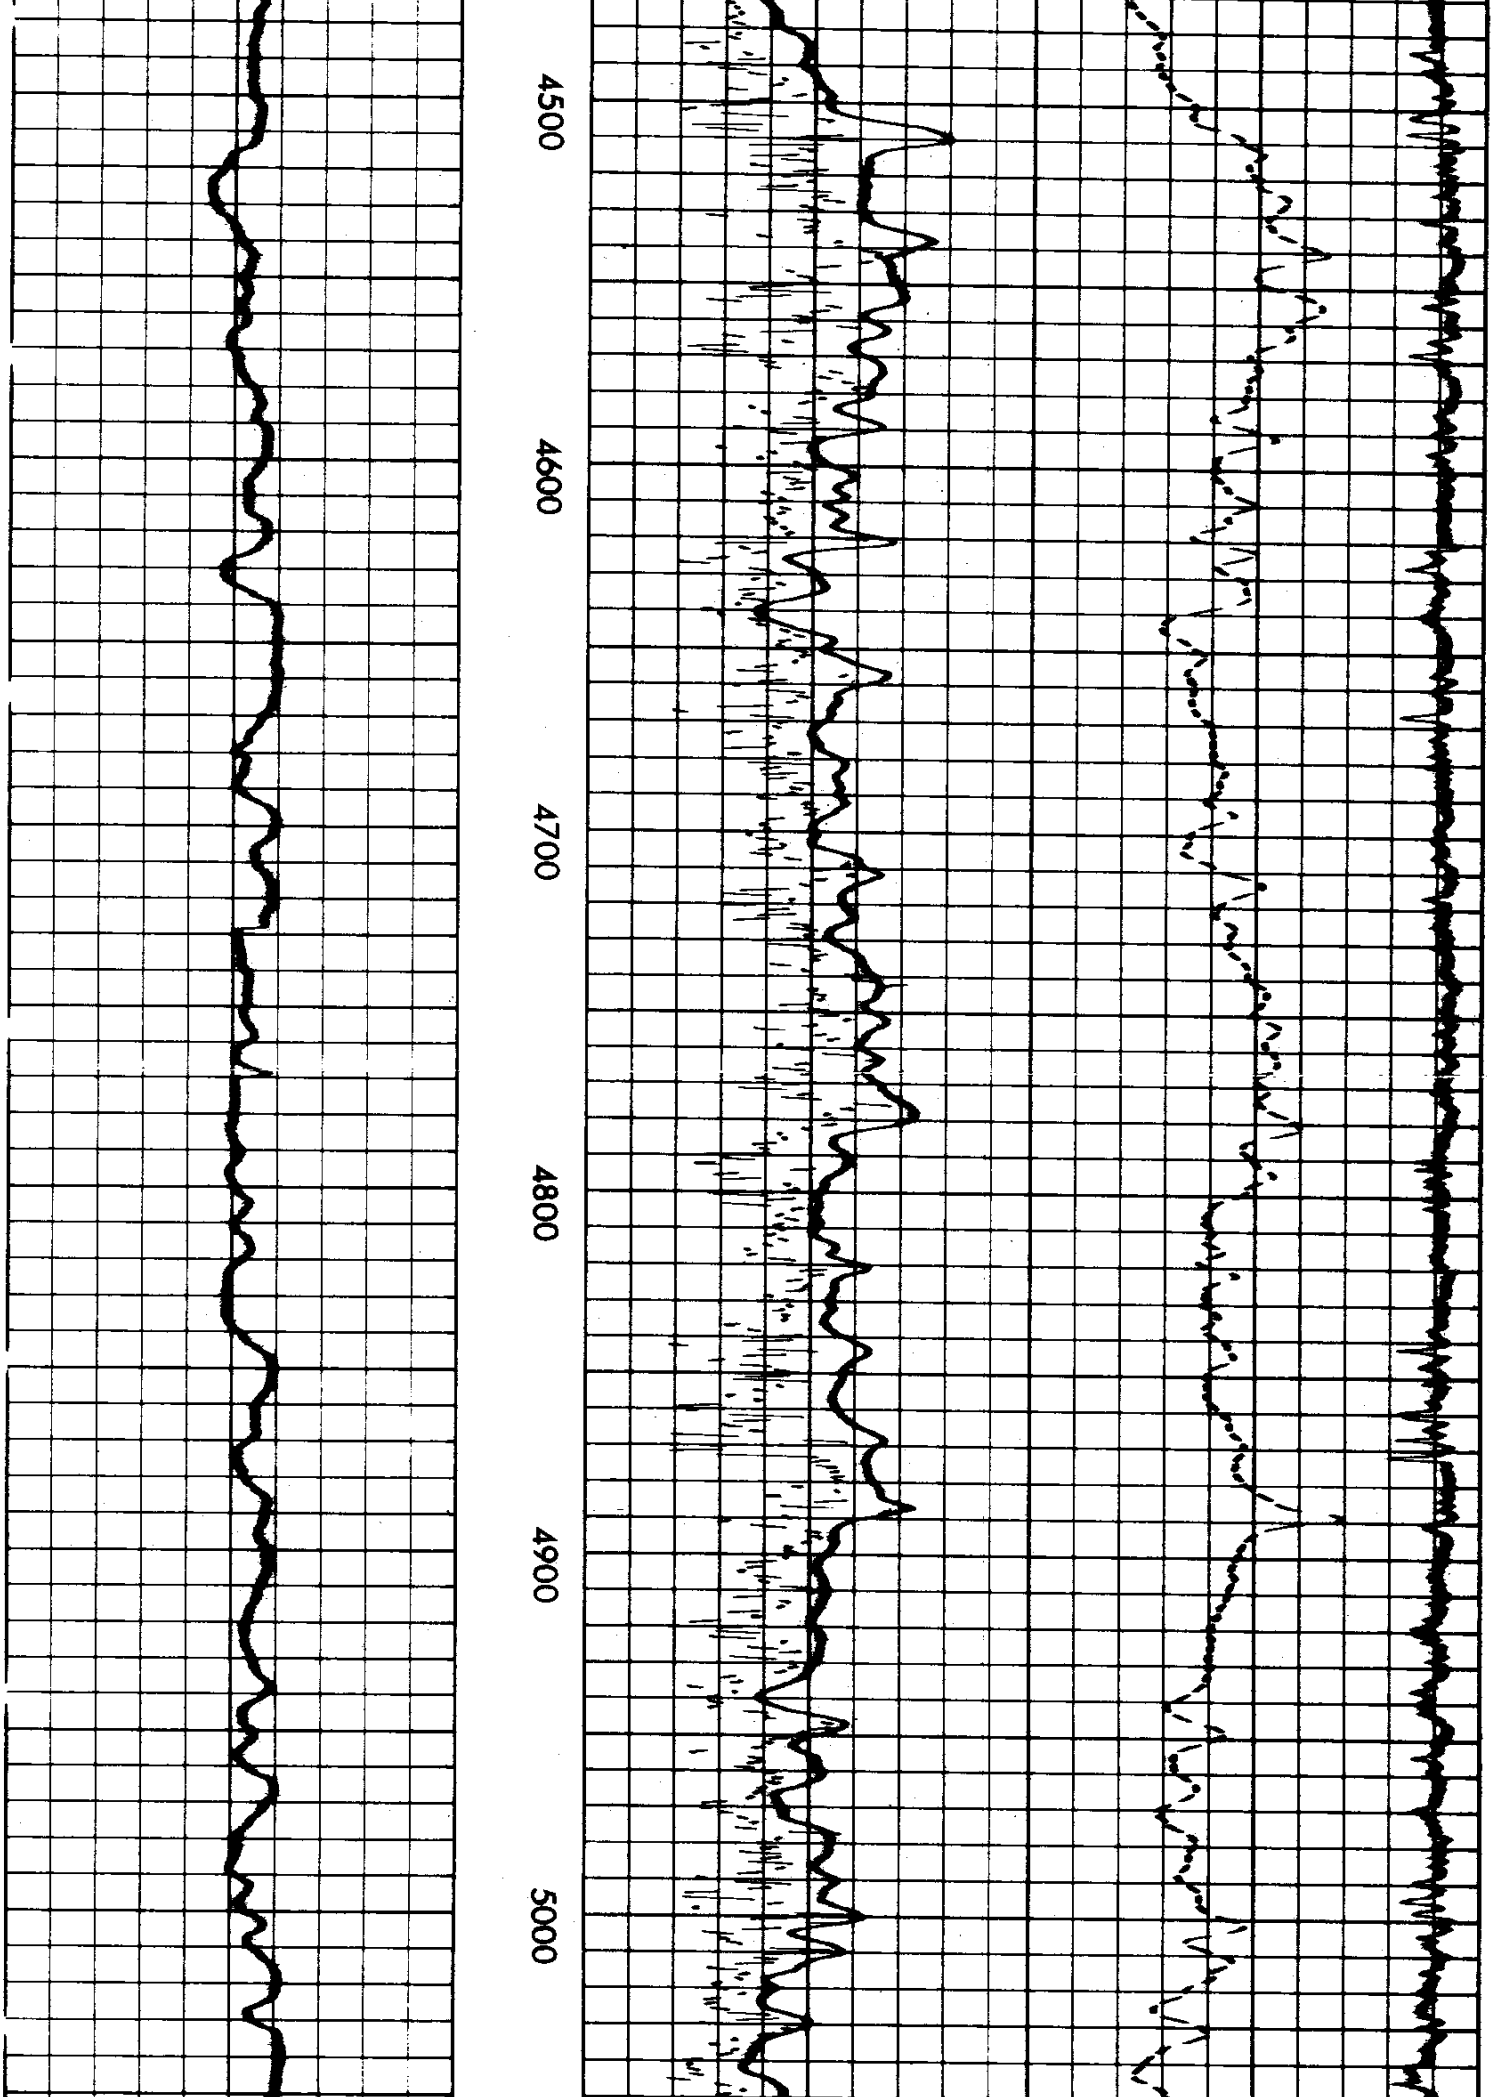

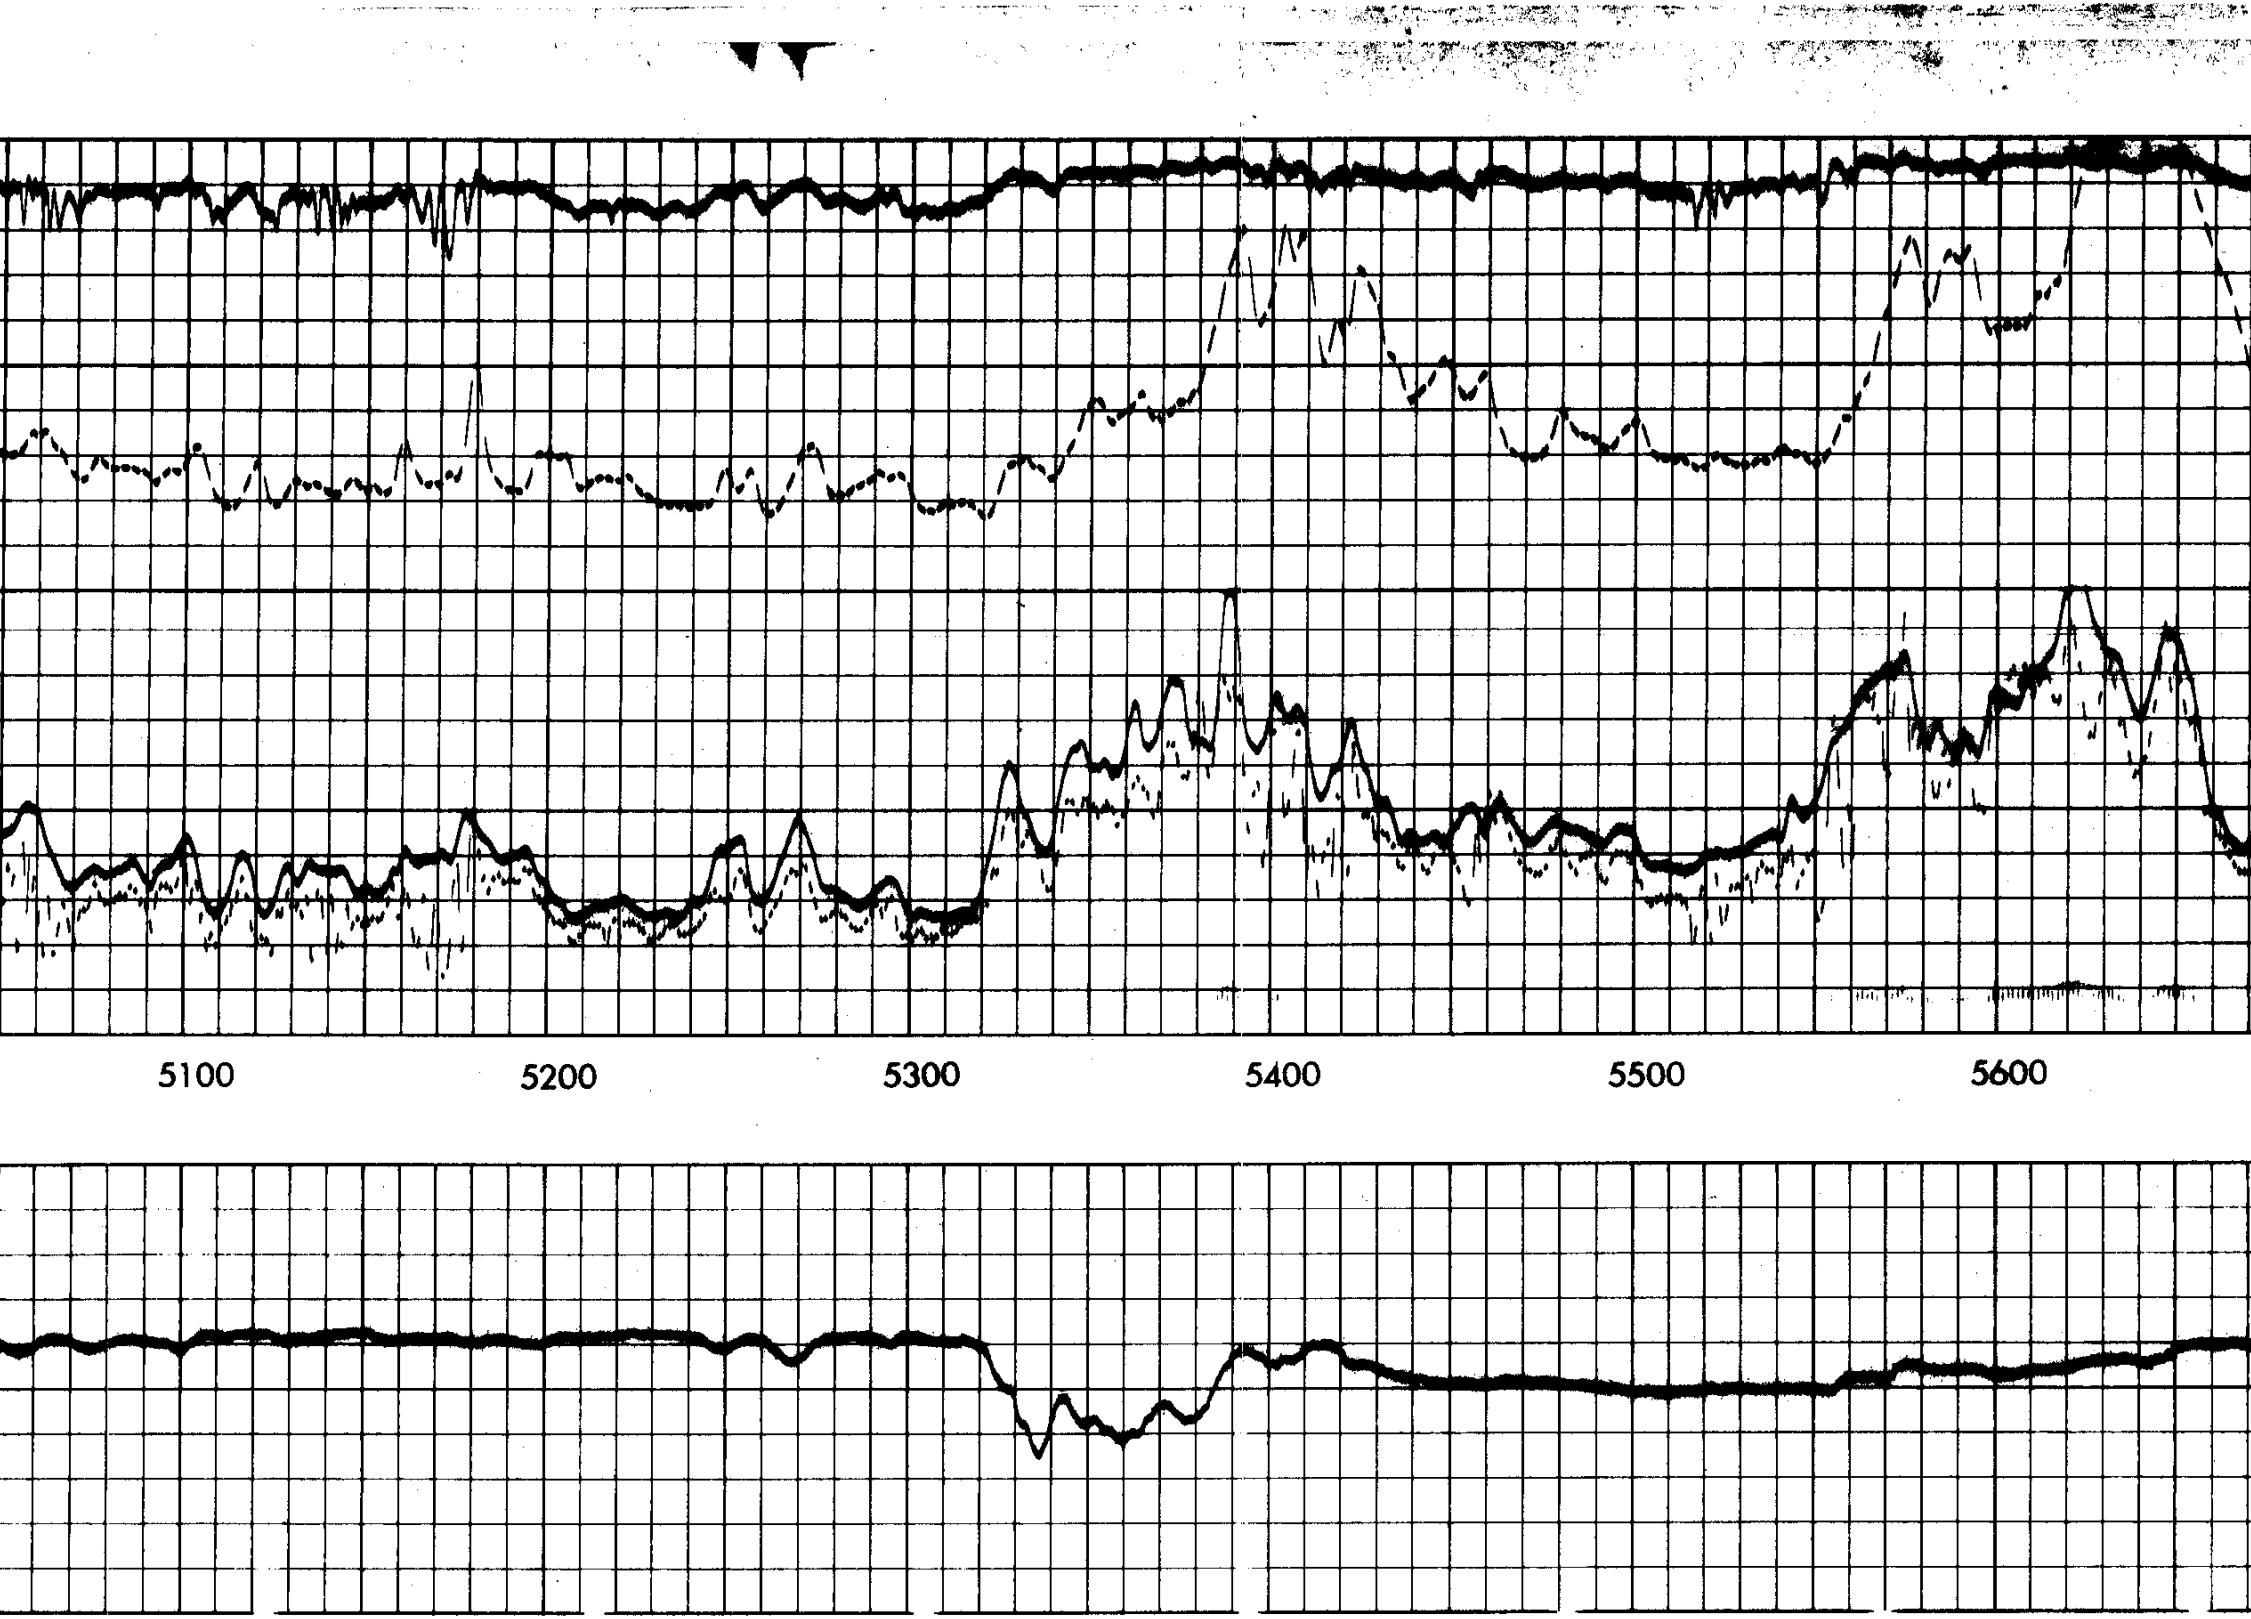

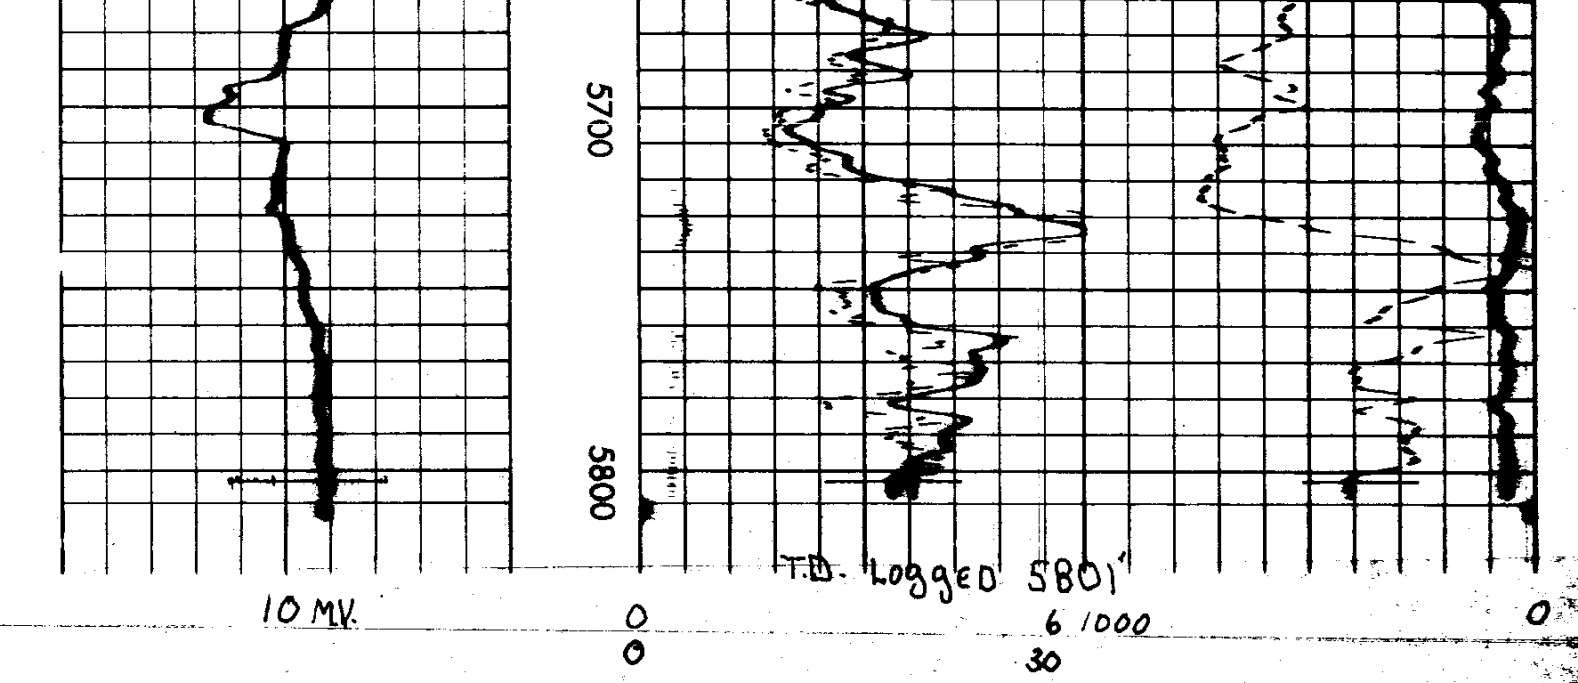

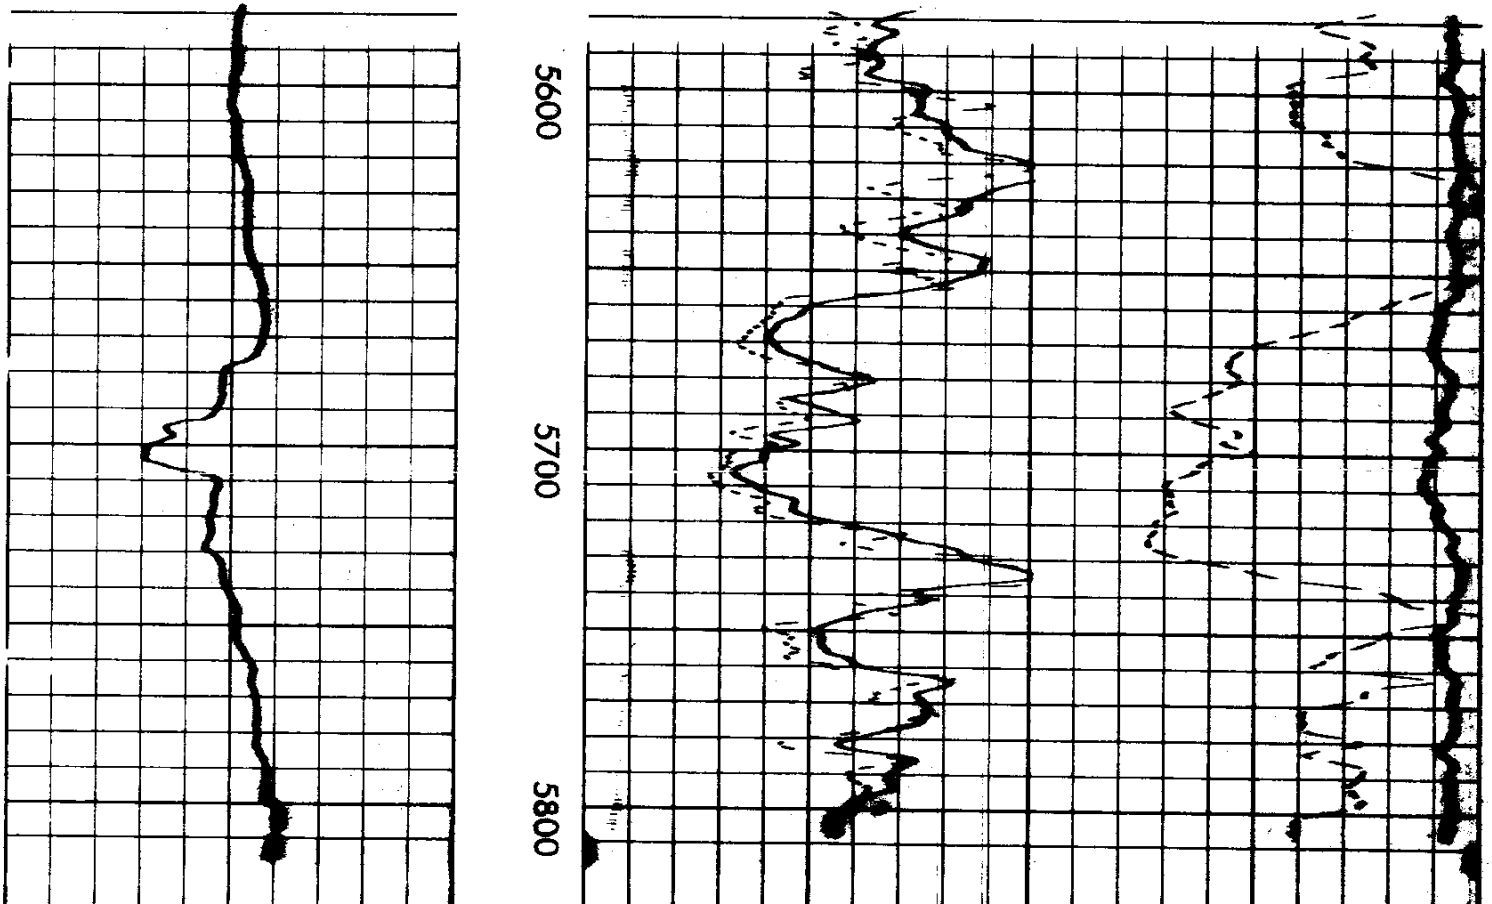REPEAT SECTION