

April 16, 2008

Enerfin  
2500 City West Blvd Suite 400  
Houston TX 77042


## Miscellaneous Permit

---

The application to set a wireline plug below 1678' but above 1730' and perforate and test 1657' - 1672' and 1493' - 1512' at JH 32-27-64, located in Section 27, Township 6N, Range 4W, Mist Gas Field, DOGAMI ID No. 515, has been approved with the following conditions.


The permittee shall:

1. Construct all sumps/mud pits by excavating below grade with a design and size for holding the drill cuttings and fluid removed from the well. Loose fill material will not be allowed to be used in the construction of the sumps/mud pits for the purposes of water retention.

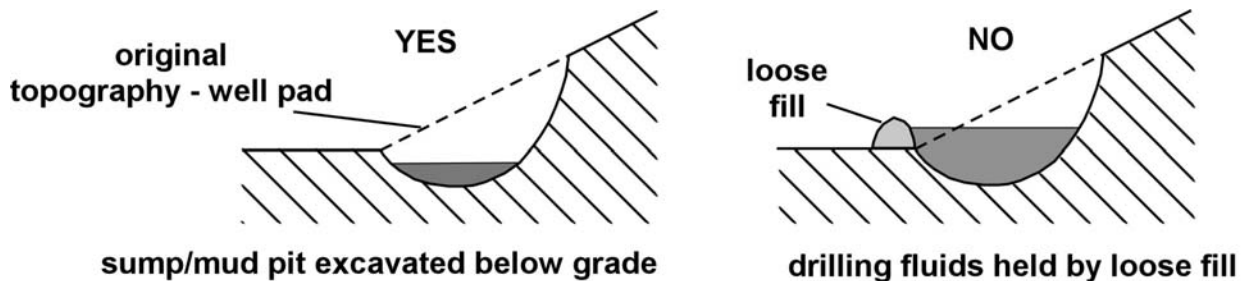

2. Contact DOGAMI two weeks prior to spud.
3. Provide DOGAMI with a 2-week, a 3 day, and a 24-hour notice to schedule an inspection to witness all BOPE tests conducted prior to drilling out each casing shoe.
4. Per 632-010-0014(C) & (D), the BOPE shall be pressure tested: when installed, prior to drilling out casing shoes, following repairs or reassembly of the preventers that require disconnection a pressure seal in the assembly, and shall be actuated to test proper functioning once each trip or once each week, whichever is more frequent.

Issued on April 16, 2008, by

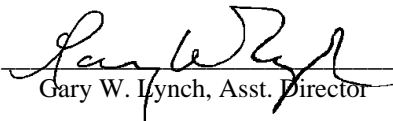  
Gary W. Lynch, Asst. Director

c: Columbia County