
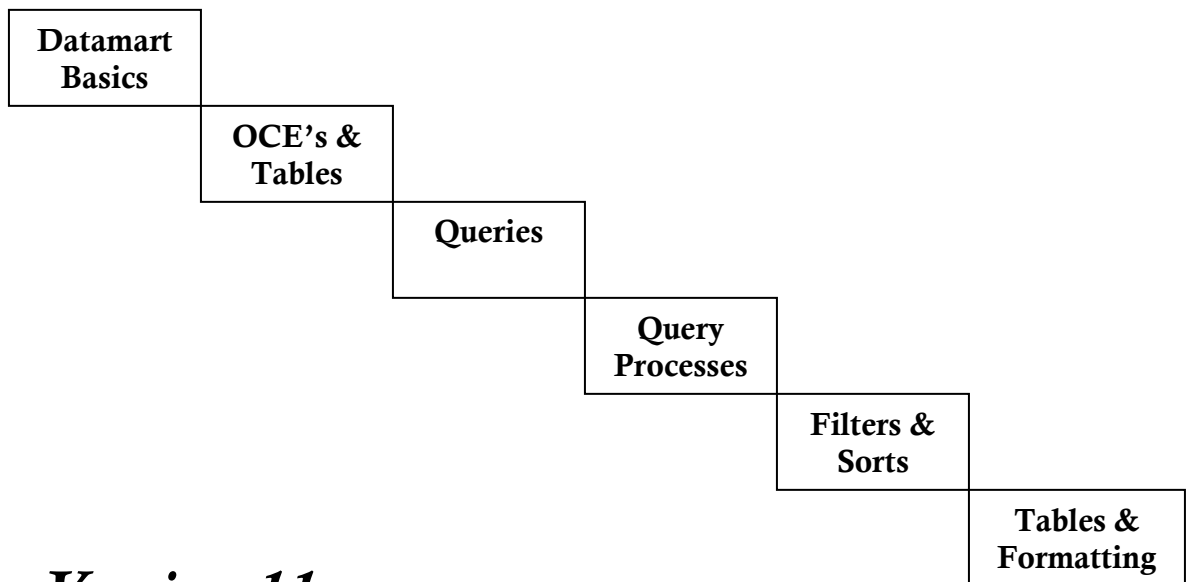


Datamart & Hyperion: Back to Basics

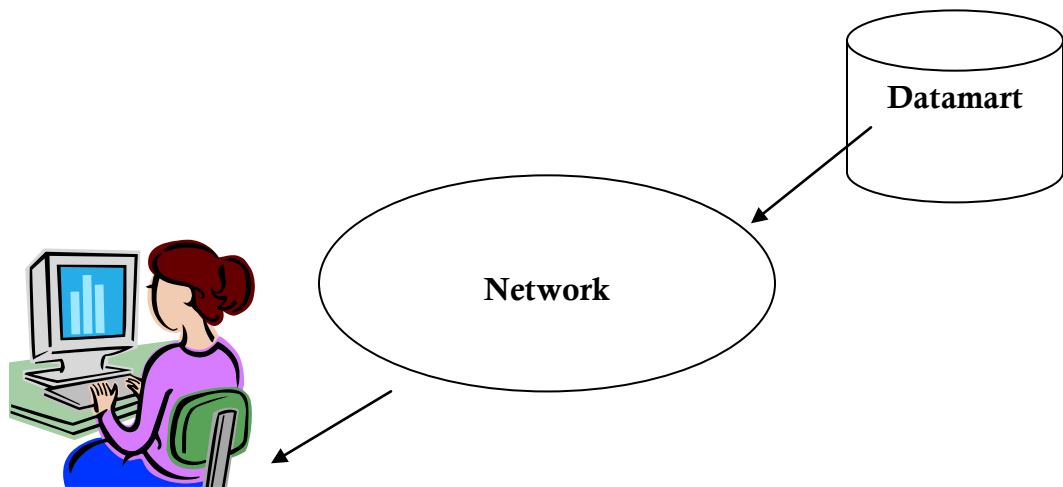

Version 11
Updated: 4/2/2012

About the DAS - State Controller's Division Training Services:

The Statewide Accounting and Reporting Services unit within the State Controller's Division provides courses with a focus on helping our customers improve their financial and technological skills.

The training materials are for the students' use both during the course and as a reference guide after the course is complete.

For more information and a list of other available products, please visit us at our website at <http://egov.oregon.gov/DAS/SCD/SARS/index.shtml>.

Copyright & Trademarks

Copyright © 2011 by DAS/SARS. All rights reserved.

Trademarked names appear throughout this book. Rather than list the names and entities that own the trademarks or insert a trademark symbol with each mention of the trademark name, DAS/SARS states that it is using the names for editorial purposes and to the benefit of the trademark owner with no intention of infringing upon the trademark.

Disclaimer

DAS/SCD/SARS has taken every effort to ensure the accuracy of this manual. If you should discover any discrepancies, please notify us immediately.

Department of Administrative Services – State Controller's Division

Statewide Accounting and Reporting Services

155 Cottage St., NE, Salem, OR 97310

SARS: (503)373-7277 – Fax: (503)378-3514

E-mail: Datamart.Support@state.or.us

Lesson 1

Datamart Basics

- ✓ **What is a Datamart?**
- ✓ **How does information get into the Datamart?**
- ✓ **How can I get current information about the Datamart?**
- ✓ **History of Brio/Hyperion**
- ✓ **Am I ready to work in Hyperion?**
- ✓ **The Repository**

What is a Datamart?

The State Controller's Division (SCD) Financial Datamart is your one-stop warehouse for financial transactions, account balances, grant profiles, PCA information, Payroll data and more, which helps employees develop reports for business information and decision making. This information comes directly from SFMA & OSPA.

Several years ago, the Department of Administrative Services (DAS) State Controller's Division (SCD) sponsored the creation of a Datamart. This initiative brought data from the primary transactional accounting system (SFMA) and the payroll system (OSPA) into a relational database for various agencies and users to easily query against for information using a reporting tool. Recently, Position Information Control System (PICS), PPDB and ORBITS (Budget) data have been added to this Datamart, and many other transactional applications have been created that capture relevant information that users can use to make better business decisions.

The Datamart provides a resource for easy reporting.

In 1997, the SCD developed a Datamart of accounting data from SFMA to meet the ad-hoc reporting needs of state agencies. This became known as the SCD Datamart and later known as the SFMA Datamart. In 1999, the SCD developed a Datamart of payroll data from OSPA, which became known as the OSPA Datamart. The number of active Datamart users has expanded over the past several years, from 145 users in 1999 to an average of 360 users per month in 2007 to over 700 users in 2010.

Many agencies are using these data sources on a regular basis to meet individual agency reporting needs. Some agencies use the Datamart to replace system-generated mainframe reports. This provides agencies with more meaningful, custom designed reports and saves time since data does not need to be re-keyed from hard-copy reports for various analyses.

The Datamart gives the user the ability to create custom reports.

How does information get into the Datamart?

The SCD Datamart contains data from the following statewide systems:

SFMA (Statewide Financial Management Application)

SFMA data is updated weekly with a download Friday evening and an upload on Saturday evening.

Mid-July through August (considered Period 13) the YE GL Detail, YE GL Summary, and Profile tables are updated three times per week from SFMA.

OSPA (Oregon Statewide Payroll Application)

The payroll or OSPA data is updated monthly after the Final Run 2, approximately the 10th of each month. The data is available the morning after Final Run 2 is posted to R*STARS (see the OSPS Processing Calendar for specific dates throughout the year).

ORBITS (Oregon Relational Budget Information Tracking System)

The Orbits or budget data is loaded weekly along with the normal SFMA load process.

PPDB (Position & Personnel Database)

The PPDB data is loaded the first of every month.

PICS (Position Information Control System)

The PICS information is loaded weekly along with the normal SFMA load process.

How can I get current information about the Datamart?

If you have any questions, suggestions, problems, or just plain comments please contact the Datamart Business Analyst listed below.

Datamart Business Analyst
Statewide Accounting and Reporting Services, DAS
155 Cottage Street NE, U50
Salem, OR 97301-3969
Phone: (503) 373-0269
Fax: (503) 378-3514
E-mail: Datamart.Support@state.or.us

Datamart Website

The SARS unit has a website dedicated to providing valuable information about the Datamart. Please visit

<http://egov.oregon.gov/DAS/SCD/SARS/datamart.shtml>

Datamart News List

To join the Datamart News List, please visit the link above and click on Datamart-News. This brings you to the E-Communications site. Follow the instructions and soon you will be receiving important communication from the Datamart team as well as other Datamart users.

Datamart User Group

The SARS unit hosts the Datamart User Group. The goal of this group is to decide on the needs and direction of the Datamart. Please visit the web link above for meeting dates and times.

Newsletter

The SARS unit publishes a newsletter, on a varying basis, called the "Datamart Connection". This publication is sent out via the Datamart News list and published to the Datamart website for easy access.

History of Brio/Hyperion?

Since the Datamart's creation in 1997, the State of Oregon has come to rely on the Brio/Hyperion query tool as its primary means of retrieving accounting and other financial information from the Datamart.

The original Brio application was created by Brio Software, Inc. and was used extensively throughout the state to access the Datamart. However, in 2003, Brio was acquired by Hyperion Solutions Corporation. Hyperion continued to update the software until March 2007, when Hyperion was acquired by Oracle. Throughout these transition years, the State of Oregon continued to use the product. In May 2010, the State of Oregon purchased an enterprise license for 'Oracle Enterprise Performance Management System 11' also known as Hyperion Interactive Reporting Studio (aka IR Studio). This purchase allows the state to use the Brio/Hyperion/Oracle product for years to come.

Am I ready to work in Hyperion?

If you can answer "YES" to all the questions below, you are ready to work in Hyperion.

- Are you a state employee?**
- Do you have a RACF ID?**
- Do you have an IBM DB2 Open Database Connection (ODBC)?**
- Do you have security access to the Datamart?**
- Is Hyperion installed on your PC?**
- Have you set up an Open Catalog Extension (OCE) for Hyperion?**
- Have you completed Datamart training?**

Exercises

1. What is the primary function of the SFMA and OSPA Datamarts?
2. How often is the SFMA, OSPA, and PICS data updated with new information on the Datamart?
3. Name 3 resources for Datamart information:
4. What are 4 things I need before I can access the Datamart?

Lesson 2


OCE's and Datamart Tables

- ✓ **What is an Open Catalog Extension (OCE)?**
- ✓ **Setting up an SFMA Datamart OCE**
- ✓ **Setting up an OSPA Datamart OCE**
- ✓ **Modifying an OCE**
- ✓ **Tables on the Datamart**
 - **SFMA Financial Tables**
 - **General Ledger Detail Tables**
 - **General Ledger Summary Tables**
 - **Other Special Financial Tables**
 - **OSPA Datamart Tables**
- ✓ **The Repository**

What is an Open Catalog Extension (OCE)?

In Hyperion, you use an OCE whenever you perform tasks that require you to connect to a database. The OCE is simply a definition of the connection required to view a particular database.

When you open Hyperion to begin a work session (as shown below), you must select the correct OCE for the targeted database. You can select from the list of Recent Database Connection Files or Browse your directory.

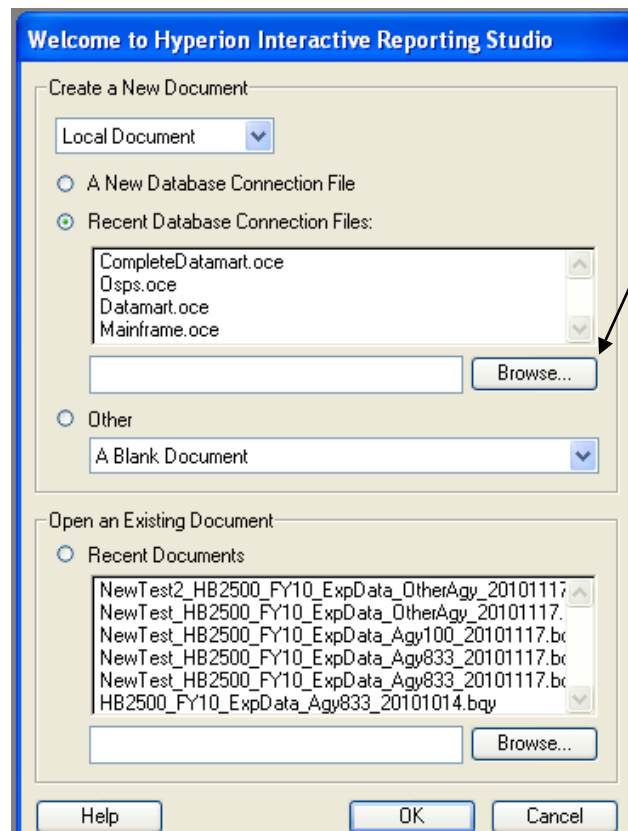


Your Recent Database Connection Files list will probably have different names compared to the above diagram because you are able to change the title of your OCE's. Standard practice is to title the OCE whatever name helps you associate with the database you will access.

Setting up a SFMA Datamart OCE

Creating an Open Catalog Extension (OCE) in Hyperion Interactive Reporting Studio - Version 11

These are the detailed instructions to be used while setting up your Hyperion SFMA OCE. In these instructions, you will connect to the SFMA Datamart only.

- 1) Open Hyperion and you should see a “Welcome to Hyperion” dialog box. Select → **A New Database Connection File**
Select → **OK**

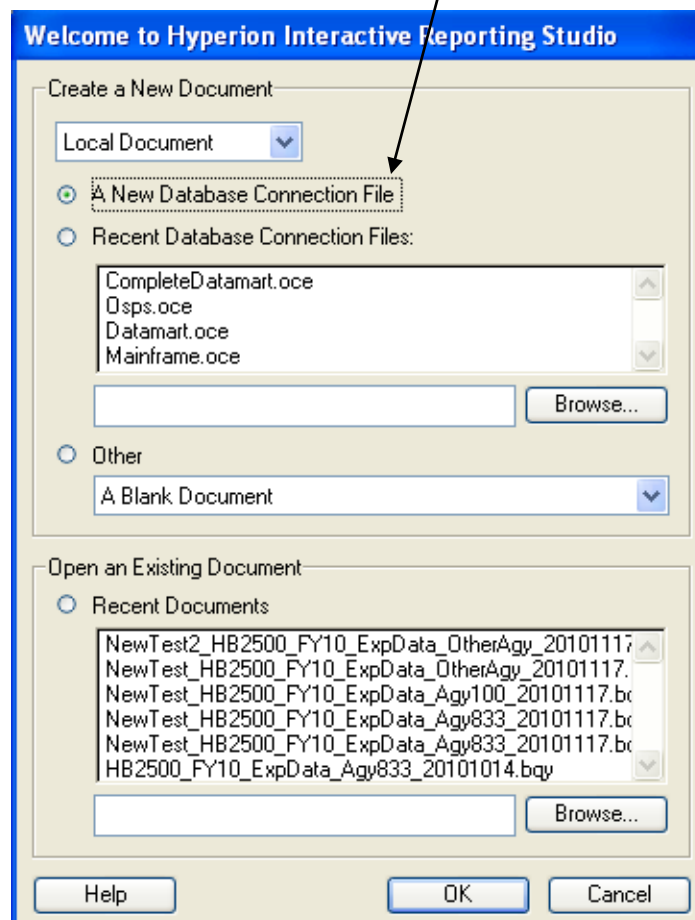

- 2) This takes you to the “Database Connection Wizard”
Select → **ODBC** from the-What connection software do you want to use?
Select → **DB2** from the-What type of database do you want to connect to?

Check the following two boxes:

1. **Show Meta Connection Wizard**
2. **Show advanced options**

Select → **Next**

Database Connection Wizard

HYPERION®
INTERACTIVE
REPORTING
STUDIO

ORACLE
ENTERPRISE PERFORMANCE
MANAGEMENT SYSTEM

The wizard will help you create a Connection File that you can use to connect to a data source.

What connection software do you want to use?
ODBC

What type of database do you want to connect to?
DB2

Show Meta Connection Wizard

Show advanced options

Prompt for database name

Help Cancel <Back Next> Finish

- 3) In the box labeled "User Name" type your **Datamart User Name** (this is your RACF ID).

In the box labeled "Password" type your **Datamart Password** (not your SFMA password).

From the dropdown list select→**SFMSP**

Select→**Next**

Database Connection Wizard

HYPERION®
INTERACTIVE
REPORTING
STUDIO

Connect to the data source.
Enter your user name, password, and select your IP address or database host.

User Name:

Password:

Host:


ORACLE
ENTERPRISE PERFORMANCE
MANAGEMENT SYSTEM

Help Cancel <Back Next> Finish

- 4) Leave this screen just as it is shown with “**On the current connection**” marked. Click ‘Next’, to continue.



- 5) On this “Meta Connection Wizard” screen select → **Edit**

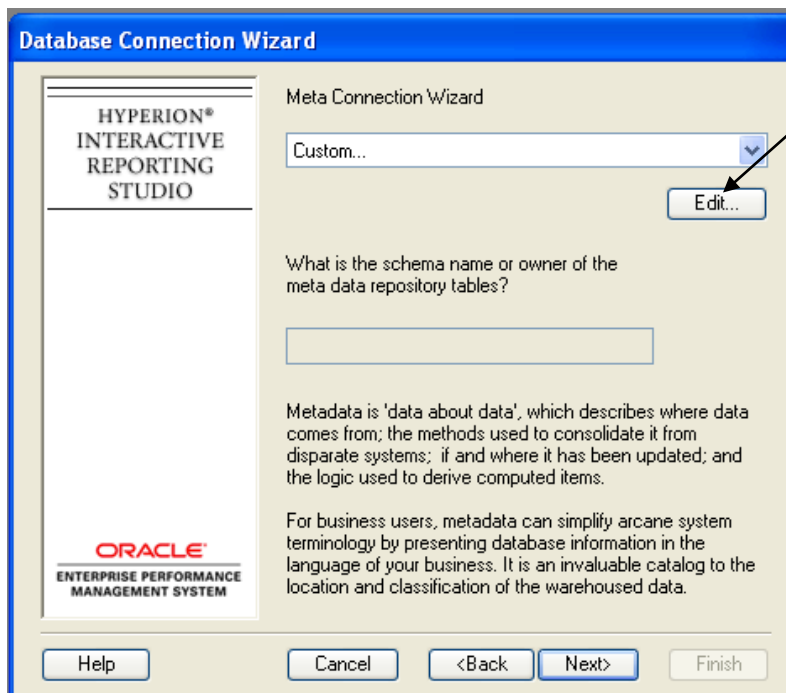

- 6) This next screen is the “Meta Data Table Definition”
Select the following tab from the top→**Joins**

- 7) Select→**Custom**
The grayed out fields now become white for data entry.

8) Fill in the fields accordingly:

Primary Owner	PKEY_OWNER
Primary Table	PKEY_TABLE_NAME
Primary Column	PKEY_COLUMN_NAME
Foreign Owner	FKEY_OWNER
Foreign Table	FKEY_TABLE_NAME
Foreign column	FKEY_COLUMN_NAME
From	SFMSPUSR.SFMS_WHSE_JOINS
Where	PKEY_OWNER=:OWNER

Select → **OK**

Then select → **Next** to continue


The screenshot shows the 'Metadata Definition' dialog box with the 'Joins' tab selected. The 'Custom' radio button is chosen. The 'Meta Data Join Definition' section contains the following fields:

- Select:**
 - Primary Database Name: (empty)
 - Primary Owner: PKEY_OWNER
 - *Primary Table: PKEY_TABLE_NAME
 - *Primary Column: PKEY_COLUMN_NAME
- Foreign Database Name:** (empty)
- Foreign Owner:** FKEY_OWNER
- *Foreign Table:** FKEY_TABLE_NAME
- *Foreign Column:** FKEY_COLUMN_NAME
- From:** SFMSPUSR.SFMS_WHSE_JOINS
- Where:** PKEY_OWNER=:OWNER

Buttons on the right include OK, Cancel, Clear, and Help.

- 9) Check the boxes for “Allow SQL-92 Advanced Set Operations” and “Exclude Brio Repository Tables”.

Next, select the middle **Define** button next to ‘Owner Name’.

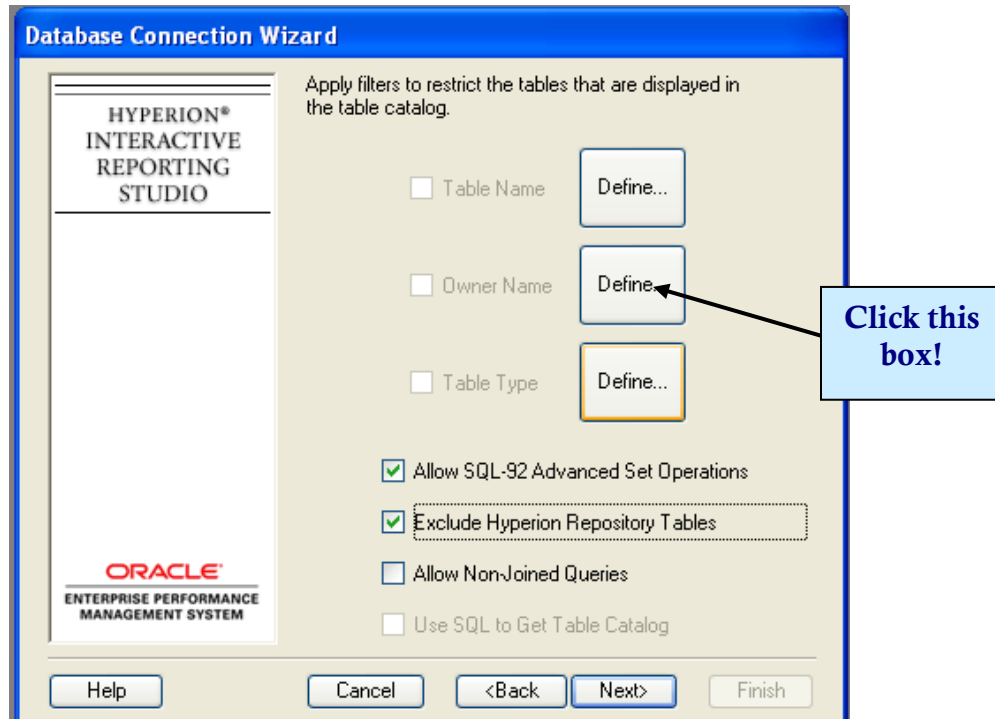

10) This takes you to a screen where you can choose the tables you want in your OCE.

Select → **Show Values**

Then, you can select the table names you want. You can select more than one by using “**CTRL+Click**”.

Select the following tables:


SFMSPUSR → SFMA Accounting Tables (no archived data)

SFMSARCH → SFMS Archive Tables

YEAREND → Year-End allows access to the Repository

Select → **OK**


Then select → **Next** to continue

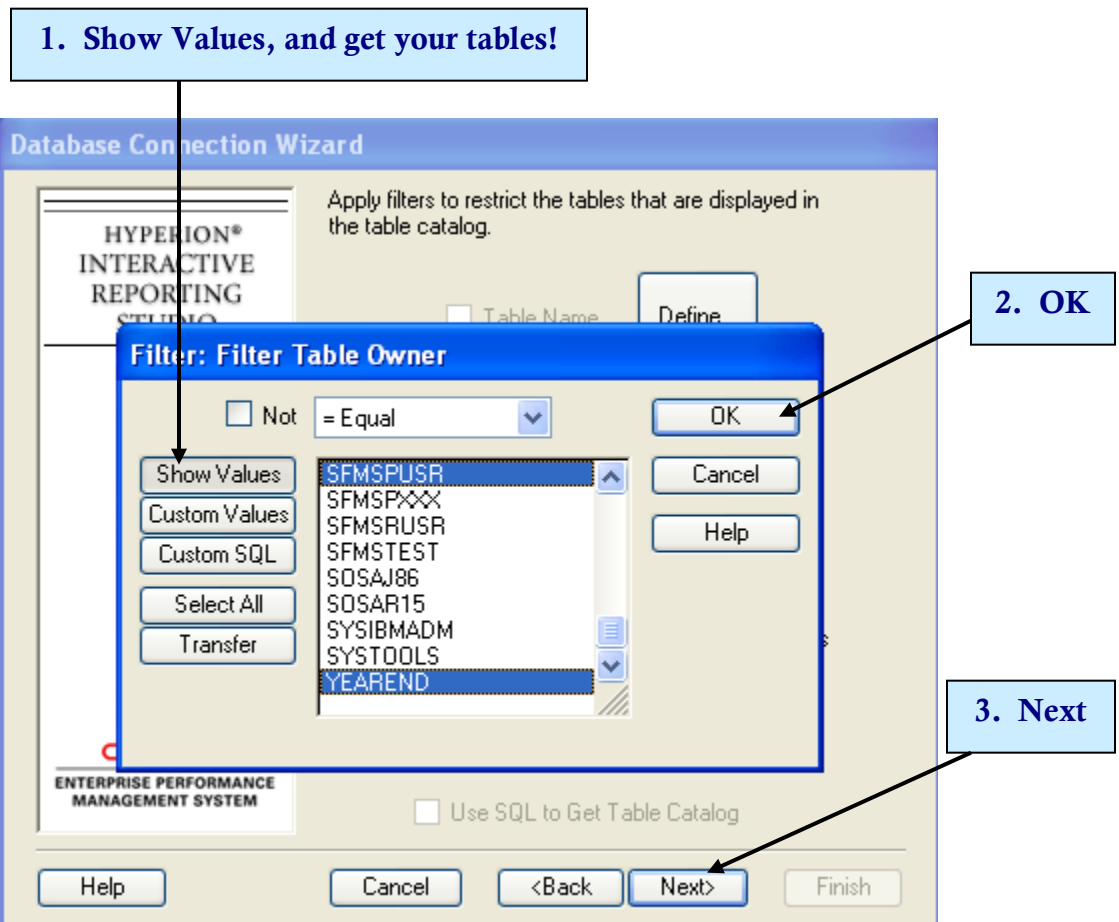

11) Update the next two screens as they appear below. Make changes as necessary.

Select → **Next** to continue on both screens

12) Select → **Finish** starting the completion of this process

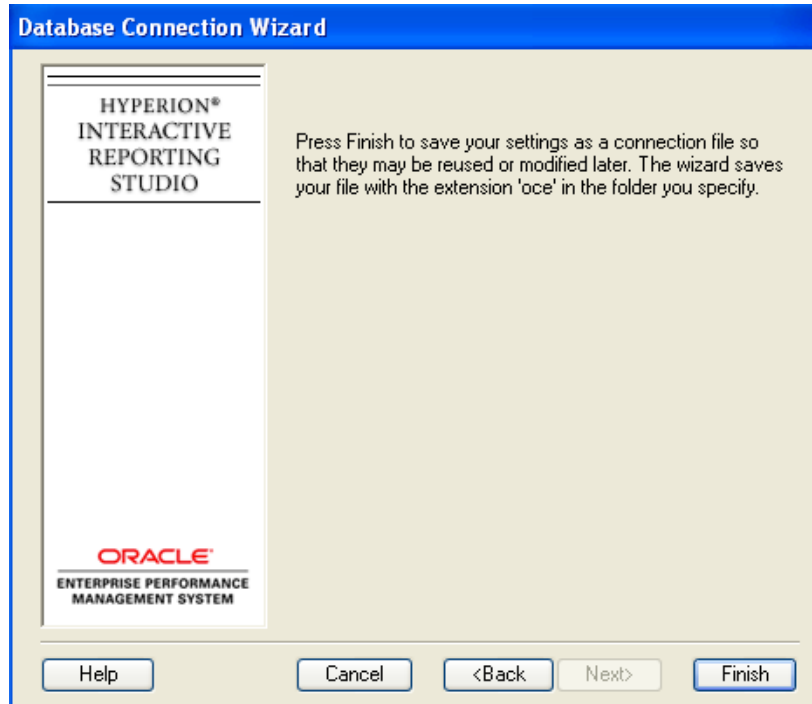


13) Select → **Yes** to save your OCE



14) Give your OCE a name in the File Name field

Select → **Save** to finalize the saving of your OCE

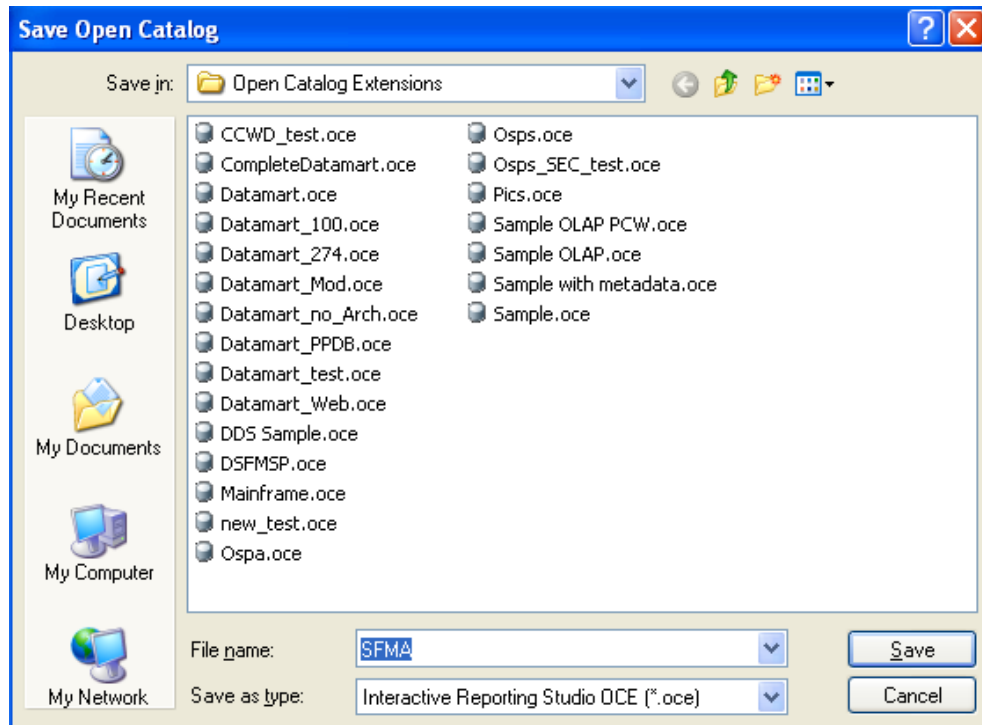

You can save Open Catalog Extensions in any directory but best practice is to save to the Standard Hyperion directory. This allows for easy access to all OCE files.

The standard SFMA OCE is downloadable from the Datamart website. <http://dasapp.oregon.gov/datamart/>

Setting up an OSPA Datamart OCE

Follow the same steps as the SFMA Datamart OCE process except replace step 10 above with the following step 10.

10) This takes you to a screen where a selection of tables must be decided for the OCE.

Select → **Show Values**

Then you can select the table names you want. You can select more than one by using “CTRL+Click”.


Select the following tables:

OSPSPUSR
YEAREND

Select → **OK**

Then select → **Next** to continue

1. Show Values, and get your tables!

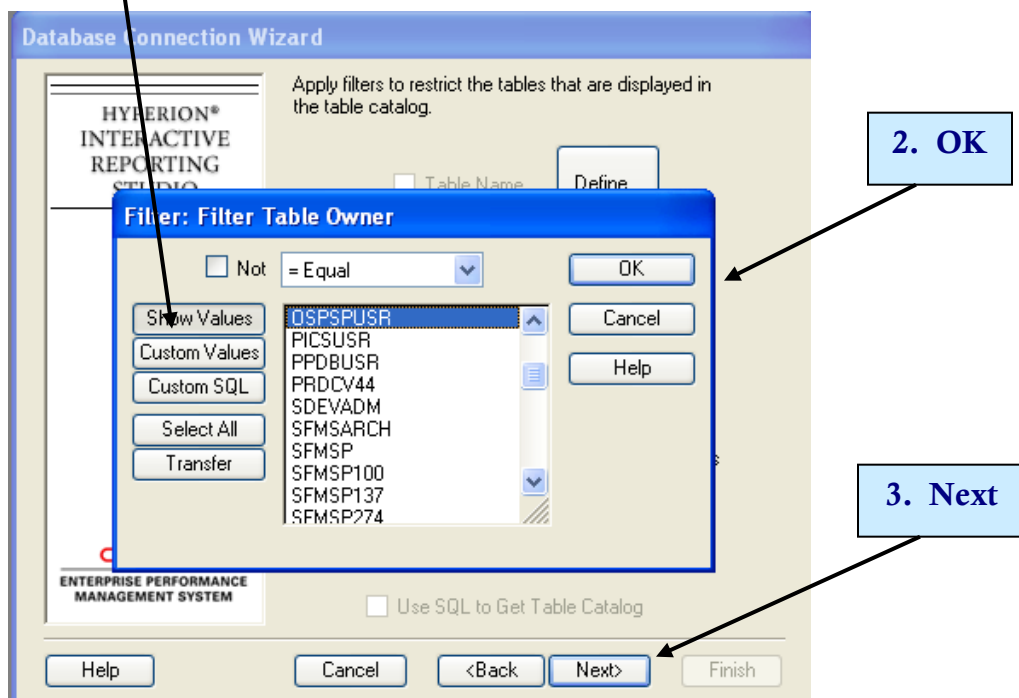

The standard OSPA OCE is downloadable from the Datamart website. <http://dasapp.oregon.gov/datamart/>


Modifying an OCE

When you create an OCE, you establish a working database connection for querying. You may need to modify an OCE to reflect changes in your network or hardware configuration, or to manage other connection information.

To modify an OCE:

- 1) Close any open Hyperion documents.
- 2) Select **Tools** → **Connection** → **Modify**

The Modify Connection dialog box appears.

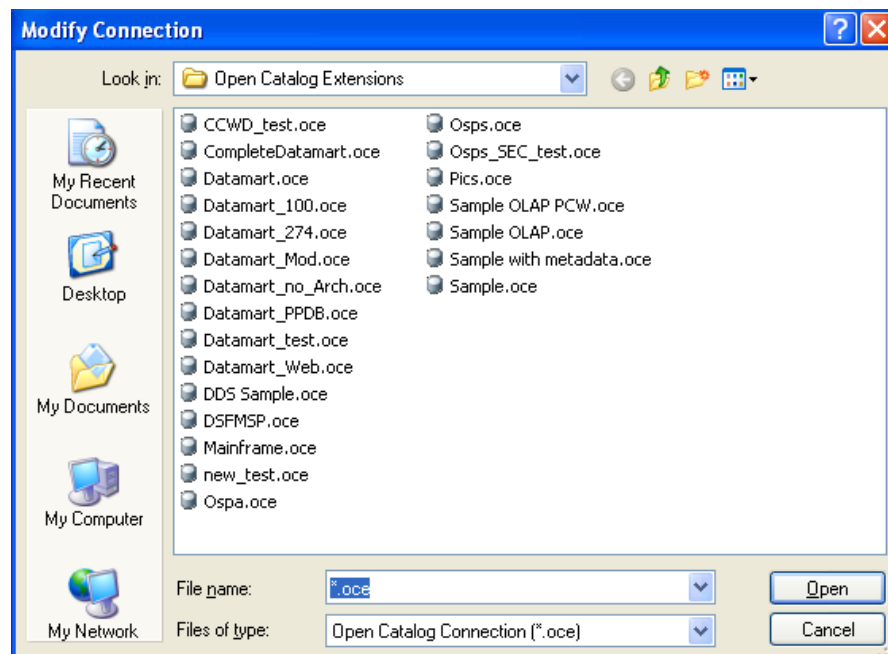

- 3) Select the connection file you want to modify and select **Open**

The Database Connection Wizard appears and displays the information for the OCE you selected.

- 4) Make any desired changes and then save the OCE when prompted.

Have fun working in Hyperion! You are now ready to create queries and run reports.

Tables on the Datamart

There are two types of tables on the Datamart: Financial tables and Profile tables. The main difference between the two is the financial tables contain financial information, such as General Ledger balances, and transaction amounts. Using the profile tables provides titles for various data elements, or allows a roll-up of information to a higher level than the financial table can accomplish.

Note that if you want detail finer than what is on any of the financial tables, you are not going to have much luck. The Datamart and the query tools can only slice and dice the data as deeply as the data goes. Say you want to get a subset of your comptroller objects. If you do not have any way to tie that subset together using data on the Datamart, you are going to be stuck (likely) having to go to the detailed records and the original documents. The following is an example of 'Meals and Lodging'. If you use comptroller object only (no agency object), you will not be able to get a report out of SFMA giving you a breakdown of Meals costs separate from Lodging. You might be able to get something based on vendor, but you also might not.

SFMA Financial Tables

Accounting Event Tables

Active Accounting Event→ This table mirrors the data from the SFMA system. Data is reflective of the current 3 months of active transactions.

All Accounting Event→ This table mirrors the data from the SFMA system. Data is reflective of the current fiscal year and five prior years of transactions. This table may contain up to two years of additional information depending on the purge timetable.

Archive Accounting Event→ This table mirrors the data from the SFMA system. Data is reflective of the current fiscal year and seven prior years of transactions. This table may contain up to two years of additional information depending on the purge timetable.

The accounting event tables are the lowest level of detail in the Datamart. All other financial tables are summaries in some way of this information.

One thing to be aware of is that the date fields in the Datamart are actual date fields. Date fields in SFMA are text fields. While those fields are edited to assure proper dates are being used, this allows SFMA to contain dates not on the calendar. Period 13 identified through effective date is the best example of this. In SFMA period 13 is identified as 6/31/2010. In the Datamart, date fields are not allowed to have dates not on the calendar – a data validation feature in DB2. In order for us to move data to the Datamart, we have to do some “data washing”. Dates like 6/31/2010 are changed to 6/30/2010, a new data element is introduced called **Batch Date Ci**. The download program picks up the last digit in the month and records it in this field. This way, any time an incorrect date is entered into SFMA, it is corrected in the Datamart, and an indicator is provided.

Note though, another data field in the Accounting Event tables will provide you with the fiscal month. The **Fiscal Month** field identifies the appropriate fiscal month, including month 13.

General Ledger Detail Tables

General Ledger Detail→ This table mirrors the data from the SFMA system. This table summarizes General Ledger balances, and summarizes at the object and agency object level.

YE General Ledger Detail→ This table mirrors the data from the SFMA system. However, the data on this table is updated only during month 13 close. During the period of mid-July to close in August, this table is updated with the balances in the **current fiscal year only**. At other times of the year, this table contains zero data. This table summarizes General Ledger balances, and summarizes at the object and agency object level.

Arch GL Detail→ This table mirrors the data from the SFMA system. The period available is dependent on the date of agency implementation onto SFMA.

General Ledger Summary Tables

General Ledger Summary→ This table mirrors the data from the SFMA system. This table summarizes General Ledger balances, but does not contain any object level detail.

YE General Ledger Summary→ This table mirrors the data from the SFMA system. However, the data on this table updates only during month 13 close. During the period of mid-July to end of August, this table updates with the balances in the **current fiscal year only**. At other times of the year, this table does not contain data. This table summarizes General Ledger balances, but does not contain object level detail.

Arch GL Detail→ This table mirrors the data from the SFMA system. The period available is dependent on the date of agency implementation onto SFMA.

The General Ledger Tables are a higher level of summarization in the Datamart from the Accounting Event tables. Balances for the tables are by month, and are **cumulative** by month. This means that a balance in **Month 03 Balance** will contain the **total** of months one, two and three in that field. Monthly information for nominal GL accounts, except for month just closed, must be created using calculated fields.

Other Special Financial Tables

Appropriation Financial Table

The Appropriation Financial table mirrors the data from the SFMA system. This provides information similar to the “62” screen on SFMA.

Contract Financial Table

The Contract Financial table mirrors the data from the SFMA system. This provides information similar to the “68” screen on SFMA.

Grant Financial Table

The Grant Financial table mirrors the data from the SFMA system. This provides information similar to the “66” screen on SFMA.

Project Financial Table

The Project Financial table mirrors the data from the SFMA system. This provides information similar to the “80” screen on SFMA.

Receipt Extr Sum Table

The Receipt Extr Sum table mirrors the data from the SFMA system. This provides information similar to the “12/13” screen on SFMA.

Document Financial Tables

Doc Financial Table → mirrors the data from the SFMA system. This provides information similar to the “64” screen on SFMA.

Arch Doc Financial Table → mirrors the data from the SFMA system. This provides information similar to the “64” screen on SFMA.

Payment Control Table

The Payment Control table mirrors the data from the SFMA system. This provides information similar to the “47” screen on SFMA.

Profile Tables

Agency	- D02 Screen
Agency Code 1	- D26 Screen
Agency Code 2	- D27 Screen
Agency Code 3	- D36 Screen
Agy GL	- D32 Screen
Agy Obj	- D11 Screen
Agy Obj Grp	- D25 Screen
Appn No	- 20 Screen
Appr Fund	- D22 Screen
Budget Obj	- D01 Screen
Cash Fund	- D73 Screen
Compt Obj	- D10 Screen
Compt Srce Grp	- D09 Screen (this is now a tie to ORBITS data)
Contract	- 30 Screen
Fund D23	- D23 Screen
GAAP Fund	- D24 Screen
GL Acct	- D31 Screen
Grant No	- D47 Screen
Grant Obj	- D48 Screen
Grant Phase	- 29 Screen
Index No	- 24 Screen
Operator ID	- D96A/B Screen
Org Code	- D03 Screen
PCA	- 26 Screen
PCA Index Rel	- 21 Screen
Program Code	- D04 Screen (this now contains the ORBITS Cross-Reference Number)
Project No	- D42 Screen
Project Phase	- 27 Screen
State Fund Grp	- D20 Screen
Sub Grantee	- 31 Screen
TDate	- Generated - not on SFMA

OSPA Datamart Tables

The OSPA tables on the Datamart are not as complex as the SFMA tables. These tables are each a flat-file database made from report output. This does make querying a bit more difficult, as you really have to know exactly what you are looking for, and where to find it.

OSPA DED Tables

OSPA Deductions

OSPA Ded	- Current Biennium
OSPA Ded B	- Current and Prior Biennium
OSPA Ded PB	- Prior Biennium
OSPA Ded PP	- Prior-Prior Biennium (2 prior biennia)

OSPA JS Lab ADJ Tables

OSPA Job Status, Labor and Gross adjustments

OSPA JS Lab ADJ	- Current Biennium
OSPA JS Lab ADJ B	- Current and Prior Biennium
OSPA JS Lab ADJ PB	- Prior Biennium
OSPA JS Lab ADJ PP	- Prior-Prior Biennium (2 prior biennia)

OSPA Labor Cost Tables

Labor Costs

OSPA Labor Cost	- Current Biennium
OSPA Labor Cost B	- Current and Prior Biennium
OSPA Labor Cost PB	- Prior Biennium
OSPA Labor Cost PP	- Prior-Prior Biennium (2 prior biennia)

OSPA LV Accrual Tables

Leave Accruals

OSPA LV Accrual	- Current Biennium
OSPA LV Accrual B	- Current and Prior Biennium
OSPA LV Accrual PB	- Prior Biennium
OSPA LV Accrual PP	- Prior-Prior Biennium (2 prior biennia)

OSPA Net Pay Tables

Net Pay amounts

OSPA Net Pay	- Current Biennium
OSPA Net Pay B	- Current and Prior Biennium
OSPA Net Pay PB	- Prior Biennium
OSPA Net Pay PP	- Prior-Prior Biennium (2 prior biennia)

OSPA Work Sched Table

Work Schedule amounts

Note: When querying the OSPA tables, you must use a five-digit agency number in order to obtain the desired results. For example, DAS is agency 107 for SFMS, but 10700 for OSPA purposes. Another example is Parks & Recreation's agency number on SFMS is 634, but on OSPA, it is 63400.

There are special view tables that agencies request be created to help lock or unlock specific data within the Datamart.


The Repository

The 'Repository' is a great tool to help share standard reports with users on a statewide level. The purpose of sharing these reports is to allow agencies to have an outlet to access reports created by different agencies. The Datamart team cannot guarantee these reports will function properly for each agency, due to specific agency structure setups; however, please feel free to make modifications to suit your agency.


The Repository contains many files, which access data from SFMA, ORBITS, OSPA, etc. Thanks to users throughout the state, we continually obtain more reports to help with our daily operations.

Below are instructions for accessing the Datamart Repository.


1. Open Oracle Hyperion Interactive Reporting Studio (Formerly known as Brio). Click **Cancel** if you get a 'Welcome' dialog box requesting to open files or open a database connection.
2. Select **File > Open from Repository > Select**. Select the Open Catalog Extension (OCE) that connects to the Repository.
3. Select the proper OCE and click **Open**. In this example, the OCE is called "Datamart". Your OCE name may be different. You should see a screen similar to the following:

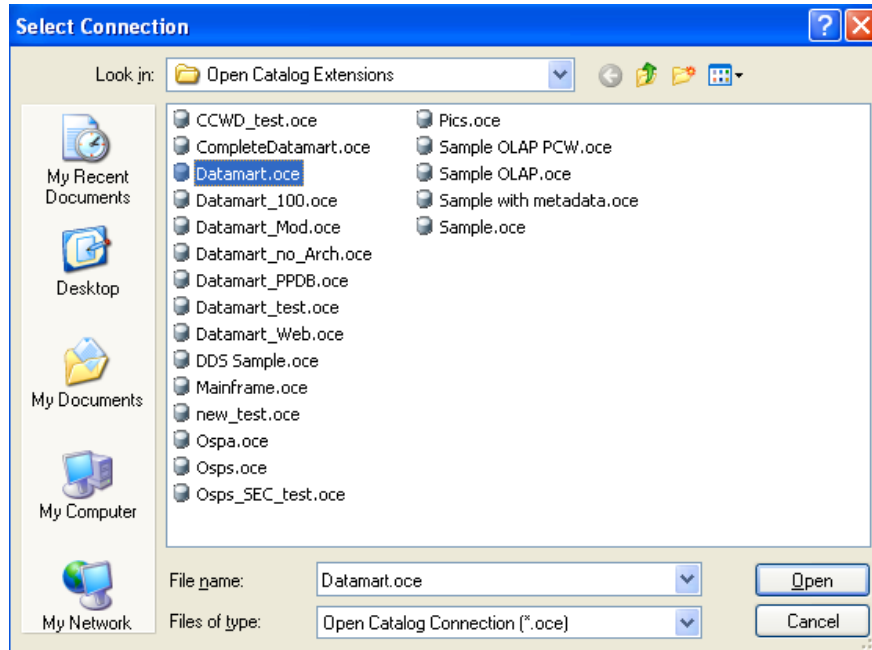


4. You will be prompted for your user name and password. Input your information and click **OK**. You should see a screen similar to the following:

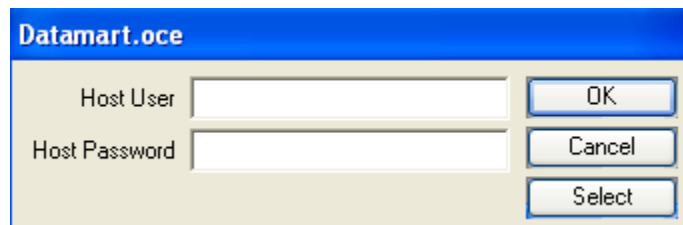


5. If no errors have occurred with your log in data, you should see a screen similar to the following:

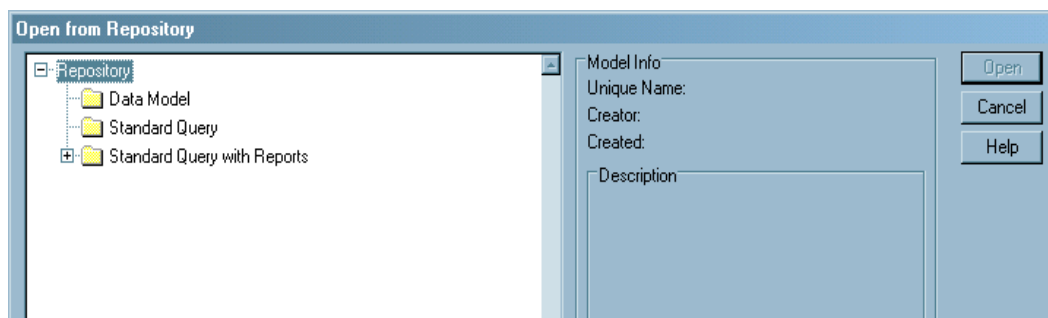


If your OCE is set up to go directly to the “**YEAREND**” directory, instead of seeing the above info, you might see something similar to the following:

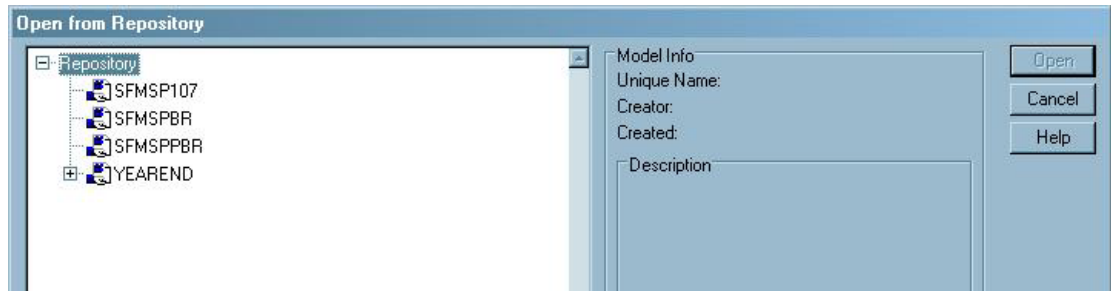


Click on the **[+]** next to “**YEAREND**”. Your screen should look like the following:

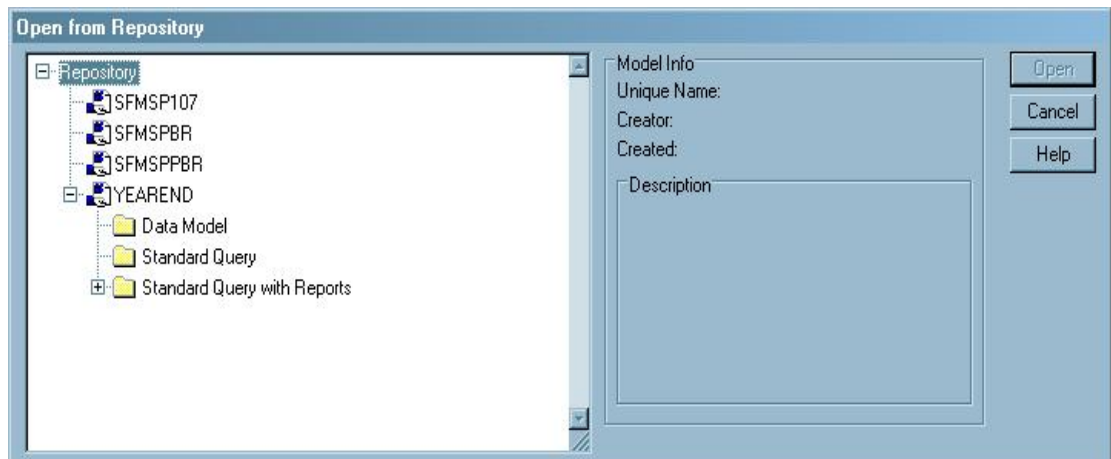

6. Click on the **[+]** next to “**Standard Query with Reports**”. Your screen should look like the following (Again this may be somewhat different depending on your OCE setup; you may not see anything but the three folders “Data Model”, “Standard Query” and “Standard Query with Reports”):

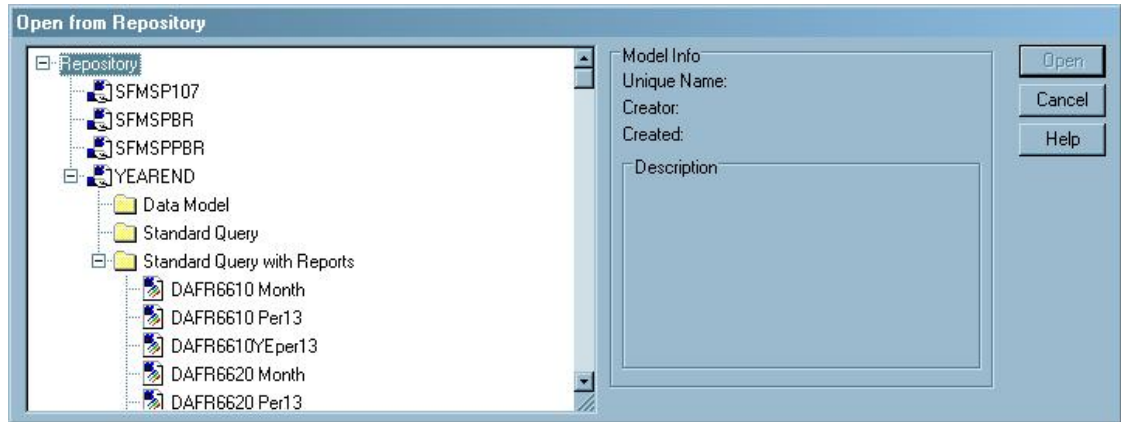

7. Scroll down until you find the report you want to use. Once selected a description field for the file will be shown on the right side. Click **Open**. Your screen should look like the following:

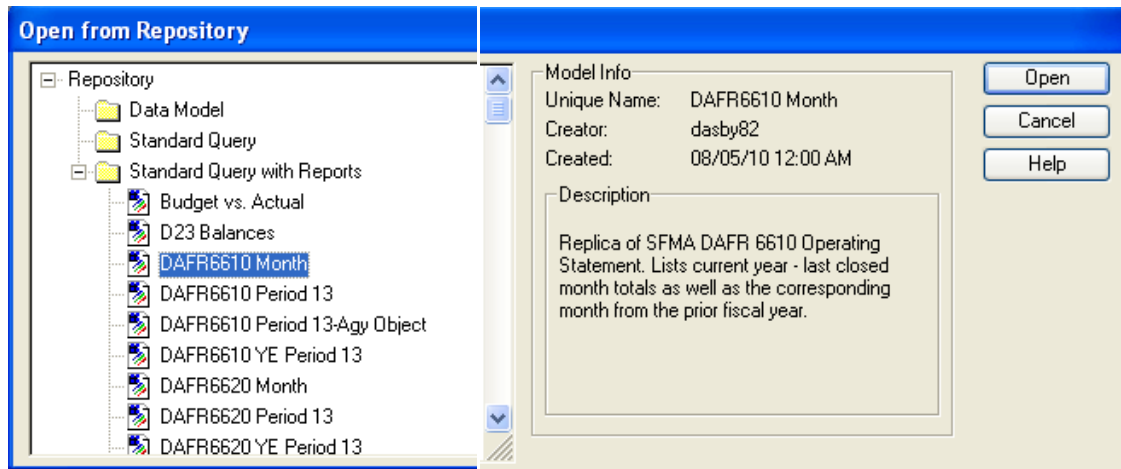

Once the Repository file is open, please review the Dashboard information contained in the file, prior to running the query.

Exercises

1. What is an OCE?
2. How many OCE's can I set up on my machine?
3. Can I modify an existing OCE on my machine?
4. Name the 2 types of tables on the Datamart.
5. Name 3 financial tables found in the Datamart.
6. Name 3 profile tables found in the Datamart.
7. Name 3 OSPA tables found in the Datamart.
8. Name a resource, which provides a great tool to help share standard reports with users on a statewide level.


Lesson 3

Hyperion Queries

- ✓ **Hyperion Spider Web**
- ✓ **BQY Documents, Sections, and Toolbars**
- ✓ **Online Help**
- ✓ **Opening and Saving BQY Documents**
- ✓ **Processing and Stopping Queries**
- ✓ **Adding, Duplicating, Renaming, and Deleting BQY Sections**
- ✓ **Hiding a BQY Section**
- ✓ **Sending BQY Documents as Email Attachments**
- ✓ **Printing BQY Sections**
 - **Adjusting the Page Margins in Print Preview**
 - **Adding Headers and Footers**
 - **Printing Sections**

Hyperion Spider Web

Let's talk about the flow of data from the financial world to the Datamart. How does it get to your machine and out on a piece of paper for your boss or meeting?

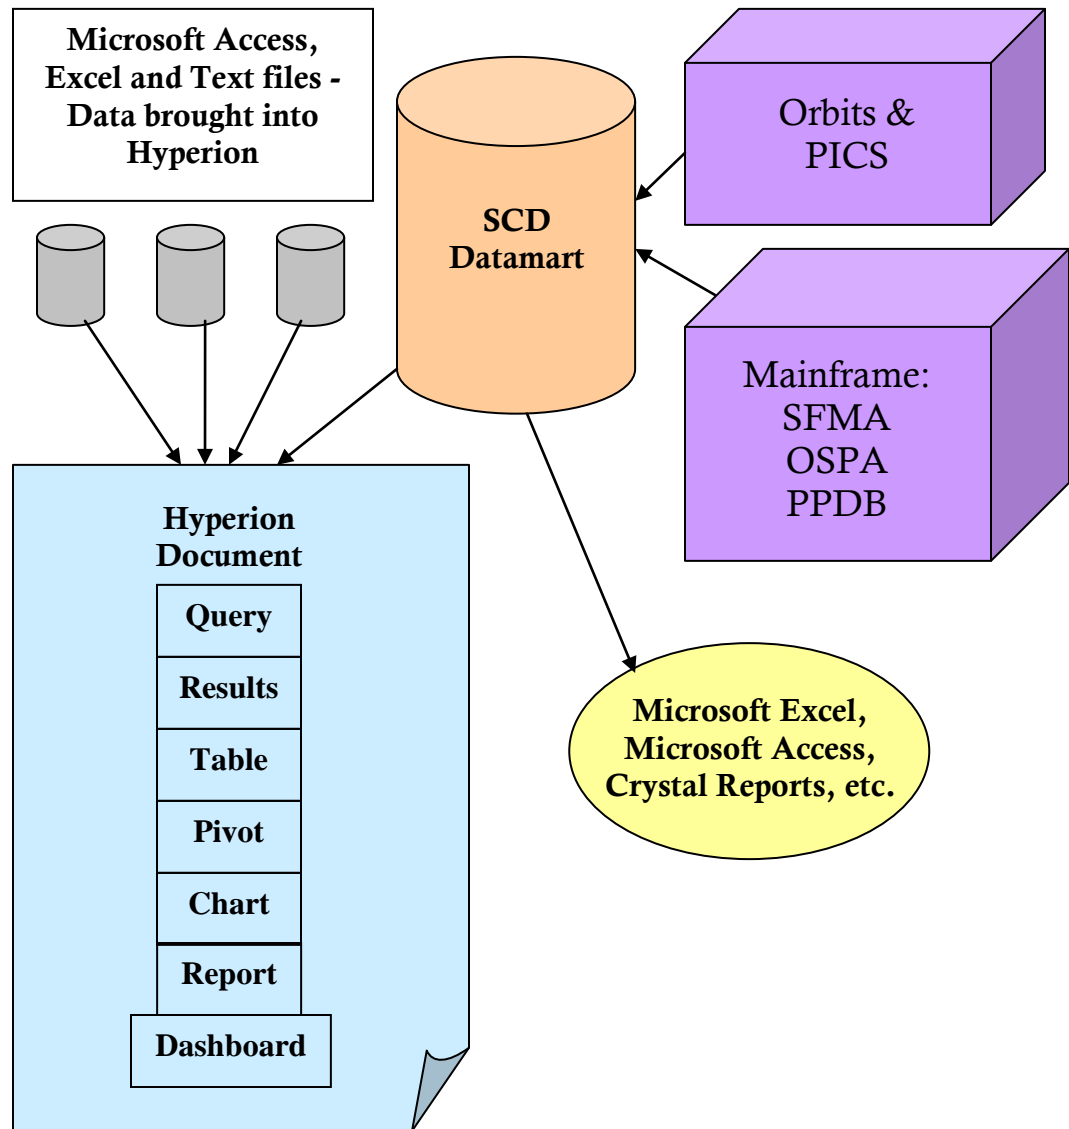

BQY Documents, Sections, and Toolbars

BQY Documents

A BQY document is a reporting file created in Hyperion and has the file extension of .bqy. A .bqy can contain queries, results, tables, pivots, charts, reports, and dashboards.

BQY Sections

Queries→ Used to create questions against the Datamart.

Results→ Used to display the rows returned/retrieved from a query built in the query section. You can take the results of the query and develop filters, sorts, computed items, and format.

Tables→ Used to create organized subsets of your query results. These are tabular-styled simple reports. You can develop filters, sorts, computed items, and format this data.

Pivots→ Used to create cross-tabular style reports in which you can analyze data. You can focus or drill-down on data items in this area. Data facts are aggregated (combined) in this area.


Charts→ Used to create horizontal and vertical bar charts, line, pie, cluster, scatter, and ribbon. You can format areas of your charts.

Reports→ Used to develop free-form reports where multiple result sets are displayed in a combined area. This is where you can integrate foreign results that have been imported into your .bqy with current information from the Datamarts.

Dashboards→ Used to create an Executive Information System (EIS), which offer a user-friendly approach to querying and manipulating results, pivots, charts, and reports. Users are able to check boxes, access drop-down lists, select radio buttons, and filter results based on their specific needs and criteria.


BQY Toolbars

The following figure shows the sections and toolbars of a Hyperion .bqy.

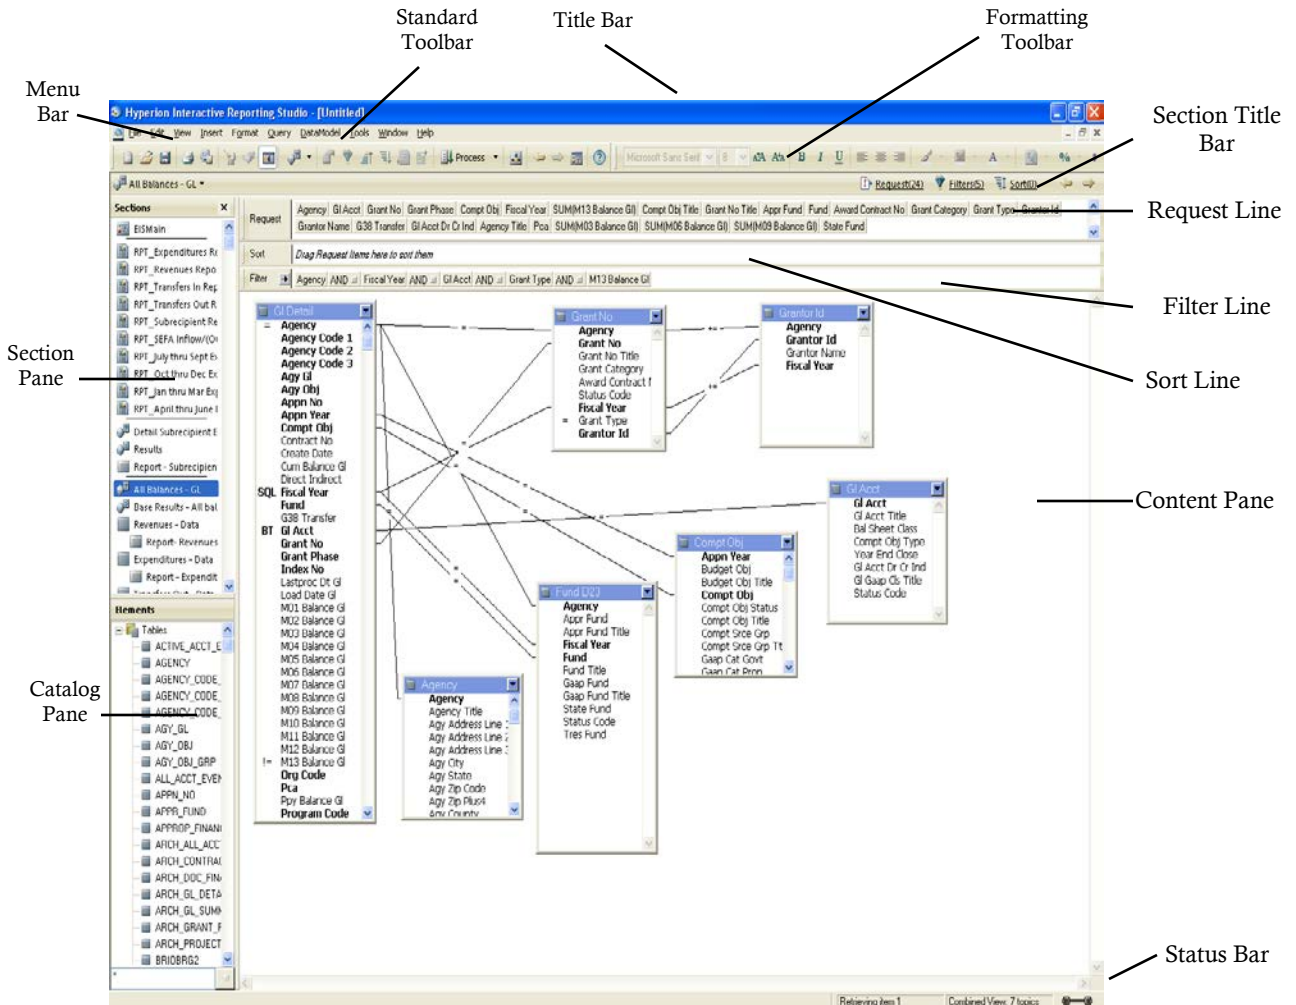

Your Section and Catalog (or Elements) Pane will vary depending upon the .bqy you are developing or using. The Section Toolbar, which is not shown, displays when you are working in Charts, Reports, and Dashboards.

If you can't visually see a toolbar or section, you can select **View** from the **Menu Bar** and choose what you would like to see.

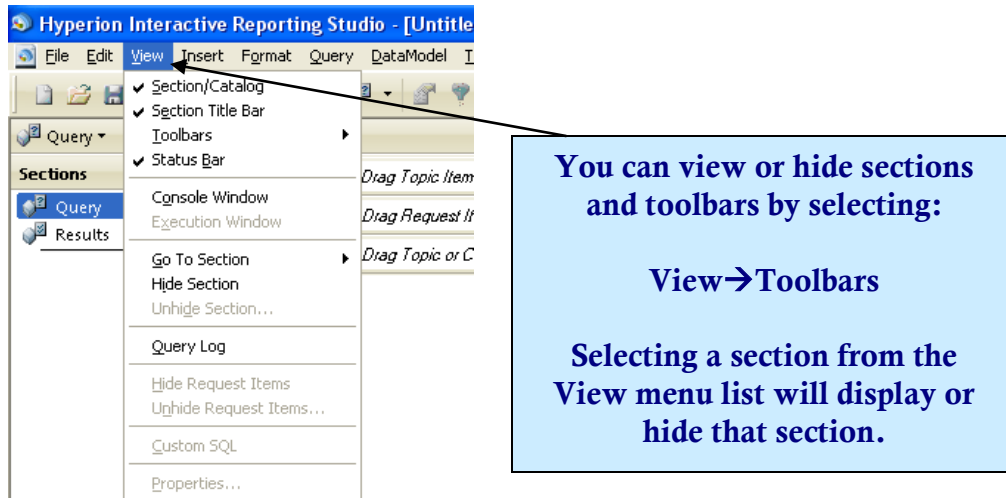

Online Help

Online help is available through Hyperion.

To access help:

From the Menu Bar (Note: Must have bqy started)

Help→Help on Content

Or

Select the 'F1' key

This will take you to Hyperion online help. You can search for help by three methods:

Contents→ Allows the user to search for help on a pre-defined topic

Index→ Search for help on predefined topics alphabetically


Search→ Type your help issue in the search box for results

Opening and Saving BQY Documents

A .bqy document is just like any other document you would create, edit, save, close, or open; only it lives in Hyperion. The .bqy is the file extension for a Hyperion document.

Opening a BQY Document

You can double-click on an existing .bqy to open it or you can go through Hyperion. Below is an example of the opening dialog box you will see when you open Hyperion.

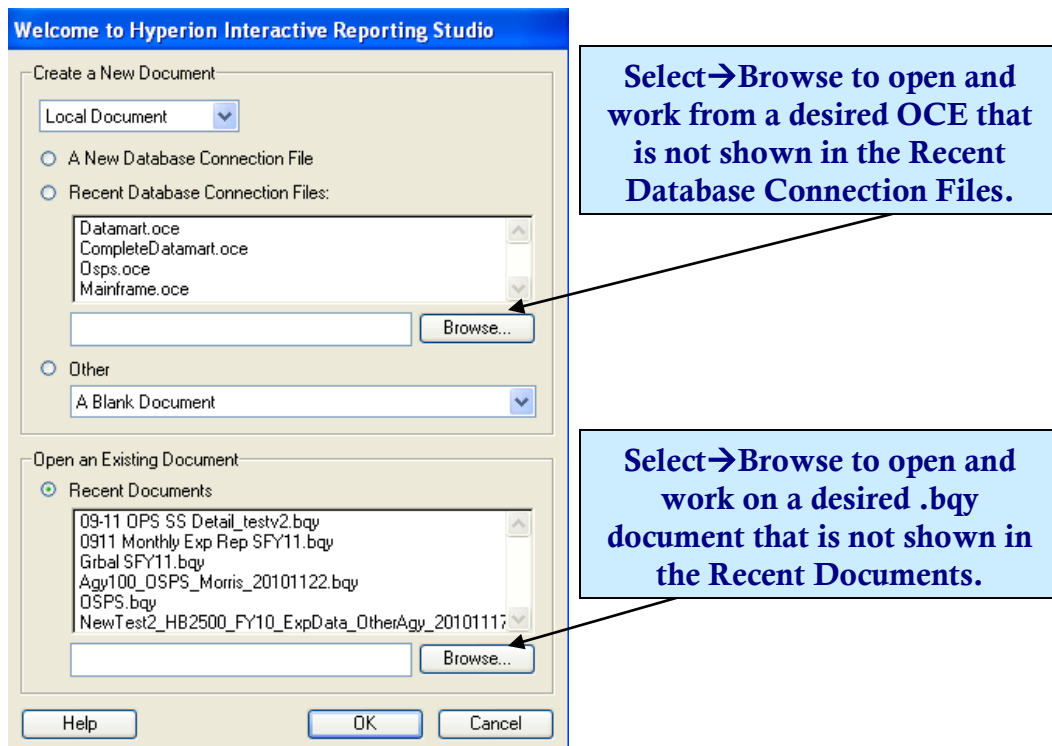

You can choose a Recent Document from the bottom half of this screen or open an OCE from the upper half of this screen.

Starting a new .bqy using the SFMS.oca:


Open Hyperion from your Start Menu

Select → **Browse from Recent Database Connection File**

Select → **SFMS.oca** → **OK**


Type → **User Name** and **Password** (this is your assigned Datamart user name and password)

You should now see the following screen:

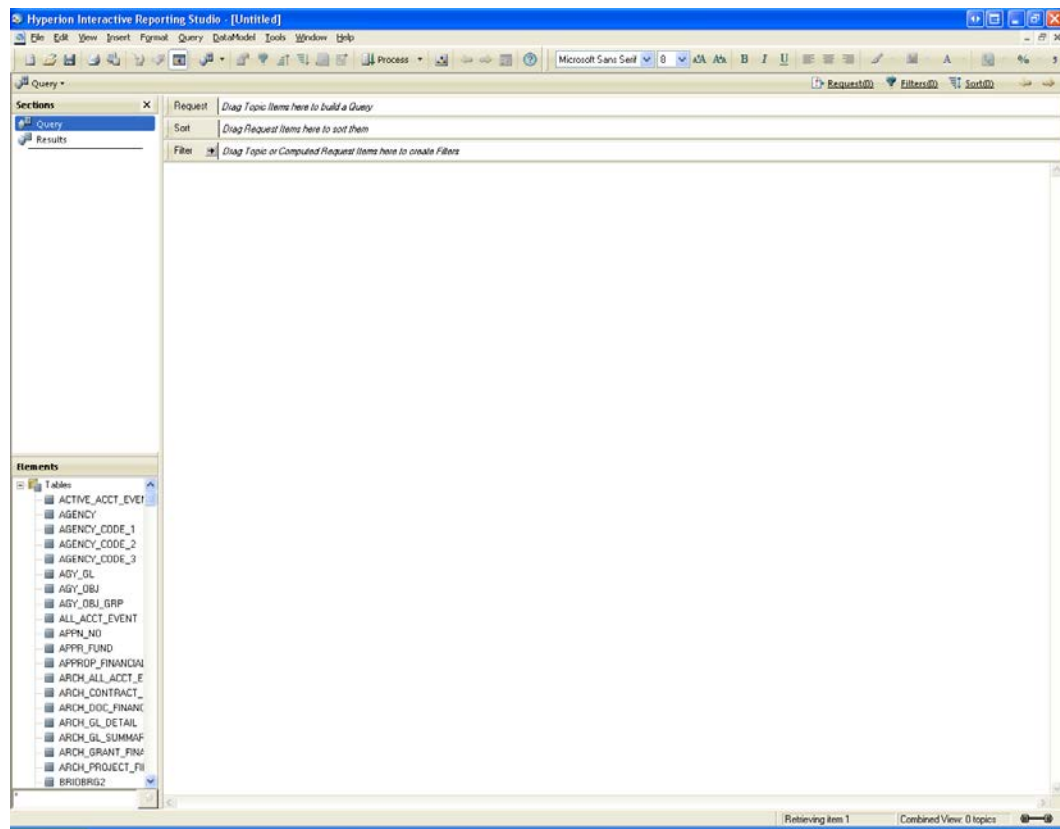


You may have to click on the + next to **Tables** to see all the topics available to use.

You can also right-click on top of the tables to see their full names. This shows you what view or tables these topics are linked.

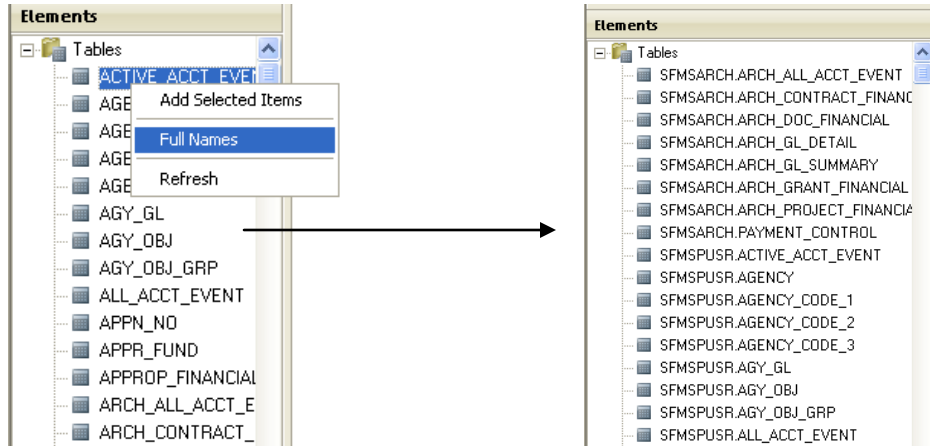

Saving a BQY Document

Just like any other application, you have several choices for saving your .bqy.

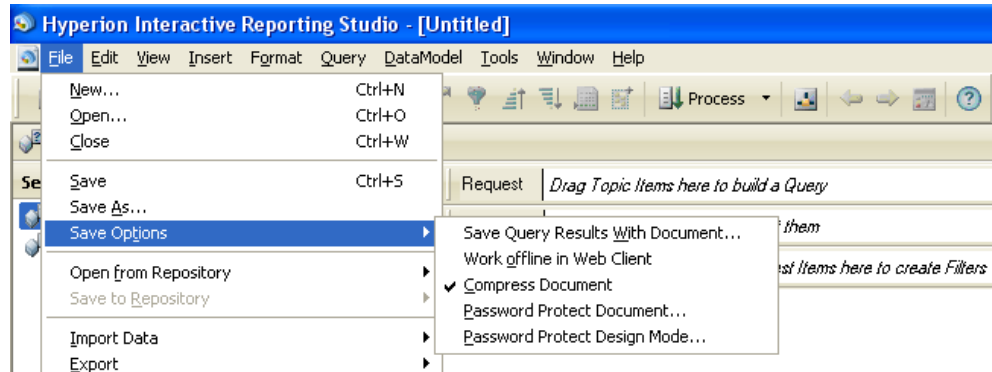

You can save a .bqy by selecting:

File→Save

This saves the .bqy under the existing name and updates any changes you have made to the opened document. This does not create a new .bqy document unless it is newly created.

File→Save As

This takes an existing .bqy document and saves it as a new document with the changes you have made. Use this option when saving a .bqy for the first time or when you desire to keep the existing .bqy document and a new .bqy document.

File→Save Options→Save Query Results With Document

Use this if you want to perform off-line data analysis of your .bqy.

File→Save Options→Compress Document

This features results in smaller file sizes and enables you to send your file quickly.

File→Save Options→Password Protect Document

Users will need a password to access this document. Be careful! You need to remember your password.

File→Save Options→Password Protect Design Mode


Password protection used to guard Dashboard designs.

Processing and Killing Queries

Processing Queries

This process refreshes the data in the .bqy document based on your requested items and filters specified. When a query is processed Hyperion goes back to the Datamart and retrieves this information for your query. The process time depends on the data you are asking the Datamart to retrieve and the power of the Datamart server and connection to the server.


Because your .bqy document could have more than one query, there are three process options to choose from:

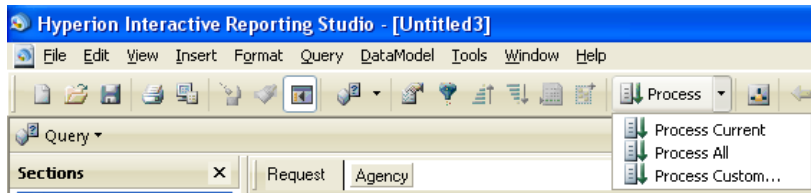

Process Current → Processes the query that is currently active.

Process All → Processes all queries that exist in the .bqy document.


Process Custom → Opens a Process Custom dialog box so you can choose which queries to process. Simply put an **X** in the box next to the query.

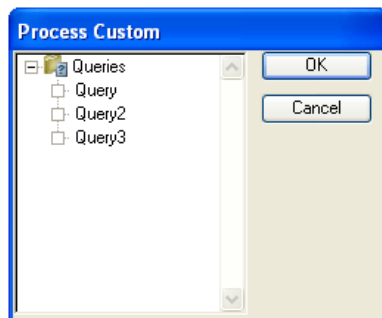

Process Order of Queries

It is important to remember how you develop your queries. If you create a .bqy with multiple queries and some of those queries depend upon others in that .bqy, you will want to make sure you order them to process in a certain order.

Tools→Process Query→Process Order

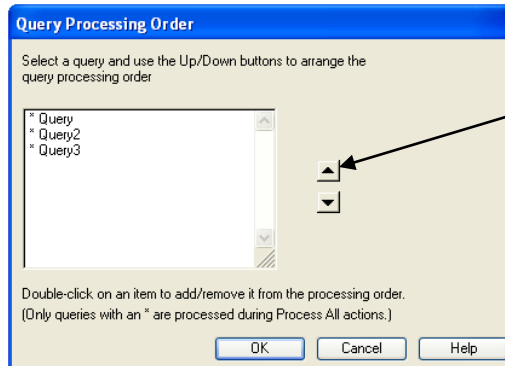


Click on the up and down arrows to select your order process for the queries.

Prior to processing a query, you must complete the following steps:


Add a 'Table' to your query section:

Bring a **Table** over from the **Elements Pane** to the **Content Pane**. You can drag and drop or double-click.

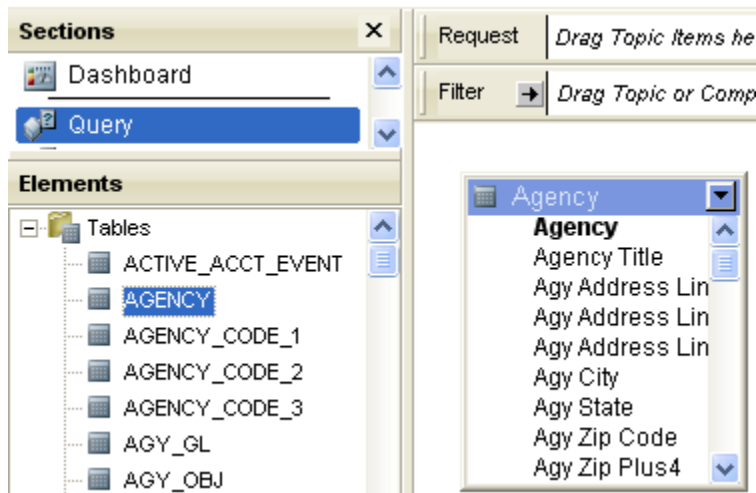

Add fields in a Table to the Request line:


All Fields: Right-click→**Table Name**→Left-click→**Add Selected Items**
Individual Fields: Right-click→**Field Name**→Left-click→**Add Selected Items**

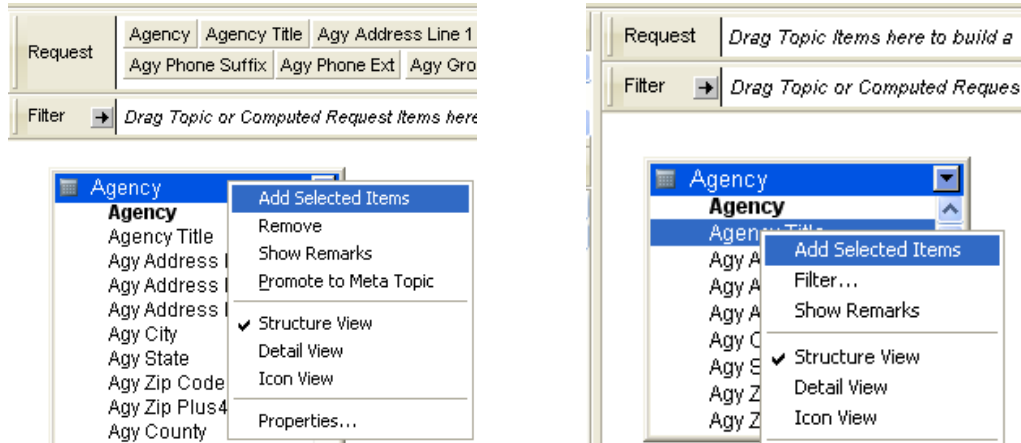


Create a Filter for your query:

Double-click→**Field Name**. A 'Filter' dialog box pops up.

Manually input a value in the 'Custom Values' section and Click→**OK** or;
 Click→**Show Values**→Select an option→Click→**OK**

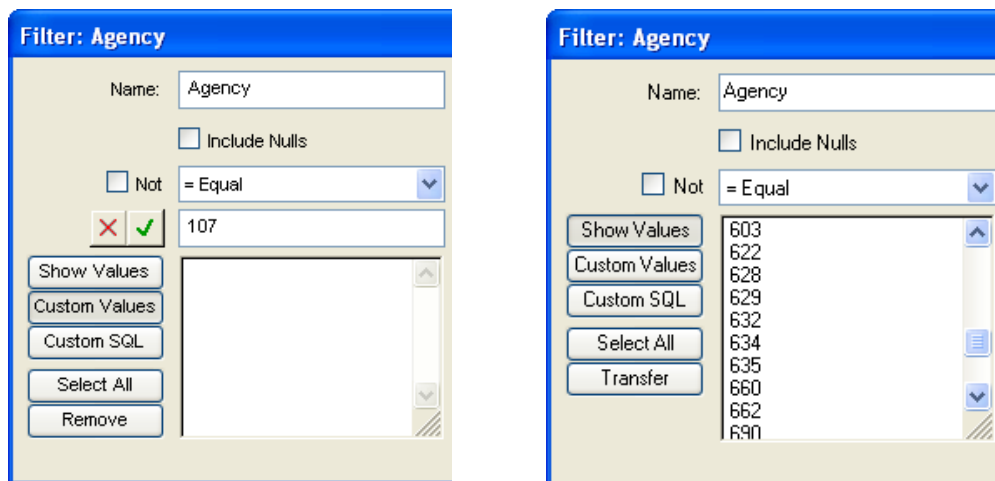

Select→  **from the Standard Toolbar**

You will now see your results under the Results section of the Section Pane.

Stopping Queries

Sometimes when you process a query or queries in a .bqy document you may find the data is not being returned from the Datamart in a timely manner. Users want to be conscious of their query/process time to keep up top performance. It is important that you use the process listed below to stop the query. Exiting out of Hyperion does not stop the query process to the Datamart and it will continue to use resources to process the query.

To stop a query:


Open the Internet

Go to → <http://dasdm1.iservices.state.or.us/>

Log in using your Datamart user name and password

Select → **List or Kill Queries**

Select → **Kill Queries**

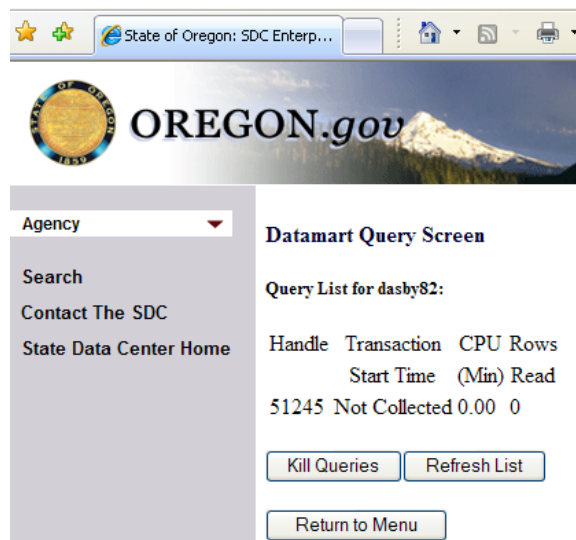

Sometimes after you stop a query, you may notice a 'Results' set of data is returned. This is called 'partial data' and you must be careful because these results are *not* complete.

You can also stop a query once it starts providing results.

Hold down the 'alt' key along with the 'End' key


Adding, Duplicating, Renaming, and Deleting BQY Sections

You can add, duplicate, rename, or delete a .bqy section at any time.

To add a new section:


Insert→**New**→Select the Section you want to add

Your choices are:

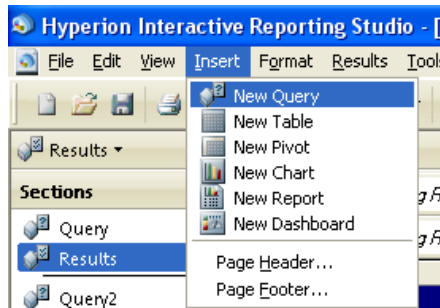


To duplicate a new section:

Edit→**Duplicate Section**

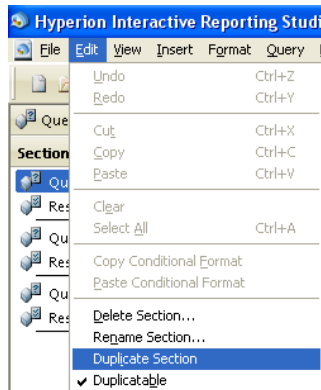


Right-click on the Section you want to duplicate

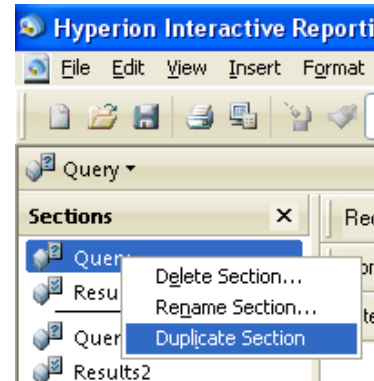


To rename a section:

Edit→Rename Section

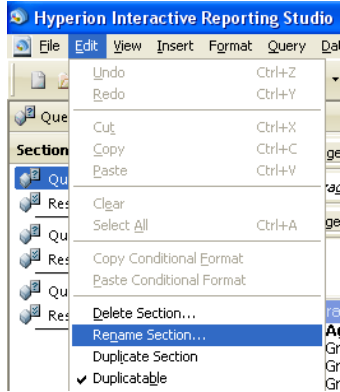


Right-click on the Section you want to rename

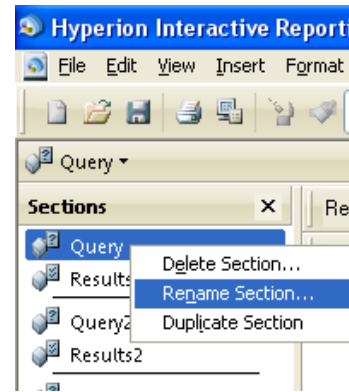



To delete a section:

Edit→Delete Section

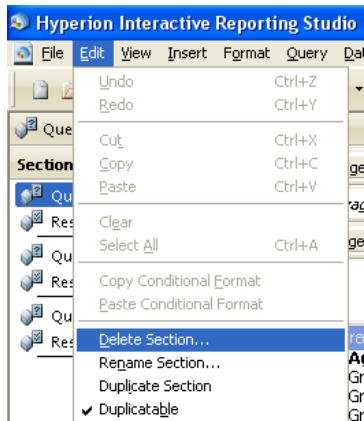

Right-click on the Section you want to delete

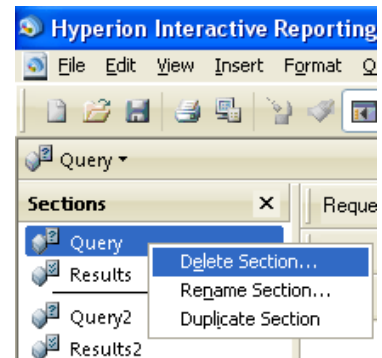

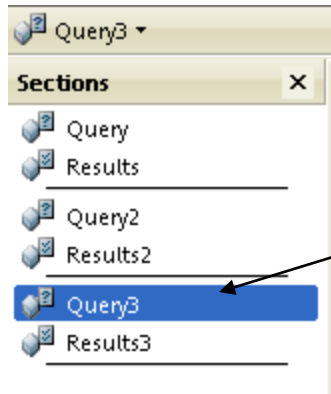


In Version 11 of Hyperion you cannot re-arrange the sections of your .bqy.

Hiding a BQY Section

Often it is helpful to hide a section on the Section Pane for security reasons or making your .bqy more user friendly for the end user.

To hide a section:



Select **View**→**Hide Section**

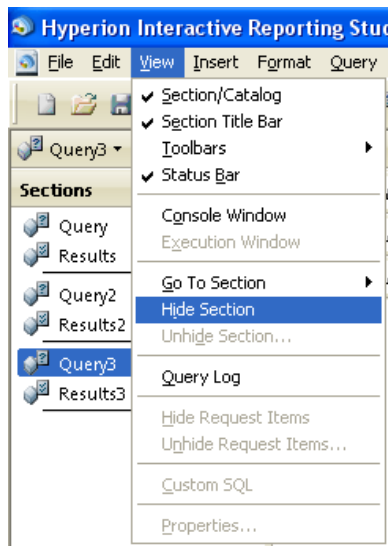

To show your hidden section:

Select **View**→**Unhide Section**

Select→**Query**→**OK**

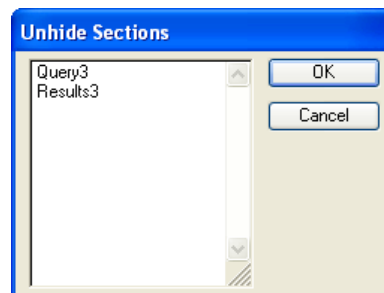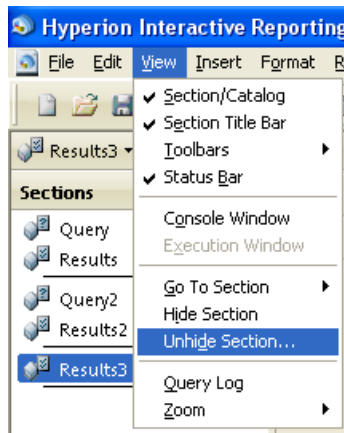


Sending BQY Documents as Email Attachments

Hyperion Interactive Reporting Studio has the capability of sending .bqy as email attachments.

To send a .bqy as an email attachment:

Select **File**→**Send**

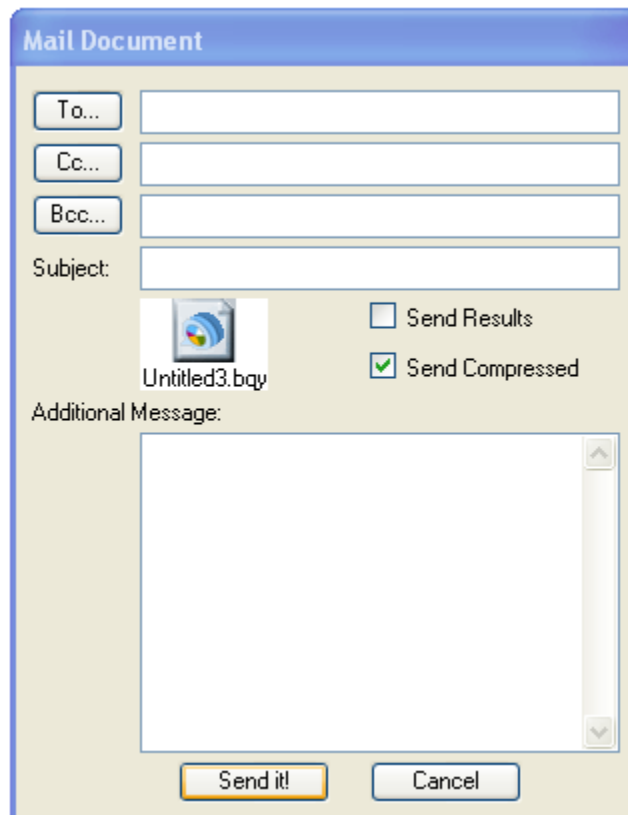

Use To, CC, Bcc, and Subject the same way you do in your regular mail program.

Notice you can see the name of your .bqy in the middle of the screen.

Select Send Results to email the results section with your email.

Select Send Compressed to zip your file prior to email.

Notice you can also type an Additional Message.

Send it!

Printing BQY Sections

Adjusting the Page Margins in Print Preview


When your .bqy is complete, you may want to view your finished product and adjust the margins, add page numbers, and headers and footers before to printing or emailing. Prior to Print Preview, you must select the section you want to preview in the Section Pane. **Please note:** The Report & Dashboard Sections do not have a Print Preview mode.

To Print Preview a section:

File→**Print Preview**

To adjust the page margins:

Just put your mouse pointer over the dashed margin lines and click and drag to get your desired margins. You can do this both vertically and horizontally.

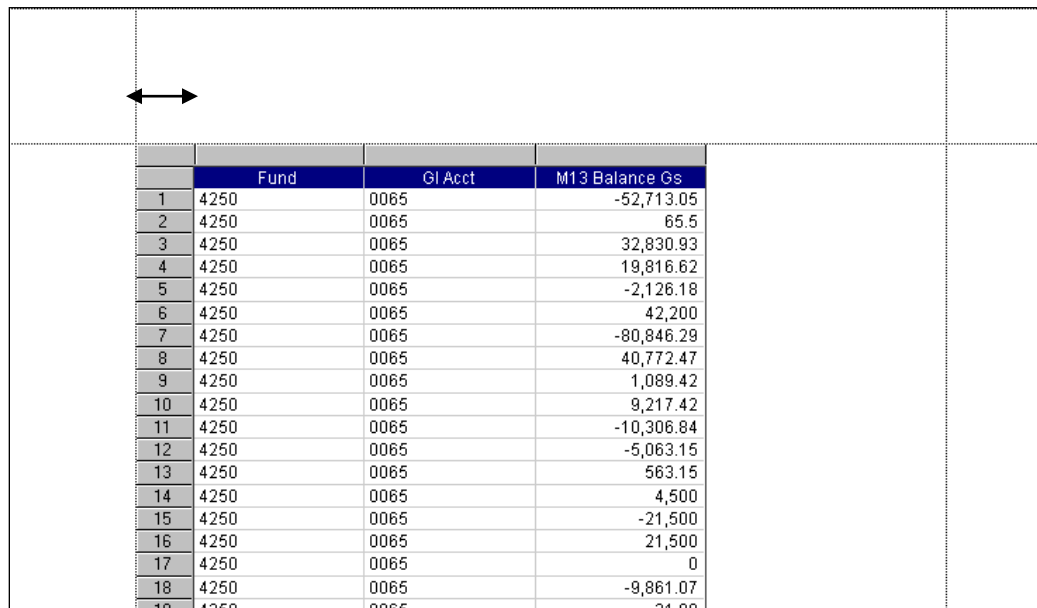


	Fund	Gl Acct	M13 Balance Gs
1	4250	0065	-52,713.05
2	4250	0065	65.5
3	4250	0065	32,830.93
4	4250	0065	19,816.62
5	4250	0065	-2,126.18
6	4250	0065	42,200
7	4250	0065	-80,846.29
8	4250	0065	40,772.47
9	4250	0065	1,089.42
10	4250	0065	9,217.42
11	4250	0065	-10,306.84
12	4250	0065	-5,063.15
13	4250	0065	563.15
14	4250	0065	4,500
15	4250	0065	-21,500
16	4250	0065	21,500
17	4250	0065	0
18	4250	0065	-9,861.07
19	4250	0065	21.80

Adding Headers and Footers

Adding a Header or Footer to your .bqy section gives you the opportunity to add page numbers, file names, date and time, and query filters.

To add a Header or Footer:

Select **Insert**→**Page Header** or **Page Footer**

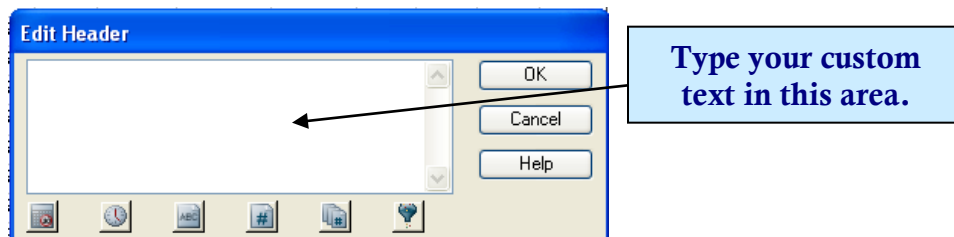

Date	Time	File Name	Page #	Page Total	Query Limits
------	------	-----------	--------	------------	--------------

Printing Sections

You can print any section of your .bqy.

To print a Section:

Select **File**→**Print**

You can select the correct printer, printer properties, number of copies, and range you would like to print.

Exercises

Name the 6 sections you can create in a .bqy.

- a.
 - b.
 - c.
 - d.
 - e.
 - f.
-

1. Start a new .bqy using the SFMS.occ.
2. Expand the Table list on the Element Pane.
3. Bring the 'GL Detail' Table over to the Content Pane.
(Note: Sort the table fields alphabetically)
4. Add the following Items to the Request Line:
 - a. Agency
 - b. GL Acct
 - c. Fund
 - d. Fiscal Year
 - e. M13 Balance GL
5. Filter the following Items:
 - a. Agency – 585
 - b. Fiscal Year – 2010
 - c. M13 Balance GL not equal to zero

- Process the query. Does your query look similar to the examples below? How many rows were returned?
(Answer: 81,773)

Request	Agency	Gl Acct	Fund	Fiscal Y	
Sort	<i>Drag Request Items here to sort th</i>				
Filter	Agency	AND	Fiscal Year		
	Agency	Gl Acct	Fund	Fiscal Year	M13 Balance Gl
	585	0060	0229	2010	2,868.6
	585	0060	0341	2010	1,248.95
	585	0060	0777	2010	-42
	585	0060	0778	2010	42
	585	0060	0003	2010	-10,373.25
	585	0060	0003	2010	911.88
	585	0060	0003	2010	-55,048.27
	585	0060	0003	2010	-12,171.12
	585	0060	0003	2010	10,373.25
	585	0060	0003	2010	-911.88
	585	0060	0003	2010	55,048.27
	585	0060	0003	2010	12,171.12
	585	0060	0006	2010	-382,921.79

- Rename your Query section as “Query - GL Detail 10” and your Results section as “Results - GL Detail 10”.
- Duplicate your “Query - GL Detail 10” section. Notice it automatically alters the name of the new section.
- Add a page header to your Results section called “Results - GL Detail 10”.
- Alert the instructor after correctly completing the exercise.

Lesson 4

Hyperion Query Building Processes

- ✓ **BQY Process**
- ✓ **Managing your Table**
 - **What can I do to the Table Properties?**
- ✓ **Understanding Joins**
- ✓ **Building the Request Line**
- ✓ **Maximizing the Query Building Process**
 - **Setting Restrictions on your Query Properties**
 - **Estimating the Size of your Query**

BQY Process

BQY documents are files you create and use to retrieve information from a database, analyze the information, and build reports. Because Hyperion is an integrated query, analysis, and reporting tool, documents have multiple sections, each of which governs one part of the query and reporting process. You create sections progressively: first, you query a database, then retrieve results, and last generate reports.


Documents can contain data from any number of relational databases queries, multidimensional database queries, and/or from imported data. Documents usually include one or more of the following items:

- A *data model*, is a visual representation of actual database tables
- A *query* or multiple queries for retrieving a subset of data from the database
- *Join* options, including local joins between different data sets within a single document, local join filters, and optional join path generation
- A *results* set displayed in a table-style format
- *Reports* presenting customized hierarchical views of your data
- Multidimensional *pivot* tables that permit drill-down analysis of data results
- *Charts* that graphically display your query results and allow different angles of vision on the data.


Most Hyperion documents have at least one Query section and one Results section. From the Results section, you can create multiple Pivot, Chart, Table, and Report sections to analyze and present data.

Managing your Table

Shown below is a Table also known as a Topic. By double-clicking on the Topic Title Bar you will open the Properties of this particular Table. You can also right-click on the Title Bar to open the Properties.

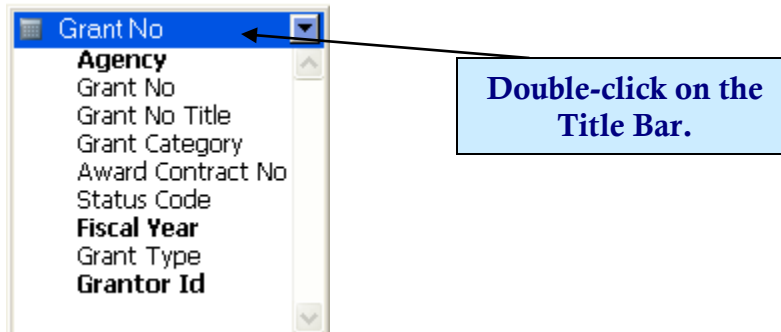

Below you can see the Properties of the Table **Grant No**. Notice the Table Name is more user-friendly than the Physical Name. This is a transition change that happens when the data is uploaded from SFMA to the Datamart.

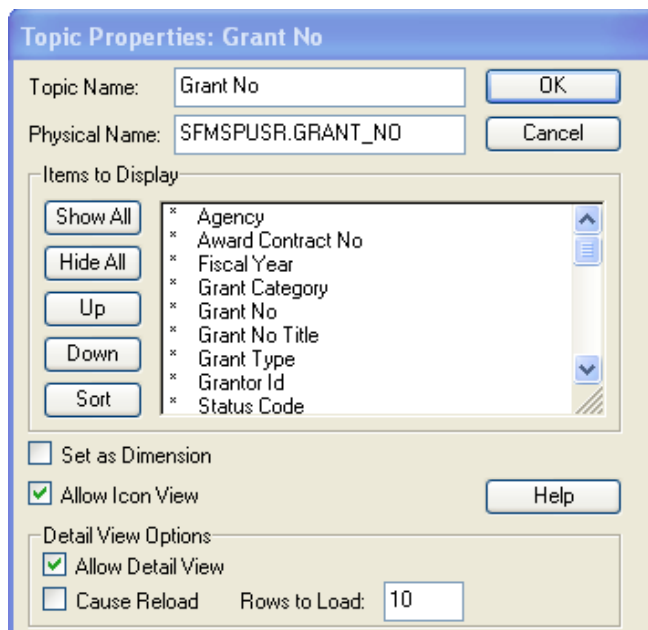

What can I do to the Table Properties?

Table Name→ It is possible to change this name to something that is more understandable.

Physical Name→ Normally, you would not alter this name. This is the full name of the underlying database table.

Hide/Show All→ Hides or actively show all table items.

Up/Down→ Moves selected item up or down one space in the topic display.

Sort→ Alphabetically sorts listed items.

Set As Dimension→ Defines the drill-down path or hierarchy for dimensional analysis as shown in the data model.

Allow Icon View→ Enables the icon view option for the table.

Allow Detail View→ Enables the detail view option for the table.

Cause Reload→ Specifies automatic reloading of server values the next time Detail View is activated.

Rows to Load→ Specifies the number of rows to be loaded and displayed in Detail View.

Icon View - Be Careful! Icon View deactivates a table and reduces it to an icon in the Content frame. This feature will break joins.

Detail View, Cause Reload & Rows to Load: If you choose Detail View you will see the amount of rows identified in Rows to Load. You will get an updated value if Cause Reload is checked or Rows to Load is altered.

Understanding Joins

Tables in relational databases share information through a conceptual link, or *join*, between related columns in different tables. These relationships are displayed in the data model through visual join lines between topic items.

Joins enable you to connect or link records in two tables by way of a shared data field. Once a data field is shared, other data contained in the joined tables can be accessed. In this way, each record can share data with another record, but does not store and duplicate the same kind of information.

Joins can be automatically created for you, or you can manually join topics.

Join types determine how data is retrieved from a database.

To specify a join type:

1. Select a join line and select View, then Properties or click the Properties icon. The Join Properties dialog box is displayed.
2. Select a join type and click OK.

Four types of joins are supported:

- Simple join (=, >, <, >=, <=+): A simple (linear) join retrieves the records in both tables that have an identical data in the joined columns. You can change the default join setting for simple joins by choosing an operator from the drop-down box. The default setting, Equal, is preferred in most situations.
- Left join (+=): A left join retrieves all rows from the topic on the left and any rows from the topic on the right that have matching values in the join column.
- Right join (=+): A right join retrieves all rows from the topic on the right and any rows from the topic on the left that have matching values in the join column.
- Outer join (+ = +): An outer join combines the impact of a left and right join. An outer join retrieves all rows from both tables matching joined column values, if found, or retrieves nulls for non-matching values. Every row represented in both topics is displayed at least once.

Note: Not all database servers support all join types.

Building the Request Line

As you build your query, you can reorder, remove, or hide items on the Request line. This allows you to change the way in which the query processes and displays.

Reordering Request Items

You can move Request items to reorder them for viewing results.

- To reorder items on the Request line, select the item to be moved and drag it to a new location on the Request line.

Removing Request Items

You can remove items from the Request line to exclude the data from your query or Results set.

- To remove an item from the Request line, select the desired item and complete one of the following actions:
 - Click the Delete button on the standard toolbar.
 - Click Remove on the shortcut menu.
 - Press the Delete key.

If you have not yet processed the query, Interactive Reporting removes the item from the Request line.

If you have previously processed the query, the Report Refresh dialog is displayed with this message: “The section XXXX (section) references the following removed column(s): XXXX (column name). Do you want to keep references to these columns or turn off auto-refresh or remove them with the query is next processed?” You can select to keep the references, or remove them.

Caution! Remove items with caution as a computed item or report may draw data from the item you delete.

Hiding Request Items

You can hide items that are displayed on the Request line. This allows you to incorporate data in the results set without displaying it. Hidden request items cannot be referenced for computations.

- To hide a request item, complete one of the following actions:
 - Select the item and click Hide on the shortcut menu.
 - Select the item and choose View, then Hide Request Items.

- To show a hidden request item:
1. Complete one of the following actions:
 - Click in the Request line and click Unhide on the shortcut menu.
 - Select View, then Unhide Request Items.

The Unhide Columns dialog box is displayed.

2. Select the items to view and click OK.

When you have identified the items to include in the query, you can perform a number of other operations before processing the query. You can add filters or computed items to the Request line, or you can use a Request line item to specify a sort order.

Maximizing the Query Building Process

It is good practice to routinely manage your query process. Often, you may be processing a query for the first time and will be unsure of your results and want to prevent a runaway query. There are properties you can control in order to view smaller datasets of your query.

Setting Restrictions on Your Query Properties


This process allows you to put restrictions on your query process prior to running the query. You can set a temporary constraint on the query to return a specific number of rows or to process for a specific number of minutes and then stop. You can also set the query to return only unique rows.

To access Query Properties:

Select **Query**→**Query Options**

or

Double-click→**Request** on the **Request Line**

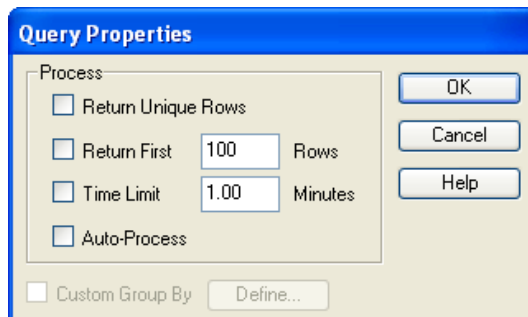


Return Unique Rows→ Eliminates duplicate rows from the dataset retrieved by the query. Only unique rows are returned.

Return First→ Filters the number of database rows retrieved to the number entered. You must enter a row filter and check mark the box.

Time Limit→ Limits the amount of time the query is allowed to run to the number entered. Seconds are entered as a decimal number. Time limits work for asynchronous (having only each operation started only after the preceding operation is completed) database connections and cancel at the earliest opportunity for non-asynchronous connections.

Auto-Process → Specifies the current query as a Standard Query to be processed automatically on download from the Repository.

Custom Group By → Check the box to customize the Group By criteria used to compute aggregate Request Items, with selected items not factored into the grouping. This feature is available only when a data function is placed on the Request Item. For example, you have specified the Sum function on the SFMS Trans Amt item. You might want to exclude other items in your Request Line from the aggregation – that's when you select this option – so you can specify which items to exclude.

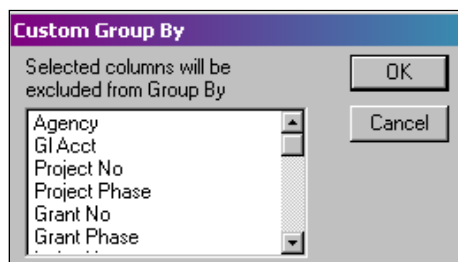


Estimating the Size of Your Query

Queries that sift through and retrieve enormous amounts of data can take a long time to process, and may consume unnecessary system and server resources. If you suspect these factors exist, you may want to limit the size of your query before you hit the process button.

The Estimate Size feature queries the database to see how many records your query will retrieve. You can use this feature to test a questionable query or to decide whether to prevent or postpone processing a large dataset during peak times.

To Estimate the Size of Your Query:

Select **Query** → **Estimate Query Size**



Exercises

1. Create a new .bqy using the SFMS.occ.
 2. Bring the GL Detail table over to the Content Pane.
 3. Open the Properties dialog box for the 'GL Detail' Table and sort the items.
 4. Hide any Items starting with a letter "M". (Hint – Individually click on the * in front of each item name.)
 5. Enter 15 as the value of 'Rows to Load' and check the 'Cause Reload' box.
 6. Select OK.
 7. Display the Table in 'Detail View'. You should see 15 total rows of data.
 8. Show all the Items.
 9. Display the Table in 'Structure View'.
 10. Add all the Items to the Request Line.
 11. Estimate the size of this query.
 12. Remove the Table from the Content Pane, also removing the Items from the Request Line.
 13. Once complete, close the bqy document and do not save.
-
1. Open "GL Detail 0910.bqy" (Obtained from instructor.)

2. Process the query and write down the number of rows and the total of 'M13 Balance GL'. (Answer: 10,800 rows)
3. Go to the query section.
4. Expand the Tables within the Elements section and add Agency and Fund D23 to the Content Pane.
5. Join the profile tables to the 'GL Detail' table. Create 'simple joins' on Agency (contained in both tables), Fund and Fiscal Year.
6. Add the following Items to the Request Line:
 - a. Agency table
 - i. Agency Title
 - b. Fund D23 table
 - i. Fund Title
 - ii. GAAP Fund
 - iii. GAAP Fund Title
7. Process the query.
8. How many rows were returned? (Answer: 10,190 rows)
9. Compare step 2 data with the new totals from step 8. Discuss the difference with the instructor.

Lesson 5

Filters and Sorts

- ✓ **Filtering Queries**
 - **Setting Filters**
 - **Creating Custom Values List**
- ✓ **Modifying Filters**
 - **Ignoring Filters**
 - **Removing Filters**
 - **Filter Line Logic and Order of Operations**
- ✓ **Variable Filters**
 - **Customizing Variable Filters Dialog Box**
- ✓ **Sorting Data**
- ✓ **Data Functions on the Requested Items**

Filtering Queries

For most queries it is necessary to set a filter on the amount of data to be returned. The Datamart contains massive amounts of data, and you want to avoid requesting unnecessary information. Before processing a query, set the appropriate filters in the Query Section.

In the Query Section, you can:


Manually specify filter values
Query the Datamart for filter values
Create custom lists of filter values
Define compound filter formulas on the Filter Line
Set filters as variables to prompt the user to select certain values

Setting Filters

To set a filter:

- 1) To show the Filter Line: Select **Filters(0)** from the **Section Title Bar**
- 2) Drag and drop the **Table Item** you want to filter to the **Filter Line** or Double-click the **Table Item**

The Filter dialog box will now be displayed on your screen if your OCE is active. Otherwise, you must log into your OCE prior to moving forward.

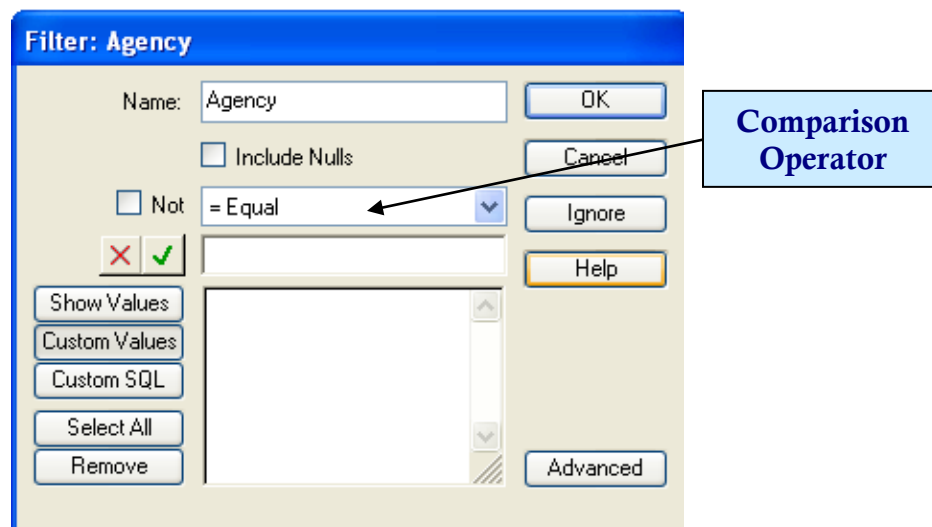

- 3) From the drop-down list → Select a **Comparison Operator**
- 4) In the Edit text box → **Type Values** – Separated by commas
- 5) Select → **Green** ✓ to add the values in the Edit text box to the Custom Values List
- 6) Select → One or more **values**
- 7) Select → **OK**

Name → Displays the name of the filter – it defaults to the item name but you can modify it to say whatever you like.

Include Nulls → Check mark this box to include null values.

Operator → Select an operator from a drop-down list.

Operator	Description
Equal =	Retrieves records where the filtered item equals the specified value(s).
Not Equal (≠)	Retrieves records where the filtered item does not equal the specified values(s).
Less Than (<)	Retrieves records where the filtered item is less than the specified values(s).
Less or Equal (<=)	Retrieves records where the filtered item is equal to or less than the specified value(s).
Greater Than (>)	Retrieves records where the filtered item is greater than the specified value(s).
Greater or Equal (>=)	Retrieves records where the filtered item is equal to or greater than the specified value(s).
Begins With	Retrieves records where the filtered item begins with the specified value(s) up to and including the end value.
Contains	Retrieves records where the filtered item contains the specified value(s) regardless of location.
Ends With	Retrieves records where the filtered item ends with the specified value(s).
Like (with wildcards)	Retrieves records where a text string appears and reflects the placement of the specified values(s).

	For example: Names Like %LI_ would retrieve records for all employees whose names have the letters li followed by a single character at the end. So, “%” represents multiple characters and “_” represents a single character.
Is Null	Retrieves records where the filtered item has no value; for example, a field in which no data has been entered.
Between	Retrieves records where the value of the filtered item lies between (and including) the specified values.
Not (with operator)	Negates the operator it precedes, reversing the results of the equation.

Not→ Reverses (inverts) the operator selected from the drop-down list. For example, if you select Equal from the operator list and then choose **Not**, the operator is effectively changed to Not Equal.

Edit Line→ Enter a value or multiple values (separated by a comma, no spaces) and select the green ✓ to add the item(s) to the custom values list to complete the filter information. Select the red X to erase the contents of the Edit field.

Show Values→ Retrieves a list of values actually in the Datamart (or in the dataset in Results) and allows you to choose a value based on the data available. Show values cannot be used for filtering computed or aggregated items.

BE CAREFUL! Because ‘Show Values’ goes directly to the Datamart and searches for the specified values it may take a while to return information. This means it searches all the data for exact values. If you think what you are asking for might be large, don’t select ‘Show Values’; manually type your request in the Edit Line.

If you are setting a filter while in the Result Section don’t hesitate to use Show Values. Using Show Values in the Results Section only searches the information on your Query.

Transfer→ Displays after you’ve selected Show Values – adds values your specified from the list to the Custom List window.

Custom Values→ This is the default value when you set a filter. One reason to use custom lists with distributed .bqy documents is many data items change rarely, if at all. For example, a Gender item has three consistent values (male, female, and unknown). An Agency item has many more values, but may only change every year or so. Data that changes rarely is said to have low cardinality. Under such circumstances, it makes sense for users to select from a custom values list, rather than continuously querying to show Datamart values.

Custom SQL→ Displays the custom SQL dialog box for coding Filters directly in SQL. The Custom SQL button appears only if you access the Filter dialog box from the Query Section.

Select All→ Selects all values displayed in the displayed value area.

Remove→ Removes highlighted values from the custom list or a filter.

Ignore→ Temporarily suspends a filter without deleting it.

Advanced→ Displays Loaded Values settings and Subquery Options.

Loaded Values Settings→ Toggles a custom values list to be read from a file or from the Datamart. Change File allows you to specify the file name. If you read values from a text file, vertical tabs or paragraph markers must delimit each value. Use Show Values to display the file contents.

Create Subquery→ Creates a Subquery where the current query is the parent. If you access the Filter dialog box from the Results Section, the Advanced button appears as Options and the Create Subquery option does not appear.

Creating Custom Values List

You don't always have to know your Filters prior to setting them up. You can directly query the Datamart for specific values to filter. **Be Careful! Only use this on items that rarely change or are not sizeable.**

Once filter values are retrieved from the Datamart, you can transfer them to a Custom Values List so they are stored locally with the .bqy. You should do this if the filter values rarely change. If those values change occasionally, you will need to renew the Custom Values List to keep it current with the values in the Datamart.

To create a Custom Values List:

- 1) Drag and drop the **Table Item** you want to filter to the **Filter Line** or Double-click the **Table Item**

The Filter dialog box will now be displayed on your screen if your OCE is active. Otherwise, you must log into your OCE prior to moving forward.

- 2) From the drop-down list → **Select a Comparison Operator**
- 3) Select → **Show Values**
- 4) Select → **Select All** or Select the specific values you want
- 5) Select → **Transfer**
- 6) Select → **Values you want for the Filter**
- 7) Select → **OK**

Modifying Filters

A Filter can always be modified. You can change the values and settings permanently, temporarily ignore it, or delete it.

To modify a Filter Item:

- 1) In the Query Section → **Double-click the Filter Item**
- 2) Make your changes to the Filter dialog box
 - Operator**
 - Type and select new values**
 - Show Values and select from a new values list**
 - Remove values from the Custom Values List**
- 3) Select → **OK**

Ignoring Filters

You can temporarily ignore a filter without deleting it.

To ignore a Filter Item:

- 1) In the Query Section → **Double-click the Filter Item**
- 2) Select → **Ignore**

Removing Filters

You can permanently remove a Filter Item.

To remove a Filter Item:

Select the **Filter** → Right-click → Select **Remove**

Filter Line Logic and Order of Operations

The Filter Line in the Query Section provides AND and OR operators as well as parentheses to control the logic and order of operations of the filters. These features are available only in the Query Section so keep this in mind when creating a query.

By using AND, OR, and parentheses, you can create complex filters and use an item on the Filter Line as many times as needed. When you add duplicate items on the Filter Line they are numbered consecutively.


Request	Agency	GI Acct	Fund	Grant No	Fiscal Year	M13 Balance GI
Filter	→	Grant No	AND	Fiscal Year	OR	Fiscal Year2

Notice this Filter Line. It is asking for Grant No 515000 AND Fiscal Year 2010 OR Fiscal Year 2011. It will return Grant No 515000 with Fiscal Year 2010 and All Grants connected to Fiscal Year 2011.

The following rules apply to all Filter Line expressions:

- By default, all equations are solved from left to right, when enclosed sub-operations evaluated first.
- AND** is evaluated before **OR**.
- The **AND** operator retrieves data that meets **both** conditions. Both conditions have to be true to get information returned. For example, if you query Agencies, and filter Agency to “100” AND “107”, the dataset returned will include both Agencies.
- The **OR** operator retrieves data that satisfies **either** of two condition. For example, if you filter Agency to “100” OR Grant No to “515000”, the dataset returned would include Agency 100 and information about Grant No 515000.
- Suboperations override the default evaluation order and may be required for certain operations that involve both **AND** and **OR** operators.

To set AND, OR, or parentheses on the Filter Line in the Query Section:

- 1) **Drag** two or more **table items** to the **Filter Line** → Define individual filters in the Filters dialog boxes. (**The AND operator is displayed by default.**)
- 2) Select →  on the left side of the Filter Line
- 3) Select from the filter controls to complete the equation
 - To toggle from **AND** and **OR**, click the operator.
 - To enclose Suboperations, select items to be enclosed and then click the parentheses button.
 - To remove parentheses, select them and click the parentheses button.

Variable Filters

Once a filter is created in the Query Section, you can construct it using the variable filter feature to prompt for values when the query is processed. Using variable filters eliminates the need for multiple queries using different filter values. You can use one query to return multiple datasets for different users.

Variable filters work great with Custom Values Lists. If a Custom Values List is created, you can answer the prompt with a choice from the Custom Values List. Each time a user processes the query, the filters are selected from the Custom Values List rather than being recreated.

To create a Variable Filter:


- 1) In the Query Section make sure to display the Filter Line

- 2) Select →  Filter

- 3) Select → **Filter Item** → **Var** on the Filter Line

or

Right-click the Filter Item → Select **Variable Filter**




The Filter Item is displayed with a V(1) next to it. If you add other Variable Filters they are numbered V(2), V(3), etc.

Customizing Variable Filters Dialog Box

The Custom Filter dialog box allows you to control access to the features available in the Filter dialog box. This is useful when you distribute the .bqy to end users. It may be preferable to disable or even remove such features as Include Null or the Custom Values buttons. However, please remember, customizing only affects a single filter.

To customize a variable filter:

- 1) Display the Filter Line in the Query Section
- 2) Select → Variable Filter Item to be customized → Right-click → Select **Customize Filter**

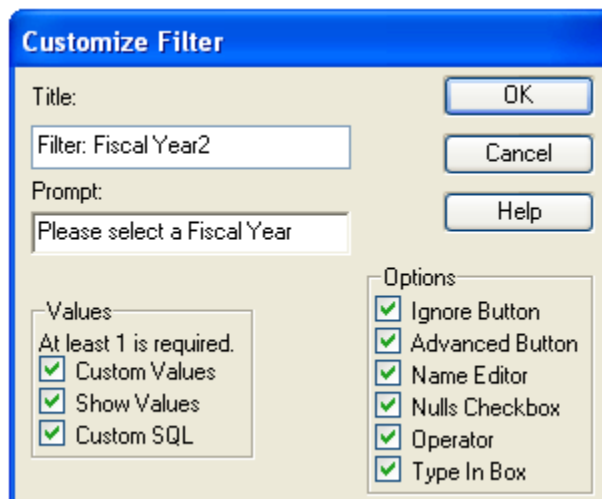

- 3) From the **Customize Filter** dialog box shown above you can do the following:

Prompt → Add a user-friendly message for display when prompted


Values → Select Values you are giving end users access to use

Options → Again, if these are check marked, you are giving the end user access to do these Options


Sorting Data

Use the Sort Line in the Query Section to sort data before it is returned from the Datamart. You can only include items on the Sort Line that also exist on the Request Line.


The appearance and functionality of the Sort Line is nearly identical in the Query, Results, and Table Sections. In each section, the Sort Line uses a drag-and-drop method similar to the Request and Filter Lines. Data sorted in the Results and Table Sections are sorted on your desktop and not directly from the Datamart.

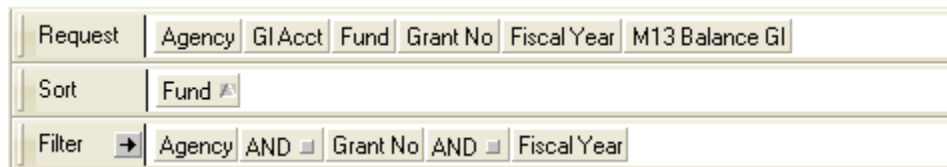

To use the Sort Line in the Query, Results, or Table Sections:

- 1) Make sure to display the **Sort Line** if needed by selecting Sort on the Section Title Bar
- 2) Select → Table Item on the Request Line you wanted sorted → Drag-and-drop this Table Item onto the Sort Line
- 3) Select →  on the Standard Toolbar or → Double-click the **Table Item** on the **Sort Line** to toggle **sort ascending** or **sort descending**

Sort | Agency ▲ Fund ▲
- 4) **Review your Sorted Data**
 - If you are sorting in the Query section, the data is sorted by the Datamart server when you process the query.
 - If the Sort Line is displayed in the Query Section, the item appears on the Sort Line. If you sort in ascending order, an up arrow appears to the right of the item name on the Sort Line; if you sort in descending order, a down arrow appears.
 - If you are sorting in the Results or Table Section-Select → Sort Now



Data Functions on the Requested Items

You can apply a data function to an Item on the Request Line in the Query Section to compute an aggregated value. An aggregated value is a summarized value. You can summarize items to show averages, sum, minimum, maximum, and count functions to name a few. By setting these aggregated data functions in the request area you are creating a smaller result group and demanding less of the Datamart.

If you need both summary data and increasing levels of detail breakdown in your reporting or analysis, do not aggregate data in the Query Section.

Listed below are the data functions you can choose from using Hyperion. Although most data functions are applied in the Query Section, you can use many of them in the Pivot, Chart, or Results Sections. You cannot apply data functions to the Table Section. In Report Sections, you can apply data functions only if you select a single fact column. You can also change the way data functions are computed.

Data Function	Description	Where Can I Use This?
None	Returns unaggregated values as stored in the database. This is the default option in the Query Section.	Query
Sum	Returns sum of underlying values.	Query, Pivot, Chart, Results, Report
Average	Return average of underlying values.	Query, Pivot, Chart, Results, Report
Minimum	Returns lowest of underlying values.	Query, Pivot, Chart, Results, Report
Maximum	Returns highest of underlying values.	Query, Pivot, Chart, Results, Report
Count	Returns number of underlying values.	Query, Pivot, Chart, Results, Report
Count Distinct	Returns the number of distinct values in a column. This function is not supported by all database servers.	Query, Pivot, Report
Weight	Use for computing weighted items in pivot tables.	Query

Null Count	Returns number of nulls among underlying values	Pivot, Chart, Report
Non-Null Count	Returns number of underlying values; null values excluded.	Pivot, Chart, Report
Non-Null Average	Returns average of underlying values; null values excluded.	Pivot, Chart, Report
Standard Deviation	Returns standard deviation of values. This function is not supported by all database servers.	Query
Variance	Returns variance of values. This function is available through Oracle servers only.	Query
% of Column	Returns sum of all underlying values as a percentage of their respective surface column.	Pivot
% of Row	Returns sum of underlying values as a percentage of their respective surface row.	Pivot
% of Grand	Returns sum of underlying values as a percentage of all surface values in the report.	Pivot, Chart
% of Category	Returns group total percentage of the selected value.	Report
Increase	Calculates the increase between the previous two rows or columns.	Pivot
% Increase	Calculates the percentage increase between the previous two rows of columns.	Pivot
Title	Returns column names.	Report

To use apply a data function to a Request Line Item in the Query Section:

- 1) Right-click on the **Item on the Request Line**→**Select Data Function**→Select desired Data Function

Here are some examples of non-aggregated data vs. aggregated data:

Example 1

This query shows non-aggregated data using the GL Detail table.

Request	Agency	Gl Acct	Fund	Project No	Project Phase	Pca	M13 Balance Gl
Filter	→ Agency	AND	Gl Acct	AND	Project No		

	Agency	Gl Acct	Fund	Project No	Project Phase	Pca	M13 Balance Gl
1	405	0065	4250	415000	00		(30,000.00)
2	405	0065	4250	415000	00	41599	30,000.00
3	405	0065	4250	415000	00		(30,000.00)
4	405	0065	4250	415000	00	41599	30,000.00
5	405	0065	4250	415000	00		(30,000.00)
6	405	0065	4250	415000	00	41599	30,000.00
7	405	0065	4250	415000	00		(30,000.00)
8	405	0065	4250	415000	00	41599	30,000.00
9	405	0065	4250	415000	00		(30,000.00)
10	405	0065	4250	415000	00	41599	30,000.00

Example 2

This query shows a 'Sum' Data Function on the M13 Balance Gl.

Request	Agency	Gl Acct	Fund	Project No	Project Phase	Pca	SUM(M13 Balance Gl)
Filter	→ Agency	AND	Gl Acct	AND	Project No		

	Agency	Gl Acct	Fund	Project No	Project Phase	Pca	M13 Balance Gl
1	405	0065	4250	415000	00		(150,000.00)
2	405	0065	4250	415000	00	41599	150,000.00

Exercises

1. Start a new .bqy using the SFMS.oce.
2. Expand the Table Elements and add the 'All Acct Event' Table to the Content Pane.
3. Add the following Items to the Request Line:
 - a. Batch Agy
 - b. Batch Date
 - c. GL Acct
 - d. SFMS Trans Amt
4. Filter on 'Batch Agency' equal to '585' and 'Fiscal Year' equal to 2010.
5. Filter the Rows Returned to 100 (Hint: Lesson 4 – Return First).
6. Process the query.
7. Sort the Results Section by Batch Date and GL Acct.
8. Add another Table Element to the Content Pane called GL Acct.
9. Add GL Acct Title from the above Table to the Request Line.
10. Remove the Rows Returned Filter of 100 Rows.
11. Add a filter by 'Batch Date' using the 'Between' data function. Showing data between '06/01/10' and '06/14/10'. (Hint - You can manually type in the dates, separated by a comma or try to find the dates using the 'Show Values' button.)

12. Add another Filter and make this one a 'Custom Filter' on 'GL Acct'.
 - a. Add 'GL Acct' from 'All Acct Event' to the Filter Line
 - b. Show Values
 - c. Select any GL Acct's between 2700-3600
 - d. Select the Transfer Button
 - e. Set the 2700-3600 accounts as the default for a Custom Value
 13. Process the query.
 14. In the Result Section move the GL Acct Title to the right of the GL Acct Number
 15. How many rows are returned? (Answer: 2,854)
 16. Go back to the Query Section and set an aggregate function (Data Function) on the SFMS Trans Amt to "Sum". (Hint: right-click on the Request Line field 'SFMS Trans Amt').
 17. Process the query.
 18. How many rows are returned? (Answer: 34)
 19. Alert the instructor after correctly completing the exercise.
-

1. Start a new .bqy using the SFMS.occ.
2. Expand the Table Elements in the Catalog Pane.
3. Bring the following Tables over to the Content Pane:
 - a. All Acct Event
 - b. PCA
 - c. Program Code

4. Sort the Items in each Table.
5. Add the following Items to the Request Line:
 - a. All Acct Event
 - i. Batch Agy
 - ii. Batch Date
 - iii. SFMS Trans Amt (Sum this using the Data Function)
 - iv. GL Acct
 - b. PCA
 - i. PCA
 - ii. PCA Title
 - c. Program Code
 - i. Program Code
 - ii. Program Code Title
6. Filter on 'Batch Agency' equal to '585' and 'Fiscal Year' equal to '2010'.
7. Process the query.
8. How many rows are returned? (Answer: 19,914)
9. Go back to the Query Section and Filter on Program Code equal to 5160 or 7100.
10. Process the query.
11. In the Results Section
 - a. Sort Ascending: Batch Date, GL Acct and Program Code.
12. How many rows are returned? (Answer: 573)
13. Go back to the Query Section and ignore the 'Program Code' Item from the Filter Line.

14. Set a Variable Filter on 'GL Acct'.
 - a. Drag 'GL Acct' to the Filter line
 - b. Set the Custom Value to Begins with 31
 - c. Right-click on 'GL Acct' Filter and select Variable Filter
15. Process the query. (The Variable filter for 'GL Acct' will pop up. Verify selection and click ok)
16. How many rows are returned? (Answer: 738)
17. Alert the instructor after correctly completing the exercise.

Lesson 6


Tables and Formatting

- ✓ **What's the difference between Results and Table Sections?**
- ✓ **Formatting Data in Results and Table Sections**
- ✓ **Sorting Data in a Table Section**
- ✓ **Suppressing Duplicate Values**
- ✓ **Setting and Removing Local Filters in Results and Table Sections**
- ✓ **Creating Date Groups**
- ✓ **Creating Grouping Columns**
- ✓ **Removing and Hiding Data**
- ✓ **Creating Grand Totals and Break Totals**

What's the difference between Results and Table Sections?

The Results and Table Sections are identical in functionality and appearance. So, what's the difference? The Results Section is the gas tank for your .bqy. This is where all your queried data lives. The Results Sections allows you to review your Query and confirm the Results. You can build different tables, which include smaller sections of your Results. Think of a Table Section as a filing cabinet with different files. It is a way to organize your data into smaller sub-sections and then develop Pivots, Charts, and Report from these sub-sets. Frankly, a Table keeps you better organized.

Sections Structure:

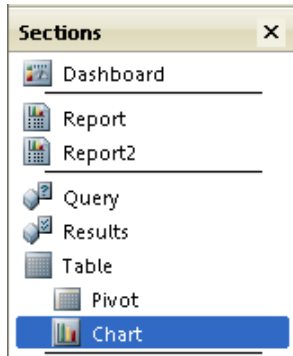

Notice the indenting or non-indenting for the different Sections. It is good practice to rename your sections for easier identification.

Dashboard→ This section does not indent and can contain information from multiple Queries, Results, Tables, Pivots, Charts, and Reports. It appears at the top of the Section Catalog.

Report→ This section does not indent and can contain information from multiple Results, Tables, Pivots, and Charts. It appears directly below Dashboard Sections and above all other sections.

Query→ This section does not indent and is a stand-alone section in your .bqy. This section comes straight from the Datamart and is the building block for all the other sections.


Results→ This section does not indent but resides directly below the Query Section it is dependant upon. This section is directly related to the Query Section.

Table→ This section does not indent and resides directly below the Results Section it is associated with. You can have more than one Table Section related to a Results Section. Used primarily for creating tabular-style reports.

Pivot→ This section does indent and resides below the Table Section it is associated with. You can have more than one Pivot Section related to a Results Section. The Pivot Section is used to create cross-tabular style reports called Pivot Reports.

Chart→ This section does indent and resides below the Table and/or Pivot Section it is associated with. You can have more than one Chart Section related to a Results Section. Chart Reports are fully interactive, three-dimensional views of data.

Below shows a Table Section before any data is added to the Content Pane. Notice the Data Layout Section.

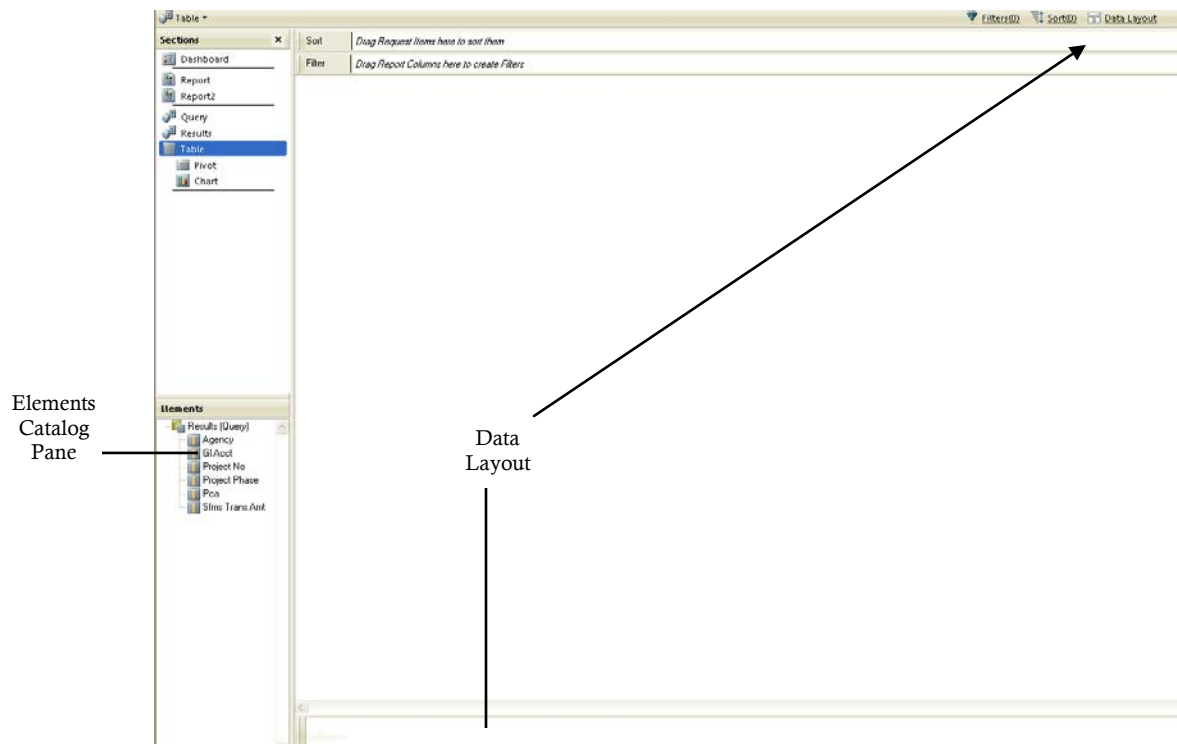

To create a Table Section (based on the Results section data):

- 1) From the Results section, select **Insert**→**New Table**
- 2) If the table Data Layout is not already displayed→Click **Data Layout** on the Section Title Bar
- 3) Drag Result Items from the Catalog Pane to the table Data Layout to build your Table. (Hyperion automatically populates the table columns.)

Formatting Data in Results and Table Sections

Use the following techniques to format data in both a Results and a Table Section.

Format	Options
Resize a column	<ul style="list-style-type: none"> ✓ To resize a column manually, drag the right margin of the column. ✓ To autosize a column, double-click the column margin or select Format→Column→Auto-Size Width (or Standard Width).
Resize a row	<ul style="list-style-type: none"> ✓ To resize a row manually, select a row (click in the left margin), position the cursor on the bottom of the row, and then drag the margin up or down. ✓ To resize a row to a standard size, select a row and then select Format→Row→Standard Height.
Modify the font	<ul style="list-style-type: none"> ✓ Select a column, select Format→Font, and then select a font type, style, size, and effect. Columns can have different fonts.
Modify a number, date, or time format	<ul style="list-style-type: none"> ✓ For numeric formatting only, select a column and then on the Formatting toolbar, select numeric formatting options. ✓ For a complete set of formatting options, select a column, select Format→Number, and then in the Category group box, select a format.
Justify data	<ul style="list-style-type: none"> ✓ Highlight columns, and then on the Formatting toolbar, click a justification button.
Display row numbers	<ul style="list-style-type: none"> ✓ To toggle row numbers on and off, select Format→Row Numbers.
Format grid lines	<ul style="list-style-type: none"> ✓ Select Format→Grid Lines, and then select properties for horizontal and vertical grid lines.
Display or hide column titles	<ul style="list-style-type: none"> ✓ Select Format→Column Titles.
Wrap text in a column	<ul style="list-style-type: none"> ✓ Select a column, and then select Format→Text Wrap.
Modify the border around a table	<ul style="list-style-type: none"> ✓ Select Format→Border and Background, select properties for the border, and then click OK.

Modify the table fill	✓ Select a column, multiple columns, or the entire table, select Format → Border and Background , select background properties, and then click OK .
Modify the text color of a column	✓ Select a column, and then on the Formatting toolbar, select a text color.

The following table provides a listing of commands available on the Format Menu.



Format Menu Command	Function
Font	✓ Opens the Font page of the Properties dialog box.
Style	✓ Choose between Plain, Bold, Italics, Underline, Overline, Double Underline.
Number	✓ Opens the Number page of the Properties dialog box.
Justify	✓ Choose between Left, Center, Right and Top, Middle, Bottom.

Column	<ul style="list-style-type: none"> ✓ By default, Results columns are evenly sized without regard to the length of data. Numeric data that does not fit is replaced with pound signs (#). ✓ To manually resize a column, drag the right edge of the column to a new position. ✓ To automatically size all columns so that the column width fits its contents, press [Ctrl+A] [Ctrl+E].
Auto-Size Width	<ul style="list-style-type: none"> ✓ Resizes the selected column to the width of the contents.
Standard Width	<ul style="list-style-type: none"> ✓ Resizes the selected column to the standard column width.
Row	<ul style="list-style-type: none"> ✓ Resizes all rows to the standard row height. ✓ To resize all rows in a table, drag the bottom edge of a row to a new position. All rows in the table are resized.
Column Titles	<ul style="list-style-type: none"> ✓ Toggles the display of column titles.
Row Numbers	<ul style="list-style-type: none"> ✓ Toggles the display of row numbers. Row numbers are printed on reports, but are not copied to the clipboard or exported to a file.
Text Wrap	<ul style="list-style-type: none"> ✓ Wraps text in a column.
Suppress Duplicates	<ul style="list-style-type: none"> ✓ Suppresses duplicate values in a column. Use this feature if you want to display only the first instance of a duplicate value when individual database records include redundant information.
Grid Lines	<ul style="list-style-type: none"> ✓ Opens the Gridlines page of the Properties dialog box.
Border and Background	<ul style="list-style-type: none"> ✓ Opens the Border and Background page of the Properties dialog box.
Spotlighter	<ul style="list-style-type: none"> ✓ Opens the Spotlight dialog box. Use to spotlight important values.
Export Properties	<ul style="list-style-type: none"> ✓ Opens the Export Properties dialog box. Use to set the number of rows that should be included on an HTML page before the data breaks to another page, and to export data that does not contain any quote to a tab-delimited text file.


Sorting Data in a Table Section

You can sort data in the Table Section using the sort options on the Standard Toolbar or the Sort Line.

To sort data using the Standard Toolbar:

1) Select → **Column** you want sorted

2) Select →  **Sort Ascending** or **Sort Descending**

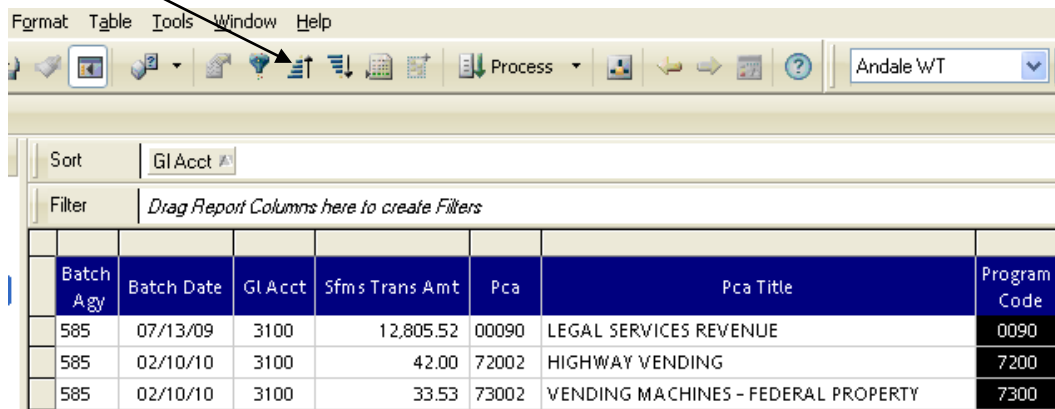


To sort data using the Sort Line:


1) Make sure the Sort Line is visible; if it isn't select → **Sort** on the **Section Title Bar**

2) Drag and drop Items from the Content Pane to the Sort Line. By default, Items will be sorted in ascending order.

3) Double-click → **Table Item** on the **Sort Line** to toggle **sort ascending** or **sort descending**



4) Select → **Sort Now** on the Sort Line



Suppressing Duplicate Values

You use Suppress Duplicates to suppress duplicate values in a column. Use this feature if you want to display only the first instance of a duplicate value when individual database records include redundant information. In order to use this feature correctly, you must first sort your data.

	Batch Agy	Batch Date	Gl Acct	Sfms Trans Amt	Pca	Pca Title	Program Code
	585	07/13/09	3100	12,805.52	00090	LEGAL SERVICES REVENUE	0090
			3101	(12,805.52)			
			3100	6,942.00	99999	UNAPPLIED AGENCY TRANSFERS & PAYMENTS	1055
				757.66	84536	OF LIMITED-OPERATING-OAH	1060
			3101	(757.66)			
			3100	21,726.54	80901	SSD- FLEET ADMIN	8410
			3101	(21,726.54)			
		07/14/09	3100	1.08	98300	MASS TRANSIT	2013
			3101	(1.08)			
			3150	5,550.00	41002	ADMINISTRATION - OF	4100
			3101	167.89	71002	SET ASIDE FUND	7100
		07/16/09	3100	10.90	98300	MASS TRANSIT	2013
			3101	(10.90)			
			3100	152.00	22534	ARCHIVES - ADMINISTRATIVE RULES	2200
			3101	(152.00)			
			3100	21,042.36	11380	FAC - O&M-REVENUE	4310
			3101	(21,042.36)			

To suppress duplicate values:

- 1) Sort the data in the Results or Table Section
- 2) Select the columns you want to suppress values on → Right-click → Select **Suppress Duplicates**


Setting and Removing Local Filters in Results and Table Sections

When you set a filter in the Results or Tables Section, you can locally filter the dataset returned from a query. You are not accessing the Datamart. This is different from setting a filter in a Query Section. When you set a filter in a query, you are sending this filter directly to the Datamart. Because local filters only hide data, it is a good way to test hypothetical situations without accessing the Datamart. You can always reverse the effects of your filter and bring your query back to its original state.

To set a filter in a Results or Table Section:

- 1) In a Results or Table section, double-click a column. A Filter dialog box is displayed
or
Drag and drop the Table Item you want to filter to the Filter Line

The Filter dialog box will now be displayed on your screen.

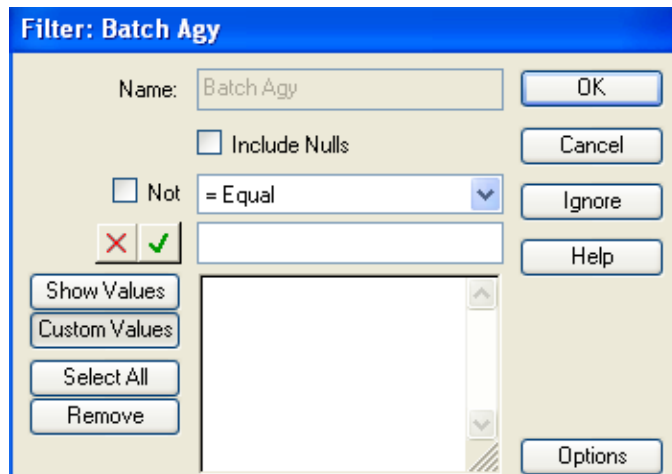


- 2) From the drop-down list → Select a **Comparison Operator**
- 3) In the **Edit text box** → **Type Values** – Separated by commas
- 4) Select → **Green** ✓ to add the values in the Edit text box to the **Custom Values List**
- 5) Select → **OK**

To remove a filter in a Results or Table Section:

- 1) Right-click the **Filtered Item** → Select **Remove**

To remove all filters in a Results or Table Section:

- 1) Right-click the  on the **Filter Line** → Select **Remove**

Creating Date Groups

This feature separates regular date type columns into Month, Year, and Quarter columns. This feature only works on columns of a date type. Please notice the before and after diagrams shown below.

Before Date Groups

Batch Agy	Batch Date	Sfms Trans Amt
585	04/01/10	60.74
585	08/25/09	6,163.92
585	12/16/09	72.69
585	01/05/10	4,743.20
585	08/17/09	81.80
585	08/27/09	3,502.42
585	03/31/10	3,403.54
585	01/11/10	64.17
585	03/26/10	5,265.35
585	06/16/10	4,055.84

The first diagram is without Date Grouping. The second diagram now has a Month, Year, and Quarter column in addition to the regular date column.

Date Groups Applied

Batch Agy	Batch Date	Sfms Trans Amt	Batch Date Month	Batch Date Year	Batch Date Quarter
585	04/01/10	60.74	Apr	2010	Q2
585	08/25/09	6,163.92	Aug	2009	Q3
585	12/16/09	72.69	Dec	2009	Q4
585	01/05/10	4,743.20	Jan	2010	Q1
585	08/17/09	81.80	Aug	2009	Q3
585	08/27/09	3,502.42	Aug	2009	Q3
585	03/31/10	3,403.54	Mar	2010	Q1
585	01/11/10	64.17	Jan	2010	Q1
585	03/26/10	5,265.35	Mar	2010	Q1
585	06/16/10	4,055.84	Jun	2010	Q2

To create a date group:

- 1) Select a regular Date column in the Results or Table Section
- 2) Right-click → **Add Date Groups**

Creating Grouping Columns

Grouping columns is a way of creating new data in your results set by grouping data from a column. You can use grouping columns to consolidate non-numeric data values into more general group values and map the group values to a new column in the data set. Grouped columns are new items added to the Results Section and are available for use in Report Sections.

Steps to create a Grouping Column:

- 1) Notice the Table Section below. The goal is to create an additional new column called Quarter.
- 2) Select the Column you want to group → Right-click → Select **Add Grouping Column**

Batch Agy	Batch Date	Sfms Trans Amt	Batch Date Month	Batch Date Year	Batch Date Quarter
585	04/01/10	60.74	Apr	2010	Q2
585	08/25/09			2009	Q3
585	12/16/09			2009	Q4
585	01/05/10			2010	Q1
585	08/17/09			2009	Q3
585	08/27/09			2009	Q3
585	03/31/10			2010	Q1

- 3) The Grouping Column dialog box opens

Batch Agy	Batch Date	Sfms Trans Amt	Batch Date Month	Batch Date Year	Batch Date Quarter
585	04/01/10	60.74	Apr	2010	Q2
585	08/25/09			2009	Q3
585	12/16/09			2009	Q4
585	01/05/10			2010	Q1
585	08/17/09			2009	Q3
585	08/27/09			2009	Q3
585	03/31/10			2010	Q1
585	01/11/10			2010	Q1
585	03/26/10			2010	Q1
585	06/16/10			2010	Q2
585	07/27/09			2009	Q3
585	01/06/10			2010	Q1

Column Name → Names the new grouping column in the Results/Table window. This is the column header.

New Group → Creates a custom group to be displayed as a value in the new grouping column.

Groups → Select a custom group to define by adding or removing items.

Items in Group → Removes an item from a selected custom group.


Available Values → Add items to a selected custom group.

Options → Indicates how to signify unassigned values within the grouping column. Options include:

- Null** → Leaves the values ungrouped and unaggregated.
- Default** → Allows you to specify a default name to assign to all ungrouped values.
- Individual Group** → Assigns each ungrouped value the name originally assigned to it.

4) In the Column Name field → **Name your Grouping Column**

5) Select **New Group** → Enter New Group Name → **OK**
Do this process until you have all the new groups set up.

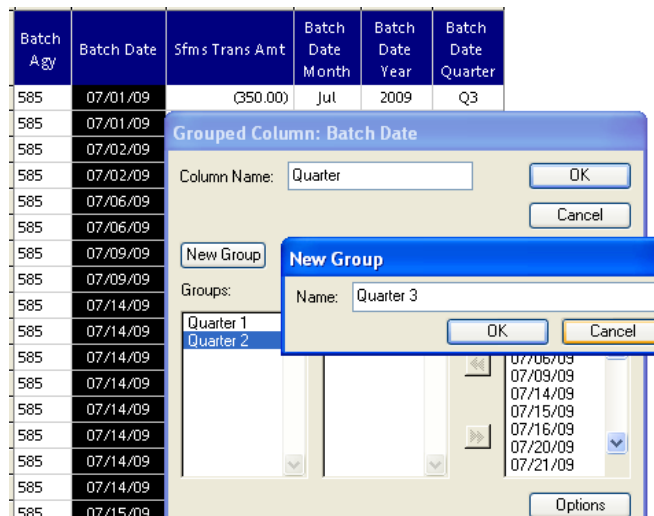

6) Select **Group** in Group Column → Move Available Values by selecting them and click on to move them over to the **Items in Group Column**. Continue this process until you have all your groups set up.

7) Select → **OK**

	Batch Agy	Batch Date	Gl Acct	Sfms Trans Amt	Pca	Fiscal Quarter
	585	07/27/09	1111	(70.00)	71002	Quarter 1
	585	07/30/09	1011	70.00	71002	Quarter 1
	585	07/27/09	3101	(2,072.25)	71002	Quarter 1
	585	07/30/09	0070	(140.00)	71002	Quarter 1
	585	07/30/09	3500	140.00	71002	Quarter 1
	585	07/30/09	1111	70.00	71002	Quarter 1
	585	12/08/09	1111	(70.00)	71002	Quarter 2
	585	12/08/09	1011	(70.00)	71002	Quarter 2
	585	12/07/09	3500	140.00	71002	Quarter 2
	585	12/07/09	3501	(140.00)	71002	Quarter 2
	585	12/11/09	0501	(405.56)	71002	Quarter 2

To modify a Grouping Column:

- 1) Right-click the Grouping Column → **Modify Column**

Removing and Hiding Data

You can either Remove or Hide items from your Query, Results, and/or Table Sections. **Use caution when removing items from any section!** Once an item is removed, you can't use it in a Pivot, Chart, or Report. If you hide an item it is still usable in all these sections.

To remove an item in the Query or Table Section:

Remove the Table Item from the Request Line from the Query Section or the Data Layout Section in the Table Section.

To hide an item in the Results or Table Section:


Select the Column → Right-click → **Hide Column**

Creating Grand Totals and Break Totals

Results and Table Sections can display grand totals and break totals. You can display multiple totals each utilizing a different data function. While a grand total would appear at the bottom of a column, a break total will appear at a specified break in the dataset.

To display a grand total:

- 1) Select column you want to total → Right-click → Select **Grand Total**
The Insert Grand Total dialog box appears.

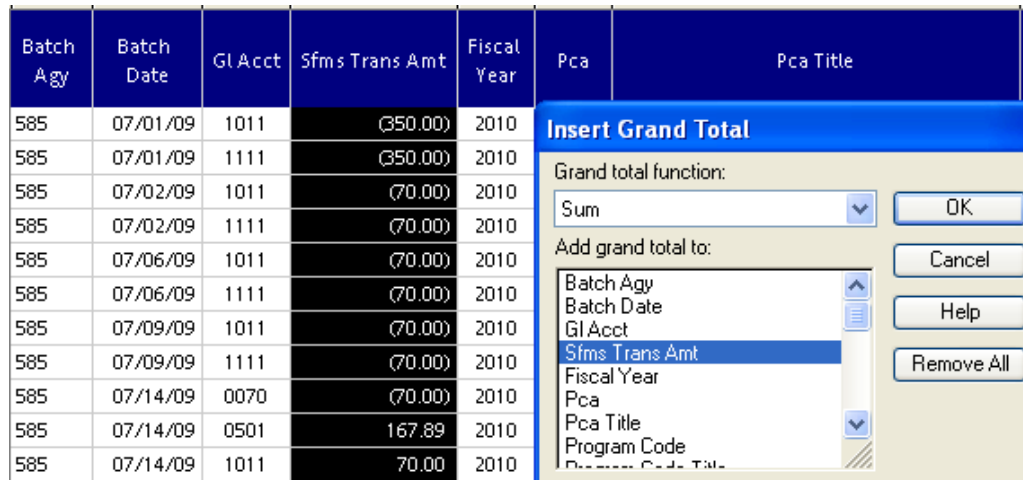

You have a choice of Grand and Break Total functions:


Function	Description
Sum	Returns sum of underlying values.
Average	Returns average of underlying values.
Minimum	Returns lowest of underlying values.
Maximum	Returns highest of underlying values.
Count	Returns number of underlying values.
Other	Allows you to create a custom function using JavaScript.

- 2) Select → Grand total function you desire
- 3) Select → Where to Add grand total to
- 4) Select → **OK**

Batch Agy	Batch Date	GL Acct	Sfms Trans Amt	Fiscal Year
585	06/23/10	3101	6,056.93	2010
585	07/07/10	0065	610.00	2010
585	07/07/10	0065	5,067.32	2010
585	07/07/10	0501	(5,067.32)	2010
585	07/07/10	1551	610.00	2010
585	07/07/10	3100	5,067.32	2010
585	07/07/10	3101	(5,067.32)	2010
585	07/09/10	0065	61.91	2010
585	07/09/10	3100	61.91	2010
585	07/16/10	0070	(3,551.90)	2010
585	07/16/10	3550	3,551.90	2010
			174,769.90	

You may find that you need to format your numbers during this process. Do you remember how to do this?

You can also create a SUM grand total using an icon on the Standard Toolbar:

- 1) Select → Column you want to total
- 2) Select →  on the Standard Toolbar

To remove a grand total row:

- 1) Select → Row containing the grant total
- 2) Right-click → **Remove Row**

	Batch Agy	Batch Date	GL Acct	Sfms Trans Amt	Fiscal Year
569	585	07/07/10	3101	(5,067.32)	2010
570	585	07/09/10	0065	61.91	2010
571	585	07/09/10	3100	61.91	2010
572	585	07/16/10	0070	(3,551.90)	2010
573	585	07/16/10	3550	3,551.90	2010
574				174,769.90	

Add Computed Item...

Remove Row

Font...

To add a custom title in the grand total row, not the grand total cell:

- 1) Double-click on a cell in the same row as the grand total
- 2) In the Custom Function dialog box enter the title you desire surrounding by quotes “” as shown below:

Batch Agy	Batch Date	Sfms Trans Amt	Pca	Fiscal Quarter
585	04/20/10	(699.38)	71002	Quarter 4
585	04/23/10	(140.00)	71002	Quarter 4
585	04/28/10	(140.00)	71002	Quarter 4
585	04/20/10	699.38	71002	Quarter 4
585	04/20/10	699.38	71002	Quarter 4
585	04/20/10	699.38	71002	Quarter 4
585	04/28/10	699.38	71002	Quarter 4
585	05/04/10	699.38	71002	Quarter 4
585	04/21/10	699.38	71002	Quarter 4
585	04/21/10	699.38	71002	Quarter 4
585	04/21/10	699.38	71002	Quarter 4
585	06/08/10	699.38	71002	Quarter 4
585	04/14/10	699.38	71002	Quarter 4

Custom Function

"SFMA Transcation Totals"

OK Cancel Help

3) Select → **OK**

4) From the **Modify Total Function** dialog box select → **Other**

Modify Total Function

Grand total function:


Other...

5) Select → **OK**

Batch Agy	Batch Date	Sfms Trans Amt	Pca	Fiscal Quarter
585	04/20/10	699.38	71002	Quarter 4
585	04/20/10	699.38	71002	Quarter 4
585	04/20/10	699.38	71002	Quarter 4
585	04/28/10	(140.00)	71002	Quarter 4
585	05/04/10	(140.00)	71002	Quarter 4
585	04/21/10	(974.67)	47608	Quarter 4
585	04/21/10	(974.67)	47608	Quarter 4
585	04/21/10	974.67	47608	Quarter 4
585	06/08/10	(1,132.00)	71002	Quarter 4
585	04/14/10	(14,479.83)	71002	Quarter 4
SFMA Transcation Totals		174,769.90		

To add a custom title in the grand total cell:


- 1) Double-click on the grand total cell
- 2) From the **Modify Total Function** dialog box → Select **Other**

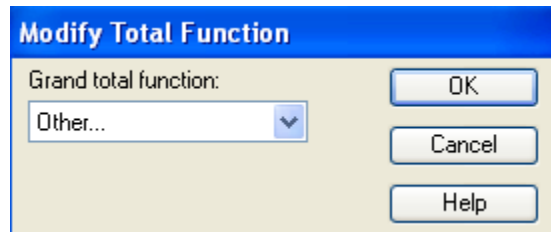

- 3) Enter your desired title surrounded by quotes “”, for example **“Total: ”**.
Make sure to insert a space after your title!
- 4) **Concatenate** text and functions with a **plus sign (+)**
“Total ”+Round(Sum(Sfms_Trans_Amt),2)
- 5) Select → **OK**
- 6) In the Modify Total Function dialog box → Select **OK**

To display break totals:

- 1) Select column you want to total → Right-click → Select **Break Total**
The Insert Break Total dialog box appears.

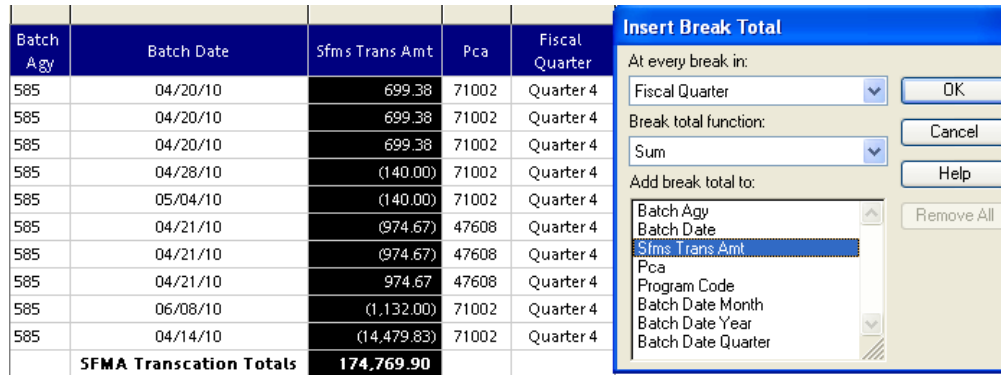

- 2) **At every break in drop-down** → Select your break column criteria
- 3) **Break total function** → Select function
- 4) Select one or more columns → **Add Break total to**
- 5) Select → **OK**

Batch Agy	Batch Date	Sfms Trans Amt	Pca	Fiscal Quarter
585	01/06/10	75.29	71002	Quarter 3
585	02/08/10	(140.00)	71002	Quarter 3
585	02/08/10	(140.00)	71002	Quarter 3
585	01/14/10	(70.00)	71002	Quarter 3
		25,376.04		Total Quarter 3
585	06/16/10	7,572.60	71002	Quarter 4
585	05/27/10	(2,000.37)	71002	Quarter 4

Exercises

1. Create a new .bqy using the SFMS.occ.
2. Include the following Tables and Items in the query:
 - a. All Acct Event
 - i. Batch Agy
 - ii. Batch Date
 - iii. GL Acct
 - iv. PCA
 - v. Fund
 - vi. SFMS Trans Amt (Use Data Function: Sum)
 - b. Agency
 - i. Agency Title
 - c. Fund D23
 - i. Fund Title
 - ii. GAAP Fund
 - iii. GAAP Fund Title
 - d. GL Acct
 - i. GL Acct Title
3. Arrange them on the Request Line to look like the example below.

Request	Batch Agy	Agency Title	Batch Date	SUM(Sfms Trans Amt)	GL Acct	GL Acct Title	Pca	Fund	Fund Title	Gaap Fund	Gaap Fund Title
---------	-----------	--------------	------------	---------------------	---------	---------------	-----	------	------------	-----------	-----------------

4. Filter the query to 'Batch Agy' 585, 'Batch Date' between 07/01/09 and 06/30/10 and 'SFMS Trans Amt' not equal to zero.
5. Process the query. You should have 26,870 rows in your Results Section.
6. Filter the Results Section to 'SFMS Trans Amt' not equal to zero.
7. Insert a New Table Section.

8. Bring the following Items over to the Content Pane in the Table Section:
 - a. Batch Date
 - b. PCA
 - c. GL Acct
 - d. GL Acct Title
 - e. Fund
 - f. Fund Title
 - g. SFMS Trans Amt

8. Sort by Batch Date, PCA, GL Acct, and Fund in Ascending Order and do a Local Filter by PCA's beginning with 2 or 3.

9. Change the font of every column on your Table to Arial - size 9 and auto size the width of your columns.

10. Suppress Duplicate values of the PCA, Fund and Fund Title.

11. Add a Date Group from the Batch Date column. Then hide the Batch Month and Batch Year columns. Move the Batch Date Quarter column to the right of Batch Date.

12. Next, create the following grouping items based on the GL Acct column, give the new column the name of CAFR Acct and only put the number and description in as the group (for example, 999-Default Oregon):
 - a. CAFR Acct: 010-Cash and Cash Equivalents
 - b. CAFR Acct: 050-Accounts & Interest Receivable
 - c. CAFR Acct: 060-Inventories
 - d. CAFR Acct: 090-Accumulated Depreciation & Amortization
 - e. CAFR Acct: 120-Accounts & Interest Payable
 - f. CAFR Acct: 160-Trust Funds Payable
 - g. CAFR Acct: 162-Compensated Absences Payable-Current

- h. CAFR Acct: 175-Compensated Absences Payable-Noncurrent
 - i. CAFR Acct: 270-Budgetary Fund Balance
 - j. CAFR Acct: 271-Encumbrance Control
 - k. CAFR Acct: 301-Reserved for Encumbrances
 - l. CAFR Acct: 307-GAAP Expenditure Offset
 - m. CAFR Acct: 310-Unreserved, Undesignated Fund Balance
 - n. CAFR Acct: 360-Reserved for Inventories
 - o. CAFR Acct: 371-Invested in Capital Assets
 - p. CAFR Acct: 375-Net Assets
 - q. CAFR Acct: 999-Default Oregon
13. Next, assign the Available Values to the New Groups as follows:
- a. CAFR Acct 010
 - i. 0065
 - ii. 0070
 - iii. 0075
 - b. CAFR Acct 050
 - i. 0501
 - ii. 0507
 - iii. 0573
 - c. CAFR Acct 060
 - i. 0601
 - d. CAFR Acct 090
 - i. 0870
 - ii. 0873
 - e. CAFR Acct 120
 - i. 1211
 - ii. 1215
 - iii. 1216
 - f. CAFR Acct 160
 - i. 1551
 - g. CAFR Acct 162
 - i. 1605
 - h. CAFR Acct 175

- i. 1718
- i. CAFR Acct 270
 - i. 2700
 - ii. 2900
- j. CAFR Acct 271
 - i. 2735
- k. CAFR Acct 301
 - i. 3011
- l. CAFR Acct 307
 - i. 3600
- m. CAFR Acct 310
 - i. 3075
 - ii. 3100
 - iii. 3101
 - iv. 3150
 - v. 3500
 - vi. 3501
 - vii. 3505
 - viii. 3550
- n. CAFR Acct 360
 - i. 3005
- o. CAFR Acct 371
 - i. 3018
- p. CAFR Acct 375
 - i. 3074
- q. CAFR Acct 999
 - i. 1011
 - ii. 1111
 - iii. 2701
 - iv. 2901
 - v. 2904
 - vi. 2954
 - vii. 9010
 - viii. 9011

14. Select OK when finished, and format the new column as necessary.

15. Modify the grouped column to show all unassigned values as Default→Error - Unassigned GL Acct
16. Input a summed 'Grand Total' in the 'SFMS Trans Amt' column within the Table section. Your Grand Total should equal 1,618,748.24.
17. Alert the instructor after correctly completing the exercise.