



20-JAN-2021

RD1040.dgn

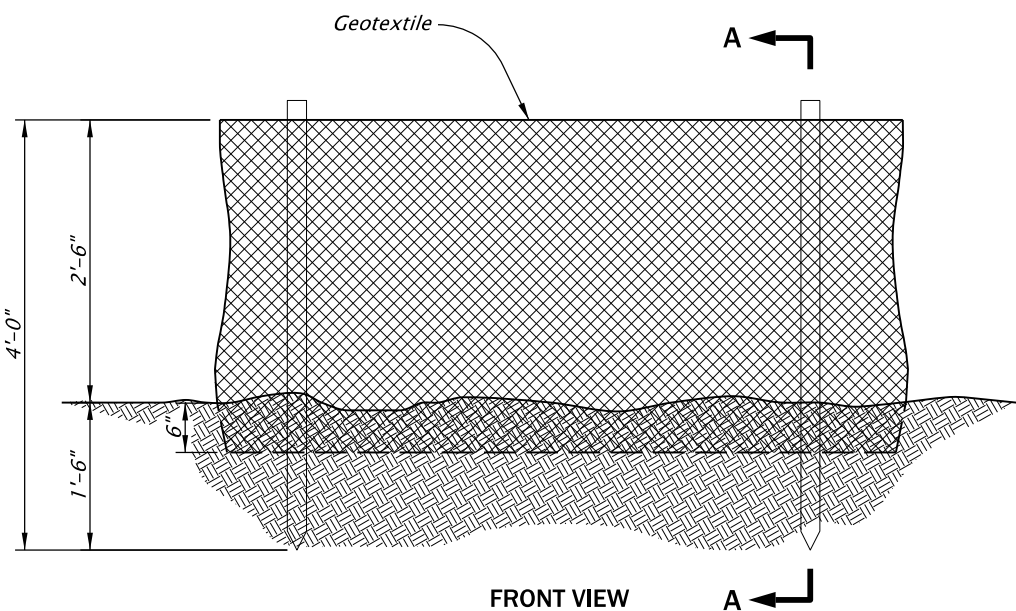


FRONT VIEW

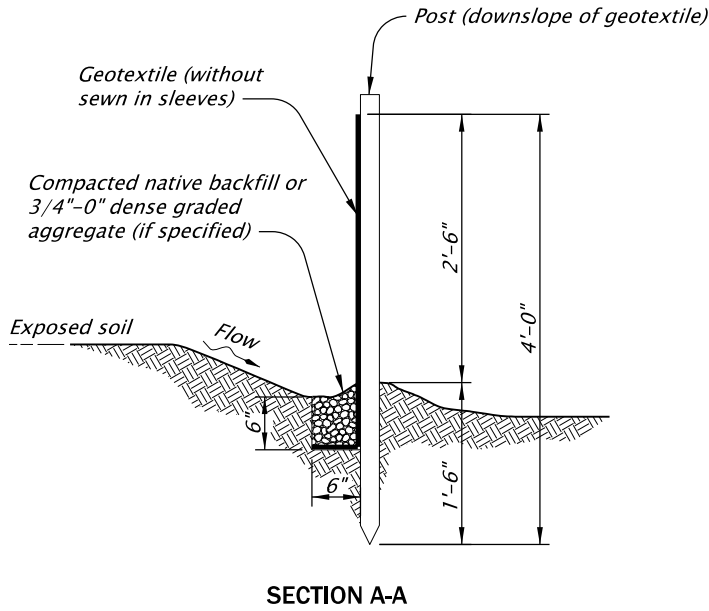


SECTION A-A

SEDIMENT FENCE AND GEOTEXTILE BURY DETAIL - TYPE 1
NOT TO SCALE

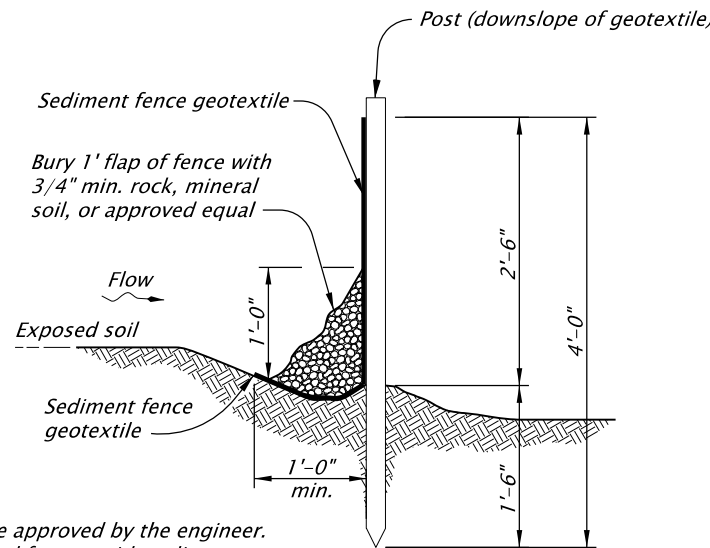


NOTES:
1. Use must be approved by the engineer.
2. Not approved for use with sediment fencing with sewn-in post sleeves.

ALTERNATE SEDIMENT FENCE
WITHOUT TRENCHING - TYPE 2
NOT TO SCALE

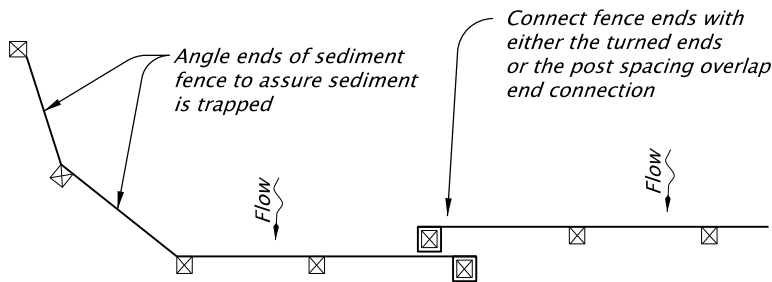

PLAN VIEW

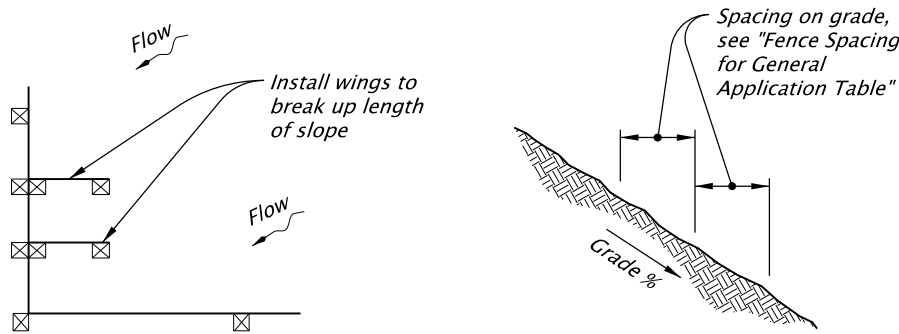


TERMINATION AT CORNER OR PROPERTY LINE


- GENERAL NOTES:
1. Use 2"x2" wood fence posts.
 2. Posts to be installed on downhill side of sediment fence geotextile. Position posts to prevent separation from geotextile.
 3. Compact filter fabric trench backfill and soil on uphill side of fence.
 4. Locate fence no closer than three feet to the toe of a slope.
 5. Wing spacing shall comply with "Fence Spacing for General Application Table".

FENCE SPACING FOR GENERAL APPLICATION TABLE	
INSTALL PARALLEL ALONG CONTOURS AS FOLLOWS	
GRADE	MAXIMUM SPACING ON GRADE
Grade < 10%	300'
10% ≤ Grade < 15%	150'
15% ≤ Grade < 20%	100'
20% ≤ Grade < 30%	50'
30% ≤ Grade	25'


POST SPACING TABLE	
6'	Sediment Fence with Geotextile elongation less than 50%
4'	Sediment Fence with Geotextile elongation 50% or more

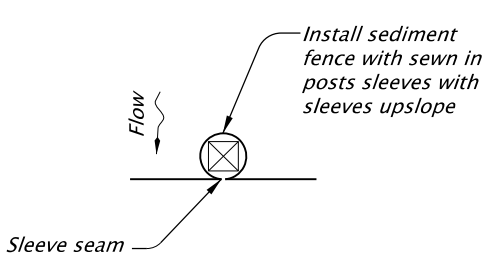

GEOTEXTILE WITH POST SLEEVES

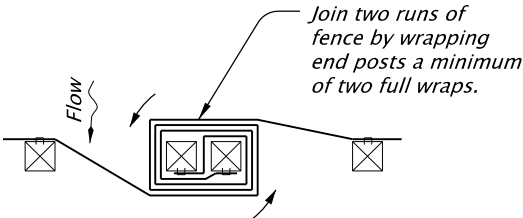

TURNED ENDS CONNECTION

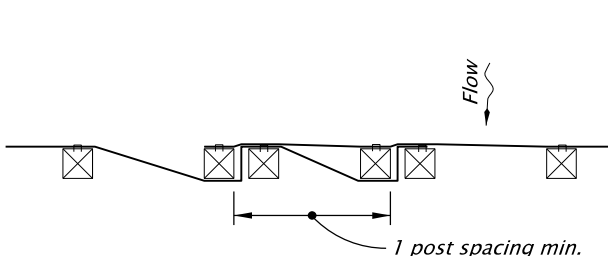

POST SPACING OVERLAP CONNECTION

GEOTEXTILE END CONNECTIONS
NOT TO SCALE

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.

All materials shall be in accordance with the current Oregon Standard Specifications.			
OREGON STANDARD DRAWINGS			
SEDIMENT FENCE			
2024			
DATE	REVISION DESCRIPTION		
01-2021	REMOVED CALC BOOK NUMBERS		
CALC. BOOK NO.	N/A	SDR DATE	20-JAN-2021
RD1040			RD1040

Effective Date: June 1, 2026 – November 30, 2026