

Boilerplate Special Provisions

2024 Oregon Standard Specification for Construction

Boilerplate Version

Published: September 1, 2023

Effective: December 1, 2026

**BID BOOKLET
FOR HIGHWAY CONSTRUCTION**



**OREGON DEPARTMENT OF TRANSPORTATION
SALEM, OREGON**



SCOPE OF WORK (match plan title sheet)

PROJECT NAME (match plan title sheet)

HIGHWAY (match plan title sheet)

COUNTY (match plan title sheet)

BID DATE (Month Day, Year)

CLASS OF PROJECT FEDERAL AID NUMBER OR "STATE (- BUY AMERICA)"

CLASS OF WORK FROM CLASS OF WORK SHEET

BID OF _____

(Use the following for the Bid booklet. Fill in all appropriate blanks.)

DESCRIPTION OF WORK

(Fill in the blanks with the same information that is on the plan title sheet except do not include the date. Remove underline and parentheses.)

(Scope of Work)

(Project Name)

(Highway Name)

(County)

TIME AND PLACES OF RECEIVING BIDS (BID CLOSING)

(Fill in the blanks with the appropriate day, month and year. Remove underline.)

Bid Closing for the work described above will be at 9:00:00 a.m. on the ____ day of _____, 20___. Bids will be received by BJ McCartney, Construction Contracts Manager.

Submit electronic bids, on-line through Bid Express® (www.bidx.com) before 9:00:00 a.m. on the day of Bid Closing.

Submit paper bids to BJ McCartney, Construction Contracts Manager:

Before 9:00:00 a.m. on the day of Bid Closing.

For Bids submitted by mail or parcel delivery service, send to:

Oregon Department of Transportation
Procurement Construction Contracts, MS #33
355 Capitol Street NE
Salem, Oregon 97301.

For Bids submitted by hand delivery, date stamp the Bid with the provided date stamping device and place into the ODOT Procurement Bid Box located in the 1st floor lobby at the following address:

Oregon Department of Transportation
355 Capitol Street NE
Salem, Oregon 97301.

Bids, Bid modifications, and Bid withdrawals will not be accepted at or after 9:00:00 a.m. on the day of Bid Closing.

PLACE, TIME, AND DATE OF READING BIDS (BID OPENING)

Bid Opening for the work described above will be at the following address: Oregon Department of Transportation, 355 Capitol Street NE, Salem, Oregon, beginning at 9:00:00 a.m. on the day of Bid Closing.

COMPLETION TIME LIMIT

See Special Provisions Subsection 00180.50(h).

CLASS OF PROJECT

(Delete word which does not apply. Remove parentheses.)

This is a (Federal-Aid) (State) (State - Buy America) Project.

CLASS OF WORK

(Use one of the following nine paragraphs to list the class of work determined by using the COW Report in the FSCOW "worksheet. The COW and the COW Report must be approved by the State Specifications Engineer if any of the following classes are identified as a class for the Project: Painting, Rock Production, Electrical, Landscaping, Temporary Traffic Control, Buildings or Other. Delete the paragraphs that do not apply. Select the class(es) from the list below (cut and paste). Remove underline and parentheses. Contact the State Specification Engineer if a different combination is required than what is listed below.)

The Class of Work for this Project is: _____.

The Class of Work for this Project is the combination of 1) _____ & 2) _____.

The Class of Work for this Project is either: A) _____, or B) _____.

The Class of Work for this Project is either: A) _____, or B) _____ or C) _____.

The Class of Work for this Project is either: A) _____, or B) the combination of 1) _____ & 2) _____.

The Class of Work for this Project is either: A) _____, or B) _____, or C) the combination of 1) _____ & 2) _____.

The Class of Work for this Project is either: A) _____, or B) the combination of any two classes in the following list: _____, _____, (_____,) (_____,) or _____.

The Class of Work for this Project is either: A) _____, or B) _____, or C) the combination of any two classes in the following list: _____, _____, (_____,) (_____,) or _____.

The Class of Work for this Project is the combination of any two classes in the following list: _____, _____, (_____,) (_____,) or _____.

(Use this list to fill in the blanks above. Delete this list when finished.)

*Earthwork and Drainage
Bridges and Structures
Painting
Rock Production
Aggregate Bases
Asphalt Concrete Paving and Oiling
Portland Cement Concrete Paving
Pavement Markings
Signing
Electrical
Landscaping
Miscellaneous Highway Appurtenances
Buildings)*

APPLICABLE SPECIAL PROVISIONS

The Special Provisions booklet applicable to the above-described work, for which Bids will be opened at the place, time, and date stated above, is that which contains the exact information as shown above on this page.

Bidders are cautioned against basing their Bids on a booklet bearing any different description, date(s), Class of Project, or Class of Work.

**SPECIAL PROVISIONS
FOR HIGHWAY CONSTRUCTION**



**OREGON DEPARTMENT OF TRANSPORTATION
SALEM, OREGON**



SCOPE OF WORK (match plan title sheet)

PROJECT NAME (match plan title sheet)

HIGHWAY (match plan title sheet)

COUNTY (match plan title sheet)

BID DATE (Month Day, Year)

If prebid meeting is required, use the following sentence and delete this first sentence, otherwise delete this field. A mandatory prebid meeting has been scheduled for this Project, see 00120.15 for the meeting time and location.



SP00004_SP_Cover (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25)

Last updated: 02-04-25)

(Use the following with the Special Provisions booklet. Fill in all appropriate blanks.)

DESCRIPTION OF WORK

(Fill in the blanks with the same information that is on the plan title sheet except do not include the date. Remove underline and parentheses.)

(Scope of Work)

(Project Name)

(Highway Name)

(County)

TIME AND PLACES OF RECEIVING BIDS (BID CLOSING)

(Fill in the blanks with the appropriate day, month and year. Remove underline.)

Bid Closing for the work described above will be at 9:00:00 a.m. on the ____ day of _____, 20___. Bids will be received by BJ McCartney, Construction Contracts Manager.

Submit electronic bids, on-line through Bid Express® (www.bidx.com) before 9:00:00 a.m. on the day of Bid Closing.

Submit paper bids to BJ McCartney, Construction Contracts Manager:

Before 9:00:00 a.m. on the day of Bid Closing.

For Bids submitted by mail or parcel delivery service, send to:

Oregon Department of Transportation
Procurement Construction Contracts, MS #33
355 Capitol Street NE
Salem, Oregon 97301.

For Bids submitted by hand delivery, date stamp the Bid with the provided date stamping device and place into the ODOT Procurement Bid Box located in the 1st floor lobby at the following address:

Oregon Department of Transportation
355 Capitol Street NE
Salem, Oregon 97301.

Bids, Bid modifications, and Bid withdrawals will not be accepted at or after 9:00:00 a.m. on the day of Bid Closing.

PLACE, TIME, AND DATE OF READING BIDS (BID OPENING)

Bid Opening for the work described above will be at the following address: Oregon Department of Transportation, 355 Capitol Street NE, Salem, Oregon, beginning at 9:00:00 a.m. on the day of Bid Closing.

COMPLETION TIME LIMIT

See Subsection 00180.50(h).

CLASS OF PROJECT

(Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

This is a (Federal-Aid) (State) (State - Buy America) Project.

CLASS OF WORK

(Use one of the following nine paragraphs to list the class of work determined by using the COW Report in the FSCOW worksheet. The COW and the COW Report must be approved by the State Specifications Engineer if any of the following classes are identified as a class for the Project: Painting, Rock Production, Electrical, Landscaping, Temporary Traffic Control, Buildings or Other. Delete the paragraphs that do not apply. Select the class(es) from the list below (cut and paste). Remove underline and parentheses. Contact the State Specification Engineer if a different combination is required than what is listed below.)

The Class of Work for this Project is: _____.

The Class of Work for this Project is the combination of 1) _____ & 2) _____.

The Class of Work for this Project is either: A) _____, or B) _____.

The Class of Work for this Project is either: A) _____, or B) _____ or C) _____.

The Class of Work for this Project is either: A) _____, or B) the combination of 1) _____ & 2) _____.

The Class of Work for this Project is either: A) _____, or B) _____, or C) the combination of 1) _____ & 2) _____.

The Class of Work for this Project is either: A) _____, or B) the combination of any two classes in the following list: _____, _____, (_____,) (_____,) or _____.

The Class of Work for this Project is either: A) _____, or B) _____, or C) the combination of any two classes in the following list: _____, _____, (_____,) (_____,) or _____.

The Class of Work for this Project is the combination of any two classes in the following list: _____, _____, (_____,) (_____,) or _____.

(Use the following list to fill in the blanks above. Delete this list when finished.)

*Earthwork and Drainage
Bridges and Structures
Painting
Rock Production
Aggregate Bases
Asphalt Concrete Paving and Oiling
Portland Cement Concrete Paving
Pavement Markings
Signing
Electrical
Landscaping
Miscellaneous Highway Appurtenances
Buildings)*

PROJECT INFORMATION

Information pertaining to this Project may be obtained from the following:

(Use the following paragraph for ODOT administered projects. Use "Project Manager" if the employee is NOT a licensed PE and "Resident Engineer" if the employee is a licensed PE. Fill in the name, address, city, zip code, and Email. Obtain the information from the Transportation Project Manager. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

_____(Name)_____, (Project Manager) (Resident Engineer), _____(Address)_____,
_____(City and Zip)_____; or Email _____(Email)_____. All requests for information must be in writing with reference to the Project name.

(Use the following paragraph for Consultant or Local Agency administered projects. Fill in the names, addresses, cities, zip codes, and Email. Obtain the ODOT information from the Transportation Project Manager. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

_____(Consultant or Local Agency Name)_____, Project Manager, _____(Consultant Company
Name or Local Agency Name)_____, _____(Address)_____, _____(City and Zip)_____; or
Email _____(Email)_____. All requests for information must be in writing with reference to the
Project name.

(Use the following paragraph for Consultant or Local Agency administered projects. Fill in the name of the ODOT Consultant Project Manager or ODOT Transportation Project Manager. Use either "Resident Engineer - Consultant Project " or "Transportation Project Manager". Fill in the name, address, city, zip code, and Email. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

_____(ODOT Name)_____, ODOT (Resident Engineer - Consultant Project)
(Transportation Project Manager), _____(Address)_____, _____(City and Zip)_____; or
Email _____(Email)_____. All requests for information must be in writing with reference to the
Project name.

Insert Project Name Here

SP00010-TOC-FED (Special Provisions for the 2024 Book)

(Bidding on or after: 10-15-25)

Last updated: 10-15-25)

(Follow all instructions. If there are no instructions above a line, then include the line on all projects. Delete items that are not included in the project special provisions. remove all instructions before preparing the final document.)

TABLE OF CONTENTS FOR SPECIAL PROVISIONS

REQUIRED CONTRACT PROVISIONS FOR FEDERAL-AID CONTRACTS (FHWA-1273)
ON-SITE WORKFORCE AFFIRMATIVE ACTION REQUIREMENTS FOR WOMEN AND
MINORITIES ON FEDERAL-AID CONTRACTS
EQUAL EMPLOYMENT OPPORTUNITY PROVISIONS
SUSPENSION OF DISADVANTAGED BUSINESS ENTERPRISE (DBE) REQUIREMENTS
(Use the following two lines on all Projects when the Region biddables estimate exceeds \$2.5 million or the contract amount might exceed \$3 million or more. For questions contact the State Specifications Engineer.)
APPRENTICESHIP REQUIREMENTS
OUTREACH, RECRUITMENT AND RETENTION
(Use the following line when there is work within the Umatilla Memorandum of Understanding Exhibit A MOU boundary. Check with the Project Leader.)
TRIBAL EMPLOYMENT RIGHTS OFFICE CODE
(Use the following line with projects in Region 1, Region 2, or Region 4 that have an assigned Grand Ronde or Warm Springs TERO Indian Employment Preference Goal, assigned Indian Subcontractor Goal, or Compliance Fee. Check with the Project Leader.)
TRIBAL EMPLOYMENT RIGHTS ORDINANCE
(Use the following two lines when Umatilla, Grand Ronde, or Warm Springs TERO applies to the project.)
INDIAN PREFERENCE IN EMPLOYMENT ON FEDERAL-AID HIGHWAY PROJECTS
MEMORANDUM OF UNDERSTANDING
(Use the following line when Umatilla, Grand Ronde, or Warm Springs TERO applies to the project.)
INDIAN EMPLOYMENT GOALS AND COMPLIANCE FEE
(Use the following line only on projects with railroad involvement.)
RAILROAD CONTRACTOR REQUIREMENTS
PROJECT WAGE RATES
(Use the following line when the project requires a coating system warranty under 00594.75.)
COATING SYSTEM WARRANTY AND PERFORMANCE BOND

(To insert TOC, right-click on "No table of contents entries found." below and select "Update Field".)

WORK TO BE DONE.....	1
SECTION 00110 - ORGANIZATION, CONVENTIONS, ABBREVIATIONS AND DEFINITIONS.....	2
SECTION 00120 - BIDDING REQUIREMENTS AND PROCEDURES.....	4
SECTION 00130 - AWARD AND EXECUTION OF CONTRACT	8

Insert Project Name Here

SECTION 00140 - SCOPE OF WORK	9
SECTION 00150 - CONTROL OF WORK	9
SECTION 00160 - SOURCE OF MATERIALS	28
SECTION 00165 - QUALITY OF MATERIALS	35
SECTION 00170 - LEGAL RELATIONS AND RESPONSIBILITIES	38
SECTION 00180 - PROSECUTION AND PROGRESS	56
SECTION 00190 - MEASUREMENT OF PAY QUANTITIES	65
SECTION 00195 - PAYMENT	68
SECTION 00196 - PAYMENT FOR EXTRA WORK.....	76
SECTION 00197 - PAYMENT FOR FORCE ACCOUNT WORK	76
SECTION 00199 - DISAGREEMENTS, PROTESTS, AND CLAIMS	77
SECTION 00205 - FIELD LABORATORY, WEIGHHOUSE, ETC.....	77
SECTION 00210 - MOBILIZATION	83
SECTION 00220 - ACCOMMODATIONS FOR PUBLIC TRAFFIC	83
SECTION 00221 - COMMON PROVISIONS FOR WORK ZONE TRAFFIC CONTROL.....	94
SECTION 00222 - TEMPORARY TRAFFIC CONTROL SIGNS	99
SECTION 00223 - WORK ZONE TRAFFIC CONTROL LABOR AND VEHICLES	114
SECTION 00224 - TEMPORARY TRAFFIC CHANNELIZING DEVICES	125
SECTION 00225 - TEMPORARY PAVEMENT MARKINGS	126
SECTION 00226 - TEMPORARY ROADSIDE BARRIERS AND IMPACT ATTENUATORS.....	130
SECTION 00227 - TEMPORARY TRAFFIC SIGNALS AND ILLUMINATION.....	137
SECTION 00228 - TEMPORARY PEDESTRIAN AND BICYCLIST ROUTING	142
SECTION 00229 - SMART WORK ZONE SYSTEMS.....	145
SECTION 00230 - TEMPORARY ROADBED AND SURFACING.....	155
SECTION 00231 - TEMPORARY ACCESS ROAD.....	157
SECTION 00235 - AGENCY PROVIDED MATERIAL SOURCES	160
SECTION 00236 - AGENCY PROVIDED DISPOSAL SITES.....	174
SECTION 00237 - AGENCY-PROVIDED STAGING AREAS	186
SECTION 00240 - TEMPORARY DRAINAGE FACILITIES	195
SECTION 00245 - TEMPORARY WATER MANAGEMENT	195
SECTION 00250 - DIVERSION BRIDGES.....	200
SECTION 00251 - AGENCY PROVIDED TEMPORARY BRIDGES	213
SECTION 00252 - TEMPORARY WORK BRIDGES.....	214
SECTION 00253 - TEMPORARY WORK ACCESS AND CONTAINMENT	216
SECTION 00255 - TEMPORARY BRIDGE JACKING.....	222
SECTION 00256 - TEMPORARY RETAINING WALLS	225
SECTION 00270 - TEMPORARY FENCES	232
SECTION 00280 - EROSION AND SEDIMENT CONTROL.....	233
SECTION 00290 - ENVIRONMENTAL PROTECTION	243
SECTION 00293 - DECOMMISSION UNDERGROUND STORAGE TANKS	271
SECTION 00294 - CONTAMINATED MEDIA.....	277
SECTION 00295 - ASBESTOS MATERIALS	289
SECTION 00296 - PAINT AND PAINTED MATERIALS.....	295
SECTION 00297 - PCB AND MERCURY CONTAINING EQUIPMENT	304
SECTION 00298 - WELL PRESERVATION AND ABANDONMENT	307
SECTION 00299 - DECOMMISSION UNDERGROUND INJECTION CONTROL SYSTEMS	310
SECTION 00299A - DECOMMISSION SEPTIC SYSTEMS.....	313
SECTION 00305 - CONSTRUCTION SURVEY WORK.....	315

SECTION 00310 - REMOVAL OF STRUCTURES AND OBSTRUCTIONS	315
SECTION 00320 - CLEARING AND GRUBBING.....	318
SECTION 00330 - EARTHWORK	320
SECTION 00331 - SUBGRADE STABILIZATION	328
SECTION 00333 - AGGREGATE DITCH LINING	329
SECTION 00334 - PREPARATION OF SHOULDERS.....	330
SECTION 00335 - BLASTING METHODS AND PROTECTION OF EXCAVATION BACKSLOPES	332
SECTION 00340 - WATERING	337
SECTION 00344 - TREATED SUBGRADE.....	338
SECTION 00350 - GEOSYNTHETIC INSTALLATION.....	342
SECTION 00360 - DRAINAGE BLANKETS	349
SECTION 00370 - FINISHING ROADBEDS	351
SECTION 00380 - ROCK SLOPE SCALING.....	352
SECTION 00390 - RIPRAP PROTECTION.....	356
SECTION 00396 - SHOTCRETE SLOPE STABILIZATION	358
SECTION 00398 - ROCK SLOPE STABILIZATION AND REINFORCEMENT	362
SECTION 00405 - TRENCH EXCAVATION, BEDDING, AND BACKFILL.....	370
SECTION 00406 - TUNNELING, BORING, AND JACKING.....	373
SECTION 00410 - REHABILITATE EXISTING PIPE	375
SECTION 00411 - PIPE BURSTING	377
SECTION 00412 - CURED-IN-PLACE PIPE LINING THERMO CURE	378
SECTION 00413 - GRP CURED-IN-PLACE PIPE LINING UV CURE	380
SECTION 00414 – PIPE RENEWAL – SPRAY APPLIED PIPE STRUCTURAL LINER.....	382
SECTION 00415 - VIDEO PIPE INSPECTION	383
SECTION 00420 - SALVAGING PIPE.....	385
SECTION 00430 - SUBSURFACE DRAINS.....	387
SECTION 00435 - PREFABRICATED VERTICAL DRAINS	388
SECTION 00440 - COMMERCIAL GRADE CONCRETE	392
SECTION 00442 - CONTROLLED LOW STRENGTH MATERIALS.....	394
SECTION 00443 - RAPID SETTING CONTROLLED LOW STRENGTH MATERIALS	395
SECTION 00444 - LOW DENSITY CELLULAR CONCRETE	397
SECTION 00445 - SANITARY, STORM, CULVERT, SIPHON, AND IRRIGATION PIPE	402
SECTION 00446 - TRENCH DRAINS	409
SECTION 00450 - STRUCTURAL PLATE SHAPED STRUCTURES.....	410
SECTION 00460 - PAVED CULVERT END SLOPES.....	412
SECTION 00470 - MANHOLES, CATCH BASINS, AND INLETS.....	413
SECTION 00475 - DRAIN WELLS	415
SECTION 00480 - DRAINAGE CURBS	416
SECTION 00490 - WORK ON EXISTING SEWERS AND STRUCTURES.....	418
SECTION 00495 - TRENCH RESURFACING.....	420
SECTION 00501 - BRIDGE REMOVAL	421
SECTION 00503 - BRIDGE DECK COLD PLANE PAVEMENT REMOVAL.....	423
SECTION 00504 - CONCRETE DECK SURFACE PREPARATION.....	424
SECTION 00505 – CONCRETE DECK HYDRODEMOLITION	427
SECTION 00510 - STRUCTURE EXCAVATION AND BACKFILL.....	433
SECTION 00512 - DRILLED SHAFTS	445
SECTION 00515 - MICROPILES.....	453

Insert Project Name Here

SECTION 00520 - DRIVEN PILES	473
SECTION 00530 - STEEL REINFORCEMENT FOR CONCRETE	484
SECTION 00531 – GLASS FIBER REINFORCED POLYMER BAR REINFORCEMENT FOR CONCRETE	489
SECTION 00532 - REBAR CONTINUITY	493
SECTION 00535 - POST-INSTALLED ANCHOR SYSTEMS	498
SECTION 00536 - INTERNAL SHEAR ANCHORS	501
SECTION 00537 - PENETRATING CONCRETE SURFACE TREATMENT	502
SECTION 00538 - CRACK INJECTING EXISTING BRIDGES	506
SECTION 00539 - CONCRETE AND CRACK SEALING	507
SECTION 00540 - STRUCTURAL CONCRETE	510
SECTION 00541 - ULTRA HIGH PERFORMANCE CONCRETE	527
SECTION 00542 - CONCRETE REPAIR	531
SECTION 00543 - ARCHITECTURAL TREATMENT	542
SECTION 00545 - REINFORCED CONCRETE BRIDGE APPROACH SLABS	546
SECTION 00550 - PRECAST PRESTRESSED CONCRETE MEMBERS	548
SECTION 00552 - PRECAST REINFORCED CONCRETE MEMBERS	552
SECTION 00555 - POST-TENSIONING	559
SECTION 00556 - MULTI-LAYER POLYMER CONCRETE OVERLAY	562
SECTION 00557 - PREMIXED POLYMER CONCRETE OVERLAYS	564
SECTION 00558 – HIGH EARLY STRENGTH CONCRETE OVERLAY	567
SECTION 00559 - STRUCTURAL CONCRETE OVERLAYS	576
SECTION 00560 - STRUCTURAL STEEL BRIDGES	579
SECTION 00564 - FALL ARREST SYSTEM	590
SECTION 00565 - CARBON FIBER REINFORCED POLYMER STRENGTHENING - WET LAYUP SYSTEM	591
SECTION 00566 - CARBON FIBER REINFORCED POLYMER STRENGTHENING - NEAR SURFACE MOUNTED	598
SECTION 00567 - TITANIUM ALLOY REINFORCEMENT SYSTEM	600
SECTION 00568 – STRUCTURAL RODS	605
SECTION 00570 - TIMBER STRUCTURES	608
SECTION 00581 - BRIDGE DRAINAGE SYSTEMS	610
SECTION 00582 - BRIDGE BEARINGS	610
SECTION 00583 - ELECTRICAL CONDUIT ON STRUCTURES	614
SECTION 00584 - ELASTOMERIC CONCRETE NOSING	616
SECTION 00585 - EXPANSION JOINTS	618
SECTION 00586 - EXPANSION JOINTS, MODULAR	625
SECTION 00587 - BRIDGE RAILS	629
SECTION 00588 - PRECAST HISTORIC ORNAMENTAL BRIDGE RAILS	635
SECTION 00589 - UTILITIES ON STRUCTURES	641
SECTION 00590 - POLYMER MEMBRANE	645
SECTION 00591 – SPRAY WATERPROOFING MEMBRANE	647
SECTION 00592 - ROLLED WATERPROOFING MEMBRANE	650
SECTION 00593 - POWDER COATING METAL STRUCTURES	652
SECTION 00594 - PREPARING AND COATING METAL STRUCTURES	655
SECTION 00595 - REINFORCED CONCRETE BOX CULVERTS	663
SECTION 00596A - MECHANICALLY STABILIZED EARTH RETAINING WALLS	665
SECTION 00596B - PREFABRICATED MODULAR RETAINING WALLS	674
SECTION 00596C - CAST-IN-PLACE CONCRETE RETAINING WALLS	680
SECTION 00596D - SOLDIER PILE RETAINING WALLS	682
Description	682

Insert Project Name Here

SECTION 00596E – GROUND ANCHORS.....	691
SECTION 00597 - SOUND WALLS.....	708
SECTION 00599 - CONCRETE SLOPE PAVING.....	710
SECTION 00610 - RECONDITIONING EXISTING ROADWAY.....	711
SECTION 00620 - COLD PLANE PAVEMENT REMOVAL.....	711
SECTION 00621 - AMG COLD PLANE PAVEMENT REMOVAL.....	713
SECTION 00622 - GRINDING CONCRETE PAVEMENT.....	716
SECTION 00630 – RUBBLIZING CONCRETE PAVEMENT.....	718
SECTION 00635 - GRID-ROLLED AGGREGATE SUBBASE.....	722
SECTION 00640 - AGGREGATE BASE AND SHOULDERS.....	724
SECTION 00641 - AGGREGATE SUBBASE, BASE, AND SHOULDERS.....	726
SECTION 00645 - RECYCLED ASPHALT PRODUCTS IN BASE.....	730
SECTION 00660 - LEAN CONCRETE BASE.....	733
SECTION 00670 - CONCRETE PAVEMENT UNDERSEALING.....	735
SECTION 00680 - STOCKPILED AGGREGATES.....	738
SECTION 00705 - EMULSIFIED ASPHALT PRIME COAT AND EMULSIFIED ASPHALT FOG COAT.....	742
SECTION 00706 - EMULSIFIED ASPHALT SLURRY SEAL SURFACING.....	744
SECTION 00706 - EMULSIFIED ASPHALT SLURRY SEAL SURFACING.....	755
SECTION 00710 - SINGLE APPLICATION EMULSIFIED ASPHALT CHIP SEAL.....	766
SECTION 00711 - PRE-COATED AGGREGATE ASPHALT CHIP SEAL.....	771
SECTION 00712 - DRY KEY EMULSIFIED ASPHALT CHIP SEAL.....	774
SECTION 00715 - MULTIPLE APPLICATION EMULSIFIED ASPHALT SURFACE TREATMENT.....	782
SECTION 00718 - HYDRATED LIME SLURRY IN COLD-IN-PLACE RECYCLING.....	787
SECTION 00719 - PRE-RECYCLE LIME TREATMENT.....	788
SECTION 00720 - COLD IN-PLACE RECYCLED ASPHALT CONCRETE PAVEMENT (CIR).....	790
SECTION 00721 - COLD RECYCLED EMULSIFIED ASPHALT CONCRETE PAVEMENT (CRP).....	801
SECTION 00725 - HOT IN-PLACE RECYCLED ASPHALT CONCRETE PAVEMENT (HIR).....	811
SECTION 00730 - EMULSIFIED ASPHALT TACK COAT.....	818
SECTION 00735 - EMULSIFIED ASPHALT CONCRETE PAVEMENT.....	820
SECTION 00738 - SAFETY EDGE.....	827
SECTION 00740 - COMMERCIAL ASPHALT CONCRETE PAVEMENT (CACP).....	828
SECTION 00743 - POROUS ASPHALT CONCRETE (PAC).....	828
SECTION 00744 - ASPHALT CONCRETE PAVEMENT.....	831
SECTION 00745 - ASPHALT CONCRETE PAVEMENT - STATISTICAL ACCEPTANCE.....	837
SECTION 00746 - CRACK SEALING FLEXIBLE PAVEMENTS.....	861
SECTION 00748 - ASPHALT CONCRETE PAVEMENT REPAIR.....	862
SECTION 00749 - MISCELLANEOUS ASPHALT CONCRETE STRUCTURES.....	863
SECTION 00754 - PLAIN CONCRETE PAVEMENT REPAIR.....	865
SECTION 00755 - CONTINUOUSLY REINFORCED CONCRETE PAVEMENT.....	877
SECTION 00756 - PLAIN CONCRETE PAVEMENT.....	888
SECTION 00758 - REINFORCED CONCRETE PAVEMENT REPAIR.....	899
SECTION 00759 - MISCELLANEOUS PORTLAND CEMENT CONCRETE STRUCTURES.....	913
SECTION 00760 - UNIT PAVERS.....	919
SECTION 00765 - TACTILE SURFACE INDICATORS.....	921

SECTION 00810 - METAL GUARDRAIL	924
SECTION 00811 - CABLE BARRIER	930
SECTION 00812 - ADJUSTING AND REPAIRING GUARDRAIL	930
SECTION 00813 - STEEL BACKED TIMBER GUARDRAIL	931
SECTION 00815 - BOLLARDS.....	934
SECTION 00820 - CONCRETE BARRIER.....	935
SECTION 00822 - GLARE SHIELDS	937
SECTION 00830 - IMPACT ATTENUATORS	939
SECTION 00840 - DELINEATORS AND MILEPOST MARKER POSTS	939
SECTION 00842 - FACILITY IDENTIFICATION MARKERS.....	941
SECTION 00850 - COMMON PROVISIONS FOR PAVEMENT MARKINGS	942
SECTION 00855 - PAVEMENT MARKERS	944
SECTION 00856 - SURFACE MOUNTED TUBULAR MARKERS.....	945
SECTION 00857 - RUMBLE STRIPS.....	946
SECTION 00860 - LONGITUDINAL PAVEMENT MARKINGS - PAINT.....	947
SECTION 00865 - LONGITUDINAL PAVEMENT MARKINGS - DURABLE	948
SECTION 00866 - LONGITUDINAL PAVEMENT MARKINGS - HIGH PERFORMANCE	949
SECTION 00867 - TRANSVERSE PAVEMENT MARKINGS - LEGENDS AND BARS.....	950
SECTION 00868 - COLORED LANE MARKINGS	952
SECTION 00869 - CURB AND NON-TRAVERSABLE MEDIAN MARKINGS.....	952
SECTION 00902 - CROSSWALK CLOSURE SUPPORTS.....	954
SECTION 00905 - REMOVAL AND REINSTALLATION OF EXISTING SIGNS	955
SECTION 00910 - WOOD SIGN POSTS	957
SECTION 00920 - SIGN SUPPORT FOOTINGS.....	957
SECTION 00921 - MAJOR SIGN SUPPORT DRILLED SHAFTS.....	959
SECTION 00930 - METAL SIGN SUPPORTS	967
SECTION 00940 - SIGNS.....	973
SECTION 00941 - SIGN COVERS.....	978
SECTION 00942 - PERMANENT BARRICADES.....	978
SECTION 00950 - REMOVAL OF ELECTRICAL SYSTEMS.....	979
SECTION 00960 - COMMON PROVISIONS FOR ELECTRICAL SYSTEMS.....	981
SECTION 00962 - METAL ILLUMINATION AND TRAFFIC SIGNAL SUPPORTS	985
SECTION 00963 - SIGNAL SUPPORT DRILLED SHAFTS.....	991
SECTION 00965 - METAL CAMERA POLES AND FOUNDATIONS.....	994
SECTION 00970 - HIGHWAY ILLUMINATION	1003
SECTION 00984 - FIBERGLASS POLES FOR ITS	1006
SECTION 00985 - ITS ELECTRICAL SYSTEM INSTALLATION.....	1010
SECTION 00987 - TELECOMMUNICATIONS	1019
SECTION 00989 - PHOTOVOLTAIC EQUIPMENT INSTALLATION.....	1031
SECTION 00990 - TRAFFIC SIGNALS, RAMP METERS, FLASHING BEACONS, INTERCONNECT SYSTEMS & AUTOMATIC TRAFFIC RECORDERS	1037
SECTION 00991 - UNINTEGRATED SPEED FEEDBACK ASSEMBLY.....	1044
SECTION 01010 - STORMWATER CONTROL, WATER QUALITY STRUCTURES	1046
SECTION 01011 - STORMWATER CONTROL, PONDS	1048
SECTION 01012 - STORMWATER CONTROL, WATER QUALITY BIOFILTRATION SWALE.....	1052
SECTION 01013 - STORMWATER CONTROL, WATER QUALITY BIOSLOPE.....	1056
SECTION 01014 - STORMWATER CONTROL, WATER QUALITY FILTER STRIP	1059

Insert Project Name Here

SECTION 01030 - SEEDING.....	1061
SECTION 01040 - PLANTING.....	1071
SECTION 01050 - FENCES	1085
SECTION 01060 - METAL CATTLE GUARDS.....	1091
SECTION 01069 - METAL HANDRAIL AND PEDESTRIAN FENCE.....	1092
SECTION 01070 - MAILBOX SUPPORTS	1093
SECTION 01090 - GRAVEL BEDS AND BLANKETS	1095
SECTION 01091 - WATERWAY ENHANCEMENTS	1095
SECTION 01095 - SITE FURNISHINGS	1102
SECTION 01120 - IRRIGATION SYSTEMS.....	1104
SECTION 01140 - POTABLE WATER PIPE AND FITTINGS	1111
SECTION 01150 - POTABLE WATER VALVES	1116
SECTION 01160 - HYDRANTS AND APPURTENANCES	1118
SECTION 01170 - POTABLE WATER SERVICE CONNECTIONS, 2 INCH AND SMALLER.....	1119
SECTION 01201 - COMMON PROVISIONS FOR CATHODIC PROTECTION SYSTEMS	1120
SECTION 01210 - QUALITY CONTROL.....	1126
SECTION 01215 - LOCATE AND REMOVE NEAR-SURFACE METAL.....	1129
SECTION 01220 - REPAIR DAMAGED REINFORCING BARS	1132
SECTION 01235 - REPAIR DAMAGED CONCRETE	1135
SECTION 01240 - INSTALL REFERENCE CELLS.....	1145
SECTION 01245 - ELIMINATE ELECTRICAL DISCONTINUITIES IN REINFORCING	1150
SECTION 01260 - PREPARE SURFACES AND APPLY ZINC ANODES	1154
SECTION 01270 - INSTALL CATHODIC PROTECTION SYSTEM WIRING.....	1161
SECTION 01280 - INSTALL POWER AND COMMUNICATIONS	1165
SECTION 01285 - CP CABINETS, RISERS, AND WEATHER EQUIPMENT	1169
SECTION 02001 - CONCRETE.....	1176
SECTION 02005 - EVALUATION OF EARLY-AGE CONCRETE	1181
SECTION 02010 – PORTLAND CEMENT	1182
SECTION 02011 – RAPID HARDENING HYDRAULIC CEMENT	1183
SECTION 02020 – WATER.....	1184
SECTION 02030 – SUPPLEMENTARY CEMENTITIOUS MATERIALS.....	1185
SECTION 02035 – CONCRETE MODIFIERS.....	1186
SECTION 02045 – SYNTHETIC FIBER REINFORCING FOR CONCRETE	1186
SECTION 02050 – CURING MATERIALS	1187
SECTION 02080 – GROUT	1187
SECTION 02110 – POSTS, BLOCKS, AND BRACES.....	1188
SECTION 02120 – POLES.....	1191
SECTION 02130 – TIMBER AND LUMBER.....	1192
SECTION 02140 – GLUED LAMINATED TIMBER MEMBERS	1193
SECTION 02150 – LUMBER AND TIMBER CONNECTORS	1194
SECTION 02190 – PRESERVATIVE TREATMENT OF TIMBER.....	1195
SECTION 02210 – COATING MATERIALS FOR TIMBER AND CONCRETE	1196
SECTION 02320 - GEOSYNTHETICS	1196
SECTION 02340 – ROCK GABION BASKETS	1201
SECTION 02350 – METAL BIN RETAINING WALLS	1203
SECTION 02410 - CONCRETE PIPE	1204
SECTION 02415 - PLASTIC PIPE.....	1206
SECTION 02420 - METAL PIPE.....	1207

Insert Project Name Here

SECTION 02430 – STRUCTURAL PLATE PIPE	1211
SECTION 02440 – JOINT MATERIALS	1212
SECTION 02450 – MANHOLE AND INLET MATERIALS	1214
SECTION 02470 – POTABLE WATER PIPE MATERIALS	1215
SECTION 02475 – POTABLE WATER FITTING MATERIALS	1217
SECTION 02480 – POTABLE WATER VALVE MATERIALS	1218
SECTION 02485 – HYDRANT AND APPURTENANCE MATERIALS	1221
SECTION 02490 - PORTABLE WATER SERVICE CONNECTION MATERIALS, 2 INCH AND SMALLER	1222
SECTION 02510 - REINFORCEMENT	1224
SECTION 02513 – STAINLESS STEEL REINFORCEMENT	1226
SECTION 02515 – PRESTRESSING REINFORCEMENT	1228
SECTION 02520 – STEEL PILES	1230
SECTION 02530 – STRUCTURAL STEEL	1231
SECTION 02540 – FORGINGS, SHAFTING, CASTINGS, and NONFERROUS MATERIALS	1232
SECTION 02560 - FASTENERS	1234
SECTION 02570 – COMPOSITE BEARINGS	1237
SECTION 02571 – ELASTOMERIC BEARING PADS	1239
SECTION 02610 – SPECIAL FILTER MATERIAL	1241
SECTION 02630 – BASE AGGREGATE	1242
SECTION 02640 – SHOULDER AGGREGATE	1243
SECTION 02690 – PCC AGGREGATES	1244
SECTION 02810 – BRIDGE RAIL	1247
SECTION 02820 – METAL GUARDRAIL	1248
SECTION 02830 – METAL HANDRAIL	1249
SECTION 02831 – PEDESTRIAN FENCE	1250
SECTION 02910 - SIGN MATERIALS	1251
SECTION 02926 - HIGHWAY ILLUMINATION MATERIALS	1256
SECTION 03010 - FENCING MATERIALS	1264
SECTION 03020 - EROSION MATERIALS	1267

(Use the following line only when plans are included in the Special Provisions.)

PLANS

BID SCHEDULE

Insert Project Name Here

SP00044-TERO-CTGR (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25)

Last updated: 01-14-25)

INDIAN EMPLOYMENT GOALS AND COMPLIANCE FEE

(Use this specification for Indian goals and fees on Federal-Aid highway projects that are within the Confederated Tribes of Grand Ronde Community Reservation in whole or in part or within the MOU Boundary shown in Exhibit A of the MOU and have an Indian Employment Preference Goal. This only applies to the list of Federal-Aid highway projects that ODOT and the Tribe have agreed to.)

Indian Employment Preference Goal

The assigned Indian Employment Preference goal for this Project is _____ %

Compliance Fee

As established in separate Memorandum of Understanding (MOU) with the Confederated Tribes of the Grand Ronde Community of Oregon (CTGR) a project in which any work takes place within reservation boundary or within the TERO boundary may be subject to a TERO compliance fee. The TERO boundary is described in Exhibit A to the MOU.

(Use one of the following compliance fee paragraphs and figures based on the location of the project. Delete the ones that do not apply.)

[Option 1 - Use this paragraph and figure when the entire project is within the Reservation. DO NOT fill in the blank.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculation to determine the fee. The Compliance Fee for this Project is this calculation*:

Total Contract Amount* x 2.5% = _____

Total COMPLIANCE FEE for this Project is: = _____

* Per Part III.(e)(6)(A) of the Confederated Tribes of the Grand Ronde Community Tribal Employment Rights Ordinance, there is no fee for contracts less than \$100,000.

[Option 2 - Use this paragraph and figures when the entire project is off of the Reservation but within the MOU Exhibit A boundary. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the following four calculations:

\$1 to \$500,000 of Contract Amount × 1.00% = _____

\$500,001 to \$999,999 of Contract Amount × 0.75% = _____

Insert Project Name Here

\$1,000,000 to \$1,999,999 of Contract Amount $\times$ 0.50% ... = _____

\$2,000,000 up to the full Contract Amount $\times$ 0.25% = _____

Total COMPLIANCE FEE for this Project is: = _____

*[Option 3 - Use this paragraph and figures when a portion of the project is on the Reservation and a portion is outside the Reservation but within the MOU Exhibit A boundary. **DO NOT** fill in the blanks.]*

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the (1) On Reservation Compliance Fee and (2) Exhibit A boundary Compliance Fee:

(1) Contract Amount on Reservation

Total Contract Amount on Reservation $\times$ 2.5%..... = _____

Total on Reservation COMPLIANCE FEE is: = _____

(2) Contract Amount within Exhibit A boundary and off Reservation

\$1 to \$500,000 of Contract Amount off Reservation
but within Exhibit A boundary $\times$ 1.00% = _____

\$500,001 to \$999,999 of Contract Amount off Reservation
but within Exhibit A boundary $\times$ 0.75% = _____

\$1,000,000 to \$1,999,999 of Contract Amount off Reservation
but within Exhibit A boundary $\times$ 0.50% = _____

\$2,000,000 up to the full Contract Amount off Reservation but within
Exhibit A boundary up to the full Contract Amount $\times$ 0.25% = _____

Total Exhibit A boundary COMPLIANCE FEE is: = _____

Total COMPLIANCE FEE ((1) + (2)) for this Project is: = _____

*[Option 4 - Use this paragraph and figures when the project is not on the Reservation but is within and outside the MOU Exhibit A boundary. **DO NOT** fill in the blanks.]*

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the following four calculations:

\$1 to \$500,000 of Contract Amount
within Exhibit A boundary $\times$ 1.00% = _____

\$500,001 to \$999,999 of Contract Amount
within Exhibit A boundary $\times$ 0.75% = _____

\$1,000,000 to \$1,999,999 of Contract Amount
within Exhibit A boundary $\times$ 0.50% = _____

\$2,000,000 up to the full Contract Amount within Exhibit A
boundary up to the full Contract Amount $\times$ 0.25% = _____

Insert Project Name Here

Total COMPLIANCE FEE for this Project is: = _____

Insert Project Name Here

SP00045-TERO-CTUIR (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25

Last updated: 01-14-25)

INDIAN EMPLOYMENT GOALS AND COMPLIANCE FEE

(Use this specification for Indian goals and fees on Federal-Aid highway projects that are within the Confederated Tribes of the Umatilla Indian Reservation in whole or in part or within the MOU Boundary shown in Exhibit A of the MOU. This applies on all Federal-Aid highway projects in the Exhibit A, MOU Boundary area (also the NEACT area), regardless of value of Indian Employment Preference Goal)

Indian Employment Preference Goal

The assigned Indian Employment Preference goal for this Project is _____ %

Compliance Fee

As established in separate Memorandum of Understanding (MOU) with the Confederated Tribes of the Umatilla Indian Reservation (CTUIR) a project in which any work takes place within reservation boundary or within the TERO boundary is subject to a TERO compliance fee. The TERO boundary is described in Exhibit A to the MOU.

(Use one of the following compliance fee paragraphs and figures based on the location of the project and or the goal. Delete the ones that do not apply.)

[Option 1 - Use the following paragraphs when the Indian Employment Preference Goal is 0% and the entire project is off of the Reservation but within the MOU Exhibit A boundary.]

The Contractor is required to pay a one-time fee of \$1,000.

Total COMPLIANCE FEE for this Project is: \$1,000.00

(Use one of the following compliance fee paragraphs and figures based on the location of the project. Delete the ones that do not apply.)

[Option 2 - Use this paragraph and figure when the entire project is within the Reservation. DO NOT fill in the blank.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculation to determine the fee. The Compliance Fee for this Project is this calculation:

Total Contract Amount of \$25,000 - \$99,999 x 4%..... = _____

Total Contract Amount of \$100,000 – \$999,999 x 3% = _____

Total Contract Amount of \$1,000,000 - \$9,999,999 × 2.0% = _____

Total Contract Amount of \$10,000,000 or more x 1.0% ... = _____

Insert Project Name Here

Per Section 6.03.B. of the CTUIR TERO CODE, the maximum fee is \$500,000. There is no fee for projects under \$25,000.

Total COMPLIANCE FEE for this Project is: = _____

[Option 3 - Use this paragraph and figures when the entire project is off of the Reservation but within the MOU Exhibit A boundary when the Indian Employment Preference Goal is greater than 0%. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the following four calculations:

First \$500,000 of Contract Amount × 1.00% = _____

Next \$500,000 of Contract Amount × 0.75% = _____

Next \$1,000,000 (\$1 million to \$2 million) × 0.50% = _____

Remaining dollar amount up to the
full Contract Amount × 0.25% = _____

Total COMPLIANCE FEE for this Project is: = _____

[Option 4 - Use this paragraph and figures when a portion of the project is on the Reservation and a portion is outside the Reservation but within the MOU Exhibit A boundary and when the Indian Employment Preference Goal is greater than 0%. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the (1) On Reservation Compliance Fee and (2) Exhibit A boundary Compliance Fee:

(1) Contract Amount on Reservation

Total Contract Amount of \$25,000 - \$99,999 × 4%..... = _____

Total Contract Amount of \$100,000 – \$999,999 × 3% = _____

Total Contract Amount of \$1,000,000 - \$9,999,999 × 2.0% = _____

Total Contract Amount of \$10,000,000 or more × 1.0%..... = _____

Total on Reservation COMPLIANCE FEE is: = _____

(2) Contract Amount within Exhibit A boundary and off Reservation

First \$500,000 of Contract Amount off Reservation
but within Exhibit A boundary × 1.00% = _____

Next \$500,000 of Contract Amount off Reservation
but within Exhibit A boundary × 0.75% = _____

Next \$1,000,000 (\$1 million to \$2 million) off Reservation
but within Exhibit A boundary × 0.50% = _____

Remaining dollar amount off Reservation but within
Exhibit A boundary up to the full Contract Amount × 0.25% = _____

Total Exhibit A boundary COMPLIANCE FEE is: = _____

Insert Project Name Here

Total COMPLIANCE FEE ((1) + (2)) for this Project is: = _____

[Option 5 - Use this paragraph and figures when the project is not on the Reservation but is within and outside the MOU Exhibit A boundary and when the Indian Employment Preference Goal is greater than 0%. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the following four calculations:

First \$500,000 of Contract Amount
within Exhibit A boundary × 1.00% = _____

Next \$500,000 of Contract Amount
within Exhibit A boundary × 0.75% = _____

Next \$1,000,000 (\$1 million to \$2 million)
within Exhibit A boundary × 0.50% = _____

Remaining dollar amount within Exhibit A
boundary up to the full Contract Amount × 0.25% = _____

Total COMPLIANCE FEE for this Project is: = _____

Insert Project Name Here

SP00046-TERO-CTWS (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25

Last updated: 01-14-25)

INDIAN EMPLOYMENT GOALS AND COMPLIANCE FEE

(Use this specification for Indian goals and fees on Federal-Aid highway projects that are within the Confederated Tribes of Warm Springs Reservation in whole or in part or within the MOU Boundary shown in Exhibit A of the MOU and have an Indian Employment Preference Goal. This only applies to the list of Federal-Aid highway projects that ODOT and the Tribe have agreed to.)

Indian Employment Preference Goal

The assigned Indian Employment Preference goal for this Project is _____ %

Compliance Fee

As established in separate Memorandum of Understanding (MOU) with the Confederated Tribes of the Warm Springs Indian Reservation (CTWS) a project in which any work takes place within reservation boundary or within the TERO boundary may be subject to a TERO compliance fee. The TERO boundary is described in Exhibit A to the MOU.

(Use one of the following compliance fee paragraphs and figures based on the location of the project. Delete the ones that do not apply.)

[Option 1 - Use this paragraph and figure when the entire project is within the Reservation. DO NOT fill in the blank.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculation to determine the fee. The Compliance Fee for this Project is this calculation*:

Total Contract Amount* x 2.5% = _____

Total COMPLIANCE FEE for this Project is: = _____

* Per Section 3.10.A. of the Confederated Tribes of the Warm Springs Indian Reservation Tribal Employment Rights Ordinance, there is no fee for contracts less than \$10,000.

[Option 2 - Use this paragraph and figures when the entire project is off of the Reservation but within the MOU Exhibit A boundary. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the following four calculations:

\$1 to \$500,000 of Contract Amount × 1.00% = _____

\$500,001 to \$999,999 of Contract Amount × 0.75% = _____

\$1,000,000 to \$1,999,999 of Contract Amount × 0.50% .. = _____

Insert Project Name Here

\$2,000,000 up to the full Contract Amount $\times 0.25\%$ = _____

Total COMPLIANCE FEE for this Project is: = _____

[Option 3 - Use this paragraph and figures when a portion of the project is on the Reservation and a portion is outside the Reservation but within the MOU Exhibit A boundary. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the (1) On Reservation Compliance Fee and (2) Exhibit A boundary Compliance Fee:

(1) Contract Amount on Reservation

Total Contract Amount on Reservation $\times 2.5\%$ = _____

Total on Reservation COMPLIANCE FEE is: = _____

(2) Contract Amount within Exhibit A boundary and off Reservation

\$1 to \$500,000 of Contract Amount off Reservation
but within Exhibit A boundary $\times 1.00\%$ = _____

\$500,001 to \$999,999 of Contract Amount off Reservation
but within Exhibit A boundary $\times 0.75\%$ = _____

\$1,000,000 to \$1,999,999 of Contract Amount off Reservation
but within Exhibit A boundary $\times 0.50\%$ = _____

\$2,000,000 up to the full Contract Amount off Reservation but within
Exhibit A boundary up to the full Contract Amount $\times 0.25\%$ = _____

Total Exhibit A boundary COMPLIANCE FEE is: = _____

Total COMPLIANCE FEE ((1) + (2)) for this Project is: = _____

[Option 4 - Use this paragraph and figures when the project is not on the Reservation but is within and outside the MOU Exhibit A boundary. DO NOT fill in the blanks.]

The Contractor is required to determine the compliance fee for this Project. Use the following calculations to determine the fee. The Compliance Fee for this Project is the summation of the following four calculations:

\$1 to \$500,000 of Contract Amount
within Exhibit A boundary $\times 1.00\%$ = _____

\$500,001 to \$999,999 of Contract Amount
within Exhibit A boundary $\times 0.75\%$ = _____

\$1,000,000 to \$1,999,999 of Contract Amount
within Exhibit A boundary $\times 0.50\%$ = _____

\$2,000,000 up to the full Contract Amount within Exhibit A
boundary up to the full Contract Amount $\times 0.25\%$ = _____

Total COMPLIANCE FEE for this Project is: = _____

Insert Project Name Here

SP00058-RRS (Special Provisions for the 2024 Book) (Bidding on or after: 05-01-25
Last updated: 01-14-25
This Section requires SP00170.)

(Use this specification for Railroad involvement when Railroad Insurance and Liability Coverage is NOT required. Fill in the blank below with the appropriate railroad company. Obtain all the "fill in the blanks" identified as " " from ODOT's State Utility and Railroad Liaison. Check with the State Utility and Railroad Liaison or State Specifications Engineer before using this specification. Do not make any other changes.)

_____ COMPANY

CONTRACTOR REQUIREMENTS

1.01 General

1.01.01 The Contractor shall cooperate with enter Railroad Company name here hereinafter referred to as "Railway" where work is over, under, on, or adjacent to Railway property and/or right-of-way, hereafter referred to as "Railway Property", during the construction of enter project name here.

1.01.02 The Contractor shall plan, schedule and conduct all work activities so as not to interfere with the movement of any trains on Railway Property.

1.01.03 The Contractor is subject to the absolute right of Railway to cause the Contractor's work above Railway Property to cease if, in the opinion of Railway, the Contractor's activities create a hazard to Railway Property, employees, and/or operations.

1.01.04 The Contractor shall notify the Agency Project Manager and notify the Railway's enter Title and name of RR representative here at enter RR phone No. here, at least 30 working days before commencing any work on Railway Property. The Contractor's notification to Railway, shall refer to enter project name here.

1.01.05 Subject to the movement of Railway's trains, Railway will cooperate with the Contractor such that the work may be handled and performed in an efficient manner. The Contractor shall have no claim whatsoever for any type of damages or for extra or additional compensation in the event the Contractor's work is delayed by the Railway.

1.02 Railway Requirements

1.02.01 The Contractor shall take protective measures as necessary to keep Railway facilities, including track ballast, free of sand, debris, and other foreign objects and materials resulting from the Contractor's operations. Any damage to Railway facilities resulting from the Contractor's operations will be repaired or replaced by Railway and the cost of such repairs or replacement shall be paid for by the Contractor.

(Use the following subsection 1.02.02 when blasting operations may be required.)

1.02.02 The Contractor shall notify the Railway's enter Title and name of RR representative here at enter RR phone No. here and provide blasting plans to the Railway for review 7 Calendar Days prior to conducting any blasting operations adjacent to or on Railway Property.

Use the following subsection 1.03 and corresponding subsections when flagging services are required.)

1.03 Protection of Railway Facilities and Railway Flagger Services

1.03.01 The Contractor shall give a minimum of enter days here Calendar Days' notice to the enter Title and name of RR representative here at enter RR phone No. here, in advance of when flagging services will be required.

1.03.02 Railway flagger services will be required insert appropriate information here such as " during the installation of the traffic signal poles...", but not limited thereto for the following conditions:

1.03.02a When in the opinion of the Railway representative it is necessary to safeguard Railway Property, employees, trains, engines and facilities.

1.03.02b When any excavation is performed below the bottom of tie elevation, if, in the opinion of Railway representative, track or other Railway facilities may be subject to movement or settlement.

1.03.02c When work in any way interferes with the safe operation of trains at timetable speeds.

1.03.02d When any hazard is presented to Railway track, communications, signal, electrical, or other facilities either due to persons, material, equipment or blasting in the vicinity.

1.03.02e Special permission shall be obtained from the Railway before moving heavy or cumbersome objects or equipment which might result in making the track impassable.

1.03.03 Flagging services shall be performed by qualified Railway flaggers.

1.03.03a Flagging crew generally consists of one employee. However, additional personnel may be required to protect Railway Property and operations, if deemed necessary by the Railway representative.

1.03.03b Each time a flagger is called, the minimum period for billing shall be the eight hour basic day.

1.03.03c The cost of flagger services provided by the Railway, when deemed necessary by the Railway representative, will be borne by ODOT according to 00170.01(e).

SP00060_RR_BNSF (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25)

Last updated: 01-14-25)

***This Section requires
SP00170.)***

(Use this when Burlington Northern Santa Fe Railway is within project limits. The included requirements and exhibits are for information and reference only. Do not make any modifications to this document.)

BURLINGTON NORTHERN SANTA FE RAILWAY COMPANY

Exhibit C: Contractor Requirements

Exhibit C-1

The following Burlington Northern Santa Fe (BNSF) Railway exhibits are included in this Project for information and reference only. The actual Exhibit C: Contractor Requirements and Exhibit C-1 will be provided and executed by the Burlington Northern Santa Fe Railway Company.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the railway agreement according to 00170.01(e). BNSF requires a temporary occupancy permit at the following website: <https://bnsf.railpermitting.com>.

The Contractor shall review and comply with the following documents as applicable located at <https://www.bnsf.com/in-the-community/public-projects/public-projects.page> :

- *Public Projects Manual*
- *UPRR-BNSF Joint Guidelines for Railroad Grade Separated Projects*
- *Utility Accommodation Policy*
- *Demolition Guidelines*
- *Shoring Guidelines*

In addition, when Railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).



EXHIBIT "C"

CONTRACTOR REQUIREMENTS

1.01 General:

- 1.01.01 The Contractor must cooperate with BNSF RAILWAY COMPANY, hereinafter referred to as "Railway" where work is over or under on or adjacent to railway property and/or right-of-way, hereafter referred to as "Railway Property", during the construction of _____.
- 1.01.02 The Contractor must execute and deliver to the Railway duplicate copies of the Exhibit "C-1" Agreement, in the form attached hereto, obligating the Contractor to provide and maintain in full force and effect the insurance called for under Section 3 of said Exhibit "C-1". Questions regarding procurement of the Railroad Protective Liability Insurance should be directed to Rosa Martinez at Marsh, USA, 214-303-8511.
- 1.01.03 The Contractor must plan, schedule and conduct all work activities so as not to interfere with the movement of any train on Railway Property.
- 1.01.04 The Contractor's right to enter Railway's Property is subject to the absolute right of Railway to cause the Contractor's work on Railway's Property to cease if, in the opinion of Railway, Contractor's activities create a hazard to Railway's Property, employees, and/or operations. Railway will have the right to stop construction work on the Project if any of the following events take place: (i) Contractor (or any of its subcontractors) performs the Project work in a manner inconsistent with the plans and specifications approved by Railway; (ii) Contractor (or any of its subcontractors) in Railway's opinion, prosecutes the Project work in a manner which is hazardous to Railway's Property, facilities or the safe and expeditious movement of railroad traffic; (iii) the insurance described in the attached Exhibit C-1 is canceled during the course of the Project; or (iv) Contractor fails to pay Railway for the Temporary Construction License or the Easement. The work stoppage will continue until all necessary actions are taken by Contractor or its subcontractor to rectify the situation to the satisfaction of Railway's Division Engineer or until additional insurance has been delivered to and accepted by Railway. In the event of a breach of (i) this Agreement, (ii) the Temporary Construction License, or (iii) the Easement, Railway may immediately terminate the Temporary Construction License or the Easement. Any such work stoppage under this provision will not give rise to any liability on the part of Railway. Railway's right to stop the work is in addition to any other rights Railway may have including, but not limited to, actions or suits for damages or lost profits. In the event that Railway desires to stop construction work on the Project, Railway agrees to immediately notify the following individual in writing:



- 1.01.05 The Contractor is responsible for determining and complying with all Federal, State and Local Governmental laws and regulations, including, but not limited to environmental laws and regulations (including but not limited to the Resource Conservation and Recovery Act, as amended; the Clean Water Act, the Oil Pollution Act, the Hazardous Materials Transportation Act, CERCLA), and health and safety laws and regulations. The Contractor hereby indemnifies, defends and holds harmless Railway for, from and against all fines or penalties imposed or assessed by Federal, State and Local Governmental Agencies against the Railway which arise out of Contractor's work under this Agreement.
- 1.01.06 The Contractor must notify (Agency) at _____ and Railway's Manager Public Projects, telephone number (_____) at least thirty (30) calendar days before commencing any work on Railway Property. Contractor's notification to Railway must refer to Railway's file _____.
- 1.01.07 For any bridge demolition and/or falsework above any tracks or any excavations located with any part of the excavations located within, whichever is greater, twenty-five (25) feet of the nearest track or intersecting a slope from the plane of the top of rail on a 2 horizontal to 1 vertical slope beginning at eleven (11) feet from centerline of the nearest track, both measured perpendicular to center line of track, the Contractor must furnish the Railway five sets of working drawings showing details of construction affecting Railway Property and tracks. The working drawing must include the proposed method of installation and removal of falsework, shoring or cribbing, not included in the contract plans and two sets of structural calculations of any falsework, shoring or cribbing. For all excavation and shoring submittal plans, the current "BNSF-UPRR Guidelines for Temporary Shoring" must be used for determining the design loads, conditions to be used in shoring design, and all calculations and submittals must be in accordance with the current "BNSF-UPRR Guidelines for Temporary Shoring". All submittal drawings and calculations must be stamped by a registered professional engineer licensed to practice in the state the project is located. All calculations must take into consideration railway surcharge loading and must be designed to meet American Railway Engineering and Maintenance-of-Way Association (previously known as American Railway Engineering Association) Coopers E-80 live loading standard. All drawings and calculations must be stamped by a registered professional engineer licensed to practice in the state the project is located. The Contractor must not begin work until notified by the Railway that plans have been approved. The Contractor will be required to use lifting devices such as cranes and/or winches to place or to remove any falsework over Railway's tracks. In no case will the Contractor be relieved of responsibility for results obtained by the implementation of said approved plans.
- 1.01.08 Subject to the movement of Railway's trains, Railway will cooperate with the Contractor such that the work may be handled and performed in an efficient manner. The Contractor will have no claim whatsoever for any type of damages or for extra or additional compensation in the event his work is delayed by the Railway.

1.02 Contractor Safety Orientation



- 1.02.01 No employee of the Contractor, its subcontractors, agents or invitees may enter Railway Property without first having completed Railway's Engineering Contractor Safety Orientation, found on the web site www.BNSFContractor.com. The Contractor must ensure that each of its employees, subcontractors, agents or invitees completes Railway's Engineering Contractor Safety Orientation through internet sessions before any work is performed on the Project. Additionally, the Contractor must ensure that each and every one of its employees, subcontractors, agents or invitees possesses a card certifying completion of the Railway Contractor Safety Orientation before entering Railway Property. The Contractor is responsible for the cost of the Railway Contractor Safety Orientation. The Contractor must renew the Railway Contractor Safety Orientation annually. Further clarification can be found on the web site or from the Railway's Representative.

1.03 Railway Requirements

- 1.03.01 The Contractor must take protective measures as necessary to keep railway facilities, including track ballast, free of sand, debris and other foreign objects and materials resulting from his operations. Any damage to railway facilities resulting from Contractor's operations will be repaired or replaced by Railway and the cost of such repairs or replacement must be paid for by the Agency.
- 1.03.02 The Contractor must notify the Railway's Division Engineer at () and provide blasting plans to the Railway for review seven (7) calendar days prior to conducting any blasting operations adjacent to or on Railway's property.
- 1.03.03 The Contractor must abide by the following temporary clearances during construction:
 - 15'-0" Horizontally from centerline of nearest track
 - 21'-6" Vertically above top of rail
 - 27'-0" Vertically above top of rail for electric wires carrying less than 750 volts
 - 28'-0" Vertically above top of rail for electric wires carrying 750 volts to 15,000 volts
 - 30'-0" Vertically above top of rail for electric wires carrying 15,000 volts to 20,000 volts
 - 34'-0" Vertically above top of rail for electric wires carrying more than 20,000 volts
- 1.03.04 Upon completion of construction, the following clearances shall be maintained:
[Note to Drafter: The vertical clearance should mirror the final negotiated design clearance]
 - 25' Horizontally from centerline of nearest track
 - 23' 6" Vertically above top of rail
- 1.03.05 Any infringement within State statutory clearances due to the Contractor's operations must be submitted to the Railway and to the (Agency) and must not be undertaken until approved in writing by the Railway, and until the (Agency) has obtained any necessary authorization from the State Regulatory Authority for the infringement. No extra compensation



will be allowed in the event the Contractor's work is delayed pending Railway approval, and/or the State Regulatory Authority's approval.

- 1.03.06 In the case of impaired vertical clearance above top of rail, Railway will have the option of installing tell-tales or other protective devices Railway deems necessary for protection of Railway operations. The cost of tell-tales or protective devices will be borne by the Agency.
- 1.03.07 The details of construction affecting the Railway's Property and tracks not included in the contract plans must be submitted to the Railway by **(Agency)** for approval before work is undertaken and this work must not be undertaken until approved by the Railway.
- 1.03.08 At other than public road crossings, the Contractor must not move any equipment or materials across Railway's tracks until permission has been obtained from the Railway. The Contractor must obtain a "Temporary Construction Crossing Agreement" from the Railway prior to moving his equipment or materials across the Railway's tracks. The temporary crossing must be gated and locked at all times when not required for use by the Contractor. The temporary crossing for use of the Contractor will be constructed and, at the completion of the project, removed at the expense of the Contractor.
- 1.03.09 Discharge, release or spill on the Railway Property of any hazardous substances, oil, petroleum, constituents, pollutants, contaminants, or any hazardous waste is prohibited and Contractor must immediately notify the **Railway's Resource Operations Center at 1(800) 832-5452**, of any discharge, release or spills in excess of a reportable quantity. Contractor must not allow Railway Property to become treatment, storage or transfer facility as those terms are defined in the Resource Conservation and Recovery Act or any state analogue.
- 1.03.10 The Contractor upon completion of the work covered by this contract, must promptly remove from the Railway Property all of Contractor's tools, equipment, implements and other materials whether brought upon said property by said Contractor or any Subcontractor, employee, agent or contractor or of any Subcontractor, and must cause Railway's Property to be left in a condition acceptable to the Railway's representative.

1.04 Contractor Roadway Worker on Track Safety Program and Safety Action Plan:

- 1.04.01 Each Contractor that will perform work within 25 feet of the centerline of a track must develop and implement a Roadway Worker Protection/On Track Safety Program and work with Railway Project Representative to develop an on track safety strategy as described in the guidelines listed in the on track safety portion of the Safety Orientation. This Program must provide Roadway Worker protection/on track training for all employees of the Contractor, its subcontractors, agents or invitees. This training is reinforced at the job site through job safety briefings. Additionally, each Contractor must develop and implement the Safety Action Plan, as provided for on the web site www.BNSFContractor.com, which will be made available to Railway prior to commencement of any work on Railway Property. During the performance of work, the Contractor must audit its work activities. The Contractor must designate an on-site Project Supervisor who will serve as the contact person for the Railway and who will maintain a copy of the Safety Action Plan, safety audits, and Material Safety



Datasheets (MSDS), at the job site.

- **1.04.02** Contractor shall have a background investigation performed on all of its employees, subcontractors and agents who will be performing any services for Railroad under this Agreement which are determined by Railroad in its sole discretion a) to be on Railroad's property, or b) that require access to Railroad Critical Infrastructure, Railroad Critical Information Systems, Railroad's Employees, Hazardous Materials on Railroad's property or is being transported by or otherwise in the custody of Railroad, or Freight in Transit involving Railroad.

The required background screening shall at a minimum meet the rail industry background screening criteria defined by the e-RAILSAFE Program as outlined at www.verifile.com, in addition to any other applicable regulatory requirements.

Contractor shall obtain written consent from all its employees, subcontractors or agents screened in compliance with the e-RAILSAFE Program to participate in the Program on their behalf and to release completed background information to Railroad's designee. Contractor shall be subject to periodic audit to ensure compliance.

Contractor subject to the e-RAILSAFE Program hereunder shall not permit any of its employees, subcontractors or agents to perform services hereunder who are not first approved under e-RAILSAFE Program standards. Railroad shall have the right to deny entry onto its premises or access as described in this section above to any of Contractor's employees, subcontractors or agents who do not display the authorized identification badge issued by a background screening service meeting the standards set forth in the e-RAILSAFE Program, or who in Railroad's opinion, which may not be unreasonable, may pose a threat to the safety or security of Railroad's operations, assets or personnel.

Contractors shall be responsible for ensuring that its employees, subcontractors and agents are United States citizens, legally working in the United States under a lawful and appropriate work VISA or other work authorization.

1.05 Railway Flagger Services:

- **1.05.01** The Contractor must give Railway's Roadmaster (telephone _____) a minimum of thirty (30) calendar days advance notice when flagging services will be required so that the Roadmaster can make appropriate arrangements (i.e., bulletin the flagger's position). If flagging services are scheduled in advance by the Contractor and it is subsequently determined by the parties hereto that such services are no longer necessary, the Contractor must give the Roadmaster five (5) working days advance notice so that appropriate arrangements can be made to abolish the position pursuant to union requirements.
- **1.05.02** Unless determined otherwise by Railway's Project Representative, Railway flagger will be required and furnished when Contractor's work activities are located over, under and/or within twenty-five (25) feet measured horizontally from centerline of the nearest track and



when cranes or similar equipment positioned beyond 25-feet from the track centerline could foul the track in the event of tip over or other catastrophic occurrence, but not limited thereto for the following conditions:

- 1.05.02a When, upon inspection by Railway's Representative, other conditions warrant.
- 1.05.02b When any excavation is performed below the bottom of tie elevation, if, in the opinion of Railway's representative, track or other Railway facilities may be subject to movement or settlement.
- 1.05.02c When work in any way interferes with the safe operation of trains at timetable speeds.
- 1.05.02d When any hazard is presented to Railway train communications, signal, electrical, or other facilities either due to persons, machinery, equipment or blasting in the vicinity.
- 1.05.02e Special permission must be obtained from the Railway before moving heavy or cumbersome objects or equipment which might result in making the track impassable.
- 1.05.03 Flagging services will be performed by qualified Railway flaggers.
 - 1.05.03a Flagging crew generally consists of one employee. However, additional personnel may be required to protect Railway Property and operations, in event necessary by the Railways Representative.
 - 1.05.03b Each time a flagger is called, the minimum period for billing will be the eight (8) hour basic day.
 - 1.05.03c The cost of flagger services provided by the Railway will be borne by Agreement. The estimated cost for one (1) flagger is approximately between \$800.00 and \$1,600.00 for an eight (8) hour basic day with time and one-half or double time for overtime, rest days and holidays. The estimated cost for each flagger includes vacation allowance, paid holidays, Railway and unemployment insurance, public liability and property damage insurance, health and welfare benefits, vehicle, transportation, meals, lodging, radio, equipment, supervision and other costs incidental to performing flagging services. Negotiations for Railway labor or collective bargaining agreements and rate changes authorized by appropriate Federal authorities may increase actual or estimated flagging rates. **THE FLAGGING RATE IN EFFECT AT THE TIME OF PERFORMANCE BY THE CONTRACTOR HEREUNDER WILL BE USED TO CALCULATE THE ACTUAL COSTS OF FLAGGING PURSUANT TO THIS PARAGRAPH.**
 - 1.05.03d The average train traffic on this route is _____ freight trains per 24-hour period at a timetable speed _____ MPH and _____ passenger trains at a timetable speed of _____ MPH.

1.06 Contractor General Safety Requirements

- 1.06.01 Work in the proximity of railway track(s) is potentially hazardous where movement of trains and equipment can occur at any time and in any direction. All work performed by contractors within 25 feet of any track must be in compliance with FRA Roadway Worker Protection Regulations.
- 1.06.02 Before beginning any task on Railway Property, a thorough safety briefing must be conducted with all personnel involved with the task and repeated when the personnel or task changes. If the task is within 25 feet of any track, the job briefing must include the Railway's flagger, as applicable, and include the procedures the Contractor will use to protect its employees, subcontractors, agents or invitees from moving any equipment adjacent to or across any Railway track(s).
- 1.06.03 Workers must not work within 25 feet of the centerline of any track without an on track safety strategy approved by the Railway's Project Representative. When authority is provided, every contractor employee must know: (1) who the flagger is, and how to contact the flagger, (2) limits of the authority, (3) the method of communication to stop and resume work, and (4) location of the designated places of safety. Persons or equipment entering flag/work limits that were not previously job briefed, must notify the flagger immediately, and be given a job briefing when working within 25 feet of the center line of track.
- 1.06.04 When Contractor employees are required to work on the Railway Property after normal working hours or on weekends, the Railway's representative in charge of the project must be notified. A minimum of two employees must be present at all times.
- 1.06.05 Any employees, agents or invitees of Contractor or its subcontractors under suspicion of being under the influence of drugs or alcohol, or in the possession of same, will be removed from the Railway's Property and subsequently released to the custody of a representative of Contractor management. Future access to the Railway's Property by that employee will be denied.
- 1.06.06 Any damage to Railway Property, or any hazard noticed on passing trains must be reported immediately to the Railway's representative in charge of the project. Any vehicle or machine which may come in contact with track, signal equipment, or structure (bridge) and could result in a train derailment must be reported immediately to the Railway representative in charge of the project and to the Railway's Resource Operations Center at 1(800) 832-5452. Local emergency numbers are to be obtained from the Railway representative in charge of the project prior to the start of any work and must be posted at the job site.
- 1.06.07 For safety reasons, all persons are prohibited from having pocket knives, firearms or other deadly weapons in their possession while working on Railway's Property.
- 1.06.08 All personnel protective equipment (PPE) used on Railway Property must meet applicable OSHA and ANSI specifications. Current Railway personnel protective equipment requirements are listed on the web site, www.BNSFContractor.com, however, a partial list of the requirements include: a) safety glasses with permanently affixed side shields (no yellow



lenses); b) hard hats; c) safety shoe with: hardened toes, above-the-ankle lace-up and a defined heel; and d) high visibility retro-reflective work wear. The Railway's representative in charge of the project is to be contacted regarding local specifications for meeting requirements relating to hi-visibility work wear. Hearing protection, fall protection, gloves, and respirators must be worn as required by State and Federal regulations. (NOTE – Should there be a discrepancy between the information contained on the web site and the information in this paragraph, the web site will govern.)

- **1.06.09 THE CONTRACTOR MUST NOT PILE OR STORE ANY MATERIALS, MACHINERY OR EQUIPMENT CLOSER THAN 25'-0" TO THE CENTER LINE OF THE NEAREST RAILWAY TRACK. MATERIALS, MACHINERY OR EQUIPMENT MUST NOT BE STORED OR LEFT WITHIN 250 FEET OF ANY HIGHWAY/RAIL AT-GRADE CROSSINGS OR TEMPORARY CONSTRUCTION CROSSING. WHERE STORAGE OF THE SAME WILL OBSTRUCT THE VIEW OF A TRAIN APPROACHING THE CROSSING. PRIOR TO BEGINNING WORK, THE CONTRACTOR MUST ESTABLISH A STORAGE AREA WITH CONCURRENCE OF THE RAILWAY'S REPRESENTATIVE.**
- **1.06.10** Machines or vehicles must not be left unattended with the engine running. Parked machines or equipment must be in gear with brakes set and equipment with blade, pan or bucket, they must be lowered to the ground. All machinery and equipment left unattended on Railway's Property must be left inoperable and secured against movement. (See internet Engineering Contractor Safety Orientation program for more detailed specifications)
- **1.06.11** Workers must not create and leave any conditions at the work site that would interfere with water drainage. Any work performed over water must meet all Federal, State and Local regulations.
- **1.06.12** All power line wires must be considered dangerous and of high voltage unless informed to the contrary by proper authority. For all power lines the minimum clearance between the lines and any part of the equipment or load must be; 200 KV or below - 15 feet; 200 to 350 KV - 20 feet; 350 to 500 KV - 25 feet; 500 to 750 KV - 35 feet; and 750 to 1000 KV - 45 feet. If capacity of line is not known, a minimum clearance of 45 feet must be maintained. A person must be designated to observe clearance of the equipment and give a timely warning for all operations where it is difficult for an operator to maintain the desired clearance by visual means.

1.07 Excavation:

- **1.07.01** Before excavating, the Contractor must determine whether any underground pipe lines, electric wires, or cables, including fiber optic cable systems are present and located within the Project work area. The Contractor must determine whether excavation on Railway's Property could cause damage to buried cables resulting in delay to Railway traffic and disruption of service to users. Delays and disruptions to service may cause business interruptions involving loss of revenue and profits. Before commencing excavation, the Contractor must contact **BNSF's Field Engineering Representative ()**. All underground and overhead wires will be considered HIGH VOLTAGE and dangerous until verified with the company having ownership of the line. It is the Contractor's responsibility to notify any other companies that have underground utilities in the area and arrange



for the location of all underground utilities before excavating.

- **1.07.02** The Contractor must cease all work and notify the Railway immediately before continuing excavation in the area if obstructions are encountered which do not appear on drawings. If the obstruction is a utility and the owner of the utility can be identified, then the Contractor must also notify the owner immediately. If there is any doubt about the location of underground cables or lines of any kind, no work must be performed until the exact location has been determined. There will be no exceptions to these instructions.
- **1.07.03** All excavations must be conducted in compliance with applicable OSHA regulations and, regardless of depth, must be shored where there is any danger to tracks, structures or personnel.
- **1.07.04** Any excavations, holes or trenches on the Railway's Property must be covered, guarded and/or protected when not being worked on. When leaving work site areas at night and over weekends, the areas must be secured and left in a condition that ensure that Railway employees and other personnel who may be working or passing through the area are protected from all hazards. All excavations must be back filled as soon as possible.

1.08 Hazardous Waste, Substances and Material Reporting:

- **1.08.01** If Contractor discovers any hazardous waste, hazardous substance, petroleum or other deleterious material, including but not limited to any non-containerized commodity or material, on or adjacent to Railway's Property, or near any surface water, swamp, wetlands or waterways, while performing any work under this Agreement, Contractor must immediately: (a) notify the Railway's Resource Operations Center at 1(800) 832-5452, of such discovery; (b) take safeguards necessary to protect employees, subcontractors, agents and/or third parties; and (c) exercise due care with respect to the release, including the taking of any appropriate measures to minimize the impact of such release.

1.09 Personal Injury Reporting

- **1.09.01** The Railway is required to report certain injuries as a part of compliance with Federal Railroad Administration (FRA) reporting requirements. Any personal injury sustained by an employee of the Contractor, subcontractor or Contractor's invitees while on the Railway's Property must be reported immediately (by phone mail if unable to contact in person) to the Railway's representative in charge of the project. The Non-Employee Personal Injury Data Collection Form contained herein is to be completed and sent by Fax to the Railway at 1(817) 352-7595 and to the Railway's Project Representative no later than the close of shift on the date of the injury.



NON-EMPLOYEE PERSONAL INJURY DATA COLLECTION

(If injuries are in connection with rail equipment accident/incident, highway rail grade crossing accident or automobile accident, ensure that appropriate information is obtained, forms completed and that data entry personnel are aware that injuries relate to that specific event.)

Injured Person Type:

☐ Passenger on train (C)

☐ Non-employee (N)

(i.e., emp of another railroad, or, non-BNSF emp involved in vehicle accident including company vehicles)

☐ Contractor/safety sensitive (F)

☐ Contractor/non-safety sensitive (G)

☐ Volunteer/safety sensitive (H)

☐ Volunteer/non-safety sensitive (I)

☐ Non-trespasser (D) - to include highway users involved in highway rail grade crossing accidents who did not go around or through gates

☐ Trespasser (E) - to include highway users involved in highway rail grade crossing accidents who went around or through gates

☐ Non-trespasser (J) - Off railroad property

If train involved, Train #:

Transmit attached information to Accident/Incident Reporting Center by:

Fax 1-817-352-7595

by Phone 1-800-697-6736

or email to: Accident-Reporting.Center@BNSF.com

Officer Providing Information:

(Name)

(Employee No.)

(Phone #)

**REPORT PREPARED TO COMPLY WITH FEDERAL ACCIDENT REPORTING REQUIREMENTS AND PROTECTED FROM
DISCLOSURE PURSUANT TO 49 U.S.C. 20903 AND 83 U.S.C. 490**



NON-EMPLOYEE PERSONAL INJURY DATA COLLECTION

INFORMATION REQUIRED TO BE COLLECTED PURSUANT TO FEDERAL REGULATION. IT SHOULD BE USED FOR COMPLIANCE WITH FEDERAL REGULATIONS ONLY AND IT IS NOT INTENDED TO PRESUME ACCEPTANCE OF RESPONSIBILITY OR LIABILITY.

I. Accident City/St: _____ 2. Date: _____ Time: _____
County: _____ 3. Temperature: _____ 4. Weather: _____
(if non BNSF location)

Mile Post / Line Segment: _____

5. Driver's License No (and state) or other ID: _____ SSN (required): _____

6. Name (last, first, mi): _____

7. Address: _____ City: _____ St: _____ Zip: _____

8. Date of Birth: _____ and/or _____ Gender: _____
(if available)

Phone Number: _____ Employee: _____

9. Injury: _____ 10. Body Part: _____
(i.e., Laceration, etc.) (i.e., Hand, etc.)

II. Description of Accident (To include location, action, result, etc.): _____

12. Treatment:

☐ First Aid Only

☐ Required Medical Treatment

☐ Other Medical Treatment _____

13. Dr. Name: _____ Date: _____

14. Dr. Address:

Street: _____ City: _____ St: _____ Zip: _____

15. Hospital Name: _____

16. Hospital Address:

Street: _____ City: _____ St: _____ Zip: _____

17. Diagnosis: _____

REPORT PREPARED TO COMPLY WITH FEDERAL ACCIDENT REPORTING REQUIREMENTS
AND PROTECTED FROM DISCLOSURE PURSUANT TO 49 U.S.C. 20903 AND 83 U.S.C. 490



EXHIBIT "C-1"

Agreement Between BNSF RAILWAY COMPANY and the CONTRACTOR

Railway File: _____

Agency Project: _____

SUPPLIER LEGAL NAME [Insert contractor's legal name here] (hereinafter called "Contractor"), has entered into an agreement (hereinafter called "Agreement") dated _____, 201_, [***Drafter's Note: insert the date of the contract between the Agency and the Contractor here] with [Drafter's Note: insert the name of the Agency here] for the performance of certain work in connection with the following project: _____ Performance of such work will necessarily require Contractor to enter BNSF RAILWAY COMPANY (hereinafter called "Railway") right of way and property (hereinafter called "Railway Property"). The Agreement provides that no work will be commenced within Railway Property until the Contractor employed in connection with said work for [insert Agency name here] (i) executes and delivers to Railway an Agreement in the form hereof, and (ii) provides insurance of the coverage and limits specified in such Agreement and Section 3 herein. If the Agreement is executed by a party who is not the Owner, General Partner, President or Vice President of Contractor, Contractor must furnish evidence to Railway certifying that the signatory is empowered to execute this Agreement on behalf of Contractor.

Accordingly, in consideration of Railway granting permission to Contractor to enter upon Railway Property and as an inducement for such entry, Contractor, effective on the date of the Agreement, has agreed and does hereby agree with Railway as follows:



1) RELEASE OF LIABILITY AND INDEMNITY

Contractor hereby waives, releases, indemnifies, defends and holds harmless Railway for all judgments, awards, claims, demands, and expenses (including attorneys' fees), for injury or death to all persons, including Railway's and Contractor's officers and employees, and for loss and damage to property belonging to any person, arising in any manner from Contractor's or any of Contractor's subcontractors' acts or omissions or any work performed on or about Railway's property or right-of-way. **THE LIABILITY ASSUMED BY CONTRACTOR WILL NOT BE AFFECTED BY THE FACT THAT IT IS A FACT, THAT THE DESTRUCTION, DAMAGE, DEATH, OR INJURY WAS OCCASIONED BY OR CONTRIBUTED TO BY THE NEGLIGENCE OF RAILWAY, ITS AGENTS, SERVANTS, EMPLOYEES OR OTHERWISE, EXCEPT TO THE EXTENT THAT SUCH CLAIMS ARE PROXIMATELY CAUSED BY THE INTENTIONAL MISCONDUCT OR GROSS NEGLIGENCE OF RAILWAY.**

THE INDEMNIFICATION OBLIGATION ASSUMED BY CONTRACTOR INCLUDES ANY CLAIMS, SUITS OR JUDGMENTS BROUGHT AGAINST RAILWAY UNDER THE FEDERAL EMPLOYEE'S LIABILITY ACT, INCLUDING CLAIMS FOR STRICT LIABILITY UNDER THE SAFETY APPLIANCE ACT OR THE LOCOMOTIVE INSPECTION ACT WHENEVER SO CLAIMED.

Contractor further agrees, at its expense, in the name and on behalf of Railway, that it will adjust and settle all claims made against Railway, and will, at Railway's discretion, appear and defend any suits or actions of law or in equity brought against Railway on any claim or cause of action arising or growing out of or in any manner connected with any liability assumed by Contractor under this Agreement for which Railway is liable or is deemed to be liable. Railway will give notice to Contractor, in writing, of the receipt or dependency of such claims, and thereupon Contractor must proceed to adjust and handle to a conclusion such claims, and in the event of a suit being brought against Railway, Railway may forward summons and complaints or other process in connection therewith to Contractor, and Contractor, at Railway's discretion, must defend, adjust, or settle such suits and protect, indemnify, and save harmless Railway from and against all damages, judgments, decrees, attorney's fees, costs, and expenses growing out of or resulting from or incident to any such claims or suits.

In addition to any other provision of this Agreement, in the event that all or any portion of this Article shall be deemed to be inapplicable for any reason, including without limitation as a result of a decision of an applicable court, legislative enactment or regulatory order, the parties agree that this Article shall be interpreted as requiring Contractor to indemnify Railway to the fullest extent permitted by applicable law. **THROUGH THIS AGREEMENT THE PARTIES EXPRESSLY INTEND FOR CONTRACTOR TO INDEMNIFY RAILWAY FOR RAILWAY'S ACTS OF NEGLIGENCE.**

It is mutually understood and agreed that the assumption of liabilities and indemnification provided for in this Agreement survive any termination of this Agreement.

2) TERM

This Agreement is effective from the date of the Agreement until (i) the completion of the project set forth herein, and (ii) full and complete payment to Railway of any and all sums or other amounts owing and due hereunder.

3) INSURANCE

Contractor shall, at its sole cost and expense, procure and maintain during the life of this Agreement the following insurance coverage:

A. Commercial General Liability insurance. This insurance shall contain broad form contractual liability with a combined single limit of a minimum of \$2,000,000 each occurrence and an aggregate limit of at least \$4,000,000 but in no event less than the amount otherwise carried by the Contractor. Coverage must be purchased on a post 2004 ISO occurrence form or equivalent and include coverage for, but not limit to, the following:

- ◆ Bodily Injury and Property Damage
- ◆ Personal Injury and Advertising Injury
- ◆ Fire legal liability
- ◆ Products and completed operations

This policy shall also contain the following endorsements, which shall be indicated on the certificate of insurance:

- ◆ The definition of insured contract shall be amended to remove any exclusion or other limitation for any work being done within 50 feet of railroad property.
- ◆ Waiver of subrogation in favor of and acceptable to Railway.
- ◆ Additional insured endorsement in favor of and acceptable to Railway.
- ◆ Separation of insureds.



- ♦ The policy shall be primary and non-contributing with respect to any insurance carried by Railway.

It is agreed that the workers' compensation and employers' liability related exclusions in the Commercial General Liability insurance policy(s) required herein are intended to apply to employees of the policy holder and shall not apply to *Railway* employees.

No other endorsements limiting coverage as respects obligations under this Agreement may be included on the policy with regard to the work being performed under this Agreement.

B. Business Automobile Insurance. This insurance shall contain a combined single limit of at least \$1,000,000 per occurrence, and include coverage for, but not limited to the following:

- ♦ Bodily injury and property damage.
- ♦ Any and all vehicles owned, used or hired.

The policy shall also contain the following endorsements or language, which shall be indicated on the certificate of insurance.

- ♦ Waiver of subrogation in favor of and acceptable to Railway.
- ♦ Additional insured endorsement in favor of and acceptable to Railway.
- ♦ Separation of insureds.
- ♦ The policy shall be primary and non-contributing with respect to any insurance carried by Railway.

C. Workers Compensation and Employers Liability insurance including coverage for, but not limited to:

- ♦ Contractor's statutory liability under the worker's compensation laws of the state(s) in which the work is to be performed. If optional under State law, the insurance must cover all employees anyway.



- ◆ Employers' Liability (Part B) with limits of at least \$500,000 each accident, \$500,000 by disease policy limit, \$500,000 by disease each employee.

This policy shall also contain the following endorsements or language, which shall be indicated on the certificate of insurance:

- ◆ Waiver of subrogation in favor of and acceptable to Railway.
- A. Railroad Protective Liability insurance naming only the **Railway** as the Insured with coverage of at least \$2,000,000 per occurrence and \$6,000,000 in the aggregate. The policy Must be issued on a standard ISO form CG 00 35 12 04 and include the following:
- ◆ Endorsed to include the Pollution Exclusion amendment
 - ◆ Endorsed to include the Limited Damage and Pollution Endorsement.
 - ◆ Endorsed to remove any exclusion for punitive damages.
 - ◆ No other endorsements restricting coverage may be added.
 - ◆ The original policy must be provided to the **Railway** prior to performing any work or services under this Agreement.
 - ◆ Definition of "Physical Damage to Property" shall be endorsed to read: "means direct and accidental loss or damage to all property owned by any named insured and all property in any named insured's care, custody, and control arising out of the acts or omissions of the contractor named on the Declarations."

In lieu of providing a Railroad Protective Liability Policy, Licensee may participate (if available) in Railway's Blanket Railroad Protective Liability Insurance Policy.

Other Requirements:

Where allowable by law, all policies (applying to coverage listed above) shall contain no exclusion for punitive damages.



Contractor agrees to waive its right of recovery against *Railway* for all claims and suits against *Railway*. In addition, its insurers, through the terms of the policy or policy endorsement, waive their right of subrogation against *Railway* for all claims and suits. Contractor further waives its right of recovery, and its insurers also waive their right of subrogation against *Railway* for loss of its owned or leased property or property under Contractor's care, custody or control.

Allocated Loss Expense shall be in addition to all policy limits for coverages referenced above.

Contractor is not allowed to self-insure without the prior written consent of *Railway*. If granted by *Railway*, any self-insured retention or other financial responsibility for claims shall be covered directly by Contractor in lieu of insurance. Any and all *Railway* liabilities that would otherwise, in accordance with the provisions of this Agreement, be covered by Contractor's insurance will be covered as if Contractor elected not to include a deductible, self-insured retention or other financial responsibility for claims.

Prior to commencing services, Contractor shall furnish to *Railway* an acceptable certificate(s) of insurance from an authorized representative evidencing the required coverage(s), endorsements, and amendments. The certificate should be directed to the following address:

BNSF Railway Company
c/o CertFocus
P.O. Box 140528
Kansas City, MO 64114
Toll Free: 877-576-2378
Fax number: 817-840-7487
Email: BNSF@certfocus.com
www.certfocus.com

Contractor shall notify *Railway* in writing at least 30 days prior to any cancellation, non-renewal, substitution or material alteration.

Any insurance policy shall be written by a reputable insurance company acceptable to *Railway* or with a current Best's Guide Rating of A- and Class VII or better, and authorized to do business in the state(s) in which the service is to be provided.



If coverage is purchased on a "claims made" basis, Contractor hereby agrees to maintain coverage in force for a minimum of three years after expiration, cancellation or termination of this Agreement. Annually Contractor agrees to provide evidence of such coverage as required hereunder.

Contractor represents that this Agreement has been thoroughly reviewed by Contractor's insurance agent(s)/broker(s), who have been instructed by Contractor to procure the insurance coverage required by this Agreement.

Not more frequently than once every five years, *Railway* may reasonably modify the required insurance coverage to reflect then-current risk management practices of the railroad industry and underwriting practices in the insurance industry.

If any portion of the operation is to be subcontracted by Contractor, Contractor shall require that the subcontractor shall provide and maintain insurance coverage(s) as set forth herein, naming *Railway* as an additional insured, and shall require that the subcontractor shall release, defend and indemnify *Railway* to the same extent and under the same terms and conditions as Contractor is required to release, defend and indemnify *Railway* herein.

Failure to provide evidence as required by this section shall entitle, but not require, *Railway* to terminate this Agreement immediately. A certificate of a certificate that does not comply with this section shall not operate as a waiver of Contractor's obligations hereunder.

The fact that insurance (including, without limitation, self-insurance) is obtained by Contractor shall not be deemed to release or diminish the liability of Contractor including, without limitation, liability under the indemnity provisions of this Agreement. Damages recoverable by *Railway* shall not be limited by the amount of the required insurance coverage.

In the event of a claim or lawsuit involving *Railway* arising out of this agreement, Contractor will make available any required policy covering such claim or lawsuit.

These insurance provisions are intended to be a separate and distinct obligation on the part of the Contractor. Therefore, these provisions shall be enforceable and Contractor shall be bound thereby.



regardless of whether or not indemnity provisions are determined to be enforceable in the jurisdiction in which the work covered hereunder is performed.

For purposes of this section, *Railway* shall mean "Burlington Northern Santa Fe LLC", "BNSF Railway Company" and the subsidiaries, successors, assigns and affiliates of each.

4) SALES AND OTHER TAXES

In the event applicable sales taxes of a state or political subdivision of a state of the United States are levied or assessed in connection with and directly related to any amounts invoiced by Contractor to Railway ("Sales Taxes"), Railway shall be responsible for paying only the Sales Taxes that Contractor separately states on the invoice or other billing documents provided to Railway; *provided, however*, that (i) nothing herein shall preclude Railway from claiming whatever Sales Tax exemptions are applicable to amounts Contractor bills Railway, (ii) Contractor shall be responsible for all sales, use, excise, consumption, services and other taxes which may accrue on all services, materials, equipment, supplies or fixtures that Contractor and its subcontractors use or consume in the performance of this Agreement, (iii) Contractor shall be responsible for Sales Taxes (together with any penalties, fines or interest thereon) that Contractor fails to separately state on the invoice or other billing documents provided to Railway or fails to collect at the time of payment by Railway of invoiced amounts (except where Railway claims a Sales Tax exemption), and (iv) Contractor shall be responsible for Sales Taxes (together with any penalties, fines or interest thereon) if Contractor fails to issue separate invoices for each state in which Contractor stores goods, provides services or, if applicable, transfers intangible rights to Railway.

Upon request, Contractor shall provide Railway satisfactory evidence that all taxes (together with any penalties, fines or interest thereon) that Contractor is responsible to pay under this Agreement have been paid. If a written claim is made against Contractor for Sales Taxes with respect to which Railway may be liable for under this Agreement, Contractor shall promptly notify Railway of such claim and provide Railway copies of all correspondence received from the taxing authority. Railway shall have the right to contest, protest, or claim a refund, in Railway's own name, any Sales Taxes paid by Railway to Contractor or for which Railway might otherwise be responsible for under this Agreement; provided, however, that if Railway is not permitted by law to contest any such Sales Tax in its own name, Contractor shall, if requested by Railway at Railway's sole cost and expense, contest in Contractor's own name the validity, applicability or amount of such Sales Tax and allow Railway to control and conduct such contest.



Railway retains the right to withhold from payments made under this Agreement amounts required to be withheld under tax laws of any jurisdiction. If Contractor is claiming a withholding exemption or a reduction in the withholding rate of any jurisdiction on any payments under this Agreement, before any payments are made (and in each succeeding period or year as required by law), Contractor agrees to furnish to Railway a properly completed exemption form prescribed by such jurisdiction. Contractor shall be responsible for any taxes, interest or penalties assessed against Railway with respect to withholding taxes that Railway does not withhold from payments to Contractor.

1) EXHIBIT "C" CONTRACTOR REQUIREMENTS

The Contractor must observe and comply with all provisions, obligations, requirements and limitations contained in the Agreement, and the Contractor Requirements set forth on Exhibit "C" attached to the Agreement and this Agreement, including, but not be limited to, payment of all costs incurred for any damages to Railway roadbed, tracks, and/or maintenance thereto, resulting from use, occupancy, or presence of its employees, representatives, or agents or subcontractors on or about the construction site. Contractor shall execute a Temporary Construction Crossing Agreement or Private Crossing Agreement (<http://www.bnsf.com/communities/faqs/private-real-estate/>), for any temporary crossing requested to aid in the construction of this Project, if approved by BNSF.

2) TRAIN DELAY

Contractor is responsible for and hereby indemnifies and holds harmless Railway (including its affiliated railway companies, and its agents) for, from and against all damages arising from any unscheduled delay to a freight or passenger train which affects Railway's ability to fully utilize its equipment and to meet customer service and contractual obligations. Contractor will be billed, as further provided below, for the economic losses arising from loss of use of equipment, contractual loss of incentive pay and bonuses and contractual penalties resulting from train delays, whether caused by Contractor, or subcontractors, or by the Railway performing work under this Agreement. Railway agrees that it will not perform any act to unnecessarily cause train delay.

For loss of use of equipment, Contractor will be billed the current freight train hour rate per train as determined from Railway's records. Any disruption to train traffic may cause delays to multiple trains at the same time for the same period.

Additionally, the parties acknowledge that passenger, U.S. mail trains and certain other grain, intermodal, coal and freight trains operate under incentive/penalty contracts between Railway and its customer(s). Under these arrangements, if Railway does not meet its contract service commitments, Railway may



suffer loss of performance or incentive pay and/or be subject to penalty payments. Contractor is responsible for any train performance and incentive penalties or other contractual economic losses actually incurred by Railway which are attributable to a train delay caused by Contractor or its subcontractors.

The contractual relationship between Railway and its customers is proprietary and confidential. In the event of a train delay covered by this Agreement, Railway will share information relevant to any train delay to the extent consistent with Railway confidentiality obligations. The rate then in effect at the time of performance by the Contractor hereunder will be used to calculate the actual costs of train delay pursuant to this agreement.

Contractor and its subcontractors must give Railway's representative () weeks advance notice of the times and dates of proposed work windows. Railway and Contractor will establish mutually agreeable work windows for the project. Railway has the right at any time to revise or change the work windows due to train operations or service obligations. Railway will not be responsible for any additional costs or expenses resulting from a change in work windows. Additional costs or expenses resulting from a change in work windows shall be accounted for in Contractor's expenses for the project.

Contractor and subcontractors must plan, schedule, coordinate and conduct all Contractor's work so as to not cause any delay to any trains.



IN WITNESS WHEREOF, each of the parties hereto has caused this Agreement to be executed by its duly authorized officer the day and year first above written.

SUPPLIER LEGAL NAME

BNSF Railway Company

By: _____

By: _____

Printed Name: _____

Name: _____

Manager, Public Projects

Title: _____

Accepted and effective this _____ day of 20__.

Contact Person: _____

Address: _____

City: _____

State: _____ Zip: _____

Fax: _____

Phone: _____

E-mail: _____

SP00061-RR-CBRL (Special Provisions for the 2024 Book)

**(Bidding on or after: 05-01-25
Last updated: 01-14-25
This Section requires
SP00170.)**

(Use this when Coos Bay Rail Link is within project limits. The included requirements and exhibits are for information and reference only. Do not make any modifications to this document.)

COOS BAY RAIL LINK

The following Coos Bay Rail Link document is included in this project for information and reference only. The actual document will be provided and executed by Coos Bay Rail Link.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the railway agreement according to 00170.01(e).

In addition, when railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).

Application To Access Railroad Property

Application Information

Application	Associated Fees
New Agreement	\$1,200
Adoption of Existing Agreement	\$1,500
Expedited Processing, within 10 business days	\$1,000
Engineering Review Fee, if applicable	\$1,750
Railroad Property Access and/or Occupancy	Associated Fees
Right of Entry, limited access for 90 days	\$1,000
Grade Crossing, Farm/Residential, minimum 16 feet	\$38 per foot
Grade Crossing, Industrial/Commercial, minimum 24 feet	\$65 per foot
Track Lease, Lessee Maintained, minimum 100 feet**	\$25 per foot
Pipeline or Wireline Crossing, rate varies with type of crossing	See Rate Schedule*
Outdoor Advertising, rate varies with size of signage	See Rate Schedule*
Land Lease, per square foot, minimum \$300 per agreement	\$0.80

*For a complete list of applicable fees, please see the current Oregon International Port of Coos Bay Rate Schedule, online at www.portofcoosbay.com. **Additional rate applies to land leased for track use.

This is an application to access Railroad property. Application fee(s) are non-refundable and due at the time of application. Allow up to six weeks for processing after application fees have been received. Incomplete applications may delay processing. Expedited processing is available for an additional fee, as outlined above. Engineering Review Fee will be determined based upon the potential for impact to Railroad operations. An agreement will be drafted based upon the information provided herein. Access and occupancy fees are due upon execution of that agreement and prior to any access or occupancy. Access to Railroad property is only for temporary access typically granted for a specific purpose. Occupancy is a permanent structure and/or extended access (not temporary or limited in duration). Occupancy agreements are billed annually in advance and subject to a standard 3% CPI increase annually.

New Installations: Upon approval, the signed application is an agreement to reimburse the Port of Coos Bay for any cost incurred, including maintenance and/or supervision necessitated by the installation. Applicant further agrees to assume all liability for accidents and/or injuries that arise as a result of the installation. Plans for the proposed installation shall be submitted to and meet the approval of the Port of Coos Bay prior to construction. Materials and installation are to be in strict accordance with AREMA (current edition) and requirements of the Railroad.

A minimum \$300 crossing removal and disposal fee will be assessed should it become necessary for Railroad to remove a crossing due to account delinquency status. Additional labor and equipment charges may be assessed. Should the landowner/user desire reinstallation of the crossing, it will be necessary to reapply. Failure to abide by the provisions of the agreement, including cancellation of the required insurance as provided for in the agreement, will result in account delinquency status.

Please Note: Contractor crews are not permitted on Railroad and/or Port of Coos Bay property until a Right of Entry Agreement has been fully executed, following the approval of this application and engineering review if applicable. Contingent upon approval, crews are required to provide at least five days advance notice to Railroad prior to work being conducted on Railroad and/or Port of Coos Bay property. Failure to provide the required notice will result in contractor crews being trespassed off Coos Bay Rail Line and/or Port of Coos Bay property, nullifying any previously executed Right of Entry Agreement, and resulting in the forfeiture of all associated previously paid fees.

Acknowledged By: _____ (Initials)

Section 1: General Applicant Information. All applicants must complete this section.			
Name of Applicant:		FEIN or SSN:	
Corporate Name:		State Incorporated:	
Name of Contact:		Email Address:	
Telephone Number:		Fax Number:	
Applicant Physical Address:	City:	State:	Zip:
Applicant Mailing Address (if different):	City:	State:	Zip:
Preferred Billing Address (if different):	City:	State:	Zip:
Overnight Delivery Address (if different):	City:	State:	Zip:
Preferred Courier:		Preferred Courier Account Number:	
Section 2: General Agreement Information. All applicants must complete this section.			
Specific Description of Agreement (Include type of agreement, location of land area or roadway, nearest city/town/landmark, etc.):			
Physical Address of Agreement Location (GPS coordinates, if no address):			
County:	Nearest Road Mile Post:	DOT Crossing (ENS) #:	
Section 3: Adopt Existing Agreement. Complete this section to adopt an existing agreement. Provide as much information as possible. Do not leave boxes blank, write "N/A" if not applicable or "UNK" if unknown. Existing agreement must be in good standing prior to adoption. If no existing agreement is not available, a new agreement must be established. Subject to Railroad approval. ☐ Check here if section is not applicable and continue to next section.			
Name of Former Lessee/Licensee:		Former Lessee/Licensee FEIN or SSN:	
Name of Former Lessee/Licensee Contact:		Former Lessee/Licensee Telephone Number:	
Former Lessee/Licensee Mailing Address:	City:	State:	Zip:
Former Lease/License Agreement Number:	Original Date of Agreement:	Effective Date of Adoption:	
Changes to Condition of Existing Agreement (i.e., change in use, increase or decrease size of land use, etc. If no changes, specify "None"):			

Section 4: Roadway or Grade Crossing. Complete this section for all agreements pertaining to a roadway or grade crossing, including installation of a new crossing, adoption of an existing agreement, or improvements to an existing roadway. Do not leave boxes blank, write "N/A" if not applicable or "UNK" if unknown. If construction activity is planned, complete Section 3.

☐ Check here if section is not applicable and continue to next section.

Type of Roadway or Grade Crossing (Check all that apply):

- | | | | |
|--|---|--|--|
| ☐ New | ☐ Existing | ☐ Public | ☐ Private |
| ☐ Relocation | ☐ Reconstruction | ☐ Vehicle Crossing | ☐ Pedestrian Crossing |
| ☐ Parallel Roadway | ☐ Contractor Crossing | ☐ Underpass | ☐ Overpass |
| ☐ Recreational Crossing | ☐ Residential or Farm Crossing | ☐ Commercial or Industrial Crossing | |
| ☐ Other _____ | | | |

Roadway or Crossing Usage (Check all that apply):

- | | | | |
|---|--|---|---|
| ☐ Passenger Cars | ☐ Pickup Trucks | ☐ Farm Equipment | ☐ Heavy Construction Equipment |
| ☐ Other _____ | | | |

of Trips Over Crossing/Roadway Per Day:

of Property Owners Crossing/Roadway Will Serve:

Width of Crossing/Roadway:

Length of Crossing/Roadway:

Crossing Angle (90° preferred):

Distance from Center of Roadway to Track:

Material to be Used:

Is there Alternate Access to the Property?

Location and Lease/License Agreement Numbers of Applicant's Existing Crossings in the Vicinity:

Section 5: Contractor Access and Right of Entry. Complete this section for any Contractor Access within Railroad Right of Way. Right of Entry agreements allow for limited access for a specified purpose for 90 days. A minimum of five (5) days advance notice must be given to Railroad prior to access and application approval. Do not leave boxes blank, write "N/A" if not applicable or "UNK" if unknown. Extension of access is available for an additional fee, see current Port of Coos Bay rate schedule online at www.portofcoosbay.com. ☐ Check here if section is not applicable and continue to next section.

Describe the Purpose and Need for Access:

Describe the Manner and Method of Installation on Railroad Property:

Road Name If Crossing is Within a Public Road Right-of-Way:

Existing Lease/License Agreement Numbers at this Location:

Name of Property Owner:

Telephone Number:

Name of Contractor:

Telephone Number:

Name of Contact Person:

Contractor Physical Address:

City:

State:

Zip:

Section 6: Use/Lease of Railroad Track. Complete this section for any use or lease of Railroad track, including spurs, sidings, and/or transload facilities. Do not leave boxes blank, write "N/A" if not applicable or "UNK" if unknown.

☐ Check here if section is not applicable and continue to next section.

Track to be Maintained by Lessee or Railroad:	Land Lease Associated with Track (Dimensions and Square Footage):
---	---

Purpose of Use:

Will track be used for transport or storage of hazardous material? ☐ Yes ☐ No
If yes, additional information will be required including but not limited to: containment plan, SDS for all materials, training and transload procedures, and/or other permits as required. Subject to Railroad approval.

Estimated Length of Track Use:	Estimated Term of Track Use:
--------------------------------	------------------------------

Section 7: Wireline or Pipeline Crossing. Complete this section for any installation of new or maintenance of existing wireline or pipeline crossings. Do not leave boxes blank, write "N/A" if not applicable or "UNK" if unknown.

☐ Check here if section is not applicable and continue to next section.

Describe the Manner and Method of Installation on Railroad Property:			
--	--	--	--

Size & Type of Wire:	Total Length/Distance of Wire:	Position of Crossing Track:	Angle of Wire Crossing Track:
----------------------	--------------------------------	-----------------------------	-------------------------------

A/C or D/C:	Voltage:	Number of Phases:	Number of Conductors:
-------------	----------	-------------------	-----------------------

Height of Wire Supports:	Type of Wire Supports:	Size of Wire Supports:	False Dead Ends:
--------------------------	------------------------	------------------------	------------------

Wire Height at 60":	Sag In Spans at 60":	Number of Poles:	Distance from Pole to Track:
---------------------	----------------------	------------------	------------------------------

Underground Encasement Material:	Underground Length & Thickness of Casing:	Size & Number of Innerducts:
----------------------------------	---	------------------------------

Depth from Base of Rail to Top of Casing:	Length Not Beneath Tracks:	Length in Roadway Ditches:
---	----------------------------	----------------------------

Section 8: Land Lease, Outdoor Advertising, or Other Installation/Use. Complete this section for land leases, outdoor advertising, or any other installation or use not specified in previous sections. Do not leave boxes blank, write "N/A" if not applicable or "UNK" if unknown. Fees for any Railroad access or occupancy not specified within the current Port of Coos Bay rate schedule, available online at www.portofcoosbay.com, will be reviewed and rate quoted on an individual basis.

☐ Check here if section is not applicable and continue to next section.

Describe the Purpose of Lease (Check all that apply):			
☐ Land Beautification	☐ Land Cultivation	☐ Septic Drainage	☐ Outdoor Advertising
☐ Unloading Platform	☐ Weight Scales	☐ Overhead Conveyor	
☐ Other _____			

Size of Land Lease (Dimensions and Total Square Footage):	Dimensions of Outdoor Advertising Sign:
---	---

Describe the Manner and Method of Installation on Railroad Property:
--

Section 9: Applicant Acknowledgement. All applicants must complete this section.	
By signature below, applicant acknowledges they have read and understand the policies and procedures contained herein. Applicant further acknowledges the information provided herein is true and accurate to the best of their knowledge.	
Printed Name:	Title:
Signature:	Date:

☐ Check here for expedited processing and be sure to include the appropriate payment.

Application fee(s) are non-refundable and due at the time of application. Allow up to six weeks for processing after application fee(s) have been received. Expedited processing is available for an additional fee and should be indicated above. Engineering Review Fee will be determined based upon the potential for impact to Railroad operation.

Send completed application, along with certificate of general liability insurance, and any applicable plans, drawings, deeds or legal documentation proving property ownership to portcoos@portofcoosbay.com. Questions concerning this application should be directed to this email address.

Mail applicable fees (check or money order payable to the Oregon International Port of Coos Bay) to:

Oregon International Port of Coos Bay
P.O. Box 1215
Coos Bay, OR 97401

The following table includes example applications and associated sections that must be completed. This table does not include all possible applications and is intended as informational only. Incomplete applications may delay processing. Questions regarding this application should be directed to the email address above.

<u>Purpose of Application</u>	<u>Complete These Sections</u>
Contractor Access or Right of Entry	1, 2, 3, 9
Adopt Existing Agreement Roadway or Grade Crossing	1, 2, 3, 4, 9
Installation of New Roadway or Grade Crossing	1, 2, 4, 3, 9
Use of Railroad Track	1, 2, 6, 9
Installation of New Pipeline or Wireline Crossing	1, 2, 7, 9
Installation of New Outdoor Advertising	1, 2, 8, 9
Adopt Existing Agreement and Lease	1, 2, 3, 8, 9
New Land Lease	1, 2, 8, 9

Office Use Only, Do Not Write Below This Line.

Application Received Date:	Applicable Fees Paid Date:
Expedited Processing? ☐ Yes, due date: _____ ☐ No	Engineering Review Needed? ☐ Yes ☐ No
Staff Comments:	
Application Is: ☐ Approved ☐ Denied	Agreement Number Assigned:

SP00062-RR-CORP (Special Provisions for the 2024 Book)

(Bidding on or after: 10-15-25

Last updated: 10-15-25

This Section requires

SP00170.)

(Use this when Central Oregon & Pacific Railroad is within project limits. The included agreement, exhibits, and application are for information and reference only. Do not make any modifications to this document.)

CENTRAL OREGON & PACIFIC RAILROAD

Application for Contractors Access/Occupancy on Railroad Property

The following Central Oregon & Pacific Railroad agreement and exhibits are included in this Project for information and reference only. The actual Application for Contractors Access/Occupancy on Railroad Property will be provided and executed by the Central Oregon & Pacific Railroad.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the railway agreement according to 00170.01(e). Permits and licenses are located at:

- www.gwrr.com/real-estate/accessing-property

In addition, when Railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).

Genesee & Wyoming Railroad Services, Inc.

Real Estate Department, 13901 Sutton Park Dr., S, Suite 270, Jacksonville, FL 32224

Contractors Access/Occupancy on Railroad Property

☐ Check box if Contractor unknown at this time (this form will need to be completed with contractor information and submitted prior to any work once bid process is complete)

Incomplete or Inaccurate Information will delay application request

Section 1 - Applicant Data

Complete Legal Name of
Applicant to appear on License
Agreement:

Applicant Mailing Address:

Applicant Overnight Address:

Type of Entity:

☐ Corporation ☐ Partnership ☐ Sole Proprietorship ☐ Individual
☐ Municipality ☐ Developer ☐ Other

If other please explain:

State of Incorporation or
Partnership:

Contact during Application Process:

Name:

Contact

Telephone

Email

Address:

Section 2 - Location Data

Railroad Name:

Estimated Start Date

Specify the amount of time access
is required:

**Reason for
extension of time
beyond 60 days

****\$500 extension fee for each additional 30 days being requested.**

Nearest City:

County:

State:

REQUIRED: Latitude/Longitude
(Convert to Decimal Format)
(ex 12.3456789/-64.101112):

Address of
proposed
worksite:

Railroad
Subdivision - If
known

US DOT/AAR Crossing Number - If
available

Section 3 - Existing Agreement Data

Is there an Existing Agreement at this Location which will be affected by this Request?

☐ Yes ☐ No If YES, List Agreement Number(s):

Will facility be exclusively used by Applicant? ☐ Yes ☐ No

If YES, List Name of Lessee:

Describe the complete scope of work on or around Railroad property (REQUIRED):

Section 4 - Department of Transportation (D.O.T.)

Is this Installation associated
with a Department of
Transportation project?

☐ Yes ☐ No

If Yes, complete the following:

D.O.T. Contract Number: D.O.T. Project Number: D.O.T. Project Name:
D.O.T. Contact Information:
Name:
Address:
City: State: Zip Code:
Phone Number Email Address

Some important items to note when completing the application:

Checklist prior to submittal

- ☐ Latitude & longitudinal information converted to digital decimal format with an aerial map of location
- ☐ Payment for fees included - check payable to specific railroad
- ☐ If paying fees by credit card a completed signed credit card release is included - only Visa, MasterCard or Discover can be accepted - US Roads only
- ☐ Applications can be emailed with a copy of the check in order to start the approval process. Only the check for the doc prep fees needs to be mailed or overnighted when the complete application packet is emailed. Include a copy of the application to make sure the payment is matched to the correct project.
- ☐ When returning the signed agreement and proof of insurance for final review and execution please allow 2-3 weeks prior to the start of work. Once all required fees are paid and documentation in place the agreement must go through an approval process before it can be finalized.

Section 5 - Insurance Requirements - US Roads

Insurance Requirements prior to any construction project - Both the Utility Owner and the Contractor completing Installation are required to provide proof of current Commercial General Liability Insurance. Prior to construction the Contractor is required to provide current proof of Railroad Protective Liability Insurance.

General Liability Insurance must meet the minimum requirements of \$2M per occurrence and \$6M aggregate per the terms of the written contract.

Automobile Insurance must meet the minimum requirements of \$1M bodily injury and property damage per occurrence.

The General Liability certificate is required to show proof of **CG2417 or its equivalent**. (*Contractual Liability Railroads*)

Evidence of **Workers Compensation** must be provided on certificate and meet the minimum requirements of \$1M. Certificate Holder naming **(Specified Railroad)** ****Specified Railroad names can be found at www.gwm.com****

General Liability, Automobile Liability and Umbrella/Excess Liability provides additional Insured status to the certificate holder and any other party(ies) specified in or required by written contract between the named Insured and the certificate holder.

Where applicable and permitted by law, all policies include a blanket automatic waiver of subrogation endorsement that provides this feature in favor of the certificate holder and any other party(ies) specified in or required by written contract between the named Insured and the certificate holder.

Prior to Construction or any access within 50' of Railroad - Current **Certificate of Railroad Protective Liability Insurance (RPL)** which shows the **specific Railroad** as named Insured. If the Contractor does not carry a policy of Railroad Protective Liability Insurance, this coverage can be secured through the railroad. An application and current Fee structure for this coverage is available upon request.

****Insurance Requirements for pollution/hazardous pipelines such as natural gas, oil, petroleum, etc. to be provided as shown below****

General Liability Insurance which names the **specific Railroad** as additional Insured and must meet the limits of \$5M per occurrence and \$10M aggregate. Such policy shall be endorsed to provide Waiver of Subrogation in favor of the certificate holder per written contract.

Pollution Legal Liability Insurance with minimum limits of Five Million Dollars (\$5,000,000) per occurrence naming the **certificate holder** as additional Insured per written contract. Such policy shall be endorsed to provide Waiver of Subrogation in favor of the certificate holder per written contract.

Section 6 - Insurance requirements - Canadian Roads

Insurance Requirements prior to any construction project - Both the Utility Owner and the Contractor completing Installation are required to provide proof of current Commercial General Liability Insurance.

General Liability Insurance must meet the minimum requirements of \$2M per occurrence and \$2M aggregate per the terms of the written contract.

Automobile Insurance must meet the minimum requirements of \$1M bodily injury and property damage per occurrence.

Where applicable, the General Liability certificate is required to show proof of **CG2417 or its equivalent**. (Contractual Liability Railroads)

Evidence of **Workers Compensation** must be provided on certificate and meet the minimum requirements of \$1M. Certificate Holder naming **(specified Railroad)** ""Specified Railroad names can be found at www.gwrr.com""

General Liability, Automobile Liability and Umbrella/Excess Liability provides additional Insured status to the certificate holder and any other party(ies) specified in or required by written contract between the named insured and the certificate holder.

Where applicable and permitted by law, all policies include a blanket automatic waiver of subrogation endorsement that provides this feature in favor of the certificate holder and any other party(ies) specified in or required by written contract between the named insured and the certificate holder.

IMPORTANT

Prior to application submittal, Questions can be answered and additional contact information obtained by visiting the website at www.gwrr.com - select the specific railroad and click on the link for Real Estate.

Plans for proposed Installations shall be submitted and approved by the Railroad, on behalf of itself, its subsidiaries, and affiliates, and designed engineer before work can begin! Applications submitted not meeting current specifications as outlined in the General Specifications for Sub-grade and Above grade Utility Crossings of Railway's Right-of-Way will be returned and may incur additional engineering review fees. For your convenience a copy of these specifications can be found on the website at www.gwrr.com.

Materials and Installations are to be in accordance with specifications of National Electrical Safety Code, AREMA, current edition, and requirements of the Railroad.

Upon application approval, applicant agrees to reimburse Railroad for any cost incurred by Railroad incident to the Installation, maintenance and/or supervision necessitated by the Installation. Applicant further agrees to assume all liability for accidents or injuries that arise as a result of this Installation.

This section must be completed in full, signed and dated prior to submittal to the Real Estate Department for processing. Unsigned applications, incomplete or inaccurate information will delay application request and may incur additional fees.

Date:	_____	Signature:	_____
Phone Number	_____	Printed Name:	_____
Fax Number:	_____	Title:	_____

Please make check payable to the specific Railroad where proposed work is to occur . A list of Genesee & Wyoming, Inc. subsidiary railroads can be found at: www.gwrr.com . W-9 Information available upon request.

Mall the application for proposed project, along with the applicable non-refundable fee(s) In U.S. Funds (Canadian Applicants please pay all fee In Canadian Funds plus HST) to:

Genesee & Wyoming Railroad Services, Inc.

Attn: Real Estate Department

13901 Sutton Park Dr. S., Suite 270

Jacksonville, FL 32224

In order for the application to be complete ALL required details pertinent to the proposed installation must be completed in full and submitted along with the following fees:

	# of Copies	Amount Due	Description
☐	1	\$2,250	Engineer review fee, plans/drawings no larger than 11 x 17. Larger drawings may incur additional engineering fees.
☐	1	\$1,750	Completed Contractor's Access/Occupancy Application and Fee required with ALL application submittals. If the contractor is unknown at time of submittal, just check the box under the heading on the form.
		\$4,000	Full amount due with submittal for new utility installations - Unless prior arrangements are made, applications received without payment will not be processed until receipt of payment. This could extend the time frame for the processing of your request.
Only applicable for projects over 60 days		\$500	Extension fee for each additional 30 days over the initial 60 days

Standard Application processing takes approximately 6-8 weeks. PLEASE READ IN FULL - "Expedited processing" is available and will reduce the processing time to between 1-2 weeks at an additional cost of \$3,000. For all expedited requests, the application and plans submitted must meet engineering specifications and be approved in order for the applicable agreement(s) to be forwarded to the applicant for signature within 2 weeks from receipt of all required information and full payment of required fees. It is important to note that an incomplete application and plans submitted that do not meeting engineering specifications will cause a delay in the processing of expedited request and the two week guarantee no longer applies if revisions are required to be made by the applicant in order for them to meet engineering specs for engineering to approve the request.

The expedited processing of an application does not apply to the final review and execution phase of the agreement process. Once a signed agreement has been received and ALL required fees and insurance has been submitted the agreement(s) is(are) forwarded for final review by a VP of Real Estate, Legal and the signatory for the Railroad. This final review and execution process can take up to 2 weeks from receipt of all required documentation and fees. This part of the agreement process cannot be expedited.

At this time we are unable to expedite requests for the installation of new private grade crossings, industrial track agreements, and track leases. The process for these requests varies somewhat from the review and approval process for new utilities and takes a little longer to secure all required approvals.

Entering or working on the railroad right of way or any other railroad property without the permission of the railroad is trespassing and illegal. Violators risk the possibility of serious, even fatal injury and will be prosecuted.

SP00063-RR-OER (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25

Last updated: 01-14-25

This Section requires

SP00170.)

(Use this when Oregon Eastern Railroad is within project limits. The included agreement, exhibits, and application are for information and reference only. Do not make any modifications to this document.)

OREGON EASTERN RAILROAD

Application for Contractor Access/Occupancy on Railroad Property

The following Oregon Eastern Railroad agreement and exhibits are included in this Project for information and reference only. The actual Application for Contractor Access/Occupancy on Railroad Property will be provided and executed by the Oregon Eastern Railroad.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the railway agreement according to 00170.01(e).

In addition, when Railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).



APPLICATION FOR RIGHT OF ENTRY

The work will be performed by: ☐ Contractor ☐ Company

Name of Applicant _____
Corporate Name _____ FEIN# _____
Physical Address _____
PO Box _____

Contact Name _____ City _____ State _____ Email _____
Phone _____ Cell _____
Type of Business ☐ Individual ☐ Corporation ☐ Partnership _____
☐ Developer ☐ Partnership _____
☐ Municipality ☐ Partnership _____

LOCATION

Railroad Name _____
Nearest City _____ County _____ State _____
Nearest Railroad Mile Post: _____
Latitude _____ Longitude _____ Distance From _____ Direction _____
Valuation Station # (if known) _____ Valuation Map # (if known) _____

EXISTING AGREEMENTS

Is Crossing Within a Public Road Right-Of-Way? ☐ Yes ☐ No
If Yes, Name of Road _____
Is there an Existing Lease or License Agreement at this Location? ☐ Yes ☐ No
List Lease or License # _____
Is the Existing Agreement in the same name as the Applicant on this Application? ☐ Yes ☐ No
If Not, please provide the following information on the party you represent:
Name _____
Address _____
Phone Number _____

DETAILS OF PROJECT

Projected start date: _____

Does occupancy require a private rail crossing? ☐ Yes ☐ No

Existing improvements or structures present? ☐ Yes ☐ No

If so, please define: _____

Describe in detail the manner and method of installation on Railroad property:

INSTRUCTIONS FOR FILING

If request for occupancy pertains to an existing license agreement or accompanies a new license request, submit this application, General Liability Certificate of Insurance, plans and drawings of the proposed project via email to applications@imgonline.net.

IMGRail Consulting, Inc.

1629 Race Track Road, Suite 206
St. Johns, Florida 32259
Phone (800) 818-0184
Fax (904) 448-1215

Questions concerning this application should be submitted by email to applications@imgonline.net. All correspondence submitted by email receives priority response. Other requests can be made by calling (904) 264-1560.

Name _____ Date: _____

Phone _____

Email Address _____

A general liability insurance certificate listing the railroad as additional insured and an independent policy of Railroad Protective Liability (RPL) in the railroad's name is required. All pipeline/wireline occupancy must adhere to A.R.E.M.A guidelines and specifications for materials and installation. Proposal and construction must be in accordance with railroad specifications, The National Electrical Safety Code (current edition), and any/all governing laws or regulations. Please note: Specifications furnished in the Application Package are offered for guideline only, the railroad reserves the right to approve/decline any application.

Agreement: «ContractNumber»(use a date w/ A after it: 221010A=Oct 10, 2022)

CONTRACTOR OCCUPANCY/ACCESS AGREEMENT

This Agreement (hereinafter "Agreement") made this «Day»TH day of «Month» «Year» by and between «Railroad Name», its successors, assigns or affiliated companies (hereinafter "Railroad"), whose address is «Railroad Address», «RailroadCity» and «Contractor/CompanyName» (hereinafter referred to as "Company"), whose address is «CompanyAddress1» «CompanyAddress2», «CompanyCity», «CompanyState» «CompanyZip».

WITNESSETH:

1. Upon payment of a one-time fee of One Dollar U.S. Dollar (\$1.00) and compliance with the provisions herein contained, Railroad hereby permits Company to enter the property of Railroad, at Mile Post «MilePost», near «LocationCity», «LocationCounty» «County», «State», for purpose of installation, maintenance, renewal or removal (hereinafter referred to as "Work"), of a «Description of Work», (hereinafter "Structure"). Said permit is granted for a period not to extend beyond sixty (60) days from the date of execution of this Agreement by Railroad. Provided, however, this permit may be canceled by Railroad at any time Company is deemed by Railroad not to be in compliance with any of the terms herein.
2. The term "Contractor" shall be used to identify the party that will perform the Work described in Section 1, whether or not Contractor is signatory to «ContractNumber» above. If Contractor is other than «Contractor/CompanyName», Contractor warrants to Railroad that Contractor (hereinafter termed "Third Party"), has entered into a "Contract" with «Contractor/CompanyName» covering the Work to be performed in connection with Structure at said locations.
3. As additional consideration, Company agrees to reimburse Railroad for all cost and expense incurred by Railroad in connection with the Work. Such costs and expenses shall include, but are not limited to, furnishing of inspectors, watchmen and flagmen as Railroad deems necessary to protect its property, tracks, engines, trains and cars and the operation thereof, the installation and removal of any necessary falsework beneath the tracks of Railroad and the restoration of Railroad property. No vehicle crossing over Railroad's tracks shall be installed or used by Company without prior written permission of Railroad.
4. Company shall give Railroad at least five (5) days' notice in advance of any work done upon or adjacent to Railroad property under this Agreement. Company shall notify Railroad General Manager by calling «GMPhone», in advance of the start of the Work, give the General Manager notification of the date said Work is completed, and also the date the Contractor's work is accepted by Third Party. Upon completion of the Work, Company shall promptly remove from Railroad property all tools, equipment and materials placed thereon by Company and Company's agents. Company shall restore Railroad property to the same state and condition as when Company entered thereon and shall leave said property in a clean and presentable condition. Company, after completion of construction or termination of work, at its sole cost, hereby agrees to restore in a good and workman like manner all property disturbed by Company use or construction or maintenance activities from the date of execution of this document. Said restoration shall include, but not be limited to, any and all harm, damage or injury done to Railroad property and/or to any other public or private property by acts or occurrences subject to Federal, State or local environmental enforcement or regulatory jurisdiction, and shall include necessary and appropriate testing and cleanup.
5. Company's work shall be performed in accordance with plans and specifications approved by Railroad and in such manner and at such times as shall not endanger or interfere with the safe operation of the tracks and other facilities of Railroad at said location. No materials, tools or equipment shall be stored within ten (10) feet of the centerline of any track. The regulations of Railroad and the instructions of its representatives shall be complied with relating to the proper manner of protecting the tracks, pipelines, wire lines, signals and all other property at said location, the traffic moving on such tracks and the removal of tools, equipment and materials. Provided, no bailment shall be created by the storage of any materials, tools or equipment on Railroad property.

Agreement: «ContractNumber»(use a date w/ A after it: 221010A=Oct 10, 2022)

6. Before said Work, Company shall, at its sole cost and expense, obtain all necessary authority from any public authorities having jurisdiction in the premises, and shall thereafter observe and comply with the requirements of such public authority or authorities and all applicable laws and regulations. Company shall secure written approval by Railroad of plans and/or specifications submitted to Railroad prior to the commencement of any Work.
7. The Structure shall be installed at the sole risk, cost and expense of Company, in accordance with American Railway Engineering Association Specifications or other Industry Standard Specifications as may apply or be appropriate for the use intended. Said specifications are incorporated herein and made a part hereof by reference. Approval of plans or completed work by Railroad's designated representative shall not, in itself, be considered acknowledgment that said project is in conformity with said standards.
8. COMPANY AGREES TO DEFEND, INDEMNIFY AND HOLD HARMLESS RAILROAD, ITS OFFICERS, AGENTS, AND EMPLOYEES FROM AND AGAINST ANY AND ALL CLAIMS, DEMANDS, LOSSES, DAMAGES, CAUSES OF ACTION, SUITS, AND LIABILITIES OF EVERY KIND (INCLUDING REASONABLE ATTORNEYS' FEES, COURT COSTS, AND OTHER EXPENSES RELATED THERETO) FOR INJURY TO OR DEATH OF A PERSON OR FOR LOSS OF OR DAMAGE TO ANY PROPERTY, ARISING OUT OF OR IN CONNECTION WITH ANY WORK DONE, ACTION TAKEN OR PERMITTED BY COMPANY, ITS SUBCONTRACTORS, AGENTS OR EMPLOYEES UNDER THIS CONTRACT.

IT IS THE EXPRESS INTENTION OF THE PARTIES HERETO, BOTH COMPANY AND RAILROAD, THAT THE INDEMNITY PROVIDED FOR IN THIS PARAGRAPH INDEMNIFIES RAILROAD FOR ITS OWN NEGLIGENCE, WHETHER THAT NEGLIGENCE IS ACTIVE OR PASSIVE, OR IS THE SOLE OR A CONCURRING CAUSE OF THE INJURY, DEATH OR DAMAGE; PROVIDED THAT SAID INDEMNITY SHALL NOT PROTECT RAILROAD FROM LIABILITY FOR DEATH, INJURY OR DAMAGE ARISING SOLELY OUT OF THE CRIMINAL ACTIONS OF RAILROAD, ITS OFFICERS, AGENTS AND EMPLOYEES. IT IS STIPULATED BY THE PARTIES THAT RAILROAD OWES NO DUTY TO COMPANY, ITS CLIENT, OR THEIR DIRECTORS, OFFICERS, EMPLOYEES, AGENTS OR INVITEES, TO PROVIDE A REASONABLY SAFE WORKPLACE AND THAT ANY PARTIES ENTERING ONTO RAILROAD PROPERTY DO SO AT THEIR SOLE RISK.

9. Should Railroad bring suit to enforce performance of or to recover for breach of any covenant or condition contained herein, Company shall pay to Railroad reasonable attorneys' fees in addition to the amount of judgment and costs.
10. Prior to the performance of any work upon or adjacent to Railroad's property under this Agreement:
 - (a) Company shall furnish Railroad at Company expense, a certified copy of a public liability and property damage liability insurance policy issued in the name of Company covering the contractual liability assumed by Company under Section 8 hereof. The form, substance and limits of said insurance policy shall be subject to the approval of Railroad and shall be in compliance with the provisions contained in the insert marked Exhibit "A", hereto attached and made a part hereof.
 - (b) Company shall furnish Railroad, at Company expense, a certificate of Workers Compensation coverage, including Federal Employee Liability Act coverage if applicable, for its workers and subcontractors in accordance with the requirements of the State or States in which said work is to be performed.
 - (c) Company shall furnish a policy of Railroad Protective coverage in the amount of Two million and no/100 dollars (\$2,000,000.00) per occurrence, Six million and no/100 dollars (\$6,000,000.00) aggregate with named insured as outlined in COMPANY OCCUPANCY/ACCESS AGREEMENT, Exhibit "A". WARNING: ONLY A POLICY OF RAILROAD PROTECTIVE INSURANCE WHICH SPECIFICALLY NAMES «Railroad Name» AS THE INSURED PARTIES IS ACCEPTABLE AND A COPY OF SAID POLICY MUST BE RECEIVED PRIOR TO THIS PERMIT BEING APPROVED ON BEHALF OF RAILROAD.

Agreement: «ContractNumber»(use a date w/ A after it: 221010.4=Oct 10, 2022)

Company shall keep said insurance in full force and effect until all work to be performed upon or adjacent to Railroad property under said contract is completed to the satisfaction of and accepted by Third Party and thereafter until Company has fulfilled the provisions of this agreement with respect to the removal of tools, equipment and materials from Railroad property. Said policy shall name Railroad as additional insured.

11. The permission herein given shall not be assigned by Company without the prior written consent of Railroad, except in the case of subcontractors who shall be deemed agents of Company, subject to the terms of this Agreement. Railroad Requirements for Company working on Railroad Right-of-Way are attached as Company OCCUPANCY/ACCESS AGREEMENT, Exhibit "B" and made a part hereof. Failure to comply with all of said requirements shall be grounds for cancellation of this Agreement at the sole option of Railroad.
12. CONSTRUCTION PROVISIONS: In relation to Railroad's track and Railroad operations:
 - a. Company warrants it will place no bore pit closer than 25 feet from the end of the ties of the nearest track, as measured at right angles from said track; that all of the lines to be installed under Railroad's track shall be a minimum of five feet six inches below the base of the rail; that carrier pipe(s) and/or wire lines shall be encased in Steel Casing Pipe in accordance with the attached Company OCCUPANCY/ACCESS AGREEMENT, Exhibit "D" casing criteria attached hereto; and that casing shall extend a minimum of 25 feet from the center line of the outside track on each side of said crossing, measured at a right angle to said track.
 - b. Company shall be solely liable for location and protection of any subgrade railroad signal wires or other railroad facilities, which may be impacted by Company Work. If same shall be damaged by said Work, Contractor shall, at its own expense, immediately cause said damage to be corrected. Contractor shall be solely liable to Railroad for any and all costs resulting for any interruption of train service resulting from Company Work.
 - c. Said provisions shall prevail over any lesser provision or standard set out for occupancy of adjoining or underlying lands.

THIS AGREEMENT IS hereby declared to be binding upon the parties hereto.

IN WITNESS WHEREOF, the undersigned have hereunto set their hand and seals this _____ day of _____ 20____.

Railroad

«Railroad Name»

By: «RailroadSignor»
«Signortitle»

Signed: _____

Company

«Contractor/CompanyName»

By: _____

Its: _____

Signed: _____

Agreement: «ContractNumber»(use a date w/ A after it: 221010A=Oct 10, 2022)

EXHIBIT A

The coverage afforded hereunder shall include the liability assumed by the named insured under the following indemnification provisions contained in an agreement in writing between the named insured and «FullLegalName», covering work to be performed upon or adjacent to its property.

Company AGREES TO DEFEND, INDEMNIFY AND HOLD HARMLESS Railroad, ITS OFFICERS, AGENTS, AND EMPLOYEES FROM AND AGAINST ANY AND ALL CLAIMS, DEMANDS, LOSSES, DAMAGES, CAUSES OF ACTION, SUITS, AND LIABILITIES OF EVERY KIND (INCLUDING REASONABLE ATTORNEYS' FEES, COURT COSTS, AND OTHER EXPENSES RELATED THERETO) FOR INJURY TO OR DEATH OF A PERSON OR FOR LOSS OF OR DAMAGE TO ANY PROPERTY ARISING OUT OF OR IN CONNECTION WITH ANY Work DONE, ACTION TAKEN OR PERMITTED BY Company, ITS SUBCONTRACTORS, AGENTS OR EMPLOYEES UNDER THIS CONTRACT.

IT IS THE EXPRESS INTENTION OF THE PARTIES HERETO, BOTH Company AND Railroad, THAT THE INDEMNITY PROVIDED FOR IN THIS PARAGRAPH INDEMNIFIES Railroad FOR ITS OWN NEGLIGENCE, WHETHER THAT NEGLIGENCE IS ACTIVE OR PASSIVE, OR IS THE SOLE OR A CONCURRING CAUSE OF THE INJURY, DEATH OR DAMAGE; PROVIDED THAT SAID INDEMNITY SHALL NOT PROTECT Railroad FROM LIABILITY FOR DEATH, INJURY OR DAMAGE ARISING SOLELY OUT OF THE CRIMINAL ACTIONS OF Railroad, ITS OFFICERS, AGENTS AND EMPLOYEES. IT IS STIPULATED BY THE PARTIES THAT Railroad OWES NO DUTY TO Company, ITS AGENT, OR THEIR DIRECTORS, OFFICERS, EMPLOYEES AGENTS OR INVITEES TO PROVIDE A REASONABLY SAFE WORK PLACE AND THAT ALL PARTIES ENTERING ONTO Railroad PROPERTY DO SO AT THEIR SOLE RISK. "

The policy or policies shall provide coverage in amount not less than Two Million Dollars (\$2,000,000) combined single limit for all damages arising out of bodily injury to or death of persons and for loss of or damage to property.

The policy or policies, where applicable and available, shall contain Insurance Services Office Standard Endorsement CG 2417.

No cancellation of this policy or modification of the coverage afforded under this endorsement shall be effective until ten (10) days' notice thereof has been given to: «Railroad Name», C/O IMGRail Consulting, Inc., P.O. Box 2475, Orange Park, FL 32067-2475, E-mail contact@imgonline.net

The policy as required in section 10(a) of the Agreement shall name Railroad as an additional insured.

The policy as required in section 10(b) shall name Railroad and affiliates as listed below as additional insured with respect to F.E.L. coverage, and/or if applicable under the laws of the State in which the work is performed.

The policy as required in section 10(c) shall name «Railroad Name» as insured.

Railroad requires each Insurance Carrier providing coverage must be an Admitted Company in the State for which this Agreement is written and has an A.M. Best rating of "A" or better and a financial class rating of 10 or better.

Agreement: «ContractNumber»(use a date w/ A after it: 221010A=Oct 10, 2022)

EXHIBIT B

Requirements for Contractors working on Railroad Right-of-Way:

- A. In order to protect Railroad's investment in its right-of-way and for the safety of persons coming onto Railroad property, Railroad has established certain requirements. The following constitute minimum requirements for all persons coming on or near Railroad right-of-way. Company is encouraged to develop their own safety rules that meet or exceed the following requirements. Company will not be allowed to occupy or work on Railroad right-of-way prior to signing and dating this Agreement and returning it to the Railroad contact person noted herein.
- B. All permits and agreements must be in effect, required payments made and insurance certificates received and approved prior to Company entering Railroad right-of-way. Insurance must remain in effect during the entire project.
- C. Any dewatering utilizing drains or ditches on Railroad property must be approved by Railroad.
- D. Company must have approved "Construction Plans" prior to commencing work on a project. No changes will be made to "Construction Plans" without approval by all parties involved. Approved revision plans will be furnished to all parties prior to implementation of changes.
- E. Company will incur all costs for track work, including flagging, made necessary due to the Work.
- F. Pursuant to Federal Regulation, flagging protection is always required when equipment crosses or is working within 25 feet of center of any live track. When deemed necessary by Railroad, a flagman may be required at all times while working on Railroad right-of-way.
- G. Crossing of any Railroad tracks must be done at approved locations and must be over full depth timbers, rubber, etc. Any equipment with steel wheels, lugs or tracks must not cross steel rails without aid of rubber tires or other approved protection.
- H. If temporary construction crossings are necessary, they must be covered by a Private Roadway and Crossing Agreement and must be barricaded when not in use. A Private Roadway and Crossing Agreement is prepared by Railroad under the same general terms as this Agreement.
- I. Company must furnish details on how Company will perform work that may affect existing drainage and/or possible fouling of track ballast as well as removal of overhead bridges/structures. (Structures and bridge spans over tracks must be removed intact).
- J. Absolutely no piling or construction materials or any other material, including dirt, sand, etc., within 15 feet of center on any secondary track (25 feet of Main Line and siding tracks) or on property of Railroad not covered by an existing Construction Easement, purchase or agreement. A 10' clear area on both sides of a main track must remain unobstructed at all times to allow for stopped train inspection.
- K. (a) All bore pits must be a minimum of 25 feet from the nearest outside rail of any track, measured at a 90 degree angle to said track and all under track bores shall be no less than six feet below the bottom of the ties.
- (b) No construction will be allowed within 15 feet of center of any track unless authorized by Railroad and as shown on plans approved by Railroad. This includes any excavation, slope encroachment and driving of sheet piles.
- L. No vehicles or machines shall remain unattended within 15 feet of a secondary track or within 25 feet of a Main Line track.

Agreement: «ContractNumber»(use a date w/ A after it: 221010A=Oct 10, 2022)

M. Should Company in any way interfere with Railroad operations or damage property during construction operations over Railroad's tracks and right-of-way, Company, upon demand by Railroad to Company and/or Client, shall immediately stop work on Railroad's right-of-way for a period of not less than 48 hours to allow Railroad to investigate. Any necessary repairs shall be made by Railroad at Company's sole cost and expense. No work will proceed until authorized by Railroad.

N. Company's safety rules, including rules regarding personal Safety Equipment, must not conflict with Railroad safety policies or rules.

O. Articles included in any agreement with Railroad, which complement this document or exceed its contents, include Company OCCUPANCY/ACCESS AGREEMENT, Exhibit "C".

Company's Acknowledgement: Work Site Location

Company _____

Address: _____

By: _____

Town: _____

Title: _____

State: _____

Date: _____

Project No. _____

Railroad Contact Person:

«RailroadName»

«ROEContact»

Name

«ROEContactTitle»

Title

«MergeAddress»

Address

«MergeCity»

City, State, Zip

«ROEPhone»

Telephone Number

«ROECELL»

Cellular

«ROEEmail»

Email

«RailroadFax»

Fax Number

Agreement: «ContractNumber»(use a date w/ A after it: 221010.4=Oct 10, 2022)

EXHIBIT "C"

Statement of Conditions when Flagmen, Protective Services and Devices or other appropriate personnel will be furnished by Railroad at sole expense of Company:

A. Railroad flagmen will be required for, but not limited to, the following conditions:

1. When, in the sole opinion of Railroad, protection is necessary to safeguard Railroad's trains, engines, facilities and property.
2. When work is performed, in any way, over, under, or in close proximity to tracks or any Railroad facilities.
3. When work in any way interferes with the operation of trains at usual speeds or threatens, damages, or endangers track or Railroad facilities.
4. When any hazard is presented Railroad communications, signal, electrical, or other facilities due to persons, material, equipment, or blasting in the vicinity.
5. When and where material is being hauled across tracks. Provided, however, special clearance must be obtained from Railroad before moving heavy or cumbersome objects and equipment which might result in making the track impassable for any period of time.

B. Protective Services and Devices, Other Specialized Personnel shall be provided when, in the sole opinion of Railroad, such are necessary in addition to flagging.

COST OF FLAGGING AND OTHER PROTECTIVE SERVICES AND DEVICES

A. Flagging

1. Shall be billed a minimum of actual cost (please verify rates with the Railroad office) per day plus any expenses incurred for each flagman required for each day, or for any portion thereof, for up to eight hours in one shift Monday through Friday, excepting holidays recognized by Railroad in its personnel policy manual.
2. Time worked in excess of eight hours in one shift Monday through Friday, or worked in any amount on Saturday, Sunday or on holiday recognized by Railroad in its personnel policy manual, shall be billed at the rate of actual cost (please verify rates with the Railroad office) per eight-hour day, per flagman required, for each day or portion thereof worked.

B. Communications Linemen, Signalmen, Protective Services and Devices

All services required shall be billed at Railroad's contracted rate with service provider plus a 20 percent Railroad administrative fee.

EXHIBIT "D"**MINIMUM WALL THICKNESS FOR CASING PIPES UNDER Railroad TRACKS****1. STEEL CASING PIPE (A.R.E.A. SPEC. 1964)**

<u>NOMINAL DIAMETER</u> (Inches)	<u>NOMINAL WALL THICKNESS</u> (Inches)	
	<u>PROTECTED</u>	<u>NOT PROTECTED*</u>
Under 14	0.188	0.188
14 and 16	0.219	0.281 (9/32)
18	0.250	0.312
20	0.281	0.344
22	0.312	0.375
24	0.344	0.406
26	0.375	0.438
28 and 30	0.406	0.469
32	0.438	0.500
34 and 36	0.469	0.531
38, 40 and 42	0.500	0.562

Steel Pipe to have minimum yield strength of 35,000 psi.

* When casing is installed without benefit of a protective coating and said casing is not cathode protected, the wall thickness shall be increased to the nearest standard size which is a minimum of 0.063 inches greater than the thickness shown for protected pipe except for diameters under 14.75 inches.

2. CONCRETE PIPE

All diameters of concrete pipe under main tracks shall be specified, as A.S.T.M. C-76 (Latest Revision) Table V. Concrete pipe under siding and yard tracks may be Table IV. (Either Wall "B" or "C" is acceptable.

3. CORRUGATED METAL PIPE

Table shows permissible minimum and maximum height of cover for both riveted and helical pipe.

<u>NOMINAL DIAMETER</u> (Inches)	<u>16 GAGE</u>	<u>14 GAGE</u>	<u>12 GAGE</u>
12	3-33 (ft)	4-80 (ft)	
15	4-42	4-64	
18	4-34	4-53	
21	4-28	4-45	4-79 (ft)
24	5-23	4-40	4-70
30		4-31	4-56
36		5-23	4-46
42		4-49	4-78

SP00064-RR-CORP-CROE (Special Provisions for the 2024 Book)

(Bidding on or after: 10-01-25

Last updated: 06-26-25

This Section requires

SP00170.)

(Use this when ODOT has submitted the initial Contractor Right of Entry and paid the initial fee to Central Oregon & Pacific Railroad is within project limits. The included agreement, exhibits, and application are for information and reference only. Do not make any modifications to this document.)

CENTRAL OREGON & PACIFIC RAILROAD

Contractors Right of Entry License Agreement

The following Central Oregon & Pacific Railroad agreement and exhibits are included in this Project for information and reference only. The actual Contractors Right of Entry License Agreement will be provided by the Engineer to be submitted to and executed by the Central Oregon & Pacific Railroad.

ODOT has submitted the initial Contractor Right of Entry and paid the initial fee. The Contractor shall obtain all necessary agreements (permits and licenses) and pay all additional fees and obtain a fully executed copy of the railway agreement according to 00170.01(e).

In addition, when Railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).

CONTRACTOR RIGHT OF ENTRY LICENSE AGREEMENT

THIS AGREEMENT (the "Agreement") is made as of _____, 20____, (the "Effective Date"),
by and between XXXXXXXXXXXXXXX ("Railroad") and XXXXX ("Licensee").

WITNESSETH:

WHEREAS, Licensee has submitted a written request or application to Railroad requesting permission to enter Railroad's property at or near the location specified in Section 1 below for the limited purpose of performing certain work; and

WHEREAS, Railroad is willing to grant to Licensee the limited right and permission to enter upon such property for the limited purpose of performing such work in accordance with the terms provided herein.

NOW THEREFORE, in consideration of these promises, the Agreement herein, and other good and valuable consideration the receipt and sufficiency of which are hereby acknowledged, the parties agree as follows:

Section 1. LOCATION/PAYMENT/WORK PRACTICES:

1.1 Railroad hereby conveys to Licensee the limited right and permission to enter upon the Railroad's property located at or near Milepost XX, XX Subdivision, Latitude: XX, Longitude: -XX located in CITY, in the County of XX State of OR as reflected on the map attached hereto as Exhibit A and incorporated herein by reference (the "Property") for the purpose of Licensee, through its employees, agents or contractors to PERFORM XXXXXXX FOR ODOT PROJECT XXXXXX (the "Work"); and

1.2 Upon payment of a fee referenced in Section 11 herein, Railroad hereby grants to Licensee, the right and permission to enter upon Railroad's Property for the purpose of performing the Work, subject to the terms, conditions and provisions set forth in this Agreement.

1.3 The Work shall be performed at the entire cost and expense of Licensee, in accordance with good and sound engineering practices, to the satisfaction of Railroad's Chief Engineer, or his duly authorized representative (the "Representative"), and in a manner to avoid accident, damage or harm to persons or property and delays to or interference with the operations of Railroad.

Section 2. PRIOR NOTICE/FLAGGING/OTHER CONDITIONS.

2.1 Licensee or Licensee's contractor shall notify the Representative at least ten (10) business days before proceeding with any phase of the Work on the Property and shall abide by the instructions of the Representative concerning the safety of the Railroad. All persons entering the Property pursuant to the permission granted herein shall comply with and perform the Work in accordance with the following policies:

- a) Genesee & Wyoming Inc.'s Contractor Safety Rules, available at: <https://www.gwrr.com/wp-content/uploads/2021/05/GWI-Contractor-Safety-Rules.pdf>; and
- b) Genesee & Wyoming Inc.'s Code of Ethics and Conduct, available at: [gwrr.com/about_us/code-of-ethics](https://www.gwrr.com/about_us/code-of-ethics)

The following Personal Protective Equipment ("PPE") must be worn at all times on the Property: Hard hats, safety footwear, certified eye protection with side shields and approved high-visibility work wear. Additional forms of PPE may be required under certain circumstances as specified in the aforesaid Contractor Safety Rules or as required by the Representative.

2.2 Railroad shall furnish such personnel, flagman or watchman which, in Railroad's sole discretion, may be necessary to protect the facilities and traffic of Railroad during the performance of the Work. If flagging or other special protective or safety measures are performed by Railroad, Railroad will invoice Licensee for such expenses incurred by Railroad based on the current fee schedule annexed hereto as Exhibit D. Licensee shall pay such invoices within thirty (30) days of Licensee's receipt of billing. If Railroad performs any flagging, or other special protective or safety measures are performed by Railroad, Licensee agrees that Licensee is not relieved of any of its responsibilities or liabilities set forth in this Agreement. The Licensee or its contractor shall reimburse Railroad promptly for the actual cost of said services, including all applicable surcharges, upon receipt of bill or bills therefor.

2.3 Unless Prior arrangements have been made with the Chief Engineer or his representative, Licensee shall not place or operate equipment at a distance of less than fifty (50) feet from the center of track, nor perform any Work at a distance of less than fifty (50) feet from the center of Railroad's track. Further, no equipment shall be moved across the Railroad's track(s) except at an established public crossing, unless prior arrangements have been made with the Chief Engineer or his Representative. All reasonable precautions must be taken by Licensee to avoid interference with and/or damage to Railroad's facilities during the course of the Work.

2.4 Prior to entering upon the Property, Licensee agrees to comply with RAILROAD'S ROADWAY WORKER PROTECTION TRAINING POLICY as set forth in Exhibit B, attached hereto and incorporated herein by reference, if such training is applicable as determined in the sole discretion of Railroad.

2.5 The permission herein granted is subject to all existing leases, licenses and occupancies of the Property by third parties. Licensee acknowledges that, in executing this Agreement, Railroad acts on its own behalf only and has no authority to act, and does not claim to act, on behalf of any other entity or person with respect to any right any such other entity or person may have to object to this Agreement. Licensee shall secure the consent, and protect the facilities, of each such third-party occupier of the Property.

2.6 Licensee shall implement and enforce a safety program conforming to all applicable requirements of federal, state and local laws, rules and regulations.

Section 3. LEGAL COMPLIANCE

Licensee expressly agrees, at its own cost and expense, to comply and cause its agents, employees and contractor(s) to comply with all applicable ordinances, rules, regulations, requirements and laws of any governmental authority (state, federal or local) having jurisdiction over the Work or Licensee's activities, including the location, contact, excavation and protection regulations of the Occupational Safety and Health Act and state "One Call" - "Call Before You Dig" or similar requirements. Licensee shall indemnify, defend and save harmless Railroad, its parents, affiliates and subsidiaries, and the respective shareholders, directors, officers and employees of each (hereinafter collectively the "Railroad Indemnitees"), from and against, and shall pay, all expenses, damages, penalties, and claims, including without limitation reasonable counsel fees, that may arise from, or be imposed because of the failure of Licensee to comply with this Section.

Section 4. LIABILITY/INDEMNITY

4.1 Licensee hereby assumes risk of and agrees to indemnify, defend, protect and save the Railroad Indemnitees harmless from and against (a) injury to or death of any person or persons whomsoever, including but not limited to the agents, employees or contractor(s) of the parties hereto, and (b) the loss or damage to any property whatsoever, including property claims, demands, suits, judgments or expenses incurred in connection therewith, resulting from or arising out of the acts or omissions of Licensee, its agents, employees or contractor(s), or resulting from, arising out of, or occurring in connection with the entry or presence of Licensee, its agents, employees or contractor(s) on the Property, or resulting from, arising out of, or occurring in connection with the performance or execution of the Work performed under this Agreement or incidental thereto, regardless of any

negligence on the part of Licensee or Railroad. THE INDEMNITY PROVIDED IN THIS SECTION 4 IS SPECIFICALLY MEANT TO INCLUDE INDEMNITY OF THE RAILROAD INDEMNITEES FOR THEIR OWN ORDINARY NEGLIGENCE, EVEN IF THE INJURY OR DAMAGE IS CAUSED ENTIRELY BY THE ORDINARY NEGLIGENCE OF THE RAILROAD INDEMNITEES AND THERE IS NO NEGLIGENCE ON THE PART OF THE LICENSEE. LICENSEE'S INDEMNITY OBLIGATIONS IN THIS SECTION 4 SHALL NOT BE LIMITED IN ANY WAY BY ANY LIMITATION ON THE AMOUNT OR TYPE OF DAMAGES, COMPENSATION OR BENEFITS AVAILABLE UNDER WORKERS' OR WORKMEN'S COMPENSATION ACTS, DISABILITY ACTS OR EMPLOYEE BENEFITS ACTS.

4.2 IN NO EVENT UNDER THIS AGREEMENT WILL THE RAILROAD INDEMNITEES HAVE ANY LIABILITY FOR INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES. ADDITIONALLY, THE TERM "RAILROAD INDEMNITEES" AS USED IN THIS SECTION 4 SHALL INCLUDE ANY OTHER RAILROAD COMPANY THAT MAY BE LAWFULLY OPERATING UPON AND OVER THE TRACKS OR THE TRACKS CROSSING OR ADJACENT TO THE TRACKS, AND THE OFFICERS, AGENTS, INVITEES AND EMPLOYEES THEREOF.

Section 5. INSURANCE.

Licensee agrees to comply with the **INSURANCE REQUIREMENTS FOR CONTRACTOR RIGHT-OF-ENTRY LICENSE AGREEMENTS** attached hereto as Exhibit C and incorporated herein by reference and shall provide the required Certificate of Insurance to Railroad with return of the signed duplicate original of this Agreement prior to the commencement of the Work.

Section 6. NOTIFICATION.

Licensee shall promptly notify the Chief Engineer of any loss, damage, injury or death arising out of or in connection with the Work.

Section 7. RESTORATION.

Upon completion of the Work or the termination or expiration of this Agreement, Contractor shall promptly remove from the Property all tools, equipment and materials placed thereon by Contractor. Contractor shall restore the Property to the same state and condition as when Contractor first entered thereon and shall leave the Property in a condition satisfactory to the Chief Engineer or the Representative.

Section 8. TERM/TERMINATION.

This Agreement and the permission conferred, and the license granted by it does not constitute a grant of permanent easement and shall terminate upon completion of the Work or at midnight 60 calendar days following the Effective Date, whichever occurs first, unless extended in writing by Railroad. Notwithstanding the foregoing, Railroad shall have the right to terminate this Agreement and the license granted hereunder immediately if Licensee defaults on any of the terms and/or conditions set forth herein.

Section 9. COMPLIANCE AND DOCUMENTATION.

Licensee agrees, and shall cause its agents, employees and contractor(s), to (a) understand and comply with the terms and conditions of this Agreement, (b) carry a copy of this Agreement at all times while on the Property, and (c) promptly present the copy of this Agreement to any employee of Railroad upon request.

Section 10. RAILROAD CONTACT INFORMATION.

The Railroad's Chief Engineer is:

Jason Sims
698 12th St SE Suite 205
Salem, OR 97301

The Railroad's Representative is:

Foreman MOW, Dennis W. Hannahs
1200 Howard Dr. SE
Albany, OR 97322
503.508.7440

Railroad EMERGENCY Phone Number: (971) 322-5767
Reference Location: Portland & Western Railroad, Inc. Subdivision XXXXX Milepost XXX.XX

Section 11. FEE.

Upon execution of this Agreement, Licensee shall pay Railroad the sum of \$1750 toward the cost of preparing this Agreement and for the privileges granted to the Licensee.

Section 12. NON-WAIVER.

If either party fails to enforce its respective rights under this Agreement, or fails to insist upon the performance of the other party's obligations hereunder, such failure shall not be construed as a permanent waiver of any rights or obligations in this Agreement.

Section 13. APPLICABLE LAW.

This Agreement shall be governed by and construed under the laws of the State of OR, without regard to the choice of law provisions thereof.

Section 14. ASSIGNMENT.

Licensee shall not assign this Agreement without the prior written consent of Railroad, which consent may be granted or withheld at Railroad's sole discretion. This Agreement shall be binding upon the parties and their respective successors and permitted assigns.

Section 15. INTERPRETATION/SEVERABILITY.

To the maximum extent possible, each provision of this Agreement shall be interpreted in such manner as to be effective and valid under applicable law, but if any provision of this Agreement shall be prohibited by, or held to be invalid under, applicable law, such provision shall be ineffective solely to the extent of such prohibition or invalidity, and this shall not invalidate the remainder of such provision or any other provision of this Agreement.

Section 16. COUNTERPARTS.

This Agreement may be executed in multiple counterparts, each of which shall, for all purposes, be deemed an original but which together shall constitute one and the same instrument, and counterparts of this Agreement may also be exchanged electronically and any electronic facsimile of any party's signature shall be deemed to be an original signature for all purposes.

Section 17. HEADINGS.

The headings of the sections of this Agreement are inserted for convenience only and are not intended to govern, limit or aid in the construction of any term or provision of this Agreement.

Section 18. CONSTRUCTION OF TERMS.

The terms of this Agreement have been arrived at after mutual negotiation and, therefore, it is the intention of the Parties that its terms not be construed against any of the Parties by reason of the fact that it was prepared by one of the Parties.

Section 19. CONFIDENTIALITY.

The parties shall not disclose the terms of this Agreement to a third party (a) other than as required by law so long as such party required to disclose the terms of this Agreement under applicable law provides the other party with prior written notice of such requirement, or (b) as otherwise agreed in writing between the parties. Notwithstanding the foregoing, the parties may disclose the terms and conditions of the Agreement to (1) a parent, subsidiary or affiliated company; or (2) to their lawyers and consultants, including but not limited to its auditors, provided that all such parties agree to maintain the confidentiality of such information in accordance with the terms of this provision. If any party violates this paragraph, any adversely affected party may cancel this Agreement without penalty and exercise any available remedies under applicable law.

[Signature Page Follows]

IN WITNESS WHEREOF, the parties hereto have caused this Agreement to be executed as of the Effective Date.

RAILROAD:
PORTLAND & WESTERN RAILROAD, INC.

LICENSEE:
XXXXXXXX

By: _____

Name:

Its:

By: _____

Name:

Its:

SAMPLE

EXHIBIT A

DESCRIPTION OF PROPERTY

SAMPLE

EXHIBIT B

ROADWAY WORKER PROTECTION TRAINING POLICY

A. In order to maintain the integrity and security of the Property and Railroad's operations, prior to each employee of Licensee and its contractor entering upon the Property (each a "Licensee Applicant"), Licensee shall cause its employees, and shall cause its contractor to require its employees, to successfully complete the Genesee & Wyoming Inc. Roadway Worker Training Program (the "Program") on an annual basis to be administered by Roadway Worker Training, Inc. (the "Program Administrator"), at the sole cost and expense of the Licensee or contractor, as the case may be (the current cost of which is \$75.00 USD per Licensee Applicant). The Program shall be available via the internet and instructions to access the Program set forth in Paragraph K.

B. Upon completion of the Program, the Licensee Applicant shall be required to satisfactorily complete a test administered by the Program Administrator. The Program Administrator shall be responsible for scoring such test and verifying whether the Licensee Applicant satisfies the requirements of Railroad to perform work on the Property. Any Licensee Applicant who fails to achieve a satisfactory score or who refuses to complete such test shall not be permitted to enter the Property.

C. When a satisfactory score is achieved by the Licensee Applicant, the Program Administrator shall furnish a certificate (the "Certificate") to the business address of Licensee or its contractor, as the case may be, for distribution to the Licensee Applicant. Until receipt of the Certificate from the Program Administrator, the Licensee Applicant shall print a temporary certificate authorizing the Licensee Applicant's access to the Property.

D. For the avoidance of doubt, satisfactory completion of the Program as evidenced by receipt of a Certificate does not in itself grant permission to the Licensee Applicant to enter the Property, except as expressly permitted under and in strict compliance with the terms of the Agreement.

E. The Licensee Applicant shall be responsible for carrying the Certificate at all times when on the Property.

F. All communications regarding Licensee Applicants, the Program, or any other matters described in this Exhibit B should be addressed to:

Kyle Baker
GWI Safety Department
13901 Sutton Park Drive South, Suite 270
Jacksonville, FL 32224
kyle.baker@gwrr.com
(904) 999-3356

G. Licensee and its contractor shall be responsible for managing and recovering Certificates from their employees who resign, retire or are terminated.

H. Notwithstanding the receipt of a Certificate by a Licensee Applicant, Railroad reserves the right to reject any Licensee Applicant from entering upon the Property in Railroad's sole discretion in accordance with:

- i) Genesee & Wyoming Inc. Code of Ethics and Conduct,
- ii) Genesee & Wyoming Inc. Contractor Safety Rules, or
- iii) upon failure to comply with the terms and conditions of the Agreement and all applicable laws.

I. To the extent that any portion of the requirements set forth in this Exhibit B violates any law, ordinance, statute or regulation that portion shall be ignored and the Licensee or contractor, as the case may be, shall comply with all remaining portions of Railroad's Roadway Protection Training Policy, the Program or the related application process.

J. Licensee or its contractor, as the case may be, shall be primarily responsible for enforcement of the Program; *provided, however*, that both Railroad and the Federal Railroad Administration reserve the right to audit Licensee and its contractor, as the case may be, for compliance with the Program and Railroad's Roadway Protection Training Policy. Should a Licensee or its contractor, as applicable, be found out of compliance, any and all fines or penalties incurred by Railroad due to such non-compliance shall be the sole obligation of the Licensee.

K. To access the G&W Roadway Worker Protection Training for Railroad Contractors Course on the RWT On-Line please follow these instructions:

- Start at website:
<https://www.bistrainer.com/store/railpros-store/productdetails/genesee-and-wyoming-roadway-worker-protection-for-contractors-training>
- Click on the "On-Line Courses" button
- Select the G&W course by clicking on the course name
- On the right hand side of the page select "New User Registration"
- Fill out all of the fields on the registration page and submit
- You will receive a username and password via email
- After receiving the username and password go back to the On-Line Courses page and select the G&W course again
- Complete the registration process and training.

EXHIBIT C

INSURANCE REQUIREMENTS FOR RIGHT-OF-ENTRY LICENSE AGREEMENT

(a) The Licensee shall, at its own cost and expense, prior to entry onto the Property or the commencement of any work pursuant to this Agreement, procure and thereafter maintain throughout the term of this Agreement the following types and minimum amounts of insurance:

(i) The Licensee shall maintain Public Liability or Commercial General Liability Insurance ("CGL"), including Contractual Liability Coverage and CG 24 17 "Contractual Liability - Railroads" endorsement, covering all liabilities assumed by the Licensee under this Agreement, without exception or restriction of any kind, with a combined single limit of not less than Two Million Dollars (\$2,000,000) for Bodily Injury and/or Property Damage Liability per occurrence, and an aggregate limit of not less than Six Million Dollars (\$6,000,000) per annual policy period. Such insurance policy shall be endorsed to provide a Waiver of Subrogation in favor of the Railroad Indemnitees and shall name the Railroad Indemnitees as Additional Insureds. An Umbrella or Excess policy may be utilized to satisfy the required limits of liability under this section but must "follow form" and afford no less coverage than the primary policy.

(ii) The Licensee shall maintain Commercial Automobile Insurance for all owned, non-owned and hired vehicles with a combined single limit of not less than One Million Dollars (\$1,000,000) for Bodily Injury and/or Property Damage Liability per occurrence. Such insurance policy shall be endorsed to provide a Waiver of Subrogation in favor of the Railroad Indemnitees and shall name the Railroad Indemnitees as Additional Insureds.

(iii) The Licensee shall maintain Statutory Workers' Compensation and Employers' Liability Insurance for its employees (if any) with minimum limits of not less than One Million Dollars (\$1,000,000) for Bodily Injury by Accident, Each Accident; One Million Dollars (\$1,000,000) for Bodily Injury by Disease, Policy Limit; One Million Dollars (\$1,000,000) for Bodily Injury by Disease, Each Employee. Such insurance policy shall be endorsed to provide a Waiver of Subrogation in favor of the Railroad Indemnitees.

(iv) Prior to construction within 50' of the railroad tracks, the Licensee shall purchase Railroad Protective Liability Insurance naming the Railroad Indemnitees as the named insured with limits of Two Million Dollars (\$2,000,000) each occurrence and Six Million Dollars (\$6,000,000) aggregate limit. The policy shall be issued on a standard ISO form CG 00 35 12 03 or, if available, obtain such coverage from the Railroad.

(b) The following general insurance requirements shall apply:

(i) The specified insurance policies must be affected under standard form policies underwritten by insurers licensed in the state where work is to be performed and carry a minimum Best's rating of "A-" and size "Class VII" or better. The Railroad reserves the right to reject as inadequate any insurance coverage provided by an insurer that is rated less than the ratings specified in this section.

(ii) All coverages shall be primary and non-contributory to any insurance coverages maintained by the Railroad Indemnitees.

(iii) All insurance policies shall be endorsed to provide the Railroad with thirty (30) days prior written notice of cancellation, non-renewal or material changes.

(iv) The Licensee shall provide the Railroad with certificates of insurance evidencing the insurance coverages, terms and conditions required prior to commencement of any activities on or about the Property. Said certificates should reference this Contractor Right of Entry License Agreement by agreement date and description and shall be furnished to the Railroad at the following address, or to such other address as the Railroad may hereafter specify:

Portland & Western Railroad, Inc.
C/O Genesee & Wyoming Railroad Services, Inc.
13901 Sutton Park Drive South, Suite 270
Jacksonville, FL 32224

(v) If any policies providing the required coverages are written on a Claims-Made basis, the following shall apply:

- (1) The retroactive date shall be prior to the commencement of the work;
- (2) The Licensee shall maintain such policies on a continuous basis;
- (3) If there is a change in insurer or policies are canceled or not renewed, the Licensee shall purchase an extended reporting period of not less than three (3) years after the contract completion date; and
- (4) Licensee shall arrange for adequate time for reporting of any loss under this Agreement.

(c) The Railroad may require the Licensee to purchase additional insurance if the Railroad reasonably determines that the amount of insurance then being maintained by the Licensee is insufficient in light of all relevant factors. If the Licensee is required to purchase additional insurance, the Railroad will notify the Licensee. Failure of the Licensee to comply within thirty (30) days shall be considered a default subject to termination of the Agreement.

(d) Furnishing of insurance by the Licensee shall not limit the Licensee's liability under this Agreement but shall be additional security therefor.

(e) The above indicated insurance coverages shall be enforceable by any legitimate claimant after the termination or cancellation of this Agreement, or any amendment hereto, whether by expiration of time, by operation of law or otherwise, so long as the basis of the claim against the insurance company occurred during the period of time when the Agreement was in effect and the insurance was in force.

(f) Failure to provide the required insurance coverages or endorsements (including contractual liability endorsement) or adequate reporting time shall be at Licensee's sole risk.

(g) If contractors are utilized, the Licensee agrees to require all such contractors to comply with the insurance requirements of this Exhibit C.

EXHIBIT D

APPLICABLE EXHIBIT D PER RAILROAD REGION WILL BE PROVIDED BY FLAGGING
COORDINATOR UPON EXECUTION

SAMPLE

SP00065-RR-PNWR-CROE (Special Provisions for the 2024 Book)

(Bidding on or after: 10-01-25

Last updated: 06-26-25

This Section requires

SP00170.)

(Use this when ODOT has submitted the initial Contractor Right of Entry and paid the initial fee to Portland & Western Railroad Company is within project limits. The included agreement, exhibits, and application are for information and reference only. Do not make any modifications to this document.)

PORTLAND & WESTERN RAILROAD COMPANY

Contractors Right of Entry License Agreement

The following Portland & Western Railroad Company agreement and exhibits are included in this Project for information and reference only. The actual Contractors Right of Entry License Agreement will be provided by the Engineer to be submitted to and executed by the Portland & Western Railroad Company.

ODOT has submitted the initial Contractor Right of Entry and paid the initial fee. The Contractor shall obtain all necessary agreements (permits and licenses) and pay all additional fees and obtain a fully executed copy of the railway agreement according to 00170.01(e).

In addition, when Railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).

CONTRACTOR RIGHT OF ENTRY LICENSE AGREEMENT

THIS AGREEMENT (the "Agreement") is made as of _____, 20____, (the "Effective Date"),
by and between XXXXXXXXXXXXXXX ("Railroad") and XXXXX ("Licensee").

WITNESSETH:

WHEREAS, Licensee has submitted a written request or application to Railroad requesting permission to enter Railroad's property at or near the location specified in Section 1 below for the limited purpose of performing certain work; and

WHEREAS, Railroad is willing to grant to Licensee the limited right and permission to enter upon such property for the limited purpose of performing such work in accordance with the terms provided herein.

NOW THEREFORE, in consideration of these promises, the Agreement herein, and other good and valuable consideration the receipt and sufficiency of which are hereby acknowledged, the parties agree as follows:

Section 1. LOCATION/PAYMENT/WORK PRACTICES:

1.1 Railroad hereby conveys to Licensee the limited right and permission to enter upon the Railroad's property located at or near Milepost XX, XX Subdivision, Latitude: XX, Longitude: -XX located in CITY, in the County of XX State of OR as reflected on the map attached hereto as Exhibit A and incorporated herein by reference (the "Property") for the purpose of Licensee, through its employees, agents or contractors to PERFORM XXXXXX FOR ODOT PROJECT XXXXXX (the "Work"); and

1.2 Upon payment of a fee referenced in Section 11 herein, Railroad hereby grants to Licensee, the right and permission to enter upon Railroad's Property for the purpose of performing the Work, subject to the terms, conditions and provisions set forth in this Agreement.

1.3 The Work shall be performed at the entire cost and expense of Licensee, in accordance with good and sound engineering practices, to the satisfaction of Railroad's Chief Engineer, or his duly authorized representative (the "Representative"), and in a manner to avoid accident, damage or harm to persons or property and delays to or interference with the operations of Railroad.

Section 2. PRIOR NOTICE/FLAGGING/OTHER CONDITIONS.

2.1 Licensee or Licensee's contractor shall notify the Representative at least ten (10) business days before proceeding with any phase of the Work on the Property and shall abide by the instructions of the Representative concerning the safety of the Railroad. All persons entering the Property pursuant to the permission granted herein shall comply with and perform the Work in accordance with the following policies:

- a) Genesee & Wyoming Inc.'s Contractor Safety Rules, available at: <https://www.gwrr.com/wp-content/uploads/2021/05/GWI-Contractor-Safety-Rules.pdf>; and
- b) Genesee & Wyoming Inc.'s Code of Ethics and Conduct, available at: [gwrr.com/about_us/code-of-ethics](https://www.gwrr.com/about_us/code-of-ethics)

The following Personal Protective Equipment ("PPE") must be worn at all times on the Property: Hard hats, safety footwear, certified eye protection with side shields and approved high-visibility work wear. Additional forms of PPE may be required under certain circumstances as specified in the aforesaid Contractor Safety Rules or as required by the Representative.

2.2 Railroad shall furnish such personnel, flagman or watchman which, in Railroad's sole discretion, may be necessary to protect the facilities and traffic of Railroad during the performance of the Work. If flagging or other special protective or safety measures are performed by Railroad, Railroad will invoice Licensee for such expenses incurred by Railroad based on the current fee schedule annexed hereto as Exhibit D. Licensee shall pay such invoices within thirty (30) days of Licensee's receipt of billing. If Railroad performs any flagging, or other special protective or safety measures are performed by Railroad, Licensee agrees that Licensee is not relieved of any of its responsibilities or liabilities set forth in this Agreement. The Licensee or its contractor shall reimburse Railroad promptly for the actual cost of said services, including all applicable surcharges, upon receipt of bill or bills therefor.

2.3 Unless Prior arrangements have been made with the Chief Engineer or his representative, Licensee shall not place or operate equipment at a distance of less than fifty (50) feet from the center of track, nor perform any Work at a distance of less than fifty (50) feet from the center of Railroad's track. Further, no equipment shall be moved across the Railroad's track(s) except at an established public crossing, unless prior arrangements have been made with the Chief Engineer or his Representative. All reasonable precautions must be taken by Licensee to avoid interference with and/or damage to Railroad's facilities during the course of the Work.

2.4 Prior to entering upon the Property, Licensee agrees to comply with RAILROAD'S ROADWAY WORKER PROTECTION TRAINING POLICY as set forth in Exhibit B, attached hereto and incorporated herein by reference, if such training is applicable as determined in the sole discretion of Railroad.

2.5 The permission herein granted is subject to all existing leases, licenses and occupancies of the Property by third parties. Licensee acknowledges that, in executing this Agreement, Railroad acts on its own behalf only and has no authority to act, and does not claim to act, on behalf of any other entity or person with respect to any right any such other entity or person may have to object to this Agreement. Licensee shall secure the consent, and protect the facilities, of each such third-party occupier of the Property.

2.6 Licensee shall implement and enforce a safety program conforming to all applicable requirements of federal, state and local laws, rules and regulations.

Section 3. LEGAL COMPLIANCE

Licensee expressly agrees, at its own cost and expense, to comply and cause its agents, employees and contractor(s) to comply with all applicable ordinances, rules, regulations, requirements and laws of any governmental authority (state, federal or local) having jurisdiction over the Work or Licensee's activities, including the location, contact, excavation and protection regulations of the Occupational Safety and Health Act and state "One Call" - "Call Before You Dig" or similar requirements. Licensee shall indemnify, defend and save harmless Railroad, its parents, affiliates and subsidiaries, and the respective shareholders, directors, officers and employees of each (hereinafter collectively the "Railroad Indemnitees"), from and against, and shall pay, all expenses, damages, penalties, and claims, including without limitation reasonable counsel fees, that may arise from, or be imposed because of the failure of Licensee to comply with this Section.

Section 4. LIABILITY/INDEMNITY

4.1 Licensee hereby assumes risk of and agrees to indemnify, defend, protect and save the Railroad Indemnitees harmless from and against (a) injury to or death of any person or persons whomsoever, including but not limited to the agents, employees or contractor(s) of the parties hereto, and (b) the loss or damage to any property whatsoever, including property claims, demands, suits, judgments or expenses incurred in connection therewith, resulting from or arising out of the acts or omissions of Licensee, its agents, employees or contractor(s), or resulting from, arising out of, or occurring in connection with the entry or presence of Licensee, its agents, employees or contractor(s) on the Property, or resulting from, arising out of, or occurring in connection with the performance or execution of the Work performed under this Agreement or incidental thereto, regardless of any

negligence on the part of Licensee or Railroad. THE INDEMNITY PROVIDED IN THIS SECTION 4 IS SPECIFICALLY MEANT TO INCLUDE INDEMNITY OF THE RAILROAD INDEMNITEES FOR THEIR OWN ORDINARY NEGLIGENCE, EVEN IF THE INJURY OR DAMAGE IS CAUSED ENTIRELY BY THE ORDINARY NEGLIGENCE OF THE RAILROAD INDEMNITEES AND THERE IS NO NEGLIGENCE ON THE PART OF THE LICENSEE. LICENSEE'S INDEMNITY OBLIGATIONS IN THIS SECTION 4 SHALL NOT BE LIMITED IN ANY WAY BY ANY LIMITATION ON THE AMOUNT OR TYPE OF DAMAGES, COMPENSATION OR BENEFITS AVAILABLE UNDER WORKERS' OR WORKMEN'S COMPENSATION ACTS, DISABILITY ACTS OR EMPLOYEE BENEFITS ACTS.

4.2 IN NO EVENT UNDER THIS AGREEMENT WILL THE RAILROAD INDEMNITEES HAVE ANY LIABILITY FOR INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES. ADDITIONALLY, THE TERM "RAILROAD INDEMNITEES" AS USED IN THIS SECTION 4 SHALL INCLUDE ANY OTHER RAILROAD COMPANY THAT MAY BE LAWFULLY OPERATING UPON AND OVER THE TRACKS OR THE TRACKS CROSSING OR ADJACENT TO THE TRACKS, AND THE OFFICERS, AGENTS, INVITEES AND EMPLOYEES THEREOF.

Section 5. INSURANCE.

Licensee agrees to comply with the INSURANCE REQUIREMENTS FOR CONTRACTOR RIGHT-OF-ENTRY LICENSE AGREEMENTS attached hereto as Exhibit C and incorporated herein by reference and shall provide the required Certificate of Insurance to Railroad with return of the signed duplicate original of this Agreement prior to the commencement of the Work.

Section 6. NOTIFICATION.

Licensee shall promptly notify the Chief Engineer of any loss, damage, injury or death arising out of or in connection with the Work.

Section 7. RESTORATION.

Upon completion of the Work or the termination or expiration of this Agreement, Contractor shall promptly remove from the Property all tools, equipment and materials placed thereon by Contractor. Contractor shall restore the Property to the same state and condition as when Contractor first entered thereon and shall leave the Property in a condition satisfactory to the Chief Engineer or the Representative.

Section 8. TERM/TERMINATION.

This Agreement and the permission conferred, and the license granted by it does not constitute a grant of permanent easement and shall terminate upon completion of the Work or at midnight 60 calendar days following the Effective Date, whichever occurs first, unless extended in writing by Railroad. Notwithstanding the foregoing, Railroad shall have the right to terminate this Agreement and the license granted hereunder immediately if Licensee defaults on any of the terms and/or conditions set forth herein.

Section 9. COMPLIANCE AND DOCUMENTATION.

Licensee agrees, and shall cause its agents, employees and contractor(s), to (a) understand and comply with the terms and conditions of this Agreement, (b) carry a copy of this Agreement at all times while on the Property, and (c) promptly present the copy of this Agreement to any employee of Railroad upon request.

Section 10. RAILROAD CONTACT INFORMATION.

The Railroad's Chief Engineer is:

Jason Sims
698 12th St SE Suite 205
Salem, OR 97301

The Railroad's Representative is:

Foreman MOW, Dennis W. Hannahs
1200 Howard Dr. SE
Albany, OR 97322
503.508.7440

Railroad EMERGENCY Phone Number: (971) 322-5767
Reference Location: Portland & Western Railroad, Inc. Subdivision **XXXX** Milepost **XX.XX**

Section 11. FEE.

Upon execution of this Agreement, Licensee shall pay Railroad the sum of \$1750 toward the cost of preparing this Agreement and for the privileges granted to the Licensee.

Section 12. NON-WAIVER.

If either party fails to enforce its respective rights under this Agreement, or fails to insist upon the performance of the other party's obligations hereunder, such failure shall not be construed as a permanent waiver of any rights or obligations in this Agreement.

Section 13. APPLICABLE LAW.

This Agreement shall be governed by and construed under the laws of the State of OR, without regard to the choice of law provisions thereof.

Section 14. ASSIGNMENT.

Licensee shall not assign this Agreement without the prior written consent of Railroad, which consent may be granted or withheld at Railroad's sole discretion. This Agreement shall be binding upon the parties and their respective successors and permitted assigns.

Section 15. INTERPRETATION/SEVERABILITY.

To the maximum extent possible, each provision of this Agreement shall be interpreted in such manner as to be effective and valid under applicable law, but if any provision of this Agreement shall be prohibited by, or held to be invalid under, applicable law, such provision shall be ineffective solely to the extent of such prohibition or invalidity, and this shall not invalidate the remainder of such provision or any other provision of this Agreement.

Section 16. COUNTERPARTS.

This Agreement may be executed in multiple counterparts, each of which shall, for all purposes, be deemed an original but which together shall constitute one and the same instrument, and counterparts of this Agreement may also be exchanged electronically and any electronic facsimile of any party's signature shall be deemed to be an original signature for all purposes.

Section 17. HEADINGS.

The headings of the sections of this Agreement are inserted for convenience only and are not intended to govern, limit or aid in the construction of any term or provision of this Agreement.

Section 18. CONSTRUCTION OF TERMS.

The terms of this Agreement have been arrived at after mutual negotiation and, therefore, it is the intention of the Parties that its terms not be construed against any of the Parties by reason of the fact that it was prepared by one of the Parties.

Section 19. CONFIDENTIALITY.

The parties shall not disclose the terms of this Agreement to a third party (a) other than as required by law so long as such party required to disclose the terms of this Agreement under applicable law provides the other party with prior written notice of such requirement, or (b) as otherwise agreed in writing between the parties. Notwithstanding the foregoing, the parties may disclose the terms and conditions of the Agreement to (1) a parent, subsidiary or affiliated company; or (2) to their lawyers and consultants, including but not limited to its auditors, provided that all such parties agree to maintain the confidentiality of such information in accordance with the terms of this provision. If any party violates this paragraph, any adversely affected party may cancel this Agreement without penalty and exercise any available remedies under applicable law.

[Signature Page Follows]

IN WITNESS WHEREOF, the parties hereto have caused this Agreement to be executed as of the Effective Date.

RAILROAD:
PORTLAND & WESTERN RAILROAD, INC.

LICENSEE:
XXXXXXXX

By: _____

Name:

Its:

By: _____

Name:

Its:

SAMPLE

EXHIBIT A

DESCRIPTION OF PROPERTY

SAMPLE

EXHIBIT B

ROADWAY WORKER PROTECTION TRAINING POLICY

A. In order to maintain the integrity and security of the Property and Railroad's operations, prior to each employee of Licensee and its contractor entering upon the Property (each a "Licensee Applicant"), Licensee shall cause its employees, and shall cause its contractor to require its employees, to successfully complete the Genesee & Wyoming Inc. Roadway Worker Training Program (the "Program") on an annual basis to be administered by Roadway Worker Training, Inc. (the "Program Administrator"), at the sole cost and expense of the Licensee or contractor, as the case may be (the current cost of which is \$75.00 USD per Licensee Applicant). The Program shall be available via the internet and instructions to access the Program set forth in Paragraph K.

B. Upon completion of the Program, the Licensee Applicant shall be required to satisfactorily complete a test administered by the Program Administrator. The Program Administrator shall be responsible for scoring such test and verifying whether the Licensee Applicant satisfies the requirements of Railroad to perform work on the Property. Any Licensee Applicant who fails to achieve a satisfactory score or who refuses to complete such test shall not be permitted to enter the Property.

C. When a satisfactory score is achieved by the Licensee Applicant, the Program Administrator shall furnish a certificate (the "Certificate") to the business address of Licensee or its contractor, as the case may be, for distribution to the Licensee Applicant. Until receipt of the Certificate from the Program Administrator, the Licensee Applicant shall print a temporary certificate authorizing the Licensee Applicant's access to the Property.

D. For the avoidance of doubt, satisfactory completion of the Program as evidenced by receipt of a Certificate does not in itself grant permission to the Licensee Applicant to enter the Property, except as expressly permitted under and in strict compliance with the terms of the Agreement.

E. The Licensee Applicant shall be responsible for carrying the Certificate at all times when on the Property.

F. All communications regarding Licensee Applicants, the Program, or any other matters described in this Exhibit B should be addressed to:

Kyle Baker
GWI Safety Department
13901 Sutton Park Drive South, Suite 270
Jacksonville, FL 32224
kyle.baker@gwrr.com
(904) 999-3356

G. Licensee and its contractor shall be responsible for managing and recovering Certificates from their employees who resign, retire or are terminated.

H. Notwithstanding the receipt of a Certificate by a Licensee Applicant, Railroad reserves the right to reject any Licensee Applicant from entering upon the Property in Railroad's sole discretion in accordance with:

- i) Genesee & Wyoming Inc. Code of Ethics and Conduct,
- ii) Genesee & Wyoming Inc. Contractor Safety Rules, or
- iii) upon failure to comply with the terms and conditions of the Agreement and all applicable laws.

I. To the extent that any portion of the requirements set forth in this Exhibit B violates any law, ordinance, statute or regulation that portion shall be ignored and the Licensee or contractor, as the case may be, shall comply with all remaining portions of Railroad's Roadway Protection Training Policy, the Program or the related application process.

J. Licensee or its contractor, as the case may be, shall be primarily responsible for enforcement of the Program; *provided, however*, that both Railroad and the Federal Railroad Administration reserve the right to audit Licensee and its contractor, as the case may be, for compliance with the Program and Railroad's Roadway Protection Training Policy. Should a Licensee or its contractor, as applicable, be found out of compliance, any and all fines or penalties incurred by Railroad due to such non-compliance shall be the sole obligation of the Licensee.

K. To access the G&W Roadway Worker Protection Training for Railroad Contractors Course on the RWT On-Line please follow these instructions:

- Start at website:
<https://www.bistrainer.com/store/railpros-store/productdetails/genesee-and-wyoming-roadway-worker-protection-for-contractors-training>
- Click on the "On-Line Courses" button
- Select the G&W course by clicking on the course name
- On the right hand side of the page select "New User Registration"
- Fill out all of the fields on the registration page and submit
- You will receive a username and password via email
- After receiving the username and password go back to the On-Line Courses page and select the G&W course again
- Complete the registration process and training.

EXHIBIT C

INSURANCE REQUIREMENTS FOR RIGHT-OF-ENTRY LICENSE AGREEMENT

(a) The Licensee shall, at its own cost and expense, prior to entry onto the Property or the commencement of any work pursuant to this Agreement, procure and thereafter maintain throughout the term of this Agreement the following types and minimum amounts of insurance:

(i) The Licensee shall maintain Public Liability or Commercial General Liability Insurance ("CGL"), including Contractual Liability Coverage and CG 24 17 "Contractual Liability - Railroads" endorsement, covering all liabilities assumed by the Licensee under this Agreement, without exception or restriction of any kind, with a combined single limit of not less than Two Million Dollars (\$2,000,000) for Bodily Injury and/or Property Damage Liability per occurrence, and an aggregate limit of not less than Six Million Dollars (\$6,000,000) per annual policy period. Such insurance policy shall be endorsed to provide a Waiver of Subrogation in favor of the Railroad Indemnitees and shall name the Railroad Indemnitees as Additional Insureds. An Umbrella or Excess policy may be utilized to satisfy the required limits of liability under this section but must "follow form" and afford no less coverage than the primary policy.

(ii) The Licensee shall maintain Commercial Automobile Insurance for all owned, non-owned and hired vehicles with a combined single limit of not less than One Million Dollars (\$1,000,000) for Bodily Injury and/or Property Damage Liability per occurrence. Such insurance policy shall be endorsed to provide a Waiver of Subrogation in favor of the Railroad Indemnitees and shall name the Railroad Indemnitees as Additional Insureds.

(iii) The Licensee shall maintain Statutory Workers' Compensation and Employers' Liability Insurance for its employees (if any) with minimum limits of not less than One Million Dollars (\$1,000,000) for Bodily Injury by Accident, Each Accident; One Million Dollars (\$1,000,000) for Bodily Injury by Disease, Policy Limit; One Million Dollars (\$1,000,000) for Bodily Injury by Disease, Each Employee. Such insurance policy shall be endorsed to provide a Waiver of Subrogation in favor of the Railroad Indemnitees.

(iv) Prior to construction within 50' of the railroad tracks, the Licensee shall purchase Railroad Protective Liability Insurance naming the Railroad Indemnitees as the named insured with limits of Two Million Dollars (\$2,000,000) each occurrence and Six Million Dollars (\$6,000,000) aggregate limit. The policy shall be issued on a standard ISO form CG 00 35 12 03 or, if available, obtain such coverage from the Railroad.

(b) The following general insurance requirements shall apply:

(i) The specified insurance policies must be effected under standard form policies underwritten by insurers licensed in the state where work is to be performed and carry a minimum Best's rating of "A-" and size "Class VII" or better. The Railroad reserves the right to reject as inadequate any insurance coverage provided by an insurer that is rated less than the ratings specified in this section.

(ii) All coverages shall be primary and non-contributory to any insurance coverages maintained by the Railroad Indemnitees.

(iii) All insurance policies shall be endorsed to provide the Railroad with thirty (30) days prior written notice of cancellation, non-renewal or material changes.

(iv) The Licensee shall provide the Railroad with certificates of insurance evidencing the insurance coverages, terms and conditions required prior to commencement of any activities on or about the Property. Said certificates should reference this Contractor Right of Entry License Agreement by agreement date and description and shall be furnished to the Railroad at the following address, or to such other address as the Railroad may hereafter specify:

Portland & Western Railroad, Inc.
C/O Genesee & Wyoming Railroad Services, Inc.
13901 Sutton Park Drive South, Suite 270
Jacksonville, FL 32224

(v) If any policies providing the required coverages are written on a Claims-Made basis, the following shall apply:

- (1) The retroactive date shall be prior to the commencement of the work;
- (2) The Licensee shall maintain such policies on a continuous basis;
- (3) If there is a change in insurer or policies are canceled or not renewed, the Licensee shall purchase an extended reporting period of not less than three (3) years after the contract completion date; and
- (4) Licensee shall arrange for adequate time for reporting of any loss under this Agreement.

(c) The Railroad may require the Licensee to purchase additional insurance if the Railroad reasonably determines that the amount of insurance then being maintained by the Licensee is insufficient in light of all relevant factors. If the Licensee is required to purchase additional insurance, the Railroad will notify the Licensee. Failure of the Licensee to comply within thirty (30) days shall be considered a default subject to termination of the Agreement.

(d) Furnishing of insurance by the Licensee shall not limit the Licensee's liability under this Agreement but shall be additional security therefor.

(e) The above indicated insurance coverages shall be enforceable by any legitimate claimant after the termination or cancellation of this Agreement, or any amendment hereto, whether by expiration of time, by operation of law or otherwise, so long as the basis of the claim against the insurance company occurred during the period of time when the Agreement was in effect and the insurance was in force.

(f) Failure to provide the required insurance coverages or endorsements (including contractual liability endorsement) or adequate reporting time shall be at Licensee's sole risk.

(g) If contractors are utilized, the Licensee agrees to require all such contractors to comply with the insurance requirements of this Exhibit C.

EXHIBIT D

APPLICABLE EXHIBIT D PER RAILROAD REGION WILL BE PROVIDED BY FLAGGING
COORDINATOR UPON EXECUTION

SAMPLE

SP00066-RR-PNWR (Special Provisions for the 2024 Book)

(Bidding on or after: 10-15-25

Last updated: 10-15-25

This Section requires

SP00170.)

(Use this when Portland & Western Railroad Company is within project limits. The included agreements and exhibits are for information and reference only. Do not make any modifications to this document.)

PORTLAND & WESTERN RAILROAD COMPANY

Contractors Access/Occupancy on Railroad Property

The following Portland & Western Railroad Company agreements and exhibits are included in this Project for information and reference only. The actual Contractors Access/Occupancy on Railroad Property will be provided and executed by the Portland & Western Railroad Company.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the railway agreement according to 00170.01(e). Permits and licenses are located at:

- www.gwrr.com/real-estate/accessing-property

In addition, when Railroad flagger services are required, the Agency will pay for the services according to 00170.01(e).

Genesee & Wyoming Railroad Services, Inc.

Real Estate Department, 13901 Sutton Park Dr., S, Suite 270, Jacksonville, FL 32224

Contractors Access/Occupancy on Railroad Property

☐ Check box if Contractor unknown at this time (this form will need to be completed with contractor information and submitted prior to any work once bid process is complete)

Incomplete or Inaccurate Information will delay application request

Section 1 - Applicant Data

Complete Legal Name of
Applicant to appear on License
Agreement:

Applicant Mailing Address:

Applicant Overnight Address:

Type of Entity:

☐ Corporation ☐ Partnership ☐ Sole Proprietorship ☐ Individual
☐ Municipality ☐ Developer ☐ Other

If other please explain:

State of Incorporation or
Partnership:

Contact during Application Process:

Name:

Contact

Telephone

Email

Address:

Section 2 - Location Data

Railroad Name:

Estimated Start Date

Specify the amount of time access
is required:

**Reason for
extension of time
beyond 60 days

****\$500 extension fee for each additional 30 days being requested.**

Nearest City:

County:

State:

REQUIRED: Latitude/Longitude
(Convert to Decimal Format)
(ex 12.3456789/-64.101112):

Address of
proposed
worksite:

Railroad
Subdivision - If
known

US DOT/AAR Crossing Number - If
available

Section 3 - Existing Agreement Data

Is there an Existing Agreement at this Location which will be affected by this Request?

☐ Yes ☐ No If YES, List Agreement Number(s):

Will facility be exclusively used by Applicant? ☐ Yes ☐ No

If YES, List Name of Lessee:

Describe the complete scope of work on or around Railroad property (REQUIRED):

Section 4 - Department of Transportation (D.O.T.)

Is this Installation associated
with a Department of
Transportation project?

☐ Yes ☐ No

If Yes, complete the following:

D.O.T. Contract Number: D.O.T. Project Number: D.O.T. Project Name:
D.O.T. Contact Information:
Name:
Address:
City: State: Zip Code:
Phone Number Email Address

Some important items to note when completing the application:

Checklist prior to submittal

- ☐ Latitude & longitudinal information converted to digital decimal format with an aerial map of location
- ☐ Payment for fees included - check payable to specific railroad
- ☐ If paying fees by credit card a completed signed credit card release is included - only Visa, MasterCard or Discover can be accepted - US Roads only
- ☐ Applications can be emailed with a copy of the check in order to start the approval process. Only the check for the doc prep fees needs to be mailed or overnighted when the complete application packet is emailed. Include a copy of the application to make sure the payment is matched to the correct project.
- ☐ When returning the signed agreement and proof of insurance for final review and execution please allow 2-3 weeks prior to the start of work. Once all required fees are paid and documentation in place the agreement must go through an approval process before it can be finalized.

Section 5 - Insurance Requirements - US Roads

Insurance Requirements prior to any construction project - Both the Utility Owner and the Contractor completing Installation are required to provide proof of current Commercial General Liability Insurance. Prior to construction the Contractor is required to provide current proof of Railroad Protective Liability Insurance.

General Liability Insurance must meet the minimum requirements of \$2M per occurrence and \$6M aggregate per the terms of the written contract.

Automobile Insurance must meet the minimum requirements of \$1M bodily injury and property damage per occurrence.

The General Liability certificate is required to show proof of **CG2417 or its equivalent**. (*Contractual Liability Railroads*)

Evidence of **Workers Compensation** must be provided on certificate and meet the minimum requirements of \$1M. Certificate Holder naming **(Specified Railroad)** ****Specified Railroad names can be found at www.gwm.com****

General Liability, Automobile Liability and Umbrella/Excess Liability provides additional Insured status to the certificate holder and any other party(ies) specified in or required by written contract between the named Insured and the certificate holder.

Where applicable and permitted by law, all policies include a blanket automatic waiver of subrogation endorsement that provides this feature in favor of the certificate holder and any other party(ies) specified in or required by written contract between the named Insured and the certificate holder.

Prior to Construction or any access within 50' of Railroad - current Certificate of Railroad Protective Liability Insurance (RPL) which shows the **specific Railroad** as named Insured. If the Contractor does not carry a policy of Railroad Protective Liability Insurance, this coverage can be secured through the railroad. An application and current Fee structure for this coverage is available upon request.

****Insurance Requirements for pollution/hazardous pipelines such as natural gas, oil, petroleum, etc. to be provided as shown below****

General Liability Insurance which names the **specific Railroad** as additional Insured and must meet the limits of \$5M per occurrence and \$10M aggregate. Such policy shall be endorsed to provide Waiver of Subrogation in favor of the certificate holder per written contract.

Pollution Legal Liability Insurance with minimum limits of Five Million Dollars (\$5,000,000) per occurrence naming the **certificate holder** as additional Insured per written contract. Such policy shall be endorsed to provide Waiver of Subrogation in favor of the certificate holder per written contract.

Section 6 - Insurance requirements - Canadian Roads

Insurance Requirements prior to any construction project - Both the Utility Owner and the Contractor completing Installation are required to provide proof of current Commercial General Liability Insurance.

General Liability Insurance must meet the minimum requirements of \$2M per occurrence and \$2M aggregate per the terms of the written contract.

Automobile Insurance must meet the minimum requirements of \$1M bodily injury and property damage per occurrence.

Where applicable, the General Liability certificate is required to show proof of **CG2417 or its equivalent**. (Contractual Liability Railroads)

Evidence of **Workers Compensation** must be provided on certificate and meet the minimum requirements of \$1M. Certificate Holder naming **(specified Railroad)** ""Specified Railroad names can be found at www.gwrr.com""

General Liability, Automobile Liability and Umbrella/Excess Liability provides additional Insured status to the certificate holder and any other party(ies) specified in or required by written contract between the named insured and the certificate holder.

Where applicable and permitted by law, all policies include a blanket automatic waiver of subrogation endorsement that provides this feature in favor of the certificate holder and any other party(ies) specified in or required by written contract between the named insured and the certificate holder.

IMPORTANT

Prior to application submittal, Questions can be answered and additional contact information obtained by visiting the website at www.gwrr.com - select the specific railroad and click on the link for Real Estate.

Plans for proposed Installations shall be submitted and approved by the Railroad, on behalf of itself, its subsidiaries, and affiliates, and designed engineer before work can begin! Applications submitted not meeting current specifications as outlined in the General Specifications for Sub-grade and Above grade Utility Crossings of Railway's Right-of-Way will be returned and may incur additional engineering review fees. For your convenience a copy of these specifications can be found on the website at www.gwrr.com.

Materials and Installations are to be in accordance with specifications of National Electrical Safety Code, AREMA, current edition, and requirements of the Railroad.

Upon application approval, applicant agrees to reimburse Railroad for any cost incurred by Railroad incident to the Installation, maintenance and/or supervision necessitated by the Installation. Applicant further agrees to assume all liability for accidents or injuries that arise as a result of this Installation.

This section must be completed in full, signed and dated prior to submittal to the Real Estate Department for processing. Unsigned applications, incomplete or inaccurate information will delay application request and may incur additional fees.

Date:	_____	Signature:	_____
Phone Number	_____	Printed Name:	_____
Fax Number:	_____	Title:	_____

Please make check payable to the specific Railroad where proposed work is to occur . A list of Genesee & Wyoming, Inc. subsidiary railroads can be found at: www.gwrr.com . W-9 Information available upon request.

Mall the application for proposed project, along with the applicable non-refundable fee(s) In U.S. Funds (Canadian Applicants please pay all fee In Canadian Funds plus HST) to:

Genesee & Wyoming Railroad Services, Inc.

Attn: Real Estate Department

13901 Sutton Park Dr. S., Suite 270

Jacksonville, FL 32224

In order for the application to be complete ALL required details pertinent to the proposed installation must be completed in full and submitted along with the following fees:

	# of Copies	Amount Due	Description
☐	1	\$2,250	Engineer review fee, plans/drawings no larger than 11 x 17. Larger drawings may incur additional engineering fees.
☐	1	\$1,750	Completed Contractor's Access/Occupancy Application and Fee required with ALL application submittals. If the contractor is unknown at time of submittal, just check the box under the heading on the form.
		\$4,000	Full amount due with submittal for new utility installations - Unless prior arrangements are made, applications received without payment will not be processed until receipt of payment. This could extend the time frame for the processing of your request.
Only applicable for projects over 60 days		\$500	Extension fee for each additional 30 days over the initial 60 days

Standard Application processing takes approximately 6-8 weeks. PLEASE READ IN FULL - "Expedited processing" is available and will reduce the processing time to between 1-2 weeks at an additional cost of \$3,000. For all expedited requests, the application and plans submitted must meet engineering specifications and be approved in order for the applicable agreement(s) to be forwarded to the applicant for signature within 2 weeks from receipt of all required information and full payment of required fees. It is important to note that an incomplete application and plans submitted that do not meeting engineering specifications will cause a delay in the processing of expedited request and the two week guarantee no longer applies if revisions are required to be made by the applicant in order for them to meet engineering specs for engineering to approve the request.

The expedited processing of an application does not apply to the final review and execution phase of the agreement process. Once a signed agreement has been received and ALL required fees and insurance has been submitted the agreement(s) is(are) forwarded for final review by a VP of Real Estate, Legal and the signatory for the Railroad. This final review and execution process can take up to 2 weeks from receipt of all required documentation and fees. This part of the agreement process cannot be expedited.

At this time we are unable to expedite requests for the installation of new private grade crossings, industrial track agreements, and track leases. The process for these requests varies somewhat from the review and approval process for new utilities and takes a little longer to secure all required approvals.

Entering or working on the railroad right of way or any other railroad property without the permission of the railroad is trespassing and illegal. Violators risk the possibility of serious, even fatal injury and will be prosecuted.

SP00067_RR_TriMET (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-26

Last updated: 09-01-26)

This Section requires

SP00170.)

(Follow current boilerplate applicable to the Project. Incorporate the following unique language into the current boilerplate. The State Specification Engineer needs to approve the final incorporated language.)

(Use this when TriMET Railway is within the project limits. The included requirements and exhibits are for information and reference only. Do not make any modifications to this document.)

TRI-COUNTY METROPOLITAN DISTRICT OF OREGON (TRIMET)

**License Agreement, License application guidelines, License application and MAX
Right-of-Way Access Request/Permit**

The following sample TriMet agreements and application are included in these Special Provisions for information and reference only. See 00170.01(f).



LICENSE AGREEMENT

No. XXXX

LICENSOR: The Tri-County Metropolitan Transportation District of Oregon

LICENSEE: Name of Company / Municipality

The Tri-County Metropolitan Transportation District of Oregon ("TriMet") hereby grants to Name of Company / Municipality ("Licensee"), and Licensee's employees and contractors the right to enter upon and use the premises shown or designated on the attached and incorporated Exhibit A (the "Premises"), in accordance with the terms and conditions of this License Agreement ("License").

Subject to the terms and conditions of this License and during the term hereof, TriMet grants to Licensee the right to construct, maintain, and operate the facility described as follows: <Companies Work> (the "Permitted Use" or "Work"). The Work will be performed in compliance with the plans shown in Exhibit A, and in compliance with the terms and conditions of this License.

Term of License: For the period from <Date License is issued> until completed or terminated. (the "Effective Date").

Special Insurance Requirements: Certificate of Insurance.

Compensation to be Paid by Licensee: \$2000, to be paid prior to issuance of License, pursuant to the provisions of Section C.

ADDITIONAL TERMS AND CONDITIONS

A. Use of the Premises

Licensee shall use the Premises solely for the Permitted Use as set forth in this License.

B. Special Use Provisions

1. If the Work is not concluded within one year after the Effective Date, Licensee must contact Michael McNeill, TriMet Real Property, (503) 962-2148, mcneillm@trimet.org, to clear any scheduling conflicts or changed conditions on the Premises.
2. Notwithstanding anything to the contrary contained herein or in drawings or other materials submitted to TriMet, a minimum depth of ten (10) feet below top of rail to top of boring is required.
3. Licensee shall return track ballast and track drainage areas adjacent to or affected

by the Permitted Use to their original condition within ten (10) days of being given written notice by TriMet to do so. TriMet may take documentation photos during the pre-excavation inspection.

4. All construction and survey personnel shall attend a Track Access Training class and carry a Track Access Card and hard hat sticker. Track Access Training classes are provided to construction personnel by TriMet at no cost.
5. All construction and survey personnel shall wear red or green fluorescent vests while in the right of way.
6. All construction and survey personnel will be prohibited from blocking ingress and egress of TriMet traffic.
7. A MAX Right-of-Way Access Request/Permit (a "ROW Access Permit") must be submitted to and approved by TriMet's Maintenance of Way department prior to performing any Work permitted under this License. The ROW Access Permit issued to Licensee and all requirements imposed upon Licensee thereby are considered special use provisions of this License, and are incorporated by this reference.
8. No installation, alteration, or construction of improvements will be made on the Premises without the prior written consent of TriMet, which will not be unreasonably withheld. At least ten (10) business days prior to any proposed installation, alteration, or construction, Licensee shall submit to TriMet proposed plans and specifications thereof and must not commence any placement of any improvements or any construction until it has received TriMet's written approval. Approval by TriMet will be in its sole discretion, not to be unreasonably withheld.
9. No later than 10:00 a.m. Monday of the week prior to the scheduled work, Licensee (or its contractor) shall submit requests for a ROW Access Permit to TriMet Light Rail Operations: Contact - Jeff Johnson (503) 962-8138 office, (503) 962-8525 fax, johnsonj@trimet.org. Requests for a ROW Access Permit shall be submitted on a weekly basis until work is concluded.
10. As part of the ROW Access Permit process, Licensee must inform Maintenance of Way, of any scheduling of traffic signal interruption related to the Work.
11. Licensee (or its contractor) shall provide TriMet's Project Implementation Department a complete project schedule for all work activity associated with the Permitted Use.
12. Licensee shall provide to TriMet a signed and stamped as-built drawing of the completed work within thirty (30) days of completion of work.
13. Licensee shall be responsible for any taxes, assessments, utilities, or other third-party costs associated with its use of the Property. TriMet shall have no

obligation regarding costs related to Licensee's use of the Property.

C. Place of Payments

Any payment required under this License shall be sent to TriMet, Accounts Receivable 101 SW First Ave. Suite 700., Portland, Oregon 97204 listing license number #XXXX, or such other place as TriMet may designate. All amounts not paid by Licensee when due will bear interest at the rate of the lesser of (a) twelve percent (12%) per annum, or (b) the highest interest rate allowed by law.

D. Insurance

Licensee, and any contractor who will perform any part of the Permitted Use on the Premises, shall maintain comprehensive general and automobile liability insurance for the protection of Licensee, its directors, officers, agents, volunteers, and employees, and insuring Licensee against liability for damages because of personal injury, bodily injury, death, or damage to property, including loss of use thereof, and occurring on or in any way related to this License caused by Licensee's use of the Premises with insurance of not less than Two Million Dollars (\$2,000,000.00) combined single limit per occurrence for bodily injury and property damage. This insurance must name TriMet, its directors, officers, and employees as additional insureds with the stipulation that this insurance, as to the interest of TriMet only, must not be invalidated by any act or neglect or breach of contract by the Licensee. The coverage provided by this policy shall be available as primary and noncontributory to any other insurance carried by TriMet in excess.

Licensee shall maintain in force Workers' Compensation insurance coverage and Employers' Liability insurance coverage. If Licensee is a qualified self-insured employer, a copy of Licensee's Certificate of Compliance and a certificate of insurance evidencing excess insurance must be forwarded to TriMet upon execution of this License.

Licensee shall furnish to TriMet a certificate evidencing the date, amount, and type of insurance that has been procured pursuant to this License, for itself and for any contractor performing any part of the Permitted Use on the Premises. TriMet must receive the required certificate or certificates prior to any work being performed on the Premises. Licensee is required to notify TriMet not less than thirty (30) days written notice prior to termination, cancellation, reduction or non-renewal of coverage, except only ten (10) days prior notice shall be required if the coverage is being cancelled for nonpayment of premiums.

E. Indemnity

Unless caused by the negligence or intentional misconduct of TriMet or its employees, contractors or agents, Licensee agrees to fully indemnify, defend, and hold harmless TriMet, its directors, officers, agents, volunteers, and employees from and against all third party claims and actions and all expenses incidental to the investigation and defense thereof (including but not limited to reasonable attorney fees), based upon or arising out

of damages or injuries to persons or property, caused by the fault or negligence in whole or in part of the Licensee, its agents, contractors, or employees related to the use or occupancy of the Premises. All provisions concerning indemnity will survive the termination of this License for any reason.

F. No Benefit to Third Parties

TriMet and Licensee are the only parties to this License and as such are the only parties entitled to enforce its terms. Nothing in this License gives or may be construed to give or provide any benefit, direct, indirect, or otherwise, to third parties unless such third parties are expressly described in this License as intended to be beneficiaries of its terms.

G. Assignment of Interest of Rights

The Licensee, or its assigns, must not, in any manner, directly or indirectly, by operation of law or otherwise, sublease, assign, transfer, or encumber (collectively, "Assign") any of Licensee's rights granted by this instrument, without obtaining the express prior written approval of TriMet. In the absence of TriMet's express prior written approval, any attempted assignment or transfer will be null and void. Notwithstanding the foregoing, Licensee may Assign without TriMet's consent to any parent, subsidiary or affiliate or to any entity that succeeds to all or substantially all of the assets of equity of Licensee by merger, sale or otherwise. In the event Licensee so assigns this Agreement to any parent, subsidiary, or affiliate or to any entity ("new entity") that succeeds to all or substantially all of the assets or equity of Licensee by merger, sale, or otherwise, Licensee shall promptly send written notification to TriMet of such assignment and provide TriMet with all known contact information of the new entity.

H. Warranties/Guarantees; Property "As Is"

The Licensee acknowledges that it has inspected the Premises and found them to be completely acceptable and safe for Licensee's intended use. TriMet makes no warranty, guarantee, or averment of any nature whatsoever concerning the physical condition of the Premises, and it is agreed that TriMet will not be responsible for any loss, damage, or costs that may be incurred by Licensee by reason of any such physical condition.

I. Compliance With Law; Permits

Licensee shall comply with all applicable state, federal, and local laws, including but not limited to, zoning ordinances and laws, rules, regulations, and policies concerning equal opportunity, nondiscrimination, Workers' Compensation, minimum and prevailing wage requirements, and all applicable TriMet regulations. Licensee shall obtain all necessary government or regulatory permits and approvals needed to perform the Work on the Premises, prior to performing Work pursuant to this License. Licensee shall provide copies of any permit or approval to TriMet, upon request to Licensee.

J. Notices

All notices required under this Agreement must be sent in writing to the address set forth below the signatures to this License and will be effective upon actual receipt or refusal of delivery.

K. Hazardous Substances

No use may be made of, on, or from the Premises by Licensee relating to the handling, storage, disposal, transportation, or discharge of hazardous substances, toxic material, or environmentally regulated material or substance, as those terms are defined in any environmental law or regulation, except for uses that are incidental to any business conducted on the Premises, the primary purpose of which is not the handling, storage, disposal, transportation, or discharge of hazardous substances. All of those incidental uses must be in strict conformance with all applicable federal, state, and local laws, rules, and regulations, as the same may be amended from time to time. Promptly after Licensee receives notice of any use, whether incidental or otherwise, by Licensee of such substances on the Premises, or of any violation of any governmental requirement with respect to such use by Licensee, Licensee shall deliver to TriMet written notice describing such use or violation. Failure to give such notice will result in the immediate termination of this License.

L. Hazardous Substances Clean Up and Indemnity

In the event Licensee receives a notice or a copy thereof prepared by any governmental entity requiring cleanup of hazardous substances that are regulated by environmental law or regulation for which Licensee is responsible pursuant to any term of this License, or imposing a fine or other obligation as a result of the existence of such substances for which Licensee is responsible pursuant to any term of this License, then on or before the date such compliance is due, Licensee shall comply with or cause the compliance with the terms of such notice, in accordance with the terms of such notice. If Licensee does not perform the obligations described in the previous sentence of this Section when and as required, or, if performance is not possible during the time required by the notice, if Licensee does not proceed with diligence and good faith to effect the performance, then in addition to all other rights and remedies TriMet may have, TriMet will have the right to terminate this License.

Licensee agrees to hold harmless, defend, and indemnify TriMet from, and to assume all duties, responsibilities, and liabilities at its sole cost and expense for payment of penalties, sanctions, forfeitures, losses, costs, attorney fees, or damages, and for responding to any action, notice, claim, order, summons, citation, directive, litigation, investigation, or proceeding that is related to: (i) Licensee's failure to comply with any environmental or industrial hygiene law, including without limitation any regulations, guidelines, standards, or policies of any governmental authorities regulating or imposing standards of liability or standards of conduct with regard to any environmental or industrial hygiene conditions or matters as may now or hereafter be in effect; or (ii) Licensee's storage, handling, disposal, or release of hazardous substances; or (iii) any environmental or industrial hygiene conditions that arise out of or are in any way related to the activities conducted by Licensee thereon, except to the extent the environmental

conditions are caused or contributed to by TriMet or other third party unrelated to Licensee or are naturally occurring. In case any action or proceeding is brought against TriMet by reason of any such claim, TriMet may, at its option, require that Licensee resist or defend such action or proceeding at Licensee's own cost and expense and by counsel reasonably satisfactory to TriMet. This indemnity specifically includes reasonable costs, expenses, and fees incurred in connection with any investigation of Premises conditions or any clean-up, remediation, removal, or restoration work required by any governmental authority. The indemnity provided herein will survive the expiration or termination of this License for any reason.

M. Restoration

Upon termination of this License, Licensee shall restore the Premises to a condition as good as or better than its original condition, which condition will be determined at TriMet's discretion, unless otherwise directed by TriMet.

N. TriMet's Right to Terminate

Notwithstanding any provision contained herein, TriMet or its authorized representative may terminate this License, as allowed by law. Such termination will be in writing. Upon expiration of the notice of termination, the Licensee shall immediately leave the Premises. Except for Licensee's payment obligations accruing after the termination, all other obligations and liability and indemnification to TriMet survive termination. Unless waived by TriMet, the Licensee shall restore the Premises to a condition as good as or better than its condition at the commencement hereof, which condition will be determined at TriMet's reasonable discretion.

Both parties agree to be bound by the terms and conditions of this License Agreement. Each party represents that the signatory below has the complete power and authority to commit on behalf of that party.

[SIGNATURE PAGE FOLLOWS]

Licensor

The Tri-County Metropolitan
Transportation District of Oregon

By: _____

Name: Nicholas Stewart

Title: TriMet Real Property Manager

Date: _____

Contact Name: Michael McNeill
Phone: (503) 962-2148
Address: 101 SW First Ave., 7th Floor,
Portland, OR, 97204
E-mail: mcneillm@trimet.org

Licensee

Company Name

By: _____

Name: _____

Title: _____

Date: _____

Contact Name:
Phone:
Address:
E-mail:



License application guidelines

For right-of-way-access

In order to assist with the license application, TriMet provides the following guidelines:

Time:

- 1) License applications should be submitted at least eight weeks in advance of anticipated access. Licenses require review by multiple TriMet departments including Real Property, Maintenance of Way, Right of Way, Engineering and Legal.
- 2) License applications for fiber or cell towers may take up to six months, as they require FTA approval. Typically these are leases (e.g., ATT cell tower).

Submittals:

- 1) To ensure receipt by TriMet, applications should be sent to StewartN@trimet.org along with any supporting documentation such as drawings. Drawings should be sent in PDF format.
- 2) Mailed applications may be sent to:

TriMet Real Property
Attn: Nicholas Stewart
101 SW Main St., Suite 700
Portland, OR 97204

General Design Criteria:

- 1) Pipelines crossing underneath the light rail tracks carrying water or pressure sanitary storm sewers shall be encased.
- 2) Pipelines and conduits, which contain flammable materials, such as gas lines, do not need to be cased. If casing pipe is installed it shall be vented and approved on a case-by-case basis by TriMet.
- 3) Casing pipes shall be designed to withstand Light Rail Train ("LRT") loadings and shall be protected against corrosion. The end of casing pipes shall be sealed and the annular space between the carrier pipe and the casing pipe shall be filled with sand. When casings are bored or augured under LRT tracks, provisions shall be made to ensure no voids are created.
- 4) Minimum cover for utilities trenched under proposed LRT tracks is 6'0" below top-of-rail. Trenching is not allowed across existing LRT tracks.
- 5) Minimum cover for utilities augured or pushed under existing LRT tracks is 7'0" below top-of-rail.
- 6) Minimum cover for utilities directionally drilled under existing LRT tracks is 10'0" below top-of-rail.

- 7) Where possible, all utilities shall cross beneath the LRT right-of-way at 90 degrees to the LRT centerline.
- 8) New or replacement utilities that run longitudinally adjacent to the LRT right-of-way, unless otherwise approved by TriMet, shall be located a minimum of 10' from the centerline of track to the near edge of longitudinal pipe.
- 9) All non-metallic LRT utilities pipes or casings shall have tone wires that terminate in a handhole to facilitate locating buried pipes.
- 10) All abandoned pipes beneath the trackbed shall be plugged and filled with sand or controlled density fill ("CDF") or low-strength concrete slurry, unless otherwise approved by TriMet.
- 11) TriMet does not allow crossings or parallel systems to the Overhead Catenary System ("OCS") on our right-of-way unless, in TriMet's sole judgment, it is on a structure or at an elevation that allows TriMet ample room to operate and maintain the system. Clearances for anything parallel to TriMet's system should be a minimum of 15' from the centerline of our track. This is dependent upon the specific location that is being considered.
- 12) TriMet does not rent space and/or allow foreign contacts on our exclusive OCS poles.

Fees:

- 1) TriMet's standard license application fee is \$2,000.
- 2) Additional fees may be charged for costs related to TriMet coordination, staff time, plan review, safety precautions, additional permits, transit impacts, and other necessary costs related to the project.
- 3) TriMet may charge additional annual fees for fiber optic lines, cell towers, and other private intrusions into the Right of Way.
- 4) Fees will be determined at the time a License Application is submitted to TriMet.

TRIMET
License application
For right-of-way-access

No.: _____

SECTION I

- A. Name of proposed licensee: _____
- B. Mailing address: _____
- C. City: _____ State: _____ Zip: _____
- D. Name of contact person: _____
- E. Phone number: _____ E-Mail: _____
- F. Effective date desired: _____
- G. Do you now have an existing license with TriMet at this location? _____
- H. Is the application for a new facility or relocation of existing facility? _____

SECTION II



- A. Describe the proposed facility, including its purpose, location, materials and construction methods. Is this use underground, above ground or a combination? Are you aware of other existing underground facilities?
NOTE: Conduit shall be bored or jacked under trackage unless otherwise approved by TriMet Engineering.

- _____
1. Length of underground crossing: _____
 2. Depth of underground crossing: _____
 3. Carrier pipe: Dia.: _____ Length: _____ Type: _____
 4. Inner conduit: Dia.: _____ Length: _____ Type: _____
 5. Wire: Size: _____ Type: _____ lb.
 6. Crossing is located within a (check one): Dedicated street ☐ Private right-of-way ☐

7. Please fill in the blanks corresponding to figures A and B below, or attach a separate page, or pages, in pdf form, containing all the information requested below.

- Name of nearest MAX station on each side of proposed facility:

- Name of street at nearest crossing: _____
- Distance from proposed facility to nearest street crossing: _____
- Angle at which proposed facility intersects right-of-way: _____
- In Figure A, north is most closely approximated by: Left ☐ Right ☐ Up ☐ Down ☐

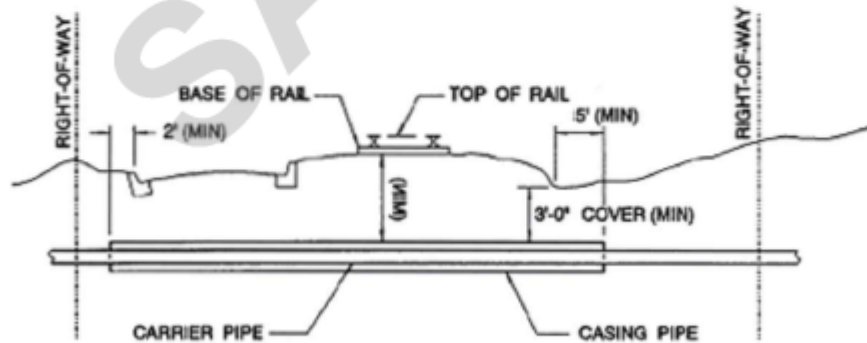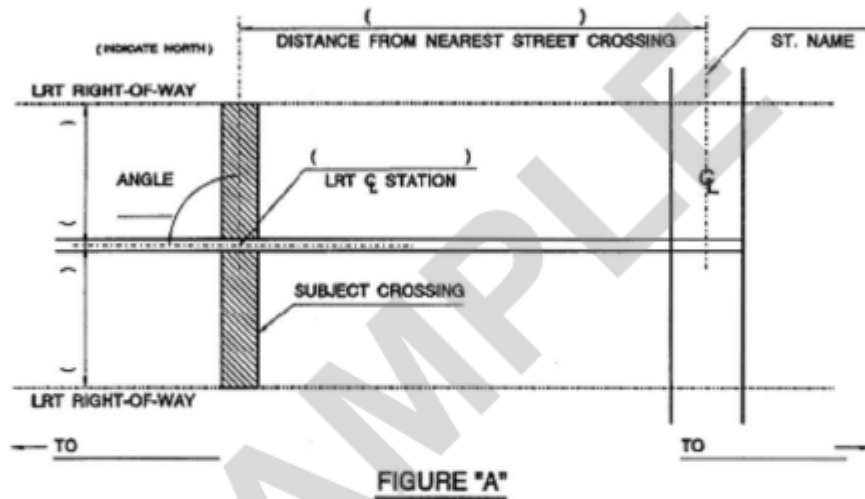

- B. Construction shall be performed under applicable sections of current Oregon Department of Transportation (ODOT) Standard Specifications for Highway Construction.

List the major components of the proposed work and the applicable ODOT specification section:

Section	Title
_____	_____
_____	_____
_____	_____
_____	_____

- C. If you are drilling, jacking, or boring under our facility, what are the locations of the jacking and receiving pits (location, length, width, depth and distance from the nearest track)?

If you access our right-of-way with vehicles, where will they enter and exit?

- E. If you are working in the TriMet right-of-way, you must complete a "MAX Right-of-Way Access Request/Permit" after you receive your license. A copy of our current MAX Right-of-Way Access Request/Permit is included with this application.

Please note: Licensee will be required to cover any expense involved in restoring the right-of-way, including roadways.

Send completed application to:

TriMet Real Property
Attn: Nicholas Stewart
101 SW Main St., Suite 700
Portland, OR 97204
StewartN@trimet.org

This page is intentionally blank,
to assure proper pagination for double-sided printing.
For single-sided printing, this page can be skipped.

SAMPLE

Permit Number: _____



MAX RIGHT-OF-WAY ACCESS REQUEST/PERMIT
TRIMET

This Section Completed by Requesting Party:

Dates of Access: From: _____ To: _____

Limits of Access:

North or Eastbound Track	From: _____	To: _____
Time:	From: _____	To: _____
South or Westbound Track	From: _____	To: _____
Time:	From: _____	To: _____

Permit Holder: _____ **Number of People:** _____
Pager: _____ Cell: _____

Description of Work: _____

Equipment Required: _____

Requesting Party: _____ **Telephone:** _____
Fax: _____ Email: _____

CAUTION:

The overhead catenary electrical system must be considered LIVE and HOT at all times. Electrical power removal must be confirmed in the field with the designated power personnel.

This Section Completed by Trimet:

Special Operating Conditions:

1. Permits are good only for a maximum of 7 days
2. Request for Right-of-Way access permit must be submitted by 10:00 a.m. Monday, a week prior to the scheduled work.
3. All personnel must wear reflective safety vests that comply ANSI Class 2 standards.
4. Advise Control when entering and leaving the right-of-way. (Telephone 503-962-6262)
5. E-mail to johnson@trimet.org bacclim@trimet.org and to trackaccessrequests@trimet.org

Required:

Track Access RWP Training	Yes _____ No _____	# Personnel: _____
Special Instruction:	Yes _____ No _____	Number: _____
Train Order:	Yes _____ No _____	_____
Call Boards:	Yes _____ No _____	_____
Flags:	Yes _____ No _____	_____
EIC: if yes check one:	Yes _____ No _____	_____
Control	☐	_____
MOW	☐	_____
Other: (explain)	☐	_____
Train Flagger	Yes _____ No _____	Limits: _____
Lookout/Watchperson	Yes _____ No _____	_____
Traffic Flagger	Yes _____ No _____	_____
Manual Block:	Yes _____ No _____	_____
Bus Bridge:	Yes _____ No _____	_____
Power Removal:	Yes _____ No _____	_____
Maintenance Advisory:	Yes _____ No _____	Name: _____
Other:	_____	_____

Original: _____
Copies: _____
Control
Permit Holder, Requesting Party, Manager of Maintenance-of-Way, System Safety, File

Request
Approved: _____
Maintenance-of-Way Project Engineer Field Operations Track Access Coordinator

SP00068-RR-UPRR (Special Provisions for the 2024 Book)

(Bidding on or after: 08-14-25

Last updated: 04-22-25

*This Section requires
SP00170 and SP00223.)*

(Use this when Union Pacific Railroad Company is within project limits. The included agreement and exhibits are for information and reference only. Do not make any modifications to this document.)

UNION PACIFIC RAILROAD COMPANY

Contractor's Right of Entry Agreement

Exhibit B

Exhibit C

Exhibit D

The following Union Pacific Railroad Company agreements and exhibits are included in this Project for information and reference only. The actual Contractor's Right of Entry Agreement with Exhibit B, Exhibit C, and Exhibit D will be provided and executed by the Union Pacific Railroad Company.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the Railroad agreement according to 00170.01(e).

The Contractor shall review and comply with the following documents as applicable:

- *UPRR-BNSF Guidelines for Grade Separated Projects and Guidelines for Temporary Shoring* located at:
https://www.up.com/real_estate/roadxing/industry/grade_separation/index.htm
- *Union Pacific Railroad Public Projects Manual* located at:
https://www.up.com/cs/groups/public/@uprr/@corprel/documents/up_pdf_nativedocs/pdf_up_public_projects_manual.pdf
- *Union Pacific Railroad Engineering Standard Drawings* located at:
<https://www.up.com/emp/engineering/apps/archives/standards/public/index.cfm>
- *Union Pacific General Conditions and Specifications* located at:
[https://www.up.com/emp/engineering/mapcontent/standards/UP_GENERAL SPECIFICATIONS.pdf](https://www.up.com/emp/engineering/mapcontent/standards/UP_GENERAL_SPECIFICATIONS.pdf)
- *Guide for Preparation of a Bridge Demolition and Removal Plan for Structures over Railroad* located at:
https://www.up.com/cs/groups/public/@uprr/@realestate/documents/up_pdf_nativedocs/pdf_up_reus_industry_demo.pdf
- *Guidelines for Contractor Material Delivery on Union Pacific Property* located at:

[https://www.up.com/emp/engineering/mapcontent/standards/GUIDELINES FOR CONTRACTORS ON UPRR PROPERTY.pdf](https://www.up.com/emp/engineering/mapcontent/standards/GUIDELINES_FOR_CONTRACTORS_ON_UPRR_PROPERTY.pdf)

- *UPRR Safety Book/UPRR Contractor Minimum Safety Requirements* located at:
<https://www.up.com/suppliers/contractor-safety/index.htm>

When Railroad flagger services are required, the Contractor shall provide Railroad flagger services from a vendor on Union Pacific's approved third party list of Railroad flagger vendors according to 00223.35.

**CONTRACTOR'S
RIGHT OF ENTRY AGREEMENT**

THIS AGREEMENT is made and entered into as of the _____ day of _____, 20____, by and between UNION PACIFIC RAILROAD COMPANY, a Delaware corporation ("Railroad"); and _____, a _____ corporation ("Contractor").

RECITALS:

Contractor has been hired by _____ to perform work relating to _____ (the "Work") with all or a portion of such Work to be performed on property of Railroad in the vicinity of Railroad's Milepost _____ on Railroad's _____ [Subdivision or Branch] [at or near DOT No. _____] located at or near _____, in _____ County, State of _____, as such location is in the general location shown on the print marked Exhibit A, attached hereto and hereby made a part hereof, which Work is the subject of a contract dated _____ between Railroad and _____.

Railroad is willing to permit Contractor to perform the Work described above at the location described above subject to the terms and conditions contained in this agreement.

AGREEMENT:

NOW, THEREFORE, it is mutually agreed between Railroad and Contractor, as follows:

ARTICLE 1 - DEFINITION OF CONTRACTOR

For purposes of this agreement, all references in this agreement to Contractor shall include Contractor's contractors, subcontractors, officers, agents and employees, and others acting under its or their authority. For purposes of clarity, Contractor agrees that any MC (defined below) hired by Contractor is a subcontractor of Contractor and therefore included in the defined term Contractor pursuant to the foregoing sentence.

ARTICLE 2 - RIGHT GRANTED PURPOSE

Railroad hereby grants to Contractor the right, during the term hereinafter stated and upon and subject to each and all of the terms, provisions and conditions herein contained, to enter upon and have ingress to and egress from the property described in the Recitals for the purpose of performing the Work described in the Recitals above. The right herein granted to Contractor is limited to those portions of Railroad's property specifically described herein, or as designated by the Railroad Representative named in Article 4.

ARTICLE 3 - TERMS AND CONDITIONS CONTAINED IN EXHIBITS B AND C

The terms and conditions contained in Exhibit B and Exhibit C, attached hereto, are hereby made a part of this agreement.

ARTICLE 4 - ALL EXPENSES TO BE BORNE BY CONTRACTOR; RAILROAD REPRESENTATIVE.

A. Contractor shall bear any and all costs and expenses associated with any Work performed by Contractor (including without limitation any CIC), or any costs or expenses incurred by Railroad relating to this agreement.

B. Contractor shall coordinate all of its Work with the following Railroad representative or his or her duly authorized representative (the "Railroad Representative"):

C. Contractor, at its own expense, shall adequately police and supervise all Work to be performed by Contractor and shall ensure that such Work is performed in a safe manner as set forth in Section 7 of Exhibit B. The responsibility of Contractor for safe conduct and adequate policing and supervision of Contractor's Work shall not be lessened or otherwise affected by Railroad's approval of plans and specifications involving the Work, or by Railroad's collaboration in performance of any Work, or by the presence at the Work site of a Railroad Representative, or by compliance by Contractor with any requests or recommendations made by Railroad Representative.

ARTICLE 5 - SCHEDULE OF WORK ON A MONTHLY BASIS.

The Contractor, at its expense, shall provide on a monthly basis a detailed schedule of Work to the Railroad Representative named in Article 4B above. The reports shall start at the execution of this agreement and continue until this agreement is terminated as provided in this agreement or until the Contractor has completed all Work on Railroad's property.

ARTICLE 6 - TERM; TERMINATION.

A. The grant of rights herein made to Contractor shall commence on the date of this agreement, and continue until _____, unless sooner terminated as herein provided, or at such time as Contractor has completed its Work on Railroad's property, whichever is earlier. Contractor agrees to notify the Railroad Representative in writing when it has completed its Work on Railroad's property.

B. This agreement may be terminated by either party on ten (10) days written notice to the other party.

ARTICLE 7 - CERTIFICATE OF INSURANCE.

A. Before commencing any Work and throughout the entire term of this Agreement, Contractor, at its expense, shall procure and maintain in full force and effect the types and minimum limits of insurance specified in Exhibit C of this agreement and require each of its subcontractors to include the insurance endorsements as required under Section 12 of Exhibit B of this agreement.

B. Not more frequently than once every two (2) years, Railroad may reasonably modify the required insurance coverage to reflect then-current risk management practices in the railroad industry and underwriting practices in the insurance industry.

C. Upon request of Railroad, Contractor shall provide to Railroad a certificate issued by its insurance

carrier evidencing the insurance coverage required under Exhibit B.

D. Contractor understands and accepts that the terms of this Article are wholly separate from and independent of the terms of any indemnity provisions contained in this Agreement.

D. Upon request of Railroad, insurance correspondence, binders, policies, certificates and endorsements shall be sent to:

Union Pacific Railroad Company

[Insert mailing address]

Attn: _____

Folder No. _____

ARTICLE 8 - PRECONSTRUCTION MEETING.

If the Work to be performed by the Contractor will involve the Railroad providing any flagging protection (or if a CIC is approved to provide flagging protection pursuant to the terms set forth herein) and/or there is separate work to be performed by the Railroad, the Contractor confirms that no work shall commence until the Railroad and Contractor participate in a preconstruction meeting involving flagging procedures and coordination of work activities of the Contractor and the Railroad (and any CIC, as applicable.)

ARTICLE 9. DISMISSAL OF CONTRACTOR'S EMPLOYEE.

At the request of Railroad, Contractor shall remove from Railroad's property any employee of Contractor who fails to conform to the instructions of the Railroad representative in connection with the Work on Railroad's property, and any right of Contractor shall be suspended until such removal has occurred. Contractor shall indemnify Railroad against any claims arising from the removal of any such employee from Railroad's property.

ARTICLE 10. ADMINISTRATIVE FEE.

Upon the execution and delivery of this agreement, Contractor shall pay to Railroad One Thousand Twenty Five Dollars (\$1,025.00) as reimbursement for clerical, administrative and handling expenses in connection with the processing of this agreement.

ARTICLE 11. CROSSINGS; COMPLIANCE WITH MUTCD AND FRA GUIDELINES.

A. No additional vehicular crossings (including temporary haul roads) or pedestrian crossings over Railroad's trackage shall be installed or used by Contractor without the prior written permission of Railroad.

B. Any permanent or temporary changes, including temporary traffic control, to crossings must conform to the Manual of Uniform Traffic Control Devices (MUTCD) and any applicable Federal Railroad Administration rules, regulations and guidelines, and must be reviewed by the Railroad prior to any changes being implemented. In the event the Railroad is found to be out of compliance with federal safety regulations due to the Contractor's modifications, negligence, or any other reason arising from the Contractor's presence on the Railroad's property, the Contractor agrees to assume liability for any civil penalties imposed upon the Railroad for such noncompliance.

ARTICLE 12.- EXPLOSIVES.

Explosives or other highly flammable substances shall not be stored or used on Railroad's property without the prior written approval of Railroad.

IN WITNESS WHEREOF, the parties hereto have duly executed this agreement in duplicate as of the date first herein written.

UNION PACIFIC RAILROAD COMPANY

By: _____

Title: _____

(Name of Contractor)

By: _____

Name: _____

Title: _____

Phone: _____

E-Mail: _____

EXHIBIT A
TO
CONTRACTOR'S RIGHT OF ENTRY AGREEMENT

Exhibit A will be a print showing the general location of the work site.

SAMPLE

EXHIBIT B
TO
CONTRACTOR'S RIGHT OF ENTRY AGREEMENT

Section 1. NOTICE OF COMMENCEMENT OF WORK - RAILROAD FLAGGING - PRIVATE FLAGGING.

A. Contractor agrees to notify the Railroad Representative at least ten (10) working days in advance of Contractor commencing its Work and at least thirty (30) working days in advance of proposed performance of any Work by Contractor in which any person or equipment will be within twenty-five (25) feet of any track, or will be near enough to any track that any equipment extension (such as, but not limited to, a crane boom) will reach to within twenty-five (25) feet of any track.

B. No work of any kind shall be performed, and no person, equipment, machinery, tool(s), material(s), vehicle(s), or thing(s) shall be located, operated, placed, or stored within twenty-five (25) feet of any of Railroad's track(s) at any time, for any reason, unless and until a Railroad approved flagman is provided to watch for trains. Upon receipt of such thirty (30)-day notice, the Railroad Representative will determine and inform Contractor whether a flagman need be present and whether Contractor needs to implement any special protective or safety measures.

C. Contractor shall be permitted to hire a private contractor to perform flagging or other special protective or safety measures (such private contractor being commonly known in the railroad industry as a contractor-in-charge ("CIC")) in lieu of Railroad providing such services or in concert with Railroad providing such services, subject to prior written approval by Railroad, which approval shall be in Railroad's sole and absolute discretion. If Railroad agrees to permit Contractor to utilize a CIC pursuant to the preceding sentence, Contractor shall obtain Railroad's prior approval in writing for each of the following items, as determined in all respects in Railroad's sole and absolute discretion: (i) the identity of the third-party performing the role of CIC; (ii) the scope of the services to be performed for the project by the approved CIC; and (iii) any other terms and conditions governing such services to be provided by the CIC. If flagging or other special protective or safety measures are performed by an approved CIC, Contractor shall be solely responsible for (and shall timely pay such CIC for) its services. Railroad reserves the right to rescind any approval pursuant to this Section 1, Subsection C., in whole or in part, at any time, as determined in Railroad's sole and absolute discretion.

D. If any flagging or other special protective or safety measures are performed by employees of Railroad and/or any contractor of Railroad, Railroad will bill Contractor for such expenses incurred by Railroad, unless Railroad and a federal, state or local governmental entity have agreed that Railroad is to bill such expenses to the federal, state or local governmental entity. If Railroad will be sending the bills to Contractor, Contractor shall pay such bills within thirty (30) days of Contractor's receipt of billing.

E. If any flagging or other special protective or safety measures are performed by Railroad or a CIC, Contractor agrees that Contractor is not relieved of any of its responsibilities or liabilities set forth in this agreement.

F. The provisions set forth in this subsection are only applicable for Flagging Services performed by employees of Railroad: the rate of pay per hour for each flagman will be the prevailing hourly rate in effect for an eight-hour day for the class of flagmen used during regularly assigned hours and overtime in accordance with labor agreements and schedules in effect at the time the Work is performed. In addition to the cost of such labor, a composite charge for vacation, holiday, health and welfare, supplemental sickness, Railroad Retirement and unemployment compensation, supplemental pension, Employees Liability and Property Damage and Administration will be included, computed on actual payroll. The composite charge will be the prevailing composite charge in effect at the time the Work is performed. One and one-half times the current hourly rate is

paid for overtime, Saturdays and Sundays, and two and one-half times current hourly rate for holidays. Wage rates are subject to change, at any time, by law or by agreement between Railroad and its employees, and may be retroactive as a result of negotiations or a ruling of an authorized governmental agency. Additional charges on labor are also subject to change. If the wage rate or additional charges are changed, Contractor (or the governmental entity, as applicable) shall pay on the basis of the new rates and charges. If flagging is performed by Railroad, reimbursement to Railroad will be required covering the full eight-hour day during which any flagman is furnished, unless the flagman can be assigned to other Railroad work during a portion of such day, in which event reimbursement will not be required for the portion of the day during which the flagman is engaged in other Railroad work. Reimbursement will also be required for any day not actually worked by the flagman following the flagman's assignment to work on the project for which Railroad is required to pay the flagman and which could not reasonably be avoided by Railroad by assignment of such flagman to other work, even though Contractor may not be working during such time. When it becomes necessary for Railroad to bulletin and assign an employee to a flagging position in compliance with union collective bargaining agreements, Contractor must provide Railroad a minimum of five (5) days notice prior to the cessation of the need for a flagman. If five (5) days notice of cessation is not given, Contractor will still be required to pay flagging charges for the five (5) day notice period required by union agreement to be given to the employee, even though flagging is not required for that period. An additional thirty (30) days notice must then be given to Railroad if flagging services are needed again after such five-day cessation notice has been given to Railroad.

Section 2. LIMITATION AND SUBORDINATION OF RIGHTS GRANTED

A. The foregoing grant of right is subject and subordinate to the prior and continuing right and obligation of the Railroad to use and maintain its entire property including the right and power of Railroad to construct, maintain, repair, renew, use, operate, change, modify or relocate railroad tracks, roadways, signal, communication, fiber optics, or other wirelines, pipelines and other facilities upon, along or across any or all parts of its property, all or any of which may be freely done at any time or times by Railroad without liability to Contractor or to any other party for compensation or damages.

B. The foregoing grant is also subject to all outstanding superior rights (whether recorded or unrecorded and including those in favor of licensees and lessees of Railroad's property, and others) and the right of Railroad to renew and extend the same, and is made without covenant of title or for quiet enjoyment.

Section 3. NO INTERFERENCE WITH OPERATIONS OF RAILROAD AND ITS TENANTS

A. Contractor shall conduct its operations so as not to interfere with the continuous and uninterrupted use and operation of the railroad tracks and property of Railroad, including without limitation, the operations of Railroad's lessees, licensees or others, unless specifically authorized in advance by the Railroad Representative. Nothing shall be done or permitted to be done by Contractor at any time that would in any manner impair the safety of such operations. When not in use, Contractor's machinery and materials shall be kept at least twenty-five (25) feet from the centerline of Railroad's nearest track, and there shall be no vehicular crossings of Railroad's tracks except at existing open public crossings.

B. Operations of Railroad and work performed by Railroad personnel and delays in the Work to be performed by Contractor caused by such railroad operations and Work are expected by Contractor, and Contractor agrees that Railroad shall have no liability to Contractor, or any other person or entity for any such delays. The Contractor shall coordinate its activities with those of Railroad and third parties so as to avoid interference with railroad operations. The safe operation of Railroad train movements and other activities by Railroad takes precedence over any Work to be performed by Contractor.

Section 4. LIENS.

Contractor shall pay in full all persons who perform labor or provide materials for the Work to be performed by Contractor. Contractor shall not create, permit or suffer any mechanic's or materialmen's liens of any kind or nature to be created or enforced against any property of Railroad for any such Work performed. Contractor shall indemnify and hold harmless Railroad from and against any and all liens, claims, demands, costs or expenses of whatsoever nature in any way connected with or growing out of such Work done, labor performed, or materials furnished. If Contractor fails to promptly cause any lien to be released of record, Railroad may, at its election, discharge the lien or claim of lien at Contractor's expense.

Section 5. PROTECTION OF FIBER OPTIC CABLE SYSTEMS.

A. Fiber optic cable systems may be buried on Railroad's property. Protection of the fiber optic cable systems is of extreme importance since any break could disrupt service to users resulting in business interruption and loss of revenue and profits. Contractor shall visit www.up.com/CBUD to complete and submit the required form to determine if fiber optic cable is buried anywhere on Railroad's property to be used by Contractor. If it is, Contractor will telephone the telecommunications company(ies) involved, make arrangements for a cable locator and, if applicable, for relocation or other protection of the fiber optic cable. Contractor shall not commence any Work until all such protection or relocation (if applicable) has been accomplished.

B. IN ADDITION TO OTHER INDEMNITY PROVISIONS IN THIS AGREEMENT, CONTRACTOR SHALL INDEMNIFY, DEFEND AND HOLD RAILROAD HARMLESS FROM AND AGAINST ALL COSTS, LIABILITY AND EXPENSE WHATSOEVER (INCLUDING WITHOUT LIMITATION, ATTORNEYS' FEES, COURT COSTS AND EXPENSES) ARISING OUT OF ANY ACT OR OMISSION OF CONTRACTOR, ITS AGENTS AND/OR EMPLOYEES, THAT CAUSE OR CONTRIBUTES TO (1) ANY DAMAGE TO OR DESTRUCTION OF ANY TELECOMMUNICATIONS SYSTEM ON RAILROAD'S PROPERTY, AND/OR (2) ANY INJURY TO OR DEATH OF ANY PERSON EMPLOYED BY OR ON BEHALF OF ANY TELECOMMUNICATIONS COMPANY, AND/OR ITS CONTRACTOR, AGENTS AND/OR EMPLOYEES, ON RAILROAD'S PROPERTY. CONTRACTOR SHALL NOT HAVE OR SEEK RECOURSE AGAINST RAILROAD FOR ANY CLAIM OR CAUSE OF ACTION FOR ALLEGED LOSS OF PROFITS OR REVENUE OR LOSS OF SERVICE OR OTHER CONSEQUENTIAL DAMAGE TO A TELECOMMUNICATION COMPANY USING RAILROAD'S PROPERTY OR A CUSTOMER OR USER OF SERVICES OF THE FIBER OPTIC CABLE ON RAILROAD'S PROPERTY.

Section 6. PERMITS - COMPLIANCE WITH LAWS.

In the prosecution of the Work covered by this agreement, Contractor shall secure any and all necessary permits and shall comply with all applicable federal, state and local laws, regulations and enactments affecting the Work including, without limitation, all applicable Federal Railroad Administration regulations.

Section 7. SAFETY.

A. Safety of personnel, property, rail operations and the public is of paramount importance in the prosecution of any Work on Railroad property performed by Contractor. Contractor shall be responsible for initiating, maintaining and supervising all safety, operations and programs in connection with the Work. Contractor shall, at a minimum, comply with Railroad's then current safety standards located at the below web address ("Railroad's Safety Standards") to ensure uniformity with the safety standards followed by Railroad's own forces. As a part of Contractor's safety responsibilities, Contractor shall notify Railroad if Contractor

determines that any of Railroad's Safety Standards are contrary to good safety practices. Contractor shall furnish copies of Railroad's Safety Standards to each of its employees before they enter Railroad property.

http://www.up.com/cs/groups/public/@uprr/@suppliers/documents/up_pdf_nativedocs/pdf_up_supplier_safety_req.pdf

B. Without limitation of the provisions of paragraph A above, Contractor shall keep the job site free from safety and health hazards and ensure that its employees are competent and adequately trained in all safety and health aspects of the job.

C. Contractor shall have proper first aid supplies available on the job site so that prompt first aid services may be provided to any person injured on the job site. Contractor shall promptly notify Railroad of any U.S. Occupational Safety and Health Administration reportable injuries. Contractor shall have a nondelegable duty to control its employees while they are on the job site or any other property of Railroad, and to be certain they do not use, be under the influence of, or have in their possession any alcoholic beverage, drug or other substance that may inhibit the safe performance of any Work.

D. If and when requested by Railroad, Contractor shall deliver to Railroad a copy of Contractor's safety plan for conducting the Work (the "Safety Plan"). Railroad shall have the right, but not the obligation, to require Contractor to correct any deficiencies in the Safety Plan. The terms of this agreement shall control if there are any inconsistencies between this agreement and the Safety Plan.

Section 8. INDEMNITY.

A. TO THE FULLEST EXTENT ALLOWED BY APPLICABLE LAW, CONTRACTOR SHALL INDEMNIFY, DEFEND AND HOLD HARMLESS RAILROAD, ITS AFFILIATES, AND ITS AND THEIR OFFICERS, AGENTS AND EMPLOYEES (INDIVIDUALLY AN "INDEMNIFIED PARTY" OR COLLECTIVELY "INDEMNIFIED PARTIES") FROM AND AGAINST ANY AND ALL LOSS, DAMAGE, INJURY, LIABILITY, CLAIM, DEMAND, COST OR EXPENSE (INCLUDING, WITHOUT LIMITATION, ATTORNEY'S, CONSULTANT'S AND EXPERT'S FEES AND COURT COSTS), FINE OR PENALTY (COLLECTIVELY, "LOSS") INCURRED BY ANY PERSON (INCLUDING, WITHOUT LIMITATION, ANY INDEMNIFIED PARTY, CONTRACTOR, OR ANY EMPLOYEE OF CONTRACTOR OR OF ANY INDEMNIFIED PARTY) ARISING OUT OF OR IN ANY MANNER CONNECTED WITH (I) ANY WORK PERFORMED BY CONTRACTOR, OR (II) ANY ACT OR OMISSION OF CONTRACTOR, ITS OFFICERS, AGENTS OR EMPLOYEES, OR (III) ANY BREACH OF THIS AGREEMENT BY CONTRACTOR.

B. THE RIGHT TO INDEMNITY UNDER THIS SECTION 8 SHALL ACCRUE UPON OCCURRENCE OF THE EVENT GIVING RISE TO THE LOSS, AND SHALL APPLY REGARDLESS OF ANY NEGLIGENCE OR STRICT LIABILITY OF ANY INDEMNIFIED PARTY, EXCEPT WHERE THE LOSS IS CAUSED BY THE SOLE ACTIVE NEGLIGENCE OF AN INDEMNIFIED PARTY AS ESTABLISHED BY THE FINAL JUDGMENT OF A COURT OF COMPETENT JURISDICTION. THE SOLE ACTIVE NEGLIGENCE OF ANY INDEMNIFIED PARTY SHALL NOT BAR THE RECOVERY OF ANY OTHER INDEMNIFIED PARTY.

C. CONTRACTOR EXPRESSLY AND SPECIFICALLY ASSUMES POTENTIAL LIABILITY UNDER THIS SECTION 8 FOR CLAIMS OR ACTIONS BROUGHT BY CONTRACTOR'S OWN EMPLOYEES. CONTRACTOR WAIVES ANY IMMUNITY IT MAY HAVE UNDER WORKER'S COMPENSATION OR INDUSTRIAL INSURANCE ACTS TO INDEMNIFY THE INDEMNIFIED PARTIES UNDER THIS SECTION 8. CONTRACTOR ACKNOWLEDGES THAT THIS WAIVER WAS MUTUALLY NEGOTIATED BY THE PARTIES HERETO.

D. NO COURT OR JURY FINDINGS IN ANY EMPLOYEE'S SUIT PURSUANT TO ANY

WORKER'S COMPENSATION ACT OR THE FEDERAL EMPLOYERS' LIABILITY ACT AGAINST A PARTY TO THIS AGREEMENT MAY BE RELIED UPON OR USED BY CONTRACTOR IN ANY ATTEMPT TO ASSERT LIABILITY AGAINST ANY INDEMNIFIED PARTY.

E. THE PROVISIONS OF THIS SECTION 8 SHALL SURVIVE THE COMPLETION OF ANY WORK PERFORMED BY CONTRACTOR OR THE TERMINATION OR EXPIRATION OF THIS AGREEMENT. IN NO EVENT SHALL THIS SECTION 8 OR ANY OTHER PROVISION OF THIS AGREEMENT BE DEEMED TO LIMIT ANY LIABILITY CONTRACTOR MAY HAVE TO ANY INDEMNIFIED PARTY BY STATUTE OR UNDER COMMON LAW.

Section 9. RESTORATION OF PROPERTY.

In the event Railroad authorizes Contractor to take down any fence of Railroad or in any manner move or disturb any of the other property of Railroad in connection with the Work to be performed by Contractor, then in that event Contractor shall, as soon as possible and at Contractor's sole expense, restore such fence and other property to the same condition as the same were in before such fence was taken down or such other property was moved or disturbed. Contractor shall remove all of Contractor's tools, equipment, rubbish and other materials from Railroad's property promptly upon completion of the Work, restoring Railroad's property to the same state and condition as when Contractor entered thereon.

Section 10. WAIVER OF DEFAULT.

Waiver by Railroad of any breach or default of any condition, covenant or agreement herein contained to be kept, observed and performed by Contractor shall in no way impair the right of Railroad to avail itself of any remedy for any subsequent breach or default.

Section 11. MODIFICATION - ENTIRE AGREEMENT.

No modification of this agreement shall be effective unless made in writing and signed by Contractor and Railroad. This agreement and the exhibits attached hereto and made a part hereof constitute the entire understanding between Contractor and Railroad and cancel and supersede any prior negotiations, understandings or agreements, whether written or oral, with respect to the Work to be performed by Contractor.

Section 12. ASSIGNMENT - SUBCONTRACTING.

Contractor shall not assign or subcontract this agreement, or any interest therein, without the written consent of the Railroad. Contractor shall be responsible for the acts and omissions of all subcontractors. Before Contractor commences any Work, the Contractor shall, except to the extent prohibited by law; (1) require each of its subcontractors to include the Contractor as "Additional Insured" on the subcontractor's Commercial General Liability policy and Umbrella or Excess policies (if applicable) with respect to all liabilities arising out of the subcontractor's performance of Work on behalf of the Contractor by endorsing these policies with ISO Additional Insured Endorsements CG 20 10, and CG 20 37 (or substitute forms providing equivalent coverage); (2) require each of its subcontractors to endorse their Commercial General Liability Policy with "Contractual Liability Railroads" ISO Form CG 24 17 10 01 (or a substitute form providing equivalent coverage) for the job site; and (3) require each of its subcontractors to endorse their Business Automobile Policy with "Coverage For Certain Operations In Connection With Railroads" ISO Form CA 20 70 10 01 (or a substitute form providing equivalent coverage) for the job site.

EXHIBIT C
TO
CONTRACTOR'S
RIGHT OF ENTRY AGREEMENT

Union Pacific Railroad Company
Insurance Requirements For
Contractor's Right of Entry Agreement

During the entire term of this Agreement and course of the Project, and until all Project Work on Railroad's property has been completed and all equipment and materials have been removed from Railroad's property and Railroad's property has been clean and restored to Railroad's satisfaction, Contractor shall, at its sole cost and expense, procure and maintain the following insurance coverage:

- A. Commercial General Liability insurance. Commercial general liability (CGL) with a limit of not less than \$5,000,000 each occurrence and an aggregate limit of not less than \$10,000,000. CGL insurance must be written on ISO occurrence form CG 00 01 12 04 (or a substitute form providing equivalent coverage).

The policy must also contain the following endorsement, which must be stated on the certificate of insurance:

- Contractual Liability Railroads ISO form CG 24 17 00 01 (or a substitute form providing equivalent coverage) showing "Union Pacific Railroad Company Property" as the Designated Job Site.
- Designated Construction Project(s) General Aggregate Limit ISO Form CG 25 03 03 97 (or a substitute form providing equivalent coverage) showing the project on the form schedule.

- B. Business Automobile Coverage insurance. Business auto coverage written on ISO form CA 00 01 10 01 (or a substitute form providing equivalent liability coverage) with a combined single limit of not less than \$5,000,000 for each accident and coverage must include liability arising out of any auto (including owned, hired and non-owned autos).

The policy must contain the following endorsements, which must be stated on the certificate of insurance:

- Coverage For Certain Operations In Connection With Railroads ISO form CA 20 70 10 01 (or a substitute form providing equivalent coverage) showing "Union Pacific Property" as the Designated Job Site.
- Motor Carrier Act Endorsement - Hazardous materials clean up (MCS-90) if required by law.

- C. Workers' Compensation and Employers' Liability insurance. Coverage must include but not be limited to:

- Contractor's statutory liability under the workers' compensation laws of the state where the Work is being performed.
- Employers' Liability (Part B) with limits of at least \$500,000 each accident, \$500,000 disease policy limit \$500,000 each employee.

If Contractor is self-insured, evidence of state approval and excess workers compensation coverage must be provided. Coverage must include liability arising out of the U. S. Longshoremen's and Harbor Workers' Act, the Jones Act, and the Outer Continental Shelf Land Act, if applicable.

- D. Railroad Protective Liability insurance. Contractor must maintain "Railroad Protective Liability" (RPL) insurance written on ISO occurrence form CG 00 35 12 04 (or a substitute form providing equivalent coverage) on behalf of Railroad as named insured, with a limit of not less than \$2,000,000 per occurrence

and an aggregate of \$6,000,000. The definition of "JOB LOCATION" and "WORK" on the declaration page of the policy shall refer to this agreement and shall describe all WORK or OPERATIONS performed under this agreement. Contractor shall provide this agreement to Contractor's insurance agent(s) and/or broker(s) and Contractor shall instruct such agent(s) and/or broker(s) to procure the insurance coverage required by this agreement. A BINDER STATING THE POLICY IS IN PLACE MUST BE SUBMITTED TO RAILROAD BEFORE THE WORK MAY COMMENCE AND UNTIL THE ORIGINAL POLICY IS FORWARDED TO UNION PACIFIC RAILROAD.

- E. Umbrella or Excess insurance. If Contractor utilizes umbrella or excess policies, these policies must "follow form" and afford no less coverage than the primary policy.
- F. Pollution Liability insurance. Pollution liability coverage must be included when the scope of the Work as defined in the agreement includes installation, temporary storage, or disposal of any "hazardous" material that is injurious in or upon land, the atmosphere, or any watercourses; or may cause bodily injury at any time.

If required, coverage may be provided in separate policy form or by endorsement to Contractors CGL or RPL. Any form coverage must be equivalent to that provided by ISO form CG 24 15 "Limited Pollution Liability Extension Endorsement" or CG 28 31 "Pollution Exclusion Amendment" with limits of at least \$5,000,000 per occurrence and an aggregate limit of \$20,000,000.

If the scope of Work as defined in this agreement includes the disposal of any hazardous or non-hazardous materials from the job site, Contractor must furnish to Railroad evidence of pollution legal liability insurance maintained by the disposal site operator for losses arising from the insured facility accepting the materials, with coverage in minimum amounts of \$1,000,000 per loss, and an annual aggregate of \$2,000,000.

Other Requirements

- G. All policy(ies) required above (except business automobile, worker's compensation and employers liability) must include Railroad as "Additional Insured" using ISO Additional Insured Endorsements CG 20 10, and CG 20 37 (or substitute form providing equivalent coverage). The coverage provided to Railroad as additional insured shall not be limited by Contractor's liability under the indemnity provisions of this agreement. BOTH CONTRACTOR AND RAILROAD EXPECT THAT UNION PACIFIC RAILROAD COMPANY WILL BE PROVIDED WITH THE BROADEST POSSIBLE COVERAGE AVAILABLE BY OPERATION OF LAW UNDER ISO ADDITIONAL INSURED FORMS CG 20 10 AND CG 20 37.
- H. Punitive damages exclusion, if any, must be deleted (and the deletion indicated on the certificate of insurance), unless (a) insurance coverage may not lawfully be obtained for any punitive damages that may arise under this agreement, or (b) all punitive damages are prohibited by all states in which this agreement will be performed.
- I. Contractor waives all rights of recovery, and its insurers also waive all rights of subrogation of damages against Railroad and its agents, officers, directors and employees for damages covered by the workers compensation and employers liability or commercial umbrella or excess liability obtained by Contractor required in this agreement where prohibited by law. This waiver must be stated on the certificate of insurance.
- J. Prior to commencing the Work, Contractor shall furnish Railroad with a certificate(s) of insurance, executed by a duly authorized representative of each insurer, showing compliance with the insurance requirements in this agreement.

- K. All insurance policies must be written by a reputable insurance company acceptable to Railroad or with a current Best's Insurance Guide Rating of A- and Class VII or better, and authorized to do business in the state where the Work is being performed.
- L. The fact that insurance is obtained by Contractor or by Railroad on behalf of Contractor will not be deemed to release or diminish the liability of Contractor, including, without limitation, liability under the indemnity provisions of this agreement. Damages recoverable by Railroad from Contractor or any third party will not be limited by the amount of the required insurance coverage.

SAMPLE

SP00069-RR-UPRR-END (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-25

Last updated: 08-27-25

*This Section requires
SP00170 and SP00223.)*

(Use this when Union Pacific Railroad Company is within project limits. The included agreement and exhibits are for information and reference only. Do not make any modifications to this document.)

UNION PACIFIC RAILROAD COMPANY

Contractor Endorsement

(Use one of the following options)

[Option 1 – Use when ODOT has not submitted the Contractor Endorsement]

The following Union Pacific Railroad Company Contractor Endorsement is included in this Project for information and reference only. The actual Contractor Endorsement will be provided and executed by the Union Pacific Railroad Company.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the Railroad's Contractor Endorsement according to 00170.01(e).

[Option 2 – Use when ODOT has submitted the Contractor Endorsement]

The following Union Pacific Railroad Company Contractor Endorsement is included in this Project for information and reference only. The actual Contractor Endorsement will be provided by ODOT and executed by the Union Pacific Railroad Company.

The Contractor shall obtain all necessary permits and licenses and pay all fees and obtain a fully executed copy of the Railroad's Contractor Endorsement according to 00170.01(e). ODOT has submitted the initial Maintenance Consent Letter and paid the initial fee.

[End Option 2]

The Contractor shall review and comply with the following documents as applicable:

- *UPRR-BNSF Guidelines for Grade Separated Projects and Guidelines for Temporary Shoring* located at:
https://www.up.com/real_estate/roadxing/industry/grade_separation/index.htm
- *Union Pacific Railroad Public Projects Manual* located at:
https://www.up.com/cs/groups/public/@uprr/@corprel/documents/up_pdf_nativedocs/pdf_up_public_projects_manual.pdf
- *Union Pacific Railroad Engineering Standard Drawings* located at:
<https://www.up.com/emp/engineering/apps/archives/standards/public/index.cfm>
- *Union Pacific General Conditions and Specifications* located at:

https://www.up.com/emp/engineering/mapcontent/standards/UP_GENERAL_SPECIFICATIONS.pdf

- *Guide for Preparation of a Bridge Demolition and Removal Plan for Structures over Railroad* located at:

https://www.up.com/cs/groups/public/@uprr/@realestate/documents/up_pdf_nativedocs/pdf_up_reus_industry_demo.pdf

- *Guidelines for Contractor Material Delivery on Union Pacific Property* located at:
[https://www.up.com/emp/engineering/mapcontent/standards/GUIDELINES FOR CONTRACTORS ON UPRR PROPERTY.pdf](https://www.up.com/emp/engineering/mapcontent/standards/GUIDELINES_FOR_CONTRACTORS_ON_UPRR_PROPERTY.pdf)

- *UPRR Safety Book/UPRR Contractor Minimum Safety Requirements* located at:
<https://www.up.com/suppliers/contractor-safety/index.htm>

When Railroad flagger services are required, the Contractor shall provide Railroad flagger services through a third party flagger according to 00223.35.

REMS Project:
Agency Project:
Consent End Date:

Contractor Endorsement

A. It is the intention of the OREGON DEPARTMENT OF TRANSPORTATION (Agency) to perform the scope of work at the location(s) identified in Exhibit A (Work) of this Contractor Endorsement (Endorsement). As a condition to entering upon UNION PACIFIC RAILROAD COMPANY (Railroad) property to perform the Work, contractor acknowledges and agrees to comply with the following conditions.

- Completion of Union Pacific Property Access Training (UP-PAT).
www.up.com/up-pat
- Compliance with Contractor Endorsement-General Terms and Provisions.
www.up.com/ce-terms
- Acknowledgement of Third-party Flagging Policy.
www.up.com/flagging
- Acknowledgement that insurance documentation will be provided to Railroad upon request.

B. Fiber optics and telecommunication facilities can be present on Railroad property. Prior to performing work with the potential to impact Railroad facilities, the Agency or its contractor shall follow the procedures outlined on the Railroad website link below.

Fiber Optics & Telecommunication (Cut Before You Dig) - www.up.com/CBUD

C. Prior to performing the Work, contractor agrees to provide forty-five (45) days advance notice to the Railroad Representative identified below.

Leanne Craig (817) 441-9560 – lcraig@olsson.com

D. This Endorsement must be executed and sent to the Railroad before the Consent End Date above. The terms of this Endorsement shall commence on the date of execution and continue for one (1) year or until such time as contractor has completed the Work. The Work may be terminated within 24 hours' notice by either party and work may proceed until the terms of this Endorsement have been met and, the executed Endorsement and the payment of the \$2,200 administrative fee is received by the Railroad.

Email a scanned copy of the executed Endorsement to upmaintenance@olsson.com.

The remainder of page intentionally left blank.

Docusign Envelope ID:

REMS Project:
Agency Project:
Consent End Date:

The administrative fee must be submitted by the Agency or the contractor using one of the payment methods indicated on the attached Bill. If paying by check, the Bill must be included with the check. For ACH or Wire transfers, include the Bill Number in the transmittal notes.

Company Name		
Contact Name		
Address		
City, ST Zip		
Phone	Email	
Contact Signature	Date	
Payment Method	☐ Check ☐ ACH ☐ Wire Transfer	

Exhibit A to Contractor Endorsement Project Scope and Location(s)

Scope of Work

PROJECT WORK TO BE ADDED. Railroad Approved Third Party Flagging Contractor must be present during inspection.

Location

XXX Subdivision

DOT	Milepost	Street Name

SP00084-PAINT-36 (Special Provisions for the 2024 Book)

(Bidding on or after: 05-01-25)

Last updated: 01-14-25)

COATING SYSTEM WARRANTY (36 MONTH)

THIS WARRANTY, made by _____
(Contractor)

of _____ and

of _____

hereinafter called "Warrantors", in favor of the State of Oregon, hereinafter called "State";

W I T N E S S E T H:

RECITALS:

1. State has contracted for preparing and coating structural steel and other metal
surfaces on the _____.

(Description of surfaces to be coated)

2. Under the provisions of Contract No. _____ pertaining in part to coating
under said Contract of structural steel and other metal surfaces, entered into by State and
_____ ("Contractor"), the Contractor is
(Contractor)
required to and hereby furnishes to the State a written warranty for the coating system
warranting against defects as provided in said Contract for a period of 36 months beginning
at the issuance of the Second Notification under said Contract.

NOW, THEREFORE, in consideration of the foregoing, Warrantors hereby agree and unconditionally warrant to the State that the coating system and all coating work, both above deck and below deck, are and shall be free from all defects as defined in the above-described Contract for a period of 36 months, and that if any such defects occur or are discovered within said 36 month period, Warrantors shall, forthwith upon receipt of written notification of any such defect or defects make repairs to the coating system necessary to meet the original Contract requirements, at no additional cost to the State, within the time limits as specified in the Contract. References herein to the warranty requirements of the Contract include, but are not limited to, the terms, conditions and requirements contained in the Specifications, including, but not limited to, subsections 00130.40, 00170.85(b)(1), and 00594.75 for the Contract, which are incorporated herein by this reference.

It is expressly understood and agreed that the warranty and obligations herein set forth are made and undertaken by Warrantors to and for the benefit of the State.

IN WITNESS WHEREOF, Warrantors have set their hands as of this _____ day
_____ of 20 ____.

ATTEST:

(Contractor)

SUPPLEMENTAL PERFORMANCE BOND (36 MONTH WARRANTY PERIOD)

KNOW ALL MEN BY THESE PRESENTS, That we _____
as principal, and _____
as Surety, a corporation duly organized and existing under and by virtue of the laws of the
State of _____ and duly authorized to transact the business of Surety
in the State of Oregon, are jointly and severally held and bound unto the State of Oregon in
the sum of _____ (\$_____) Dollars,
for the payment of which we jointly and severally bind ourselves, our heirs and
executors, administrators, successors and assigns firmly by these presents.

THE CONDITION OF THIS BOND IS SUCH

That, whereas, the principal herein has, on or about the _____ day of _____, 20 __, made and entered into a certain Contract with the State of Oregon, by and through the Oregon Transportation Commission and its Department of Transportation, which agreement is more fully described as _____, Contract No. _____, under which Contract the principal agrees to furnish certain materials and to perform certain work which it agrees to do in accordance with the terms, conditions and requirements as set out in said Contract, and whereas, in connection with said Contract, the principal and others have executed a written warranty, a copy of which warranty is attached hereto and by this reference made a part hereof;

And, whereas, the principal also agrees to furnish materials and perform work according to all authorized modifications of the Contract which increase the amount of work and amount of Contract. Notice to the Surety of any of the immediately foregoing is waived.

And, whereas, the principal has therein undertaken to warrant the work of preparing and coating structural steel and other metal surfaces against any defects, as therein defined, for a period of at least 36 months beginning at the issuance of the Second Notification.

NOW, THEREFORE, if the principal herein shall faithfully and truly observe and comply with the terms of such warranty and shall well and truly perform all matters and things by it undertaken to be performed under said warranty upon the terms proposed therein and shall do all things required of said principal by the laws of this state and shall indemnify and save harmless the State of Oregon, the Oregon Transportation Commission and its Department of Transportation and their respective members, officers, employees, and agents against any direct or indirect damages of every kind and description that shall be suffered or claimed to be suffered in connection with or arising out of the performance of the said warranty by the Contractor or Subcontractors, then this obligation is to be void, otherwise to remain in full force and effect.

In no event shall the obligations under this bond be terminated without written consent of the State of Oregon, by and through its State Transportation Commission and its Department of Transportation.

Nonpayment of the bond premium will not invalidate this bond nor shall the State of Oregon, by and through its Transportation Commission or its Department of Transportation, be obligated for the payment thereof.

Signed and sealed this ____ day of _____, 20 ____.

SURETY _____
Attorney-in-fact

PRINCIPAL _____

BY _____

BY _____
(Official Capacity)

Countersigned:

Resident Agent

Attest: _____
Secretary

OREGON DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISIONS

FOR

(Fill in the blanks with the same information that is on the plan title sheet except do not include the date. Remove underlines, parentheses, and all instructions when finished.)

(Scope of Work)

(Project Name)

(Highway Name)

(County)

(The POR stamps, signs, dates, and fills in section numbers in the Professional of Record Certification below.

In accordance with Tech Directive TSB11-01(d), all specification sections, including the technical and material sections, except for Part 00100, Section 00210, and Section 00290, need to be included in the list. If the Special Provisions have been modified after the POR Sheets were originally signed, whether prior to advertisement or by addenda, make sure an updated POR signature sheet is submitted for any spec sections that are affected,)

PROFESSIONAL OF RECORD CERTIFICATION:

Seal w/signature	I certify the Special Provision Section(s) listed below are applicable to the design for the subject project for <u> (list specific design elements, e.g. "Bridge XYZ" or "Traffic Signals") </u>. Modified Special Provisions were prepared by me or under my supervision. Section(s) <u> (fill in section number(s) here) </u>
------------------	--

FINAL ELECTRONIC DOCUMENT AVAILABLE UPON REQUEST

(To add more POR signature sheets do the following:

- 1. Complete the project information above the Professional of Record Certification.*
- 2. Turn off Track Changes and turn on "Show/Hide" by selecting ¶ from the toolbar above.*

3. Highlight the entire text from the page, including the "Section Break" and the ¶ from the next page then select "copy".
4. Go to the last POR page and place the cursor at the ¶ line then select "paste".
5. Continue the paste process until you have enough POR signature sheets.
6. Turn Track Changes back on then complete the signature page.)

Insert Project Name Here

SP00092-002 (Special Provisions for the 2024 Book) (Bidding on or after: 05-01-25
Last updated: 01-14-25)

SPECIAL PROVISIONS

WORK TO BE DONE

(List major items of work. Modify as needed. Add items as necessary. Add a number before the last work item, "Perform additional...".)

The Work to be done under this Contract consists of the following:

1. Construct _____ .
2. Construct _____ .
3. Install _____ .

Perform additional and Incidental Work as called for by the Specifications and Plans.

(Use the following "Authority of Consultant" heading and paragraph when a Consultant is performing the construction engineering.)

AUTHORITY OF CONSULTANT

The consultant will be directly in charge of the Project. However, the consultant's authority on this Project is as designated in the official "Consultant Agreement" for this Project, and as designated by the Engineer. This does not include authority to approve Contract changes or semifinal and Final Inspection of the Project.

APPLICABLE SPECIFICATIONS

The Specifications that are applicable to the Work on this Project is the 2024 edition of the "Oregon Standard Specifications for Construction", as modified by these Special Provisions. All Sections in Part 00100 apply, whether or not modified or referenced in the Special Provisions.

All number references in these Special Provisions shall be understood to refer to the Sections and subsections of the Standard Specifications bearing like numbers and to Sections and subsections contained in these Special Provisions in their entirety.

CLASS OF PROJECT

(Delete the words which do not apply. Remove the parentheses.)

This is a (Federal-Aid) (State) (State - Buy America) Project.

SECTION 00110 - ORGANIZATION, CONVENTIONS, ABBREVIATIONS AND DEFINITIONS

(Follow all instructions. If there are no instructions above a subsection, paragraph, sentence, or bullet, then include it in the project. All other modifications to this Section will require Department of Justice and State Specifications Engineer approval. Remove all instructions before preparing the final document.)

Comply with Section 00110 of the Standard Specifications modified as follows:

00110.05(e) Reference to Websites - Add the following bullet list to the end of this subsection:

- AASHTOWare Project TM
www.oregon.gov/odot/Construction/Pages/AW-Construction.aspx
- American Traffic Safety Services Association (ATSSA)
www.atssa.com
- BidExpress
www.bidx.com
- EquipmentWatch
www.equipmentwatch.com
- ODOT Construction Section
www.oregon.gov/odot/construction/pages/index.aspx
- ODOT Construction Section - Qualified Products List (QPL)
www.oregon.gov/ODOT/Construction/Pages/Qualified-Products.aspx
- ODOT Construction Surveying Manual for Contractors
www.oregon.gov/ODOT/ETA/Documents_Geometronics/Construction-Survey-Manual-Contractors.pdf
- ODOT Electronic Bidding Information Distribution System (eBids)
(Also referred to as ODOT eBids website)
<https://ecmnet.odot.state.or.us/ebidse>
- ODOT Environmental Product Declaration

Insert Project Name Here

<https://www.oregon.gov/odot/Construction/Pages/Environmental-Product-Declarations.aspx>

- ODOT Estimating
www.oregon.gov/ODOT/Business/Pages/Steel.aspx
- ODOT Oregon Trucking Online - "Highway Restriction Notice - Size and/or Weight" (Form No. 734-2357)
<https://www.oregon.gov/odot/Forms/2ODOT/7342357.pdf>
- ODOT Procurement Office - Conflict of Interest Guidelines and Disclosure Forms
www.oregon.gov/ODOT/Business/Procurement/Pages/PSK.aspx
- ODOT Procurement Office - Construction Contracts Unit Notice of Intent
www.oregon.gov/ODOT/Business/Procurement/Pages/NOI.aspx
- ODOT Procurement Office - Construction Contracts Unit prequalification forms
www.oregon.gov/odot/business/procurement/pages/bid_award.aspx
- ODOT Traffic Control Plans Unit
www.oregon.gov/ODOT/Engineering/Pages/Work-Zone.aspx
- ODOT Traffic Standards
www.oregon.gov/ODOT/Engineering/Pages/Signals.aspx
- Oregon Legislative Counsel
www.oregonlegislature.gov/lc
- Oregon Secretary of State: State Archives
sos.oregon.gov/archives/Pages/default.aspx

00110.10 Abbreviations – Add the following paragraph to the end of this subsection:

EPD – Environmental Product Declaration

PCD - Pedestrian Channelizing Device

Delete the following paragraph:

DBE – Disadvantaged Business Enterprise

00110.20 Definitions – Add the following paragraphs to the end of this subsection:

Environmental Product Declaration - An environmental declaration providing environmental data using predetermined parameters and, where relevant, additional environmental information. *ISO 14025* refers to these as Type III Environmental Declarations.

Insert Project Name Here

Materially Unbalanced Bid - A Bid which generates a reasonable doubt that Award to the Bidder submitting a Mathematically Unbalanced Bid will result in the lowest ultimate cost to the Agency.

Mathematically Unbalanced Bid - A Bid containing lump sum or unit Pay Items (bid items) which do not reflect reasonable actual costs plus a reasonable proportionate share of the Bidder's anticipated profit, overhead costs and other indirect costs.

Pedestrian Accessible Route - An area for the use of pedestrians to navigate along sidewalks, driveways, curb ramps, crossings, and pedestrian facilities.

Pedestrian Channelizing Device - Devices used for channelizing pedestrians along a Temporary Pedestrian Accessible Route.

SP00120 (Special Provisions for the 2024 Book)

**(Bidding on or after: 10-15-25
Last updated: 10-15-25)**

SECTION 00120 - BIDDING REQUIREMENTS AND PROCEDURES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00120 of the Standard Specifications modified as follows:

00120.00 Prequalification of Bidders – Add the following bullet to the end of the bullet list:

- If delivered by electronic mail, the application shall be sent to:

ODOTProcurementOfficeConstruction@odot.oregon.gov

Replace the bullet that begins “If delivered by mail...” with the following bullet:

- If delivered by mail or parcel delivery service, the application shall be sent to:

Oregon Department of Transportation
Procurement Construction Contracts, MS #33
355 Capitol Street NE
Salem, OR 97301

00120.01 General Bidding Requirements - Replace the paragraph that begins “If the Bidder submits the Bid...” with the following paragraph:

If the Bidder submits the Bid electronically through BidExpress® as a joint venture, in addition to the joint venture signing with the digital signature and unique ID for the joint venture, the

Insert Project Name Here

Bidder must also submit the signature pages from the Bid Booklet signed by each member of the joint venture, together with a statement the Bidder adds above or with the signatures as follows: "The following joint venture member signatures are for the Bid for the [Insert Project Name] Project submitted by the joint venture through BidExpress®. The signatures are on behalf of each joint venture member and the joint venture and also confirm that the signatory in BidExpress® was authorized to submit the Bid on behalf of the joint venture." The Bidder must also email .pdf copies of the signature pages showing the signatures of the joint venture members with the required statement which must be received by BJ McCartney, Construction Contracts Manager, at the ODOT Procurement Office at: ODOTProcurementOfficeConstruction@odot.oregon.gov before the Closing date and time for the Bid. The signature pages with the original signatures must also be mailed or delivered to and received by BJ McCartney, Construction Contracts Manager, at the address given in the Bid Book as a condition of Award.

00120.05 Request for Plans, Special Provisions, and Bid Booklets - Add the following to the end of this subsection:

(Use one of the following options.)

[Option 1 - Use the following when the plans are separate. Fill in the blanks with information exactly as it appears on the plan title sheet. Remove underlines and parentheses. When filling in the "(Bid Month Year)" field below, only enter the Month and Year, but not the day (example: "March 2019"), unless otherwise shown on the plan title sheet.]

[Begin Option 1]

The Plans, which are applicable to the Work to be performed under the Contract, bear title and date as follows:

" _____ (Scope of Work) _____
_____ (Project Name) _____
_____ (Highway Name) _____
_____ (County) _____
_____ (Bid Month Year) _____"

[End Option 1]

[Option 2 - Use the following paragraph when the plans are included at the end of these Special Provisions.]

[Begin Option 2]

The Plans, which are applicable to the Work to be performed under the Contract, are included in these Special Provisions.

[End Option 2]

00120.10 Bid Booklet – Replace the bullet that begins "Appendix, which includes..." with the following bullet:

Insert Project Name Here

- Appendix, which includes required time-sensitive forms, sample forms, and other informational pages

(Use subsection .15 when listing personnel qualifications or for projects that include a mandatory prebid meeting.)

00120.15 Examination of Work Site and Solicitation Documents; Consideration of Conditions to be Encountered - Add the following to the end of this subsection:

(Use the following paragraph and list when any of the following Specification Subsections are included in the Project by reference to the Standard Specification or Special Provision. If any additional experience or personnel qualifications are added to Special Provisions, add each subsection number and subsection title to the list. Delete the lines that do not apply to the Project.

Examples of when to list Personnel Qualifications are when experience is listed or there is a requirement of experiences. Personnel Qualifications are not listed if it is a certified technician or a certification requirement only.)

Certain Specifications included in the Project require additional experience or personnel qualifications. Refer to the subsection requirements that may affect bidding considerations, including but not limited to the following:

Subsection	Title
00256.30	Personnel Qualifications
00293.30	Personnel Qualifications
00294.30	Personnel Qualifications
00295.30	Personnel Qualifications
00296.30	Personnel Qualifications
00297.30	Personnel Qualifications
00298.30	Personnel Qualifications
00299.30	Personnel Qualifications
00299A.30	Personnel Qualifications
00350.30	Personnel Qualifications
00380.30	Personnel Qualifications
00396.30	Personnel Qualifications
00398.30	Personnel Qualifications
00411.30	Personnel Qualifications
00412.30	Personnel Qualifications
00413.30	Personnel Qualifications
00414.30	Personnel Qualifications
00444.30	Personnel Qualifications
00512.30	Personnel Qualifications
00515.30	Personnel Qualifications
00535.30	Personnel Qualifications
00537.30	Personnel Qualifications
00538.30	Personnel Qualifications
00543.30	Personnel Qualifications
00556.30	Personnel Qualifications
00557.30	Personnel Qualifications
00558.30	Personnel Qualifications

Insert Project Name Here

00565.30	Personnel Qualifications
00566.30	Personnel Qualifications
00585.30	Personnel Qualifications
00590.30	Personnel Qualifications
00591.30	Personnel Qualifications
00592.30	Personnel Qualifications
00759.30	Personnel Qualifications
00765.30	Personnel Qualifications
00921.30	Personnel Qualifications
00963.30	Personnel Qualifications
00987.30	Personnel Qualifications
01030.30	Personnel Qualifications

(BEFORE USING THE FOLLOWING PREBID MEETING PARAGRAPHS, provide justification and assure scheduling according to the Prebid Meeting requirements that are outlined in the Phase Gate Delivery Manual. Use of this subsection requires a minimum 5 week project advertisement.)

(Use the following paragraphs only with mandatory prebid meetings. Fill in the blanks with the appropriate office or building, address, city, time, and date.)

Add the following to the end of this subsection:

The Agency will hold a prebid meeting for all holders of Solicitation Documents at the _____ (office or building) _____, located at _____ (address) _____ in _____ (city) _____, Oregon at _____ (time) _____ on _____ (date) _____, 20____.

All prospective Bidders must attend this meeting. Those not attending will have their Bids declared non-responsive.

Prospective Bidders will be given the opportunity to ask questions relating to any details involved in the performance of the Work under the Contract.

Information distributed, statements made or responses given to questions, by the Agency's representatives at the prebid meeting will not in any way alter or affect any of the provisions contained in the Solicitation Documents or Contract requirements and will not be binding upon the Agency unless confirmed by Addenda.

00120.40(b) Bidding Considerations – Add the following to the end of the list:

00160.20(d) Build America Buy America Act Requirements

00120.40(f) Disclosure of First-Tier Subcontractors – Replace the paragraph beginning “If no subcontracts subject to the above...” with the following paragraph:

If no subcontracts subject to the above disclosure requirements are anticipated, a Bidder shall so indicate by entering "NONE" or by filling in the appropriate check box. For each Subcontractor listed, Bidders shall provide all requested information. Failure to submit a form or submission of a form that does not include the information required by ORS 279C.370 for each Subcontractor listed, specifically the name of each Subcontractor, the dollar amount of

Insert Project Name Here

each subcontract and the category of Work that each Subcontractor will perform, will result in the rejection of the Bid. The Agency is not required to determine the accuracy or the completeness of the Subcontractor disclosure. See ORS 279C.370 and OAR 731-005-0420.

Replace both of the bullets that begin “Using the form provided on the Agency’s website...” with the following bullet:

- Using the fillable form provided on the Agency’s website, identified in the Bid Booklet on the ODOT eBIDS website, filling the form out and submitting the completed form via email to the email address given in the paper Bid Booklet.

00120.70 Rejection of Nonresponsive Bids - Delete the bullet that begins “The Bidder has not complied with the DBE...”.

Add the following bullet to the end of the bullet list:

- The Bid is found to be Mathematically Unbalanced and Materially Unbalanced.

SP00130 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 07-23-26)**

SECTION 00130 - AWARD AND EXECUTION OF CONTRACT

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00130 of the Standard Specifications modified as follows:

00130.00 Consideration of Bids - Replace the paragraph that begins “The Agency reserves...” with the following paragraph:

The Agency reserves the right to waive minor informalities and irregularities, seek clarification of any Bid or response that, in its sole discretion, it deems necessary or advisable, and to reject any Bids for irregularities under 00120.70 or all bids for good cause after finding that it is in the public interest to do so (ORS 279C.395). The Agency may correct obvious clerical errors, when the correct information can be determined from the face of the documents, if it finds that the best interest of the Agency and the public will be served thereby.

00130.40 Contract Submittals - Add the following paragraph to the end of this subsection:

The Agency, in its sole discretion, may require execution of documents identified in subsections (a), (b) and (c) with a form of electronic signature (including but not limited to sealing and signing) acceptable to the Agency.

Insert Project Name Here

00130.40(c) Workers' Compensation – Replace this subsection, except for the subsection number and title, with the following:

To certify compliance with the workers' compensation insurance coverage required by 00170.61(a) and 00170.70(e), the successful Bidder shall complete and sign the "Certification of Workers' Compensation Coverage" form bound in the Contract booklet.

00130.50 Execution of Contract and Bonds - Add the following paragraph to the end of this subsection:

The Agency, in its sole discretion, may require execution of documents identified in subsection (a) with a form of electronic signature (including but not limited to sealing and signing) acceptable to the Agency.

00130.80 Project Site Restriction - Replace the paragraph that begins "Until the Agency sends the Contractor ..." with the following paragraph:

Until the Agency sends the Contractor written Notice to Proceed with the Work, and the Contractor has filed the public works bonds required in 00170.65(b), the Contractor shall not go onto the Project Site on which the Work is to be done, nor move Materials, Equipment, or workers onto that Project Site.

SP00140 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-25

Last updated: 05-23-25)

SECTION 00140 - SCOPE OF WORK

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00140 of the Standard Specifications.

SP00150 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-22-26)

SECTION 00150 - CONTROL OF WORK

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval

Insert Project Name Here

and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00150 of the Standard Specifications modified as follows:

(Use the following subsections .15(b) and .15(c) when "Section 00305 - Construction Survey Work is included. Check with Designer. Modify as instructed below.)

[Begin subsections .15(b) and .15(c)]

00150.15(b) Agency's Responsibilities - Replace this subsection, except for the subsection number and title, with the following:

The Engineer will perform the Agency responsibilities described in the *Construction Surveying Manual for Contractors*, Chapter 1.5 (see Section 00305).

(Use the following paragraph when the Agency will perform slope staking, clearing limit staking, and Right-of-Way and easement staking.

Do not use the following paragraph when slope staking, clearing limit staking, or Right-of-Way and easement staking will be performed by the Contractor, or will not be required on the Project.)

The Engineer will perform slope staking including intersections and set stakes defining limits for clearing which approximate Right-of-Way and easements.

00150.15(c) Contractor's Responsibilities - Replace this subsection, except for the subsection number and title, with the following:

The Contractor shall perform the Contractor responsibilities described in the *Construction Surveying Manual for Contractors*, Chapter 1.6 (see Section 00305).

(Use the following paragraph when the Contractor will perform slope staking, clearing limit staking, and Right-of-Way and easement staking.

Do not use the following paragraph when slope staking, clearing limit staking, or Right-of-Way and easement staking will be performed by the Agency, or will not be required on the Project.)

The Contractor shall perform slope staking including intersections and set stakes defining limits for clearing which approximate Right-of-Way and easements.

[End subsections .15(b) and .15(c)]

00150.30 Delivery of Notices - Replace the paragraph and bullets that begin "Following Notice to Proceed, all notices and other documents submitted..." with the following paragraph and bullets:

Insert Project Name Here

Following Notice to Proceed, all notices and other documents submitted to the Contractor by the Engineer, or to the Engineer by the Contractor, electronically under 00170.08 or 00170.09:

- If recorded in Doc Express® or AASHTOWare Project™ as received before 5:00 p.m. PST on a business day it shall be considered as received on the business day on which it was actually received in Doc Express® or AASHTOWare Project™.
- If recorded in Doc Express® or AASHTOWare Project™ as received on a non-business day, or after 5:00 p.m. PST on a business day, it shall be considered as received at 8:00 a.m. PST on the next business day.

00150.50(c) Contractor's Responsibilities – Replace the bullet that begins “In addition to the notification required...” with the following bullet:

- In addition to the notification required in OAR 952-001-0090(7), notify the Engineer and the Utility as soon as the Contractor discovers any previously unknown Utility conflicts or issues. Contrary to the OAR, stop excavating until directed by the Engineer and allow the Utility a minimum of two weeks to relocate or resolve the previously unknown Utility issues; and

(Use the following bullet when requested by the Region Utility Specialist for large Projects with complex Utility issues. Be sure to also include subsection 00180.42.)

Add the following bullet to the end of the bullet list:

- Hold a Utility scheduling meeting and monthly Utility coordination meetings (see also 00180.42)

(Use the following subsection .50(e) when any part of the Project is located outside of Oregon, including temporary signs. Contact the ODOT State Specifications Engineer for alternate language.)

00150.50(e) Notification - Add the following to the end of this subsection:

[When any part of the Project is located outside of Oregon, obtain language from the ODOT State Specifications Engineer]

(Use the following lead-in paragraph and subsection .50(f) when any of the utilities located within the Project limits have no anticipated relocations. Check with the Utility Coordinator.)

Add the following subsection:

00150.50(f) Utility Information (No Anticipated Relocations) - Within the Project limits, there are no anticipated relocations with the Utilities listed in Table 00150-1. The Contractor shall contact those Utilities having buried facilities and request that they locate and mark them for their protection prior to construction.

Insert Project Name Here

(List utilities (companies) with no anticipated relocations in the following table. Add or delete rows in the table as necessary to list all applicable utilities. If the work order number is not applicable delete the language in parenthesis.)

Table 00150-1

Utility	Contact Person's Name, Address, Email, (and) Phone Number (and Work Order Number)

(Use one of the following options when requested by the Utility Coordinator. Delete the option that does not apply.)

[Option 1 - Use the following paragraph when all Utilities listed above shall be notified.]

The Contractor shall notify, in writing, the Utilities listed above, with a copy to the Engineer, at least 14 Calendar Days before beginning Work on the Project. Utilities may require an on-site observer, at no cost to the Contractor.

[Option 2 - Use the following paragraph when some, but not all, utilities listed above will be notified. Fill in the blank with the names of all utilities that will be notified.]

The Contractor shall notify, in writing, _____, with a copy to the Engineer, at least 14 Calendar Days before beginning Work on the Project. (Utility) (Utilities) may require an on-site observer, at no cost to the Contractor.

(Use the following Gas Utilities subsection when any of the following gas Utility language is used. Replace "(Name of Utility(ies))" with the name of the Gas Utility(ies). Delete this option if Gas Utilities are not listed.)

[Begin Gas Utilities]

(Name of Utility(ies)) - Gas Utilities -

(Use the following paragraph when a Gas Utility is listed above and the Utility Coordinator has requested its use. If more than one Gas Utility is listed above modify the sentence to name the specific Utility.)

The Gas Utility operates a (high pressure) gas pipeline within the Project limits and may require an on-site safety watcher, at no cost to the Contractor.

(Use the following two paragraphs when all of the following apply:

- A Gas Utility is listed in the above table;*

Insert Project Name Here

- *There is a high pressure gas pipeline located within the project limits; and*
- *The Utility Coordinator requests the use of the paragraphs.*

If more than one Gas Utility is listed above, modify the sentence to name the specific Utility.)

When operating Equipment directly above the high pressure gas pipeline, the Contractor shall keep Equipment on the paved surfaces only.

In the immediate area of the high pressure gas lines, when moving any Equipment, excavating, driving piles, pounding guardrail posts, boring, or other road construction activities, the Contractor shall increase the tolerance zone from 24 inches, as defined in OAR 952-001-010, to 10 feet. Exceptions require written approval from the Gas Utility. The Contractor shall provide the Engineer a copy of the written approval of the exception before beginning Work.

(Use the following paragraphs if a Gas Utility is listed above or may have facilities within the project limits. Delete a Utility and contact phone number below if the Utility Coordinator determines that the Utility is not present within the Project Limits.)

In the event of an emergency, and in addition to the calls required by the Utilities notification system, the Contractor shall call:

- Marathon Petroleum Corporation / Andeavor 1-800-725-1514; or
- Avista Corporation 1-800-227-9187; or
- Cascade Natural Gas Corporation 1-888-522-1130; or
- Kinder-Morgan Energy 503-224-3390; or
- Northwest Natural Gas 1-800-882-3377; or
- Olympic Pipe Line Company LLC 1-888-271-8880; or
- Ruby Pipeline (LNG) 1-877-712-2288; or
- TransCanada GTN 1-800-447-8066; or
- Williams Pipeline 1-801-584-6948.

[End Gas Utilities]

(Use the following Power Suppliers subsection when any of the following power supplier paragraphs are used. Replace "(Name of Utility(ies))" with the name of the Power Suppliers. Delete this option if Power Suppliers are not listed.)

(Name of Utility(ies)) - Power Suppliers -

(Use the following paragraph when power lines overhang Work areas. Use either "18 feet" or "__ feet" and fill in the blank. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

Energized power lines overhang portions of the Work with a minimum vertical clearance of (18 feet)(__ feet). The Contractor shall maintain at least 10 feet of safety clearance. Exceptions require written approval from the Power Supplier(s) and may require an on-site

Insert Project Name Here

safety watcher, at no cost to the Contractor. The Contractor shall provide the Engineer a copy of the written approval of exception before beginning Work.

(Use the following paragraph when power lines are beneath Work areas. For example: Bridge deck rehab.)

The Contractor shall maintain at least 10 feet of safety clearance from energized power lines. Exceptions require written approval from Power Supplier(s) and will require an on-site safety watcher at no cost to the Contractor. The Contractor shall provide the Engineer with a copy of the written approval of exception before beginning Work.

(Use the following paragraph when requested by the Utility Coordinator. Fill in the blanks.)

The Contractor shall coordinate with the Power Supplier(s) to perform Work within ____ feet of the aerial power line during ____ *(Insert specific dates when the Power Supplier(s) cannot de-energize their system due to high loads)* when the Power Supplier(s) cannot de-energize the power facility.

[End Power Suppliers]

(Use the following Telecommunication Utilities subsection when requested by the Utility Coordinator. Replace "(Name of Utility(ies))" with the name of the Telecommunication Utilities. Delete this option if Telecommunication Utilities are not listed. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

[Begin Telecommunication Utilities]

(Name of Utility(ies)) - Telecommunication Utilities - The Contractor shall obtain written approval from Telecommunication Utilities that have fiber optic communication cable facilities, for excavating (or blasting) within 10 feet of a buried fiber optic communications cable. Telecommunication Utilities may require an on-site safety (watcher)(representative) at no cost to the Contractor for monitoring purposes. The Contractor shall provide the Engineer a copy of the written approval before beginning Work.

[End Telecommunication Utilities]

(Use the following Bonneville Power Administration subsection when Bonneville Power Administration is listed in the above table. Delete this option if Bonneville Power Administration is not listed.)

[Begin Bonneville Power Administration]

Bonneville Power Administration (BPA) -

(Insert the number of feet in the blank. Any other modifications to the BPA section must be approved by the State Utility Liaison and the State Specifications Engineer.)

Energized transmission power lines may overhang portions of the Work with a minimum vertical clearance of ____ feet. The Contractor shall maintain a safety clearance of at least

Insert Project Name Here

20 feet vertically between construction Equipment or vehicles and the transmission power lines.

The Contractor shall maintain a safety clearance of at least 50 feet horizontally between construction Equipment or vehicles and the point where steel lattice tower legs, wood poles, steel poles, concrete poles, concrete foundation and guy wires enter the earth.

(Use the following four paragraphs when a BPA safety watcher is required, as requested by the Utility Coordinator. Include subsections 00223.34, .80(b)(5), & .90 in SP00223.)

BPA operates within the Project limits and requires an on-site safety watcher (see Section 00223). An on-site safety watcher is required when any of the following apply:

- The Contractor is performing Work within the limits of a BPA easement or BPA Right-of-Way; or
- The Contractor is performing Work within 100 feet of a BPA facility.

The Contractor shall keep access to all BPA structures open and unobstructed at all times.

The Contractor shall not store flammable materials or refuel construction Equipment or vehicles on BPA Right-of-Way.

In the event of an emergency, the Contractor shall call BPA Monroe Control Center (MCC) dispatch office at 1-509-465-1837, in addition to calls required by the Utilities notification system.

[End Bonneville Power Administration]

(Use the following lead-in paragraph and subsection .50(g) on Projects with utilities that may require adjustment. Check with the Utility Coordinator.)

Add the following subsection:

00150.50(g) Utility Information (Anticipated Relocations):

The organizations list in Table 00150-2 may be adjusting Utilities within the limits of the Project during the period of the Contract with relocation Work estimated to be completed by the following dates and times:

(List utilities (companies) in the table and subsection(s) below in the following order:

- ***Gas***
- ***Power***
- ***ODOT Electrical***
- ***Local Agency Electrical***
- ***Irrigation***
- ***Sewer***
- ***Telecommunication (including fiber)***
- ***Water***

Insert Project Name Here

- *Joint Use Facilities*
- *BPA*

Replace the "#" in the "subsection" column, so that it correctly corresponds with the subsection under which requirements for that Utility are specified.

Example: If requirements for a Utility are specified under subsection "(3)" below, the table will list subsection "00150.50(g)(3)".

Add or delete rows in the table as necessary to list all applicable utilities. If the work order number is not applicable delete the language in parenthesis.)

Table 00150-2

Subsection	Utility	Contact Person's Name, Address, Email, (and) Phone Number (and Work Order Number)	Estimated Completion Date
00150.50(g)(#)			
00150.50(g)(#)			
00150.50(g)(#)			
00150.50(g)(#)			

(Use the following paragraph when a utility relocation plan is available and when identified by the Utility Coordinator.)

The Contractor shall contact the Engineer to view the approved utility relocation Plans.

The Contractor shall notify, in writing, the Utilities listed above, with a copy to the Engineer, at least 14 Calendar Days before beginning Work on the Project. Utilities may require an on-site observer, at no cost to the Contractor.

(Use the following paragraphs when applicable for Utilities listed in the above table and when identified by the Utility Coordinator.)

(Begin Option for Gas Utilities - Use this option when Gas Utilities are listed in the above table. Repeat this option if more than one Gas Utility, is listed and delete this option if no Gas Utilities are listed.

Replace "#" with the subsection number, e.g. "(1)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below. Example: (1) NW Natural Gas – "Gas Utility"

Replace "(Name of Utility)" with the name of the Gas Utility.)

(#) (Name of Utility) - "Gas Utility":

The Contractor shall notify the Gas Utility in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the gas pipeline.

Insert Project Name Here

(Use the following paragraph when the utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity, and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be performed by the Contractor after the utility performs their work.)

The Contractor shall notify the Gas Utility in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Gas Utility receives the notification, the Contractor shall then allow the Gas Utility ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Gas Utility in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Gas Utility receives the notification, whichever occurs later, the Contractor shall then allow the Gas Utility ___ Calendar Days to schedule and complete the relocation and adjustment work.

(Use the following paragraph when requested by the Utility Coordinator. Insert the specific location in the blank.)

The Gas Utility operates a (high pressure) gas pipeline within the Project limits and may require an on-site safety watcher, at no cost to the Contractor. The (high pressure) gas pipeline is located at _____ (Detail location by station and offset, describe if parallel or perpendicular to the highway) _____.

(Use the following two paragraphs only when a high pressure gas pipeline is located within the project limits.)

When operating Equipment directly above the high pressure gas pipeline, the Contractor shall keep Equipment on the paved surfaces only.

Insert Project Name Here

In the immediate area of the high pressure gas lines, when moving any Equipment, excavating, driving piles, pounding guardrail posts, boring, or other road construction activities, the Contractor shall increase the tolerance zone from 24 inches, as defined in OAR 952-001-010, to 10 feet. Exceptions require written approval from the Gas Utility. The Contractor shall provide the Engineer a copy of the written approval of the exception before beginning Work.

(Use the following paragraph and bullet list at the very end of the Gas Utilities option. Delete a Utility and contact phone number if the Utility Coordinator determines that the Utility is not present within the Project Limits.)

In the event of an emergency, and in addition to the calls required by the Utilities notification system, the Contractor shall call:

- Marathon Petroleum Corporation / Andeavor 1-800-725-1514; or
- Avista Corporation 1-800-227-9187; or
- Cascade Natural Gas Corporation 1-888-522-1130; or
- Kinder-Morgan Energy 503-224-3390; or
- Northwest Natural Gas 1-800-882-3377; or
- Olympic Pipe Line Company LLC 1-888-271-8880; or
- Ruby Pipeline (LNG) 1-877-712-2288; or
- TransCanada GTN 1-800-447-8066; or
- Williams Pipeline 1-801-584-6948.

[End Option for Gas Utilities]

(Begin Option for Power Suppliers - Use this option when Power Suppliers are listed in the above table. Repeat this option if more than one Power Supplier is listed, and delete this option if no Power Suppliers are listed.

Replace "#" with the subsection number, e.g. "(2)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below. Example: (2) Pacific Power – "Power Supplier"

Replace "(Name of Utility)" with the name of the Power Supplier.)

(#) (Name of Utility) - "Power Supplier":

The Contractor shall notify the Power Supplier(s) in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the power line(s).

(Use the following paragraph when the Utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity, and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be performed by the Contractor after the utility performs their work.)

The Contractor shall notify the Power Supplier in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Power Supplier receives the notification, the Contractor shall then allow the Power Supplier ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Power Supplier in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Power Supplier receives the notification, whichever occurs later, the Contractor shall then allow the Power Supplier ___ Calendar Days to schedule and complete the relocation and adjustment work.

(Use the following paragraph when power lines overhang Work areas. Use either "18 feet" or "___ feet" and fill in the blank. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

Energized power lines overhang portions of the Work with a minimum vertical clearance of (18 feet)(___ feet). The Contractor shall maintain at least 10 feet of safety clearance. Exceptions require written approval from the Power Supplier(s) and may require an on-site safety watcher, at no cost to the Contractor. The Contractor shall provide the Engineer a copy of the written approval of exception before beginning work.

(Use the following paragraph when power lines are beneath Work areas. For example: Bridge deck rehab.)

The Contractor shall maintain at least 10 feet of safety clearance from energized power lines. Exceptions require written approval from the Power Supplier and will require an on-site safety watcher at no cost to the Contractor. The Contractor shall provide the Engineer with a copy of the written approval of exception before beginning work.

(Use this paragraph when requested by the Utility Coordinator. Fill in the blanks.)

The Contractor shall coordinate with the Power Supplier(s) to perform Work within ____ feet of the aerial power line during (Insert specific dates when the Power Supplier(s) cannot de-energize their system due to high loads) when the Power Supplier(s) cannot de-energize the power facility.

[End Option for Power Suppliers]

(Begin Option for ODOT Electrical - Use this option when ODOT Electrical is listed in the above table. Delete this option if ODOT Electrical is not listed.

Replace "#" with the subsection number, e.g. "(3)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below. Example: (3) ODOT Electrical. Delete "(and Intelligent Transportation Systems (ITS))" or purple parentheses as applicable.)

(#) ODOT Electrical (and Intelligent Transportation Systems (ITS)):

The Contractor shall notify, in writing, ODOT Electrical (and ITS) with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the ODOT line(s).

[End Option for ODOT Electrical]

(Begin Option for Local Agency Electrical - Use this option when Local Agency Electrical is listed in the above table. Repeat this option if more than one Local Agency is listed and delete this option if a Local Agency is not listed.

Replace "#" with the subsection number, e.g. "(4)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below.

Replace "(Name of Local Agency)" with the name of the Local Agency. Example: (4) City of Salem Electrical")

(#) (Name of Local Agency) Electrical:

(Fill in the blank with the name of the Local Agency.)

The Contractor shall notify ____, in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the line(s).

[End Option for Local Agency Electrical]

(Begin Option for Irrigation Facilities - Use this option when Irrigation Facilities are listed in the above table. Repeat this option if more than one Irrigation Facility is listed, and delete this option if no Irrigation Facilities are listed.

Insert Project Name Here

Replace "#" with the subsection number, e.g. "(4)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below.

Replace "(Name of Utility)" with the name of the Irrigation Facility. Example: (4) Central Oregon Irrigation District – "Irrigation Facility")

(#) (Name of Utility) - "Irrigation Facility":

The Contractor shall notify the Irrigation Facility in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the Irrigation facilities.

(Use the following paragraph when the utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity, and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be done by the Contractor after the utility performs their work.)

The Contractor shall notify the Irrigation Facility in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Irrigation Facility receives the notification, the Contractor shall then allow the Irrigation Facility ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Irrigation Facility in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Irrigation Facility receives the notification, whichever occurs later, the Contractor shall then allow the Irrigation Facility ___ Calendar Days to schedule and complete the relocation and adjustment work.

[End Option for Irrigation Facilities]

(Begin Option for Sewer Facilities - Use this option when Sewer Facilities are listed in the above table. Repeat this option if more than one Sewer Facility is listed and delete this option if no Sewer Facilities are listed.

Replace "#" with the subsection number, e.g. "(4)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below.

Replace "(Name of Utility)" with the name of the Sewer Company or City Sewer Service. Example: (4) South Suburban Sewer – "Sewer Facility")

(#) (Name of Utility) - "Sewer Facility":

The Contractor shall notify the Sewer Facility in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the Sewer facilities.

(Use the following paragraph when the utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity, and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be done by the Contractor after the utility performs their work.)

The Contractor shall notify the Sewer Facility in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Sewer Facility receives the notification, the Contractor shall then allow the Sewer Facility ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Sewer Facility in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Sewer

Insert Project Name Here

Facility receives the notification, whichever occurs later, the Contractor shall then allow the Sewer Facility ___ Calendar Days to schedule and complete the relocation and adjustment work.

[End Option for Sewer Facilities]

(Begin Option for Telecommunication, including Fiber, Utilities - Use this option when Telecommunication Utilities are listed in the above table. Repeat this option if more than one Telecommunication Utility is listed, and delete this option if no Telecommunication Utilities are listed.

Replace "#" with the subsection number, e.g. "(5)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below.

Replace "(Name of Utility)" with the name of the Telecommunication Utility. Example: (5) Comcast – "Telecommunication Utility")

(#) (Name of Utility) - "Telecommunication Utility":

The Contractor shall notify the Telecommunication Utility in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the Telecommunication Utility facilities.

(Use the following paragraph when the utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity, and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be done by the Contractor after the utility performs their work.)

The Contractor shall notify the Telecommunication Utility in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Telecommunication Utility receives the notification, the Contractor shall then allow the Telecommunication Utility ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform

their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Telecommunication Utility in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Telecommunication Utility receives the notification, whichever occurs later, the Contractor shall then allow the Telecommunication Utility ____ Calendar Days to schedule and complete the relocation and adjustment work.

(Use this paragraph when requested by the Utility Coordinator.)

The Contractor shall coordinate Fiber Optic relocation work with the Telecommunication Utility due to potential restricted work dates.

(Use this paragraph when requested by the Utility Coordinator. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall obtain written approval from the Telecommunication Utility for excavating (or blasting) within 10 feet of a buried fiber optic communications cable. The Telecommunication Utility may require an on-site safety (watcher) (representative) at no cost to the Contractor for monitoring purposes. The Contractor shall provide the Engineer a copy of the written approval before beginning work.

[End Option for Telecommunication Utilities]

(Begin Option for Water Utilities - Use this option when Water Utilities are listed in the above table. Repeat this option if more than one Water Utility is listed, and delete this option if no Water Utilities are listed.

Replace "#" with the subsection number, e.g. "(6)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below.

Replace "(Name of Utility)" with the name of the Water Utility. Example: (6) S Water District – "Water Utility")

(#) (Name of Utility) - "Water Utility":

The Contractor shall notify the Water Utility in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the Water Utility facilities.

(Use the following paragraph when the utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity, and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation

Insert Project Name Here

and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be done by the Contractor after the utility performs their work.)

The Contractor shall notify the Water Utility in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Water Utility receives the notification, the Contractor shall then allow the Water Utility ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Water Utility in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Water Utility receives the notification, whichever occurs later, the Contractor shall then allow the Water Utility ___ Calendar Days to schedule and complete the relocation and adjustment work.

[End Option for Water Utilities]

(Begin Option for Joint Use Facility Utilities - Use this option when Joint Use Facility Utilities are listed in the above table. Repeat this option if more than one Joint Use Facility is listed and delete this option if no Joint Use Facilities are listed.

Replace "#" with the subsection number, e.g. "(5)", and ensure that all subsections are sequentially numbered. Verify that the subsection numbers in the above table match the subsection numbers listed below.

Replace "(Name of Utility)" with the name of the Joint Use Facility. Example: (5) Comcast – "Joint Use Facility")

(#) (Name of Utility) - "Joint Use Facility":

The Contractor shall notify the Joint Use Facility in writing, with a copy to the Engineer, at least 14 Calendar Days before beginning Work within 10 feet of the Joint Use facility.

(Use the following paragraph when the utility must complete adjustment/relocation work in order for the Contractor to have access to perform a specific work activity,

and when identified by the Utility Coordinator. Copy and paste the paragraphs as necessary to accommodate all relocation work.

Fill in the first and third blanks with the number of days required to notify the utility (either 7 or 14 days) plus the time required for the utility to complete the relocation and adjustment work. (Example: Utility needs 7 days' notice and 10 days to complete the adjustment work. 7+10=17 days. Fill in the blanks with "17".) If the number of days for the utility to complete the relocation or adjustment work is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer.

Fill in the second and fourth blanks with the work that needs to be done by the Contractor after the utility performs their work.)

The Contractor shall notify the Joint Use Facility in writing, with a copy to the Engineer, ___ Calendar Days before the Contractor is scheduled to begin performing _____. After the Joint Use Facility receives the notification, the Contractor shall then allow the Joint Use Facility ___ Calendar Days to schedule and complete the relocation and adjustment work before the Contractor begins performing _____.

(Use the following paragraph when the Contractor must complete a specific activity in order for the utility to have access to perform relocation/adjustment work, and when identified by the Utility Coordinator. Fill in the first blank with the work that needs to be done by the Contractor in order for the utility to have access to perform their work. Insert the number of days in the second blank; if the number of days is greater than 14, it must be approved by the State Utility Liaison and the State Specifications Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

The Contractor shall notify the Joint Use Facility in writing, with a copy to the Engineer, (7)(14) Calendar Days before the Contractor's estimated completion of _____. After the Contractor has completed this Work or (7)(14) Calendar Days after the Joint Use Facility receives the notification, whichever occurs later, the Contractor shall then allow the Joint Use Facility ___ Calendar Days to schedule and complete the relocation and adjustment work.

[End Option for Joint Use facility]

(Use the following subsection .55 when there is a contract (ODOT or Local Agency) that will be performed within the project site during the duration of this Contract and the Contractor is required to cooperate with the other ODOT or Local Agency contractor. Use the following subsection to list all applicable contracts that will be procured through the ODOT Procurement Office, including Region procured Contracts and all applicable Local Agency contracts.

List the contract or project name, the contractor's name and on-site contact number, if known, and the estimated time that the other specific contract work will be taking place within the project limits. Delete the example. Obtain the information from the Project Leader or Area Manager.

Insert Project Name Here

Also use the following paragraph when there is a bridge within the project limits that is scheduled to have a safety inspection within the timeframe of the project. Contact ODOT's Senior Bridge Inspector to get the scheduled range the bridge is scheduled to be inspected. List the ODOT Region Bridge Inspector's name, phone number, bridge number, bridge name, and inspection dates for each bridge.)

00150.55 Cooperation with Other Contractors - Add the following to the end of this subsection:

The following contract work will be ongoing within the Project Site during the following times:

Contract Name (Contractor's Name)	Estimated Times (From - To)
<i>For Example - Your project's bid opening is July 4, 2025 so: OR99E Howell Prairie Rd-Waconda Rd. Contractor, Inc. 541-555-0100 (on-site)</i>	<i>Aug 2025 to Oct 31, 2025</i>
<i>Bridge Number: 07333, Columbia R & N Hayden Island Drive, Hwy1 SB John Doe, Region 1 Bridge Inspector 541-555-0100</i>	<i>Aug 2025 to Oct 31, 2025</i>

(Use the following subsection .60(a) when bridge weight limits are required by 00220.45.)

00150.60(a) Load and Speed Restrictions for Construction Vehicles and Equipment - Add the following bullet to the end of the bullet list:

- The Contractor shall restrict the combined weights of construction vehicles, Equipment, and Materials on Bridges according to 00220.45.

(Use the following subsection .91 on projects when a mandatory post-construction meeting is required.)

00150.91 Post-Construction Review - Replace this subsection, except for the subsection number and title, with the following:

The Contractor shall attend a Post-Construction Review meeting to be held by the Agency prior to issuance of Third Notification but not earlier than 45 Days following the date of Second Notification. The time and place of this meeting will be announced by the Engineer at least 15 Days prior to the meeting date. The purpose of this meeting is to examine the Project for possible process improvements that may benefit future projects. The Contractor's attendance at the Post-Construction Review meeting is mandatory.

SP00160 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26
This Section requires SP00235
when Agency-furnished material
sources are used.)**

SECTION 00160 - SOURCE OF MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00160 of the Standard Specifications modified as follows:

00160.01(a) All Materials - Replace the paragraph that begins “The Contractor shall identify...” with the following paragraph:

When the estimated value is over \$10,000, the Contractor shall submit a copy of the materials purchase order or supply agreement.

Delete the paragraph that begins “For this purpose...”.

00160.05 Qualified Products List (QPL) - Replace this subsection, except for the subsection number and title, with the following:

The QPL is a listing of manufactured products available on the market (shelf items) that ODOT has evaluated and found suitable for a specified use in highway construction. The QPL is available from ODOT's Construction Section website (see 00110.05(e)).

The most current version of the QPL on ODOT's Construction Section website at the time of Advertisement is the version in effect for the Project. When the Contract specifies the use of the QPL, unless specified as the subject of an exemption per ORS 279C.345, the Agency may approve for use a product qualified for inclusion in a later edition of the QPL, or other equivalent product that meets the requirements of the QPL, following the Standard Guidelines for Product Review, if the Agency finds the product acceptable for use on the Project.

Use of listed products shall be restricted to the category of use for which they are listed. The Contractor shall install all products as recommended by the manufacturer. The Contractor shall replace qualified products not conforming to Specifications or not properly handled or installed at no additional cost to the Agency.

(Use the following subsection .20 when this Contract is state funded and the Work was considered and included in a NEPA decision that also applies to any other work that has any federal funding. This requires 00160.20(a) Option B.)

00160.20 Preferences for Materials - Add the following paragraph to the beginning of this subsection:

Section 1518 of Moving Ahead for Progress in the 21st Century Act provides that Buy America applies to all Contracts eligible for federal assistance under Title 23, United States Code, included within the scope of an applicable National Environmental Policy Act (NEPA) finding, determination or decision, regardless of the funding source of such Contracts, where at least one Contract is funded with Title 23 funds. This Contract includes Title 23 funds under

Insert Project Name Here

such a NEPA finding, determination or decision and Buy America under subsection (a) and Build America Buy America under subsection (d) apply to this Contract.

00160.20(a) Buy America - Replace this subsection, except for the subsection number and title, with the following:

(Use one of the following options for 00160.20(a))

[Begin Option A]

(Option A1:

Contracting Agency is not ODOT or DAS (HB3332 does not apply)

Less than \$500K in Federal Aid (USDOT Waiver)

The USDOT issued a Public Interest Waiver for De Minimis Costs and Small Grants.

The final waiver can be viewed here:

<https://www.federalregister.gov/documents/2023/08/16/2023-17602/waiver-of-buy-america-requirements-for-de-minimis-costs-and-small-grants> and this waiver applies to iron and steel covered by Buy America. The public interest waiver includes iron and steel manufactured products and construction materials when the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

Option A2:

Contracting Agency is ODOT or DAS (HB3332 may apply)

Estimated Contract price less than \$250K (HB3332 does not apply)

Less than \$250K necessarily involves less than \$500K: (Less than \$500K in Federal Aid (USDOT Waiver)

The USDOT issued a Public Interest Waiver for De Minimis Costs and Small Grants.

The final waiver can be viewed here:

<https://www.federalregister.gov/documents/2023/08/16/2023-17602/waiver-of-buy-america-requirements-for-de-minimis-costs-and-small-grants> and this waiver applies to iron and steel covered by Buy America. The public interest waiver includes iron and steel manufactured products and construction materials when the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.)

Option A= Buy America for iron or steel does not apply to this Project.)

Buy America for iron and steel does not apply to this Contract.

[End Option A]

[Option B]

(Option B1

Contracting Agency is not ODOT or DAS (HB3332 does not apply)

\$500K or more in Federal Aid (USDOT Waiver does not apply)

Insert Project Name Here

Option B2

Contracting Agency is ODOT or DAS and estimated contract price is over \$250,000 (HB3332 applies)

\$500K or more in Federal Aid (USDOT Waiver does not apply; Federal Buy America is triggered.)

Pursuant to ORS 279A.030, in the event of conflict between the federal and state law, federal law prevails.

Option B= Federal Buy America laws apply.)

If \$500,000 or more of federal highway funds are involved on the Project, the Contractor shall limit the quantity of foreign Materials incorporated into the Work as follows. Section 635.410 of Title 23, Code of Federal Regulations, and the Intermodal Surface Transportation Efficiency Act require that all iron or steel manufacturing processes, including, without limitation, the casting of ingots, for iron or steel Materials permanently incorporated into the Project shall occur in the United States, unless the cost of foreign-origin iron or steel Materials does not exceed one-tenth of one percent (0.1%) of the Contract Amount or \$2,500, whichever is greater. Buy America requirements apply to any steel or iron component of a manufactured product regardless of the overall composition of the manufactured product (e.g., Buy America applies to the steel wire mesh or steel reinforcing components of a precast reinforced concrete pipe). The Contractor shall not incorporate foreign-origin iron or steel Materials in excess of this amount into the Project. All foreign-origin iron or steel Materials incorporated in the Project in excess of the amount indicated above shall be removed and replaced with domestic iron or steel Materials at the Contractor's expense. For purposes of this Specification, the cost of foreign-origin iron or steel Materials shall be the value of the iron or steel products as of the date they are delivered to the Project Site.

Manufacturing processes include without limitation the casting of ingots and the application of coatings to finished iron or steel products or components. Coatings include epoxy coating, galvanizing, painting, and any other coating that protects or enhances the value of the steel or iron product or component. The Contractor shall provide the Engineer with a Certificate of Materials Origin, on a form furnished by the Engineer, before incorporating any iron or steel products into the Project. Unless a Certificate of Materials Origin has been provided to the Engineer, the Materials shall be considered of foreign origin.

The Contractor shall retain manufacturers' certificates verifying the origin of all domestic iron or steel Materials for 3 years after the date of final payment for the Project, and shall furnish copies to the Engineer upon request.

The Contractor shall include this provision in all subcontracts.

[End Option B]

[Begin Option C]

(Option C

***Contracting Agency is ODOT or DAS (HB3332)
Contract value of \$250K or more (HB3332)***

Insert Project Name Here

Less than \$500K in Federal Aid (USDOT Waiver)

The USDOT issued a Public Interest Waiver for De Minimis Costs and Small Grants.

The final waiver can be viewed here:

<https://www.federalregister.gov/documents/2023/08/16/2023-17602/waiver-of-buy-america-requirements-for-de-minimis-costs-and-small-grants> and this waiver applies to iron and steel covered by Buy America. The public interest waiver includes iron and steel manufactured products and construction materials when the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

The USDOT Waiver waives the requirements of Federal law for Buy America; HB3332 applies.

Option C= Oregon Law (HB3332) applies

DO NOT CHANGE FORMATTING AS THIS IS REQUIRED BY ORS.)

The Contractor shall comply with HB3332 (2023) which specifies that steel, iron, coatings for steel and iron and manufactured products that a contractor purchases for or uses in the public improvement contract or public works contract, and that become part of a permanent structure, must be produced in the United States. For iron and steel products all manufacturing processes, from the initial melting stage through the application of coatings, shall occur within the United States. For manufactured products, the manufacture of the product shall occur within the United States and the cost of the components of the product that are mined, produced or manufactured in the United States shall be more than 55 percent of the total cost of all components of the product.

No de minimis amount has been established for foreign or unknown origin and no list of exempted items has been created. ODOT or DAS may adopt rules or make findings according to HB3332 (2023).

The Contractor shall provide the Engineer with a Certificate of Materials Origin, on a form furnished by the Engineer, before incorporating any iron or steel products into the Project. Unless a Certificate of Materials Origin has been provided to the Engineer, the Materials shall be considered of foreign origin.

The Contractor shall retain manufacturers' certificates verifying the origin of all domestic iron or steel Materials for 3 years after the date of final payment for the Project, and shall furnish copies to the Engineer upon request.

The Contractor shall include this provision in all subcontracts.

[End Option C]

00160.20(d) Build America Buy America Act Requirements – Replace this subsection, except for the subsection number and title, with the following:

If federal highway funds are involved on the Project, the Contractor shall comply with the Build America Buy America Act and implementing regulations (Infrastructure Investment and Jobs Act (“IIJA”), Pub. L. No. 117-58, which includes the Build America, Buy America Act (“the Act”). Pub. L. No. 117-58, Sections 70901-70941).

The Build America Buy America Act requirements apply to construction materials and manufactured products permanently incorporated in the Project. All construction materials and manufactured products permanently incorporated in the Project must be produced in the United States.

Construction materials include an article, Material, or supply that is or consists primarily of only one of the following, with the standard for the material to be considered “produced in the United States”:

- **Non-ferrous metals** - All manufacturing processes, from initial smelting or melting through final shaping, coating, and assembly, occurred in the United States.
- **Plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)** - All manufacturing processes, from initial combination of constituent plastic or polymer-based inputs, or, where applicable, constituent composite materials, until the item is in its final form, occurred in the United States.
- **Glass (including optic glass)** - All manufacturing processes, from initial batching and melting of raw materials through annealing, cooling, and cutting, occurred in the United States.
- **Fiber optic cable (including drop cable)** - All manufacturing processes, from the initial ribboning (if applicable), through buffering, fiber stranding and jacketing, occurred in the United States. All manufacturing processes also include the standards for glass and optical fiber, but not for non-ferrous metals, plastic and polymer-based products, or any others.
- **Optical fiber** - All manufacturing processes, from the initial preform fabrication stage through the completion of the draw, occurred in the United States.
- **Lumber** - All manufacturing processes, from initial debarking through treatment and planing, occurred in the United States.
- **Drywall** - All manufacturing processes, from initial blending of mined or synthetic gypsum plaster and additives through cutting and drying of sandwiched panels, occurred in the United States.
- **Engineered wood** - All manufacturing processes from the initial combination of constituent materials until the wood product is in its final form, occurred in the United States.

The classification of an article, material, or supply as construction material is based on its status at the time it is brought to the work site for incorporation in the Project. In general, the work site is the location of the Project at which the construction materials will be incorporated.

Insert Project Name Here

FHWA issued a final rule on January 14, 2025 amending FHWA's Buy America regulation to terminate FHWA's general waiver for manufactured products and establish Buy America requirements for manufactured products with respect to Federal-aid highway projects. <https://www.federalregister.gov/documents/2025/01/14/2024-31350/buy-america-requirements-for-manufactured-products>

Manufactured products assembled outside the Project Site are also subject to the Build America Buy America requirements. Manufactured products means articles, materials, or supplies that have been:

- Processed into a specific form and shape; or
- Combined with other articles, materials, or supplies to create a product with different properties than the individual articles, materials, or supplies.

For manufactured products, the final assembly of the product shall occur within the United States for projects obligated on or after October 1, 2025. For projects obligated after October 1, 2026, the cost of the components of the product that are mined, produced or manufactured in the United States shall be more than 55 percent of the total cost of all components of the product.

The USDOT issued a Public Interest Waiver for De Minimis Costs and Small Grants. The final waiver can be viewed here:

<https://www.federalregister.gov/documents/2023/08/16/2023-17602/waiver-of-buy-america-requirements-for-de-minimis-costs-and-small-grants> and this waiver applies to Materials covered by the Build America Buy America Act.

The public interest waiver is for manufactured products and construction materials for which:

- The total value of the non-compliant products (foreign or unknown origin) is no more than the lesser of \$1,000,000 or 5% of total applicable costs for the project*; or
- The total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

*The "total value of the non-compliant products" includes construction materials and manufactured products only. The "total applicable costs" includes construction materials, iron and steel, and manufactured products. The value of materials are the actual cost of the materials, not the anticipated cost of materials. Furthermore, this bullet does not apply to iron and steel subject to the requirements of 23 U.S.C. 313. The de minimis threshold in 23 CFR 635.410(b)(4) continues to apply for steel and iron. (See 00160.20(a).)

Strict compliance with the Build America, Buy America domestic preferences is required, except to the extent the above public interest waiver applies. The Contractor shall not incorporate construction materials and manufactured products in excess of this amount into the Project. All foreign origin construction materials and manufactured products incorporated in the Project in excess of the amount indicated above shall be removed and replaced with domestic construction materials at the Contractor's expense.

The Contractor shall provide the Engineer with a Certificate of Materials Origin, on a form furnished by the Engineer, before incorporating any applicable construction materials and

Insert Project Name Here

manufactured products into the Project. Unless a Certificate of Materials Origin has been provided to the Engineer, the products and Materials shall be considered of foreign origin.

The Contractor shall retain manufacturers' certificates verifying the origin of all applicable construction materials and manufactured products for 3 years after the date of final payment for the Project, and shall furnish copies to the Engineer upon request.

Iron and steel Materials and manufactured products that are predominately iron or steel are subject to 00160.20(a).

The Contractor shall include this provision in all subcontracts.

(Use the following subsection .21 on Federal funded Projects.)

00160.21 Cargo Preference Act Requirements - Add the following to the end of this subsection:

Additional information may be available at the following websites:

<https://www.fhwa.dot.gov/construction/cqit/cargo.cfm>

<https://www.fhwa.dot.gov/construction/cqit/cargo/qa.cfm>.

(Use the following subsection .30 when the Agency will furnish items or materials other than material from a borrow source - for example: poles, timbers, guardrail, etc. Give the location where the items/materials may be picked up. Delete parentheses and the words in parentheses as needed. For aggregates and other similar materials, use 00160.40.)

00160.30 Agency-Furnished Material - Add the following to the end of this subsection:

The Agency will furnish the listed items at the (Project Site:)(following locations:)

(Use the following paragraph when Agency supplied materials need to be returned. Give the location and contact information where the items/materials may be dropped off. Delete parentheses and the words in parentheses as needed.)

Add the following to the end of this subsection:

The Contractor shall return the Agency-furnished items to the (following locations:)

(Use the following subsection .40 on Projects with Agency-furnished material sources. Include SP00235 when using this subsection.)

00160.40 Agency-Furnished Sources - Add the following paragraph after the paragraph that begins "The Agency may list in the...":

Agency-Furnished Sources for this Project are listed in Section 00235 of the Special Provisions.

Insert Project Name Here

(Use the following subsection .65 on ODOT Projects (non-ODLAP) when the Region engineer's estimate is at or above \$3 million prior to PS&E. For questions contact the State Specifications Engineer.)

Add the following subsection:

00160.65 Environmental Product Declaration – Pursuant to ORS 184.879 and OAR 731-005-0910, provide an Environmental Product Declaration for the following materials:

- Concrete, including ready mix concrete, shotcrete, precast concrete and concrete masonry units;
- Asphalt paving mixtures;
- Steel, including rebar, reinforcing steel and structural steel, hot-rolled sections, hollow sections, plate steel and cold-formed steel.

Submit an EPD according to the *ODOT Environmental Product Declaration Manual* (see 00110.05(e)).

The most current published PDF version of the *ODOT Environmental Product Declaration Manual* on the date of Advertisement is the version in effect for the Project.

The EPD must be accepted by the Engineer before the product is incorporated into the Project unless the product is procured under a listed exemption in ODOT's *Environmental Product Declaration Manual*.

SP00165 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00165 - QUALITY OF MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

(When the project is by a Local Agency and the work could be done using Type D or Type E Materials testing, get approval from the ODOT Quality Assurance Engineer and Region Quality Assurance Coordinator to use Type D or Type E Materials testing.)

(Obtain language for Type D or Type E testing from the State Specifications Engineer. Do not include language for Type D or Type E testing without first obtaining approval from the State Specifications Engineer.)

Comply with Section 00165 of the Standard Specifications modified as follows:

00165.10(b) Nonfield-Tested Materials – Replace this subsection, except for the subsection number and title, with the following:

Nonfield-tested Materials will be accepted according to the ODOT Nonfield Tested Materials Acceptance Guide (NTMAG), unless otherwise specified in the Contract. The NTMAG is available on the ODOT Construction Section website (see 00110.05(e)). The most current version of the NTMAG on the date of Advertisement is the version in effect for the Project.

(1) Rejections – The inspection at the mill, shop, or precaster of any Material, Work or finished members will not prevent subsequent rejection, if later found damaged or defective, nor relieve the Contractor of the responsibility to correct or replace the Work at no additional cost to the Agency.

(2) Transport – Do not ship members or piece of fabricated steel or precast member, that requires a fabrication inspection report, without the Inspector's label or marking.

Add the following subsection:

00165.15 AASHTOWare™ – Field-tested Materials and Nonfield-tested Materials will be tracked within AASHTOWare Project™ for this Project. The acceptance criteria for Materials in AASHTOWare Project™ can be viewed at the <https://www.oregon.gov/odot/Business/Pages/AASHTOWare-Project.aspx> (see 00110.05(e)). The most current version of AASHTOWare™ on the date of Advertisement is the version in effect for the Project.

00165.20 Materials Specifications and Test Method References - Replace this subsection, except for the subsection number and title, with the following:

References to materials specifications and test methods of ODOT, WAQTC, AASHTO, ASTM, other governmental agencies, or other recognized organizations mean those officially adopted and in current use by the agency or organization on the date of Advertisement.

If there are conflicting references, or if no reference is made to materials specifications, sampling and testing frequencies, or test method, the Engineer will resolve any discrepancies between these documents in the following orders of precedence:

Field-Tested Materials:

- Contract Change Orders;
- Special Provisions;
- ODOT Laboratory Manual of Test Procedures;
- MFTP;
- Standard Specifications; and
- AASHTOWare™

Nonfield-Tested Materials:

- Contract Change Orders;

Insert Project Name Here

- Special Provisions;
- ODOT Laboratory Manual of Test Procedures;
- Standard Specifications; and
- AASHTOWare™

Material test methods:

- ODOT;
- WAQTC;
- AASHTO;
- ASTM;
- Other recognized national organizations, such as ANSI, AWP, IMSA, ISSA, and UL; and
- Industry standards in the location where the Work is being performed.

Sampling and testing frequencies:

- Contract Change Orders;
- Special Provisions;
- MFTP;
- Standard Specifications; and
- AASHTOWare™.

If the Contractor identifies conflicting references or if no reference is made, the Contractor shall immediately request a clarification from the Engineer.

00165.35(d) Certificate of Origin of Steel Materials - Replace this subsection with the following subsection:

00165.35(d) Certificate of Origin of Steel Materials, Construction Materials, and Manufactured Products - When a certificate of material origin is specified, complete the form furnished by the Engineer as required by 00160.20.

00165.35(e) Certificate of Origin of Construction Materials - Delete this subsection.

00165.91 Fabrication Inspection Expenses - Replace the table with the following table:

TABLE 00165-3		
Zone	Place of Fabrication	Reduction in Payment
1	All of State of Oregon, and the portion of the State of Washington within 50 airline miles of Portland International Airport (PDX)	\$0

Insert Project Name Here

2	Outside of Zone 1, and up to 250 airline miles of Portland International Airport (PDX)	\$300 per Calendar Day
3	Outside of Zone 2, up to 1,000 airline miles of Portland International Airport (PDX).	Round trip coach airfare from Portland, Oregon plus \$300 per Calendar Day
4	Outside of Zone 3, or outside of the continental United States.	Round trip coach airfare from Portland, Oregon plus \$500 per Calendar Day

SP00170 (Special Provisions for the 2024 Book)

**(Bidding on or after: 12-01-26
Last updated: 09-09-26)**

SECTION 00170 - LEGAL RELATIONS AND RESPONSIBILITIES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00170 of the Standard Specifications modified as follows:

(Use the following lead-in paragraph and subsection .01(e) on Projects with Railroad involvement. Obtain information from ODOT's State Utility and Railroad Liaison. Use of this subsection requires SP00058-RRS, SP00060-RR-BNSF, SP00061-RR-CBRL, SP00062-RR-CORP, SP00066-RR-PNWR, or SP00068-RR-UPRR, or SP00069-RR-UPRR_End.)

Add the following subsection:

00170.01(e) Railroads -

(Use the following language on Projects that does not have an agreement in place. Contact the ODOT State Utility and Railroad Liaison.)

An agreement between the Contractor and the Railroad to Work near or within Railroad property is required for this Project. A copy of the Railroad agreement and corresponding requirements is included near the front of this Special Provision booklet. The Railroad agreement and requirements are subject to change by the Railroad. The Railroad will provide the actual agreement and requirements for execution. The Contractor shall obtain all necessary permits and licenses and pay all fees. The Contractor shall obtain a fully executed copy of the agreement and requirements between the Contractor and the Railroad and provide a copy of it to the Engineer before beginning Work near or within the Railroad property or Right-of-Way.

Insert Project Name Here

(Use the following paragraph on Projects that ODOT has submitted the initial Contractor Right of Entry or MCL and paid the initial fee to the Railroad. Contact the ODOT State Utility and Railroad Liaison.)

ODOT has submitted the initial agreement to the Railroad. The Contractor shall sign and send to the Railroad the agreement that is supplied to the Contractor by the Engineer. A sample copy of the agreement is included near the front of this Special Provision booklet. The Railroad agreement and requirements are subject to change by the Railroad. The Contractor shall obtain all necessary agreements (permits and licenses) and pay all additional fees. The Contractor shall obtain a fully executed copy of the agreement and requirements between the Contractor and the Railroad and provide a copy of it to the Engineer before beginning Work near or within the Railroad property or Right-of-Way.

(Contact the State Railroad Liaison to complete this subsection.)

The USDOT Number for this Project is (enter USDOT No.) .
Railroad company owning the track: (enter railroad company.) .
Operating Railroad company at track: (enter operating railroad company) .
Railroad MP: (enter railroad MP.) .
Railroad Subdivision: (enter railroad subdivision.) .
City: (enter City) .
County: (enter County) .

(Use the following paragraph when Union Pacific Railroad Company property is within Project limits.)

The Union Pacific Railroad Folder Number is (enter UP Folder Number.) .

(Use one of the following options when Railroad flagger services are required. Delete the option that does not apply. Check with the State Utility and Railroad Liaison.)

[Option 1 - Use the following paragraph when Railroad flagger services are required on any Railroad, except for UPRR when a third party vendor will be used for flagging.]

When Railroad flagger services are required, the Agency will pay the flagger services costs up to a total of (enter number of hours or Days) . If this value is exceeded and additional flagging services are needed, the Contractor shall pay the Agency an amount of (enter dollar amount) per (enter "hour" or "Day") for each (enter "hour" or "Day") in excess of the total value identified above.

[Option 2 - Use the following paragraph when Railroad flagger services are required on a UPRR Railroad and the Contractor is required to use a third party vendor for flagging. Include SP00068_RR_UPRR or SP00069_RR_UPRR_END and subsections 00223.35, .80(a)(4), & .90 in SP00223.]

The Railroad requires a third-party flagging vendor when Work occurs near or within Railroad property. When Railroad flagger services are required, the Contractor shall provide flagger

Insert Project Name Here

services from a third-party flagging vendor from Union Pacific's approved third-party list according to 00223.35.

[End 00170.01(e)]

(Use the following lead-in paragraph and subsection .01(f) on Projects with TriMet involvement. Obtain information from ODOT's State Utility and Railroad Liaison. Use of this subsection requires SP00067-TriMET.)

Add the following subsection:

00170.01(f) Transit Railways - The Contractor must obtain required agreements, licenses, and permits and pay all fees (see 00170.02) from the Tri-County Metropolitan Transit District of Oregon (TriMet) to work on and within the Metropolitan Area Express (MAX) right-of-way.

A sample copy of the License Agreement, License application guidelines, License application and MAX Right-of-Way Access Request/Permit, are included near the front of the Special Provision booklet for this Project. The TriMet agreements and associated requirements are subject to change by TriMet. Contractor shall obtain the actual agreements and applications from TriMet.

The Contractor shall obtain a fully executed copy of the required agreements between the Contractor and the TriMet and provide copies to the Engineer before beginning work on or within the MAX right-of-way.

(Use the following lead-in paragraph and subsection .06 on all Federal funded Projects.)

Add the following subsection:

00170.06 Federal-Aid Participation - This Project is to be conducted according to the regulations applying to Federal-Aid Highway Projects.

00170.07 Record Requirements - Replace the paragraph that begins "For purposes of this Subsection, the term ..." with the following paragraph:

For purposes of this Subsection, the term "Contractor" includes the Contractor, all Subcontractors, Material Suppliers, and providers of rented operated Equipment (except truck drivers), at all tiers, for all subcontracts with first-tier Subcontractors, all subcontracts between the first-tier Subcontractors and their Subcontractors and any other lower-tier subcontracts, and "Related Entities" as that term is defined in OAR 734-010-0400. The Material Suppliers included in this definition are those for Aggregates, asphalt cement concrete, Portland cement concrete and the supply and fabrication of structural steel items, and Material Suppliers that provide quotes.

00170.07(a) Records Required - Replace the paragraph that begins "The Contractor shall include in its subcontracts ..." with the following paragraph:

The Contractor shall include in its subcontracts, purchase orders, and all other written agreements, a provision requiring all Subcontractors, Material Suppliers and providers of rented operated Equipment (except truck drivers), at all tiers, to comply with 00170.07. The

Insert Project Name Here

Contractor shall also require all Subcontractors, Material Suppliers, and providers of rented operated Equipment (except truck drivers), at all tiers, and Related Entities to include in their contracts, purchase orders, and all other written agreements, a provision requiring all lower-tier Subcontractors, Material Suppliers and providers of rented operated Equipment (except truck drivers) to comply with 00170.07. The Material Suppliers to which this applies are those for Aggregates, asphalt cement concrete, portland cement concrete and the supply and fabrication of structural steel items and Material suppliers that provide Material quotes and Related Entities as defined in OAR 734-010-0400.

00170.08 Electronic Document Management - Replace this subsection with the following subsection:

00170.08 Electronic Data and Document Management – The requirements of this Subsection do not apply to claims. Claims must be submitted on paper documents according to Section 00199.

For additional Specifications applicable to AASHTOWare Project™ see 00170.09.

Following Notice to Proceed, the Contractor shall submit all data and documents for this Contract to the Agency in an electronic format using Doc Express®, or using AASHTOWare Project™ for data and documents as specified in 00170.09. No paper documents, faxes or other similar paper methods or media are permitted, unless otherwise allowed or directed by the Engineer. The Contractor shall be solely responsible for submitting data and documents to the Agency using Doc Express® or AASHTOWare Project™, as applicable, for the Contractor and for Subcontractors, Suppliers, vendors and other third parties. Only data and documents submitted by the Contractor to the Agency and recorded in Doc Express® or AASHTOWare Project™, as applicable, as received will be considered valid and received by the Agency.

Following Notice to Proceed, all data and documents for this Contract will be managed in Doc Express® or AASHTOWare Project™, as applicable, unless otherwise allowed or directed by the Engineer. Following Notice to Proceed, the Contractor shall use Doc Express® or AASHTOWare Project™, as applicable, to submit data and documents to the Agency, and the Agency will use Doc Express® or AASHTOWare Project™, as applicable, to submit, or make available, data and documents to the Contractor.

If authorized to do so, Subcontractors, Suppliers, vendors and other third parties may enter data and documents into AASHTOWare Project™, but such data and documents shall not be considered submitted to Agency until the Contractor reviews the data or document and completes the workflow transition to submit the data or document to the Agency within AASHTOWare. Required workflow transitions are defined in the ODOT AASHTOWare Project™ User Guide for Construction Contractors for specific data and documents that are required to be submitted to the Agency. Completion of required workflow transitions by the Contractor will constitute submittal to the Agency. See 00170.09.

Subcontractors, Suppliers, vendors and other third parties shall not be authorized to and shall not enter data or documents into Doc Express®.

The Contractor shall comply with naming conventions, drawer structure, and other Doc Express® instructions as specified in the ODOT Doc Express® User Guide for Construction Contractors, as may be revised from time to time and available from the Engineer.

Insert Project Name Here

Instructions for entry and submittal of data and documents using AASHTOWare Project™ are specified in 00170.09.

The Contractor shall provide all Subcontractors, Suppliers, vendors, and any other third parties receiving payment from the Contractor or any Subcontractor, Supplier, vendor, or any other third party, with read-only access to the Doc Express® drawer that contains payment documents from the Agency and the Contractor. The Contractor may provide Subcontractors, Suppliers, vendors, and any other third parties receiving payment from the Contractor or any Subcontractor, Supplier, vendor or other third party with read-only access to other Doc Express® drawers at the Contractor's discretion. The Contractor shall not grant write access in Doc Express® to Subcontractors, Suppliers, vendors or any other third parties or their respective officers, employees or agents. Additional access requirements and limitations for AASHTOWare Project™ are specified in 00170.09.

Data and documents submitted according to this Subsection, from the Agency to the Contractor and from the Contractor to the Agency, are official data and documents for the Contract and will be accepted as such by both parties.

By submitting data and documents that originate from the Contractor to the Agency using Doc Express® or AASHTOWare Project™, as applicable, the Contractor is certifying that the data and documents are true and accurate and that if the data or document was required to be signed, it has been signed by a person with appropriate authority. By submitting data and documents to the Agency using Doc Express® or AASHTOWare Project™, as applicable, that originate from a Subcontractor, Supplier, vendor, manufacturer or other third party, the Contractor is certifying that the data and documents are a true and complete copy of the data and documents the Contractor received, that if the data or document was required to be signed, it has been signed, and that the Contractor does not know, nor does it have reason to believe, that the data and documents are not true and accurate, are not complete, are not what was required, or were signed by a person without appropriate authority.

In the event of a conflict between this Subsection and the Standard Specifications or other Special Provisions, this Subsection shall control except for, as applicable, 00170.09 and 00199.30.

Costs associated with obtaining and maintaining access to Doc Express® and AASHTOWare Project™ and the use of Doc Express® and AASHTOWare Project™ are Incidental to Mobilization.

Failure to submit data and documents electronically, as required by 00170.08 and 00170.09, may result in payments being withheld according to 00195.50.

The Contractor shall be responsible for causing access to Doc Express® (or to notify the Agency for AASHTOWare Project™) to be disabled for any Entity or individual that is no longer assigned, employed or under contract in relation to the Project or whose access is to be disabled due to improper activity. The Contractor's obligation to disable access applies to its own officers, employees and agents and to all Subcontractors, Suppliers, vendors and other third parties and their respective officers, employees and agents.

The Agency reserves the right to suspend or disable, or cause to be suspended or disabled, the access to Doc Express®, or AASHTOWare Project™, or both, for any Entity or individual at any time.

Insert Project Name Here

Use and access for Doc Express® and AASHTOWare Project™ are provided “as is”. The Agency does not warrant that access to or functioning of Doc Express® or AASHTOWare Project™ will be error free, uninterrupted, or will meet the Contractor’s needs. The Agency is not responsible for any damage that may occur due to error, omission, lack of timeliness or other malfunction of Doc Express® or AASHTOWare Project™ or their supporting systems. The Agency disclaims all liability arising from interference or interruption, viruses, telephone faults, malicious damage by anyone, electronic system downtime, overloading of the Internet or sites or any cause beyond the control of the Agency. The Agency reserves the right to temporarily suspend or cause to be suspended access to Doc Express® or AASHTOWare Project™, or both, without notice, because of maintenance, repair or any other reason deemed necessary for the proper functioning of Doc Express® or AASHTOWare Project™ by the Agency, AASHTO, or Info Tech, Inc.

In no event shall the State of Oregon, the Oregon Transportation Commission or the Agency or their respective members, officers, agents and employees be liable for any claims, suits, actions, losses, liabilities, damages, costs or expenses, including but not limited to attorney fees, of whatsoever nature, resulting from or arising out of the use of Doc Express® or AASHTOWare Project™ by the Contractor or Subcontractors, Suppliers, vendors or other third parties at any level or their respective officers, employees or agents.

The Contractor’s indemnification, defense and hold harmless obligations under the Contract shall apply to the terms, conditions and requirements of 00170.08 and 00170.09 and to the use of Doc Express® and AASHTOWare Project™ and the acts, errors and omissions of the Contractor, Subcontractors, Suppliers, vendors and other third parties and their respective officers, employees and agents respecting access to and use of Doc Express® and AASHTOWare Project™.

The terms, conditions and requirements of 00170.08, 00170.09, and 00150.30 shall be included in all contracts with all Subcontractors, Suppliers, vendors and other third parties at all levels for which access to Doc Express® or AASHTOWare Project™ will or may be required.

(a) User Terms and Conditions - The Contractor shall comply with, shall require its officers, employees and agents to comply with, and shall require all Subcontractors, Suppliers, vendors and other third parties to comply with and to require their officers, employees and agents using or accessing Doc Express® or AASHTOWare Project™, or both, as applicable, to comply with 00170.08, 00170.09, and the following User Terms and Conditions, all as may be revised from time to time:

As an officer, employee or agent of the Contractor or any Subcontractor, Supplier, vendor or other third party, respecting my use of or access to Doc Express®, AASHTOWare Project™, or both, I agree to the following, all as may be revised from time to time:

- The terms, conditions and requirements of 00170.08;
- The terms, conditions and requirements of 00170.09;
- The Info Tech, Inc. Doc Express® Privacy Policy and Terms of Use and the Digital Millennium Copyright Act (DMCA) Policy, accessible from the Doc Express® registration site;

Insert Project Name Here

- The AASHTOWare Project™ Privacy Policy and Terms of Use and the Digital Millennium Copyright Act (DMCA) Policy, accessible from the AASHTOWare Project™ registration site;
- The ODOT Doc Express® User Guide for Construction Contractors available from the Engineer;
- The AASHTOWare Project™ Directory available from the Engineer;
- The ODOT AASHTOWare Project™ User Guide for Construction Contractors available from the Engineer; and
- The following Additional User Terms and Conditions:

My use of and access to Doc Express® or AASHTOWare Project™, or both, as applicable, are conditioned on my agreement to and my compliance with the foregoing and these Additional User Terms and Conditions.

I may have access to sensitive personnel, business, financial and/or security related information (“Confidential Information”) through use of Doc Express® or AASHTOWare Project™, and, except to the limited extent necessary to perform my duties, I will maintain its confidential status and will not share, publish or disseminate Confidential Information or other information obtained through Doc Express® or AASHTOWare Project™, without regard to how ODOT may treat any such Confidential Information or other information. All information is also subject to the Oregon Public Records law (see 00170.07(d)). In addition, if I know or have reason to believe any information was inadvertently or improperly included in Doc Express® or AASHTOWare Project™, I will immediately notify my employer for purposes of notification to the Contractor and the Contractor’s notification to ODOT.

I will not access any information, data or documents I am not authorized to use or access and I will not browse or otherwise use or access information, data or documents that exceed the minimum necessary to perform my duties.

If my authorized use of and access to Doc Express® or AASHTOWare Project™ includes entering data and documents (or “read-write” access) into Doc Express® or AASHTOWare Project™, I will not enter any data or documents into Doc Express® or AASHTOWare Project™ except those I am authorized to enter (or in the case of the Contractor, to enter or submit, or both) and are necessary to perform my duties.

I have no expectation of privacy, rights or ownership of anything I may access, create, store, send or receive within Doc Express® or AASHTOWare Project™, respecting any data or documents, including but not limited to Confidential Information of any individual or Entity. For audit or system security purposes, ODOT may monitor and record all activity conducted within Doc Express® and AASHTOWare Project™. This includes but is not limited to the login identification information, times, dates and duration of access, as well as resources, data, or documents accessed.

Unauthorized access or activities that could compromise the systems or Confidential Information are strictly prohibited and patterns of unauthorized or unusual activity may result in access being immediately disabled, and possible further investigation.

Insert Project Name Here

If a breach of these terms and conditions or a security incident occurs, I will immediately notify my employer for purposes of notification to the Contractor and the Contractor's notification to ODOT.

I will not share my password or other means of access with any other individual or Entity. Violation of this restriction or of any of these other Terms and Conditions may result in my access being immediately disabled.

I understand that my use of and access to Doc Express® or AASHTOWare Project™, or both, as applicable, are conditioned on my relationship to my employer and my employer's relationship to one or more of: ODOT, the Contractor, a Subcontractor, Supplier, vendor or other third party, and that if I am no longer so employed, my job position or duties no longer require my access to Doc Express® or AASHTOWare Project™, or my employer no longer has such relationship, I will immediately cease my use of and access to Doc Express® and AASHTOWare Project™ and will immediately notify my employer for purposes of notification to the Contractor and the Contractor's notification to ODOT.

(b) Electronic Submittal Requirements - Unless otherwise allowed or directed by the Engineer, all data and documents submitted to the Agency for this Contract that require a signature shall be signed by a person with appropriate authority by applying:

- An original handwritten signature to a document and scanning the document into PDF format;
- An electronic signature to a document and converting the document into PDF format;
- A third-party verifiable digital signature to a PDF document;
- A Doc Express® electronic signature when prompted during submission of the document into Doc Express®; or
- An AASHTOWare Project™ electronic signature when prompted during entry or submission of the data or document into AASHTOWare Project™.

Data and documents that require a signature, but do not have a signature according to 00170.08 or 00170.09, or were signed by a person without appropriate authority, will be considered as not received and of no effect. Notice requirements will not be satisfied and payments may be withheld for any affected Work items until the required data or documents with compliant signatures have been received by the Engineer.

Unless otherwise allowed or directed by the Engineer, all data and documents submitted to the Agency for this Contract that do not require a signature shall be submitted using Doc Express® or AASHTOWare Project™, as applicable.

Add the following subsection:

00170.09 AASHTOWare Project™ - The requirements of this Subsection do not apply to claims. Claims must be submitted on paper documents according to Section 00199.

This subsection applies to data and documents identified in the AASHTOWare Project™ Directory (AWD), as data or documents to be managed in AASHTOWare Project™, as may

Insert Project Name Here

be revised from time to time. The AWD is available from the Engineer and can be downloaded from the Agency's AASHTOWare Project™ website (see 00110.05(e)).

Following Notice to Proceed, the Contractor, Subcontractors, Suppliers, vendors, and any other third parties, shall use AASHTOWare Project™ to enter certain data and upload certain documents, as identified in the AWD, for submittal by the Contractor to the Agency. The Agency will use AASHTOWare Project™ to submit or make available certain data and documents, as identified in the AWD, to the Contractor.

The Contractor, Subcontractors, Suppliers, vendors, and any other third parties authorized to enter data and documents into AASHTOWare Project™, shall comply with naming conventions, processes and other AASHTOWare Project™ instructions as specified in the ODOT AASHTOWare Project™ User Guide for Construction Contractors, as may be revised from time to time and available from the Engineer.

Data and documents that are required to be submitted to the Agency using AASHTOWare Project™ are identified in the AWD. Data and documents identified in the AWD to be submitted using AASHTOWare Project™ that are not submitted as required will be considered as not received and of no effect.

Data or documents that are not identified in the AWD as required to be submitted using AASHTOWare Project™ shall be submitted according to 00170.08 using DocExpress®, unless otherwise specified, allowed or directed by the Engineer.

The Contractor shall coordinate and identify to the Engineer the Subcontractors, Suppliers, vendors, and any other third parties requiring access to AASHTOWare Project™ to enter or access data or documents. Once identified, the Agency will work with Subcontractors, Suppliers, vendors and third parties for access rights in AASHTOWare Project™ per the AWD.

See also 00170.08, including but not limited to user terms and conditions and signature requirements which also apply to AASHTOWare Project™.

00170.10(g) Paid Summary Report – Replace this subsection, except for the subsection number and title, with the following:

The Contractor shall submit a *Paid Summary Report* to the Engineer certifying payments made to all of its Subcontractors.

The *Paid Summary Report* shall be completed on the form provided by the Engineer and submitted to the Engineer within 20 Calendar Days of receipt of payment from the Agency for each month in which payments were made to each Subcontractor.

At the completion of the Project, submit a final *Paid Summary Report* form that provides the total amounts paid to each Subcontractor.

The Contractor shall require each Subcontractor at every tier to comply with the requirement to submit a *Paid Summary Report* within 20 Calendar Days of receipt of payment for Work on the Project and submit a final *Paid Summary Report* that provides the total amounts paid to the Subcontractor for its Work under the subcontract at the completion of the Project or completion of its Work.

Insert Project Name Here

00170.20 Public Works Bond – Delete this subsection.

00170.61(a) Workers' Compensation - Replace this subsection with the following subsection:

00170.61(a) Workers' Compensation and Employer's Liability - The Contractor shall provide workers' compensation and employer's liability coverage for on-the-job injuries as required by 00170.70(e).

00170.65 Minimum Wage and Overtime Rates for Public Works Projects – Replace this subsection with the following subsection:

00170.65 Requirements for Public Works Projects:

(a) General - The provisions of ORS 279C.800 through ORS 279C.875 and OAR 839-25 are applicable to this Public Works Project ("Prevailing Wage Rate Provisions"). The Contractor, a Subcontractor or other person or Entity Contractor uses in performing all or part of the Contract who are required to comply with the Prevailing Wage Rate Provisions are collectively referred to as "Covered Employers" for the purposes of 00170.65. Covered Employers include employers of workers described in 00170.65(c)(1). "Covered Occupation" as used in 00170.65, refers to each occupation defined in the applicable Oregon Bureau of Labor and Industry ("BOLI") publication titled *Definitions of Covered Occupations for Public Works Contracts in Oregon*.

As required by ORS 279C.520, the Contractor shall comply with ORS 652.220 and shall not unlawfully discriminate against any of the Contractor's employees in the payment of wages or other compensation for work of comparable character on the basis of an employee's membership in a protected class. "Protected class" means a group of persons distinguished by race, color, religion, sex, sexual orientation, national origin, marital status, veteran status, disability, or age. The Contractor's compliance with this provision constitutes a material element of the Contract and failure to comply constitutes a material breach that entitles the Agency to exercise any remedies available under the Contract, including, but not limited to, termination for default.

As required by ORS 279C.520, the Contractor shall not prohibit any of the Contractor's employees from discussing the employee's rate of wage, salary, benefits or other compensation with another employee or another person and shall not retaliate against an employee who discusses the employee's rate of wage, salary, benefits or other compensation with another employee or another person.

(b) Public Works Bond - Before starting Work, Covered Employers shall each file with the Construction Contractors Board, and maintain in full force and effect, a separate public works bond, in the amount of \$30,000 unless otherwise exempt, as required by ORS 279C.830(2) and ORS 279C.836. The Contractor shall verify each Covered Employer has filed a public works bond before that employer begins work.

(c) Prevailing Wage Requirements - Each Covered Employer must pay its workers on the Project in each Covered Occupation not less than the prevailing rate of wage for each Covered Occupation as set by BOLI in the applicable version of its publication entitled *Prevailing Wage Rates for Public Works Contracts*.

If the Class of Project is Federal-aid, each Covered Employer must pay its workers on the Project in each Covered Occupation not less than the applicable BOLI prevailing wage rate or the federal prevailing wage rate required under the Davis Bacon Act (40 U.S.C. 3141 et seq.), whichever is higher.

The Contractor is responsible for investigating local labor conditions. The Agency does not imply that labor can be obtained at the minimum hourly wage rates specified in State or federal wage rate publications, and no increase in the Contract Amount will be made if wage rates paid are more than those listed.

The applicable Project Wage Rates and *Definitions of Covered Occupations for Public Works Contracts in Oregon* are included in the Special Provisions.

(1) Satellite Location Bespoke Work Subject to ORS 279C.800(G) - As required in ORS 279C.800(G) and OAR 839-025-0800, Covered Employers include employers of workers performing bespoke work at satellite locations when the applicable version of the BOLI publication entitled Prevailing Wage Rates for Public Works Contracts has expressly made a wage rate applicable to the satellite location bespoke work. Contractor must provide the Engineer with written notice of the satellite work that will be performed as part of its Consent to Subcontract. If the Covered Employer is not a Subcontractor, Contractor must provide the Engineer with a copy of its agreement with that Covered Employer prior to that Covered Employer performing any Work on the Project. The agreement must meet the requirements of 00170.65(f).

(2) Payroll and Certified Statements - As required in ORS 279C.845, every Covered Employer shall submit written certified statements to the Engineer on the form prescribed by the Commissioner of BOLI in OAR 839-025-0010 certifying compliance with wage payment requirements and accurately setting out the Contractor's or Subcontractor's weekly payroll records for each worker employed on the Project.

If the Class of Project is Federal-aid, in addition to providing the payroll information and certified statements required under ORS 279C.845, every Covered Employer shall submit written certified statements that also meet the requirements in FHWA Form 1273.

The Covered Employers shall preserve the certified statements for a period of 6 years from the date of completion of the Contract.

(3) Retainage for Noncompliance with 279C.845:

a. Agency - As required in ORS 279C.845(7) the Agency will retain 25% of any amount earned by the Contractor on the Project until the Contractor has filed the certified statements required in ORS 279C.845 and in FHWA Form 1273, if the Class of Project is Federal-aid. The Agency will pay to the Contractor the amount retained within 14 Days after the Contractor files the required certified statements, regardless of whether a Subcontractor has failed to file certified statements.

b. Contractor - As required in ORS 279C.845(8) the Contractor shall retain 25% of any amount earned by a first-tier Subcontractor on the Project until the first-tier Subcontractor has filed with the Agency the certified statements required in

ORS 279C.845 and in FHWA Form 1273, if the Class of Project is Federal-aid. Before paying any amount retained, the Contractor shall verify that the first-tier Subcontractor has filed the certified statement. Within 14 Days after the first-tier Subcontractor files the required certified statement, the Contractor shall pay the first-tier Subcontractor any amount retained.

(4) Posting Requirements - Every Covered Employer must post the prevailing wage rates and notices in accordance with OAR 839-025-0033.

(d) Overtime Requirements - As a condition of the Contract, the Contractor shall comply with the pertinent provisions of ORS 279C.520 and ORS 279C.540. If the Class of Project is Federal-aid, the Contractor shall comply with the overtime provision affording the greatest compensation required under FHWA Form 1273 and ORS 279C.540.

(1) Maximum Hours of Labor and Overtime Pay - According to ORS 279C.540, no person shall be employed to perform Work under this Contract for more than 10 hours in any 1 Day, or 40 hours in any 1 week, except in cases of necessity, emergency, or where public policy absolutely requires it. In such instances, the Contractor shall pay the employee at least time and a half pay:

- For all overtime in excess of 8 hours a day or 40 hours in any 1 week when the work week is 5 consecutive days, Monday through Friday; or
- For all overtime in excess of 10 hours a day or 40 hours in any 1 week when the work week is 4 consecutive days, Monday through Friday; and
- For all Work performed on Saturday and on any legal holiday specified in ORS 279C.540.

For additional information on requirements for overtime and establishing a work schedule see OAR 839-025-0050 and OAR 839-025-0034.

(2) Notice of Hours of Labor - The Contractor shall give written notice to employees of the number of hours per day and days per week the employees may be required to work. Provide the notice either at the time of hire or before commencement of work on this Contract, or by posting a notice in a location frequented by employees.

(3) Exception - The maximum hours of labor and overtime requirements under ORS 279C.540 will not apply to the Contractor's Work under this Contract if the Contractor is a party to a collective bargaining agreement in effect with any labor organization. For a collective bargaining agreement to be in effect it shall be enforceable within the geographic area of the Project, and its terms shall extend to workers who are working on the Project (see OAR 839-025-0054).

(e) State Time Limitation on Claim for Overtime - According to ORS 279C.545, any worker employed by the Contractor is foreclosed from the right to collect any overtime provided in ORS 279C.540 unless a claim for payment is filed with the Contractor within 90 Days from the completion of the Contract, provided the Contractor posted and maintained a circular as specified in this provision. Accordingly, the Contractor shall:

- Cause a circular, clearly printed in boldfaced 12-point type and containing a copy of ORS 279C.545, to be posted in a prominent place alongside the door of the

Insert Project Name Here

timekeeper's office or in a similar place that is readily available and freely visible to any or all workers employed to perform Work; and

- Maintain such circular continuously posted from the inception to the completion of the Contract on which workers are or have been employed.

(f) Required Terms for Agreements with Covered Employers - Contractor must have agreements with all Covered Employers. For each Covered Employer that is not a Subcontractor, the Contractor's agreement must include:

(1) A clause or condition that if the Contractor fails, neglects, or refuses to make payment to the Covered Employer, the Covered Employer may file a complaint with the Construction Contractors Board, unless payment is subject to a good-faith dispute as defined in ORS 279C.580.

(2) A provision requiring the Covered Employer to have a public works bond filed with the Construction Contractors Board before starting Work on the Project, unless exempt.

(3) A provision that requires the Covered Employer's workers on the Project to be paid not less than the specified minimum hourly rate of wage.

(4) A provision that requires the Covered Employer to be registered as a vendor in OregonBuys, the on-line electronic Automated Oregon Procurement System administered by the State's Department of Administrative Services; and

(5) A clause that requires the Covered Employer to include (1) – (4) in each of the Covered Employer's agreements with other Covered Employers of Workers on the Project that are also subject to the requirements of ORS 279C.800 through ORS 279C.870.

(Complete the following subsection .70(a) based on the insurance risk assessment. Obtain risk assessment information from the following:

- *For Region designed projects, contact the Transportation Project Manager*
- *For Consultant designed projects, contact the ODOT Resident Engineer Consultant Projects*
- *For Local Agency designed projects, contact the ODOT Transportation Project Manager)*

00170.70(a) Insurance Coverages - Replace the paragraph that begins "**Contractor** – The Contractor shall..." with the following paragraph:

Contractor - The Contractor shall obtain the insurance specified below prior to the execution of the Contract. The Contractor shall maintain the insurance in full force at the Contractor's expense throughout the duration of the Contract and as required by an extended reporting period or tail coverage requirements, and all warranty periods that apply.

Replace the paragraph that begins "**Insurance Provisions** - The Contractor and Subcontractor(s), if..." with the following paragraph:

Insert Project Name Here

Insurance Provisions - The Contractor and Subcontractor(s), if any, shall obtain insurance from insurance companies or entities that are authorized to transact the business of insurance and issue coverage in the State and that are acceptable to the Agency. Insurance coverage shall be primary and noncontributory with any other insurance and self-insurance, with the exception of Workers' Compensation/Employer's Liability. The Contractor, or appropriate Subcontractor, but not the Agency, shall pay for all deductibles, self-insurance retentions and self-insurance, if any.

Replace the paragraph that begins "**Commercial General Liability** - The Contractor shall provide Commercial..." with the following paragraph:

Commercial General Liability - The Contractor shall provide Commercial General Liability Insurance written on an occurrence basis and covering the Contractor's liability for bodily injury, property damage, personal and advertising injury, products and completed operations, and contractual liability. Coverage may be written in combination with Commercial Automobile Liability Insurance with separate limits for Commercial General Liability and Commercial Automobile Liability. Combined single limit per occurrence shall not be less than the dollar amount specified in the Special Provisions. The annual aggregate limit shall not be less than the dollar amount specified in the Special Provisions. The policy shall be endorsed to state that the annual aggregate limit of liability shall apply separately to the Contract.

Add the following to the end of this subsection:

The following insurance coverages and dollar amounts are required pursuant to this subsection:

Insurance Coverages	Combined Single Limit per Occurrence	Annual Aggregate Limit
<i>(Fill in the blanks with the dollar amounts from the insurance risk assessment.)</i>		
Commercial General Liability	\$_____	\$_____
Commercial Automobile Liability	\$_____	(aggregate limit not required)
<i>(Include the following commercial automobile liability vehicle transportation for pedestrian circulation item only when it is required by the insurance risk assessment, otherwise delete it.)</i>		
Commercial Automobile Liability (pedestrian transport vehicle)	\$5,000,000	(aggregate limit not required)
<i>(Include the following pollution liability item and fill in the blanks with the dollar amounts from the insurance risk assessment only when it is required by the insurance risk assessment, otherwise delete it.)</i>		
Pollution Liability	\$_____	\$_____
<i>(Include one or both of the following bullets only when they are required by the insurance risk assessment. Delete them if they are not required.)</i>		

Insert Project Name Here

- With Asbestos Liability Endorsement or separate coverage
- With Lead Liability Endorsement or separate coverage

(Include the following commercial automobile liability with pollution liability item and fill in the blanks with the dollar amount from the insurance risk assessment only when it is required by the insurance risk assessment, otherwise delete it.)

Commercial Automobile Liability
with Pollution Coverage \$_____ (aggregate limit not required)

(Marine Coverage - Include the following marine liability item and fill in the blanks with the dollar amounts from the insurance risk assessment, or as provided by the Procurement Office Risk and Compliance Analyst only when it is required by the insurance risk assessment, otherwise delete it.)

Marine Liability insurance with a minimum limit of \$_____ per occurrence for bodily injury and property damage is required.

(Marine Coverage - Include the following protection and indemnity insurance item and fill in the blanks with the dollar amounts from the insurance risk assessment, or as provided by the Procurement Office Risk and Compliance Analyst only when it is required by the insurance risk assessment, otherwise delete it.)

Protection and Indemnity Insurance coverage shall be evidenced on the SP-23 form or equivalent, including, by endorsement or otherwise, collision liability, tower's liability, specialist operations, and liability for seepage, pollution, containment and cleanup, with extensions for marine contractual liability, with a minimum limit of liability of \$_____.

(Marine Coverage - Include the following pollution liability insurance item and fill in the blanks with the dollar amounts from the insurance risk assessment, or as provided by the Procurement Office Risk and Compliance Analyst only when it is required by the insurance risk assessment, otherwise delete it.)

Pollution Liability Insurance - With a minimum limit of \$_____, if pollution coverage is provided outside of a P&I Club entry or outside of Protection and Indemnity Insurance coverage evidenced on the SP-23 form or equivalent.

[End 00170.70(a)]

00170.70(b) Extended Reporting - Replace the paragraph that begins "The Contractor or Subcontractor shall..." with the following paragraph:

The Contractor or Subcontractor shall furnish certification of this extended reporting requirement as a condition to receive Third Notification under 00150.90(b) and 00180.50(g).

00170.70(c) Excess/Umbrella Liability - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

A combination of primary and Excess/Umbrella Liability Insurance may be used to meet the required minimum limits of insurance. If any Excess/Umbrella Liability policies are in place, they must be on a true "following form" or broader coverage basis, with coverage at least as broad as provided on the underlying insurance. In addition, the limits of the underlying insurance must be sufficient to prevent any gap between such minimum limits and the attachment point of the coverage provided by the Excess/Umbrella Liability policy.

00170.70(d) Additional Insured - Replace the paragraph that begins "The liability insurance coverages of 00170.70(a)..." with the following paragraph:

The liability insurance coverages of 00170.70(a) shall include an Additional Insured Endorsement endorsing the "State of Oregon, the Oregon Transportation Commission and the Oregon Department of Transportation, and their respective officers, members, agents, and employees" as Additional Insureds, but only with respect to the Contractor's activities to be performed under the Contract. Coverage shall be primary and non-contributory with any other insurance and self-insurance. The liability coverages of 00170.70(a) that are permitted by the Agency to be obtained by an appropriate Subcontractor shall include all of the foregoing as Additional Insureds and shall also include the Contractor and its officers and employees as Additional Insureds.

(Use the following paragraphs and bullets when Project management or inspection duties are performed by other than ODOT forces. Fill in the blanks. Delete "(s)" or parentheses as applicable. Also use the following subsection for Right-of-Way easement conditions if approved by the State Specifications Engineer.)

Add the following paragraph and bullet(s) to the end of this subsection:

Add the following as Additional Insureds under the Contract:

(Use the following two bullets on city ODLAP projects or on local agency projects when the city will be performing project management or inspection duties on the Project Site.)

- The City of _____ and its officers, agents, and employees
- _____ City Council

(Use the following two bullets on county ODLAP projects or on local agency project when the county will be performing project management or inspection duties on the Project Site.)

- _____ County and its officers, agents, and employees
- _____ County Board of Commissioners

(Use the following bullet when a consultant is performing project management or inspection duties on the Project Site.)

- _____ (Consultant)

(Use the following bullet when a sub-consultant is performing project management or inspection duties on the Project Site.)

- _____ (Sub-consultant)

(Use the following bullet for Right-of-Way easement conditions if approved by the State Specifications Engineer.)

Insert Project Name Here

- _____ (entity)

(Use the following bullet on ODLAP projects for public bodies other than a city or a county.)

- _____ (entity)

[End 00170.70(d)]

00170.70(e) Workers' Compensation - Replace the title of this subsection with **"Workers' Compensation and Employer's Liability"**

00170.70(g) Certificate(s) of Insurance - Replace the bullet that begins "List the "State of Oregon..." with the following bullet:

- List the "State of Oregon, the Oregon Transportation Commission and the Oregon Department of Transportation, and their respective officers, members, agents and employees" as a Certificate holder and endorse as an Additional Insured;

Replace the bullet that begins "Specify that all liability insurance ..." with the following bullet:

- Specify that all liability insurance coverages shall be primary and noncontributory with any other insurance and self-insurance, with exception of Workers' Compensation/Employer's Liability;

Replace the bullet that begins "Include a list of all policies..." with the following bullet:

- Include a list of all policies that fall under the Excess/Umbrella Liability Insurance if Excess or Umbrella Liability Insurance is used to meet the minimum insurance requirements .

00170.70(i) Insurance Requirement Review - Replace this subsection, except for the subsection number and title, with the following:

The Contractor agrees to periodic review of insurance requirements by Agency. Agency reserves the right to periodically assess risks and the adequacy of insurance coverage and in its discretion to require additional insurance coverage or increased coverage limits on existing coverages, or both.

(Use the following subsection .70(j) when Builder's Risk is required. Fill in the blank with the dollar amount from the insurance risk assessment, or as provided by the Procurement Office Risk and Compliance Analyst.)

00170.70(j) Builder's Risk – Add the following to the end of this subsection:

Provide Builder's Risk insurance for an amount equal to at least \$_____.

(Use the following sentence, when ODOT is not the owner of the building or Structure and fill in the blank with the owner. Except for the owner, do not make any additions to this sentence. If ODOT is the owner of the Structure, delete the following sentence.)

Insert Project Name Here

The policy shall include as loss payee, the Agency and _____ (County or City Owner of Building) _____.

(Use the following subsection .70(k) when Builder's Risk installation floater is required. Fill in the blanks with the dollar amounts from the insurance risk assessment, or as provided by the Procurement Office Risk and Compliance Analyst.)

00170.70(k) Builder's Risk Installation Floater - Add the following to the end of this subsection:

Provide Builders' Risk Installation Floater insurance for an amount equal to at least \$ _____.

(Use the following subsection .72 only when project management is performed by other than ODOT forces. Also use the following subsection for Right-of-Way easement conditions if approved by the State Specifications Engineer. Fill in the blanks. Delete "(s)" or parentheses as applicable.)

00170.72 Indemnity/Hold Harmless - Add the following paragraph and bullet(s) to the end of this subsection:

Extend indemnity, defense and hold harmless to the Agency and the following:

(Use the following two bullets on city ODLAP projects or on local agency projects when the city is performing project management or inspection duties on the Project Site.)

- The City of _____ and its officers, agents, and employees
- _____ City Council

(Use the following two bullets on county ODLAP projects or on local agency projects when the county will be performing project management or inspection duties on the Project Site.)

- _____ County and its officers, agents, and employees
- _____ County Board of Commissioners

(Use the following bullet when a consultant is performing project management or inspection duties on the Project Site.)

- _____ (Include on the Project site Consultant only)

(Use the following bullet when a sub-consultant is performing project management or inspection duties on the Project Site.)

- _____ (Sub-consultant)

(Use the following bullet for Right-of-Way easement conditions if approved by the State Specifications Engineer.)

- _____ (entity)

(Use the following bullet on ODLAP projects for public bodies other than a city or a county.)

- _____ (entity)

SECTION 00180 - PROSECUTION AND PROGRESS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00180 of the Standard Specifications modified as follows:

00180.20(d) Disadvantaged Business Enterprise (DBE) – Delete this subsection.

00180.20(e) Trucking - Replace the paragraph that begins "This Section does not apply to..." with the following paragraph:

This Section does not apply to delivery of Materials by or for or from a Supplier. This Subsection applies to all truck hauling of materials not performed with trucks owned (or rented) and operated by the Contractor.

00180.20(e)(1) Trucking Services Agreement - Delete the bullet that begins "Statement specifying whether the services will be provided by a DBE...".

00180.20(e)(2) Limitations - Replace the paragraph that begins "The approved trucking services agreements..." with the following paragraph:

The approved trucking services agreements shall be used for all trucking services for hauling materials not provided by trucks owned (or rented) and operated by the Contractor. The Contractor shall execute a trucking services agreement with every trucking services provider for hauling materials prior to the trucking services provider doing any Work on the Project Site.

00180.20(e)(3) Submittals - Replace this subsection, except for the subsection number and title, with the following:

The Contractor shall provide the Engineer with an executed copy of the trucking services agreement not later than 2 Days after the trucking services provider for hauling materials has started work. The Contractor shall make certain that the provider of approved trucking services submits payrolls required under Section 00170, complies with applicable Contract provisions, including, without limitation, 00170.07, and complies with applicable trucking services agreement provisions. The work or service provider will not be considered a Subcontractor under the Contract, but the work or services will be considered to have been performed by the Contractor's own organization for the purposes of determining compliance with 00180.20(a). If the trucking services are provided by an owner/operator attach a copy of

Insert Project Name Here

the following data to the trucking services agreement before the time the services are performed and include without limitation for each owner/operator:

- Driver's name;
- Present driver license upon request;
- Vehicle identification number;
- Present vehicle registration upon request;
- Motor vehicle license plate number;
- Motor Carrier account number;
- Present ODOT Motor Carrier 1A Permit upon request; and
- Name of owner/operator from the side of the truck.

Each truck shall have the name of the owner/operator clearly displayed on the side of the truck.

00180.21(a) General – Replace the bullet that begins "If the Subcontractor is providing any..." with the following bullet:

- If the Subcontractor is providing any of the insurance coverages as permitted under 00170.70(a), the Agency will respond within 35 Calendar Days after the Engineer's receipt of the request. (28 Calendar Days for the Agency to review and approve the Certificates of Insurance required by 00170.70(g) plus 7 Calendar Days to review and approve the subcontract request.)

00180.40(b) On-Site Work – Replace the bullet that begins "Filed with the Construction Contractors..." with the following bullet:

- Filed with the Construction Contractors Board the public works bond as required in 00170.65(b);

(Use the following lead in sentence and subsection .40(c) when limitations are included in the Special Provision. Delete the limitations that do not apply.)

Add the following subsection:

00180.40(c) Specific Limitations - Limitations of operations specified in these Special Provisions include, but are not limited to, the following:

Limitations	Subsection
Cooperation with Utilities	00150.50
Cooperation with Other Contractors	00150.55
Railways	00170.01(e)
Contract Time	00180.50(h)
Right-of-Way and Access Delays	00180.65
Closed Lanes	00220.40(e)(1)
Special Events	00220.40(e)(2)(b)
Limited Duration Road Closure	00220.40(f)
Road Closure Using Rolling Slowdown Method	00220.40(g)

Insert Project Name Here

Noise Control	00290.32
Regulated Work Areas	00290.34(a)
Maintenance Under Traffic	00620.43
Opening Sections to Traffic	00744.51
Opening Sections to Traffic	00745.51

(Use the following paragraphs when the Project is within irrigation districts. Obtain information from the Region Utilities Specialist.)

[Begin irrigation paragraphs]

When submitting the supplemental "look ahead" Project Work schedule, the Contractor shall show all Work that impacts the (insert irrigation district name) canals and channels.

Irrigators have legal rights to use irrigation water from the canals and channels of the (insert irrigation district name) in (insert contact office location of the irrigation district for the project) .

During the irrigation season of (insert date: example April 1) through (insert date: example October 31) , the Contractor shall not restrict the flow of water or contaminate the water of the (insert irrigation district name) .

During the non-irrigation season of (insert date: example November 1) through (insert date: example May 31) , the Contractor shall allow a (insert number of days) Day stock water run approximately every 30 Days. The Contractor shall contact the (insert irrigation district name) for the stock water run times.

[End irrigation paragraphs]

The Contractor shall be aware of and subject to schedule limitations in the Standard Specifications that are not listed in this subsection.

00180.41 Project Work Schedules -

(Use the following paragraphs and bullets on Projects that have curb ramps.)

After the paragraph that begins "The Contractor shall submit a Project Work schedule meeting the requirements..." add the following paragraphs:

Submit an overall sequencing and phasing plan showing the timeline for construction of all curb ramps. Submit a list of individual curb ramps or groups of curb ramps not to exceed 32 curb ramps to include in the schedule for approval by the Engineer.

The Contractor shall include the following curb ramp tasks in the Project Work schedule:

- Contractor initial site visit(s) for ramp existing conditions;
- Submittal of Working Drawings for each ramp, submitted to the Agency according to 00759.03(c);
- Submittal of Curb Ramp Plan(s); and
- Preplacement Conference(s).

Insert Project Name Here

(Use the following paragraph and bullets on Projects that have curb ramps.)

In the paragraph that begins "The Contractor shall submit a supplemental "look ahead" Project Work schedule each week to the Engineer." add the following bullets to the end of the bullet list:

- Identify date of curb ramp site visit to include Contractor and Agency, to review Working Drawings;
- Identify curb ramp resubmittal of Working Drawings, as required according to 00759.03;
- Identify the anticipated date of curb ramp closure;
- Identify the field markings for excavation limits for curb ramps;
- Identify when the curb ramp formwork begins;
- Identify when the curb ramp Concrete placement begins; and
- Identify the anticipated opening curb ramp date.

(Insert the type of schedule ("A", "B", or "C") in the blank. Use the following guidelines for selecting type of schedule:

- *Type "A" - Single season, simple, small, or short projects*
- *Type "B" - Projects with several major construction items or moderately complex traffic staging*
- *Type "C" - Critical Path Method projects, largest / most complex projects with complex staging. Required for any alternative contracting methods.*

Obtain the schedule type from the project Scheduler and the Project Manager. Consult with the ODOT Sr. Cost Engineer or the ODOT Construction Claims Engineer, as needed.)

After the paragraph that begins "One of the following Type..." add the following paragraph:

In addition to the "look ahead" Project Work schedule, a Type _____ schedule as detailed in the Standard Specifications is required on this Contract.

(Use the following subsection .42 when requested by the Utility Coordinator or the Region Environmental Coordinator.)

00180.42 Preconstruction Conference - Add the following to the end of this subsection:

(Use one of the following options when requested by the Utility Coordinator. Delete the option that does not apply.)

[Option 1 - Use the following paragraph when requested by the Utility Coordinator.]

[Begin Option 1]

The Contractor shall conduct a group Utilities scheduling meeting with representatives from the Utility companies involved with this Project and the Engineer before the preconstruction conference. The Contractor shall incorporate the Utilities time needs into the Contractor's schedule submitted at the preconstruction conference.

[End Option 1]

[Option 2 - Use the following paragraphs and bullet lists when requested by the Utility Coordinator for large projects with complex utility issues. Be sure to also include subsection 00150.50(c). Delete the language in purple parentheses that does not apply and delete all purple parentheses.]

[Begin Option 2]

Before beginning On-Site Work and before the preconstruction conference, the Contractor shall conduct a Utility scheduling meeting with representatives from the Utilities involved with this Project and with the Engineer. The Contractor shall incorporate the time needs of the Utilities into the Contractor's schedule submitted at the preconstruction conference.

The Contractor shall submit a written Utility Coordination Report to the Engineer not later than seven Calendar Days after the Utility scheduling meeting. The Utility Coordination Report shall:

- Identify each specific Utility;
- Identify Utility contact names and numbers;
- Identify dates for Utility scheduling for the entire Project;
- Contain documents showing that the Contractor has accomplished Utility locates; and
- Contain documents showing that Utility locates, along with applicable construction activities, have been reviewed and discussed on-site with Utility representatives.

The Contractor shall hold monthly Utility coordination meetings with Utilities and the Engineer to coordinate Project activities with Utilities and on-going Utility relocation work. The Contractor shall hold monthly Utility coordination meetings in the office or in the field, as appropriate. The Utility coordination meetings shall include, but not be limited to:

- Detailed discussions of existing and abandoned Utilities,
- Detailed discussions of de-energizing and re-energizing service lines,
- Detailed discussions of critical locations for potholing of Utilities,
- Detailed discussions of Project activities, and
- Detailed discussions of on-going Utility relocations in upcoming Project activity areas.

During the monthly Utility coordination meetings, the Utilities will provide Utility drawings and discuss the scope, extent, locations, and significance of all Utility facilities before the Contractor begins work in a new activity area. The Contractor shall incorporate this information into the Project schedules and furnish the Utilities copies of the updated Project schedules.

The Contractor shall plan and schedule all Utility adjustment operations well in advance of On-Site Work. When the Contractor becomes aware of Utility conflicts not previously identified, the Contractor shall notify the applicable Utilities in writing the same Calendar Day. The Contractor shall allow Utilities at least (____ week(s))(____ Calendar Day(s)) to relocate (adjust) the Utility conflicts not previously identified.

Insert Project Name Here

[End Option 2]

(Use the following paragraph and bullet list when sensitive cultural sites require protection during construction.)

At the preconstruction conference, or at a mutually agreed upon time at least 10 Calendar Days prior to beginning ground disturbing activities, the Contractor shall meet with the Engineer to discuss sensitive cultural sites on the Project. In attendance at this conference shall be:

- The Contractor's supervisory personnel.
- Any Subcontractors (including contract archaeological monitors) and supervisory personnel who will be involved in ground disturbing activities.
- Agency archaeology representative or region environmental coordinator.
- When applicable, tribal representative(s) or monitor(s).

Add the following subsection:

(Use one of the following .50(h) lead-in sentence options, according to the number of completion times to be used.

This subsection requires State Specification Engineer approval on ALL Projects.

Note: If either durable pavement markings (00865) or high performance pavement markings (00866) are required, and the completion date is after September 15, check with the Scheduler and request multiple completion times.

Note: If permanent seeding (01030) or planting (01040) is required, and the completion date is outside the planting seasons (see 01030.43(b) or 01040.41 and .42), check with the Scheduler and request multiple completion times.)

[Begin lead-in sentence options]

[Option 1 - Use to specify one completion time.]

00180.50(h) Contract Time - There is one Contract Time on this Project as follows:

[Option 2 - Use to specify two completion times.]

00180.50(h) Contract Time - There are two Contract Times on this Project as follows:

[Option 3 - Use to specify three completion times.]

00180.50(h) Contract Time - There are three Contract Times on this Project as follows:

[End lead-in sentence Options]

(Use one or more of the following paragraphs as needed to specify one or more INTERIM completion dates. Fill in the blanks. Copy one of the paragraphs if needed for Projects with two interim completion times. Delete paragraphs that do not

apply. Replace "X" with a sequential number, starting with "1" for the first paragraph used.)

[Begin interim completion date options.]

(X) The Contractor shall complete all Work to be done under the Contract, except for _____, not later than _____.

(X) The Contractor shall complete all Work to be done under the Contract required to _____ not later than _____.

(X) The Contractor shall complete all Work to be done under the Contract, except for _____, before the elapse of ____ Calendar Days, or not later than _____, whichever occurs first.

(X) The Contractor shall complete all Work to be done under the Contract required to _____ before the elapse of ____ Calendar Days, or not later than _____, whichever occurs first.

[Example: "The Contractor shall complete all Work to be done under the Contract required to remove and replace Span 5 of Bridge No. 02025, including reinstalled end panel, final ACP wearing course, and permanent bridge rails; and reopen the Santiam Highway (US20) to two traffic lanes, before the elapse of 110 Calendar Days, or not later than July 31, 2016, whichever occurs first."]

[End interim completion date options.]

(Use ONE of the following paragraphs to specify a single completion time, or as the FINAL paragraph for Projects with multiple completion times. Fill in the blanks. Delete paragraphs that do not apply. Remove parentheses. Replace "X" with a sequential number when there are multiple completion times, or delete "(X)" entirely when there is only one completion time.)

[Begin final completion date options.]

(X) The Contractor shall complete all Work to be done under the Contract, except for (seeding establishment) (and) (plant establishment), before the elapse of ____ Calendar Days, or not later than _____, whichever occurs first.

(X) The Contractor shall complete all Work to be done under the Contract before the elapse of ____ Calendar Days, or not later than _____, whichever occurs first.

(X) The Contractor shall complete all Work to be done under the Contract, except for (seeding establishment) (and) (plant establishment), not later than _____.

(X) The Contractor shall complete all Work to be done under the Contract not later than _____.

[End final completion date options.]

Insert Project Name Here

(Use the following subsection .65 when right-of-way access delays are necessary. Fill in the blanks with the appropriate information.)

00180.65 Right-of-Way and Access Delays - Add the following paragraph and bullet to the end of this subsection:

It is anticipated that the ending date of an anticipated delay for the following properties will be as shown:

- File _____ (R/W file number) (Stations right and left) _____ not later than _____ (Date) _____.

(Use the following subsection .85(b)(1) when the Project has been identified as 100% preservation.)

00180.85(b)(1) Single Contract Time - Replace this subsection, except for the subsection number and title, with the following:

The Liquidated Damages per Calendar Day* are 15.0 percent of C divided by T as defined in this Section.

C = The Contractor's Bid amount for the Contract.

T = The total Calendar Days between the latest completion date or time listed under 00180.50(h) in the Solicitation Documents and the Bid Opening that will result in the greatest value for T.

* Calendar Day amounts are applicable when the Contract time is expressed on the Calendar Day or fixed date basis.

(Use the following subsection .85(b)(2) when the Project has multiple Contract Times in 00180.50(h).)

00180.85(b)(2) Multiple Contract Times - Add the following paragraph and bullet list to the end of this subsection:

The Agency determined percentages of the value of Work required to be complete by the Contract Times listed under 00180.50(h) are as follows:

[Include one of the following bullets for each Contract Completion Time in 00180.50(h). Fill in the blank with the percentage of all Work to be done, calculated based on the preliminary Engineer's Estimate and for each listed Contract Time. Show percentages to the nearest 1% and ensure that the last percentage listed is 100 percent.]

- For Contract Time 00180.50(h)(1) the Agency determined percentage of Work is _____ percent.
- For Contract Time 00180.50(h)(2) the Agency determined percentage of Work is 100 percent.

(Use the table below to fill in the dollar amount in the blank in .85(c), (d), or (e).)

Insert Project Name Here

Facility Type	AADT Volumes	LD per lane, per 15 or 20 minute period
Freeway	> 50,000	\$ 2000
Freeway	< 50,000	\$ 1000
Other Highways	> 30,000	\$ 1500
Other Highways	< 30,000	\$ 500

(Use the following lead-in paragraph and subsection .85(c) on Projects that have lane restrictions and where there is a need to have Liquidated Damages to encourage the Contractor to finish the work within the time limits. Standard lane restrictions are listed in the Standard Specs subsection 00220.40(e)(1). Any Project Specific restrictions for all appropriate closures must be inserted in the Special Provisions subsection 00220.40(e)(1) Lane Restrictions.

Delete the purple parentheses and use the references to 00220.40(f) only when 00220.40(f) is included in the Project. Otherwise, delete the references and purple parentheses.

DO NOT USE .85(c) for full road closures that are more than 24 hours. Liquidated damages for full road closures require an interim completion time in 00180.50(h).)

Add the following subsection:

00180.85(c) Lane Closures - Lane closures beyond the limits specified will inconvenience the traveling public and will be a cost to the Agency.

It is impractical to determine the actual damages the Agency will sustain in the event Traffic Lanes are closed beyond the limits listed in 00220.40(e) (or 00220.40(f)). Therefore, the Contractor shall pay to the Agency, not as a penalty, but as liquidated damages, \$_____ per 15 minutes, or for a portion of 15 minutes, per lane, for any lane closure beyond the limits listed in 00220.40(e) (or 00220.40(f)).

The Engineer will determine when it is safe to reopen lanes to traffic. Assessment of liquidated damages will stop when all lanes have been safely reopened. Any liquidated damages assessed under these provisions will be in addition to those listed in 00180.85(b).

(Use the following lead-in paragraph and subsection .85(d) on Projects that have limited access roadways, allow the Rolling Slowdown Method of traffic control listed in 00220.40(g), and where there is a need to have Liquidated Damages to encourage the Contractor to finish the work on time. Normal limits (weekend closure limitations) are listed in the Standard Specs subsection 00220.40(e)

If subsection .85(c) Lane Closures is not used, delete ", but not in addition to 00180.85(c) above for closure of the same lanes". Delete all purple parentheses.)

Add the following subsection:

00180.85(d) Rolling Slowdown Closures - Rolling slowdown closures beyond the limits specified will inconvenience the traveling public and will be a cost to the Agency.

Insert Project Name Here

It is impractical to determine the actual damages the Agency will sustain in the event Traffic Lanes are closed by the Rolling Slowdown Method. Therefore, the Contractor shall pay to the Agency, not as a penalty, but as liquidated damages, \$_____ per 20 minutes, or for a portion of 20 minutes, per lane, for any lane closure beyond the 20-minute limit listed in 00220.40(g).

The Engineer will determine when it is safe to reopen lanes to traffic. Assessment of liquidated damages will stop when all lanes have been safely reopened. Any liquidated damages assessed under these provisions will be in addition to those listed in 00180.85(b), but not in addition to 00180.85(c) for closures of the same lanes).

(Use the following lead-in paragraph and subsection .85(e) on Projects that will be stopping or holding traffic and where there is a need to have Liquidated Damages to encourage the Contractor not to delay traffic in long queues. Use when requested by the traffic designer or Project Manager.)

Add the following subsection:

00180.85(e) Traffic Delays Beyond 20 Minutes - Stopping or holding vehicles beyond the limits specified will inconvenience the traveling public and will be a cost to the Agency.

It is impractical to determine the actual damages the Agency will sustain in the event traffic is stopped or held longer than the 20-minute limit listed in 00220.02. Therefore, the Contractor shall pay to the Agency, not as a penalty, but as liquidated damages, \$_____ per 20 minutes, or for a portion of 20 minutes, for stopping or holding traffic longer than 20 minutes.

Assessment of liquidated damages will stop when the Engineer determines that traffic is no longer stopped or held beyond the 20-minute limit. Any liquidated damages assessed under these provisions will be in addition to those listed in 00180.85(b).

SP00190 (Special Provisions for the 2024 Book)

**(Bidding on or after: 01-01-26
Last updated: 09-18-25)**

SECTION 00190 - MEASUREMENT OF PAY QUANTITIES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

(Use the following lead-in paragraph when none of the following subsections are included in the Project.)

Comply with Section 00190 of the Standard Specifications.

(Use the following lead-in paragraph when any of the following subsections are included in the Project.)

Comply with Section 00190 of the Standard Specifications modified as follows:

(Use the following subsection .20(a) when ACP is paid under 00745.90 on Projects that are bid and awarded by ODOT.)

00190.20(a) General – Replace the paragraph that begins "Unless otherwise provided in the Contract,..." with the following paragraph:

Unless otherwise provided in the Contract, Pay Items to be measured by weight shall include all Contractor costs for providing, maintaining, inspecting, and testing scales; for furnishing appropriate weigh tickets; for self-printing scales; for non-Agency sponsored electronic weigh memo system(s); establishing and maintaining a connection to the Agency's e-ticket portal; and for transporting Materials to the scales or to check weighing.

(Use the following subsection .20(f)(2) when materials are to be weighed to determine pay quantities.)

00190.20(f)(2) Scale Without Automatic Printer - Replace the paragraph that begins "The Contractor shall inform..." with the following paragraph:

If the scales require manual entry of gross weight information, the Agency may periodically have a representative weigh witness at the scales to observe the weighing procedures. The Contractor shall inform the Engineer of their intent to use a scale without an automatic printer at least 3 working days before weighing begins or before the Contractor changes to a scale that does not have an automatic printer. The Contractor shall pay costs for the weigh witness. The hourly cost of the weigh witness will be as stated in the Special Provisions. In addition, the Engineer may periodically check the weight for a load of Materials by directing the haul vehicle to reweigh on a different scale that has been inspected and certified according to 00190.20(b) and 00190.20(d).

Add the following paragraph after the paragraph that begins " If the scales require manual entry...":

Pay costs for the weigh witness at \$35.00 per hour.

(Use the following subsection .20(f)(3) when ACP is paid under 00745.90 on Projects that are bid and awarded by ODOT.)

00190.20(f)(3) Duties of Weigh Technician – Replace the bullet that begins "Furnish a legible, serially numbered..." with the following paragraph:

- Furnish a legible, serially numbered weigh memo for each load of Materials to the Agency's Materials receiver at the point of delivery, through the Agency's e-ticket portal, or as directed by the Engineer. The memo shall identify the Project, the Materials, the date, net weight (gross and tare as appropriate), and identification of the vehicle and weigh technician. If approved by the Engineer an electronic weigh memo system may be used. Requests to use an electronic weigh memo system shall be submitted to the Engineer according to 00150.37, providing sufficient detail for the Engineer to perform an evaluation. If approved, the Contractor shall provide training, technical support,

Insert Project Name Here

reports, and weigh memo information to the Engineer at no additional cost to the Agency. The electronic weigh memo system shall be:

Add the following bullets after the bullet that begins “Capable of providing all the weigh...”:

- Use an electronic weigh memo system for weighing ACP mixture quantities specified in 00745.90, unless waived by the Engineer. Establish a live connection with the Agency’s e-ticket portal according to 00190.20(f)(4). When utilizing an electronic weigh memo system:
 - Ensure the identifying vehicle numbers displayed on the weigh memo correspond to those on the delivery vehicle. Ensure the numbers on the delivery vehicles are visible such that at least one can be safely read from within the work area. Delivery vehicles without identifying vehicle numbers shall be rejected.
 - Provide an alternate means of reporting weigh memo data to the Agency at point of delivery in the event there is no cellular data coverage at the point of ACP mixture delivery. The absence of cellular data coverage does not relieve the Contractor of the requirements in 00190.20(f)(3).

(Use the following subsection .20(f)(4) when ACP is paid under 00745.90 on Projects that are bid and awarded by ODOT.)

Add the following subsection:

00190.20(f)(4) Scale with Agency’s e-ticket Portal Live Connection - The use of the Agency’s e-ticket portal live connection is required for measurement of all ACP mixture quantities specified in 00745.90 unless otherwise directed. The Contractor shall establish a live connection to the Agency’s e-ticket portal with the assistance of HaulHub®. The Engineer may allow the use of the e-ticket portal for other Pay Items measured on the weight basis. The following is required for weigh memos provided through the Supplier’s e-ticket system:

- Conduct a test of each ACP mixture quantities specified in 00745.90 and any other proposed e-ticket material, with the Agency’s e-ticket portal at least 14 Calendar Days prior to transporting material. Perform at least four weigh memo tests for each Supplier approved for use on the Project. After the Engineer confirms the test weigh memos have been entered into the Agency’s e-ticket portal, void the e-tickets with the reason, “Calibration Testing”.
- Uptime reliability of the material Supplier’s e-ticket system must be 99.5% over any 30-Day rolling period. Uptime is defined as the ability to deliver electronic weigh memo data to the Agency’s e-ticket portal within 10 minutes of the electronic weigh memo creation.

The Supplier’s e-ticket system shall be:

- Capable of automatically recording and securely transmitting the same required “weigh memo” information identified in 00190.20(f)(3) to the Agency’s e-ticket portal.
- Fully integrated with the provided weigh scale system and the Agency’s e-ticket portal.
- Designed in such a way that the data electronically read from scales and transferred to the Agency’s e-ticket portal cannot be altered by the Contractor, Subcontractor, Supplier, Engineer, or other system users.

Insert Project Name Here

(Use the following subsection .20(g) when materials are to be weighed to determine pay quantities.)

00190.20(g) Agency-Provided Weigh Technician - Add the following paragraph to the end of this subsection:

Pay costs for the weigh technician at \$35.00 per hour.

(Use the following subsection .30 when ACP is paid under 00745.90 on Projects that are bid and awarded by ODOT.)

00190.30 Plant Scales - Replace the paragraph that begins "If approved by the Engineer, an electronic..." with the following paragraph:

If approved by the Engineer, an electronic weigh memo system may be used in place of a printer system. See 00190.20(f)(3). This electronic weigh memo system is required for all ACP mixture quantities specified in 00745.90.

SP00195 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 07-23-26)**

SECTION 00195 - PAYMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00195 of the Standard Specifications modified as follows:

[Use the following subsection .10 on Projects that have at least 150 Tons of liquid asphalt.]

00195.10 Payment for Changes in Materials Costs - Replace this subsection with the following subsection:

00195.10 Asphalt Cement Material Price Escalation/De-escalation - An asphalt cement escalation/de-escalation clause will be in effect during the life of the Contract.

The Agency reserves all of its rights under the Contract, including, but not limited to, its rights for suspension of the Work under 00180.70 and its rights for termination of the Contract under 00180.90, and this escalation/de-escalation provision shall not limit those rights.

(a) Monthly Asphalt Cement Material Price (MACMP) - The monthly asphalt cement material price (MACMP) is established by the Agency each month. For the actual MACMP, go to the Agency website at:

<https://www.oregon.gov/ODOT/Business/Pages/Asphalt-Fuel-Price.aspx>

The MACMP is based on selling prices of asphalt cement published by Poten & Partners, Inc. for primarily PG 64-22 paving grades in the Portland, Oregon area and typical non-modified paving grades in the Boise, Idaho area. The MACMP for a given month is the average of the range of published prices for each area reported for the week ending on the first Friday in that month. If any portion of the Project Site is located within the boundaries of ODOT Maintenance Districts 1 through 10, the MACMP will be based on the prices for the Portland, Oregon area. For Projects entirely in ODOT Maintenance District 13 or 14, the MACMP will be based on the prices for the Boise, Idaho area. For Projects entirely in ODOT Maintenance District 11 or 12, the Contractor may elect to have the MACMP based on the prices of either the Portland, Oregon area or the Boise, Idaho area. If electing to use Boise, Idaho area prices for determination of the MACMP, the Contractor shall notify the Engineer in writing of the Contractor's election before or within 7 Calendar Days after the date of the preconstruction conference. This election, once acknowledged by the Engineer, will be binding for the entire duration of the Contract. If no such written notification is made, the Portland, Oregon area prices will be used as the basis of the MACMP. The area selected as the basis of the MACMP, once chosen, will become the sole area to be used as the basis for all asphalt cement used on the Project.

If the prices cease to be available from Poten & Partners, Inc. for any reason, the Agency, in its discretion will select and begin using a substitute price source or index to establish the MACMP each month. The Agency does not guarantee that asphalt cement will be available at the MACMP.

(b) Base Asphalt Cement Material Price (Base) - The base asphalt cement material price for this Project is the MACMP published on the Agency website for the month immediately preceding the Bid Opening date.

(c) Monthly Asphalt Cement Adjustment Factor - The monthly asphalt cement adjustment factor will be determined each month as follows:

- If the MACMP is within $\pm 5\%$ of the Base, there will be no adjustment.
- If the MACMP is more than 105% of the Base, then:

$$\text{Adjustment Factor} = (\text{MACMP}) - (1.05 \times \text{Base})$$

- If the MACMP is less than 95% of the Base, then:

$$\text{Adjustment Factor} = (\text{MACMP}) - (0.95 \times \text{Base})$$

(d) Asphalt Cement Price Adjustment - A price adjustment will be made for the items containing asphalt cement listed below. The price adjustment as calculated in (c) above will use the MACMP for the month the asphalt is incorporated into the Project. The price adjustment will be determined by multiplying the asphalt incorporated during the month for subject Pay Items by the Adjustment Factor.

The Pay Items for which price adjustments will be made are:

Insert Project Name Here

Pay Item(s)

(List all Pay Items in which price adjustments apply. Use complete and accurate Pay Item names. Add or delete Pay Items as appropriate.)

_____ Asphalt in _____ ACP
Emulsified Asphalt in Fog Coat
Emulsified Asphalt for Tack Coat
Asphalt in Emulsified Asphalt Chip Seal
Asphalt in Multiple Application Emulsified Asphalt Surface Treatment
Emulsified Asphalt in Mixture
Recycling Agent

[End subsection .10]

[Use the following lead-in paragraph and subsection .11 on projects when the Fuel, Steel, Class of Work, and Scheduling program identifies any eligible items for fuel escalation/de-escalation. The estimated fuel usage is for the major Pay Items or for Pay Items under specific Structure Numbers that are listed for coverage under this specification.]

Add the following subsection:

00195.11 Fuel Cost Price Escalation/De-escalation - A fuel escalation/de-escalation clause will be in effect during the life of the Contract.

The Agency reserves all of its rights under the Contract, including, but not limited to, its rights for suspension of the Work under 00180.70 and its rights for termination of the Contract under 00180.90, and this escalation/de-escalation provision will not limit those rights.

(a) Monthly Fuel Price (MFP) - A monthly fuel price (MFP) is established by the Agency each month. For the actual MFP, go to the Agency website at:

<https://www.oregon.gov/ODOT/Business/Pages/Asphalt-Fuel-Price.aspx>

The MFP for a given month is the average rack price obtained from the Oil Price Information Service (OPIS) listing dated the first Friday of that month for ultra low sulfur distillate No. 2 diesel fuel for Portland, Oregon. If the average rack price is not posted by OPIS or is otherwise not available to the Agency for the first Friday of any month for any reason, the Agency may use the average rack price posted by OPIS immediately before or after the first Friday of that month. If the average rack prices cease to be available from OPIS for any reason, the Agency in its discretion will select and begin using a substitute price source or index to establish the MFP each month. The Agency does not guarantee that fuel will be available at the MFP.

(b) Base Fuel Price (Base) - The base fuel price for this Project is the MFP published on the Agency website for the month immediately preceding the Bid Opening date.

(c) Monthly Fuel Adjustment Factor - A monthly fuel adjustment factor is determined each month as follows:

Insert Project Name Here

- If the MFP is within $\pm 10\%$ of the Base, there will be no adjustment.
- If the MFP is more than 110% of the Base, then:

$$\text{Adjustment Factor} = (\text{MFP}) - (1.10 \times \text{Base})$$

- If the MFP is less than 90% of the Base, then:

$$\text{Adjustment Factor} = (\text{MFP}) - (0.90 \times \text{Base})$$

(d) Fuel Price Adjustment - A fuel price adjustment for fluctuations in the cost of fuel will apply only to the major fuel usage Pay Items shown in the following list and at the respective fuel factors listed:

(Use the following two tables to list Pay Items or for Pay Items under Structures that are subject to fuel escalation/de-escalation. Use the Fuel, Steel, Class of Work, and Scheduling program to determine the Pay Items or for Pay Items under Structures to which fuel factors apply. Copy and paste lines as needed and delete lines in the tables that do not apply. Check with the ODOT Sr. Cost Engineer.)

Use the following table to list all individual Pay Items that are subject to fuel escalation/de-escalation, EXCEPT items that will be included in the Schedule of Items under a Bridge or Structure number listed in the second table. Use complete and accurate Pay Item names. From the fuel escalation worksheet, determine all the appropriate individual Pay Items and list them by Pay Item name under the "Item" heading. Under the "Fuel Factor" heading, fill in the first blank with the fuel factor from the worksheet and the second blank with the unit of measurement for the specific Pay Item.)

Item

Fuel Factor

_____ Gal/_____
_____ Gal/_____

(Use the following paragraph and table for Bridges and Structures that are subject to fuel escalation/de-escalation. List each Bridge or Structure separately as "Bridge No." or "Structure No." and list all the Pay Items associated with that Bridge or Structure separately under the Bridge or Structure.

Fill in the first blank with the Bridge or Structure number for all the Pay Items associated with the entire Bridge or Structure.

List all Pay Items that fuel escalation would apply to under each Bridge or Structure No.

Example:

Bridge No. 12345

19 Gal/\$1,000

Item

Insert Project Name Here

*Bridge Removal Work
Bridge Deck Cold Plane Pavement Removal, 0-2 Inches
Furnish Premixed Polymer Concrete
Construct PPC Overlay
Structure Excavation
Granular Wall Backfill
Reinforced Concrete End Panel*

Check with the ODOT Sr. Cost Engineer if you have questions.)

The following Pay Items associated with the following Bridges and Structures:

Bridge No. _____	19 Gal/\$1,000
Item	
Bridge No. _____	19 Gal/\$1,000
Item	
Structure No. _____	19 Gal/\$1,000
Item	
Structure No. _____	19 Gal/\$1,000
Item	

The Contractor is cautioned to consider that its operations may require more or less fuel.

A price adjustment ($\pm$) to the Contractor for fuel cost changes will be made monthly if the MFP differs more than 10% or more from the Base. This adjustment will be the product of the monthly fuel adjustment factor and the estimated monthly fuel used. The monthly fuel used will be determined by multiplying the quantities of Work accomplished during the month for subject Pay Items, by the appropriate fuel factors.

Fuel cost adjustments will continue to be made as specified and will not be revised for any reason, including the Contractor's election to use an alternative fuel (natural gas, wood pellets, propane, or other).

[End subsection .11]

(Use the following subsection .12(d) when the Fuel, Steel, Class of Work, and Scheduling program identifies there are qualifying Pay Items to list under this subsection.

Fill in the table, in .12(d), with only those Pay Items which the Fuel, Steel, Class of Work, and Scheduling program identifies that the project is eligible for steel escalation/de-escalation. Use complete and accurate Pay Item names.)

Insert Project Name Here

00195.12(d) Steel Materials Pay Item Selection - Add the following paragraphs to the end of this subsection:

If the Contractor elects not to participate in the steel escalation/de-escalation program for this Project, no response from the Contractor is required.

The Contractor may elect to participate in the steel escalation/de-escalation program for this Project under 00195.12 through 00195.12(d) by marking each check box for each Pay Item in the list below the Contractor is selecting for participation in the program. The completed list must be submitted in writing, signed and dated by the Contractor, to the Project Manager before or within 7 Calendar Days after the date of the preconstruction conference.

PARTICIPATE	PAY ITEM DESCRIPTION	COST BASIS (CB)
☐	Pay Item Name (from the Worksheet)	CB (from the Worksheet)
☐	Pay Item Name (from the Worksheet)	CB (from the Worksheet)
☐	Pay Item Name (from the Worksheet)	CB (from the Worksheet)
☐	Pay Item Name (from the Worksheet)	CB (from the Worksheet)

(Copy and paste the above list to add additional items. Use complete and accurate Pay Item names.)

Regardless of the number of Pay Items listed by the Agency or selected by the Contractor, or if no Pay Items qualify for the steel escalation/de-escalation program for this Project or the Contractor elects not to participate in the steel escalation/de-escalation program for this Project, the steel price escalation/de-escalation clause (and program) contained in 00195.12 through 00195.12(d) are included in this Contract and are the only steel price escalation/de-escalation clause (and program) that apply to this Contract.

Contractor's Signature

Date

(Use the following subsection .12(d) on Projects which do not have any qualifying Pay Items. Do not use this subsection when using the subsection 00195.12(d) above.)

00195.12(d) Steel Materials Pay Item Selection - Add the following paragraph to the end of this subsection:

No Pay Items under this Contract qualify for the steel escalation/de-escalation program for this Project.

00195.50(b) Retainage – Replace the paragraph that begins “As provided in...” with the following paragraph:

As provided in 00170.65(c)(3) in addition to any retainage, a withholding of 25% of amounts earned will be withheld and released according to ORS 279C.845 when the Contractor fails to file the certified statements required in ORS 279C.845, FHWA Form 1273, and 00170.65.

00195.50(c)(1) Cash, Alternate A – Replace this subsection, except for the subsection number and title, with the following:

Retainage will be deducted from progress payments and held by the Agency until final payment is made according to 00195.90, unless otherwise specified in the Contract.

Except as otherwise provided, the Agency will deposit the cash retainage withheld in an interest bearing account, established through the State Treasurer for the benefit of the Agency, as required by ORS 279C.560(5). Interest earned on the account shall accrue to the Contractor. Amounts retained and interest earned will be included in the final payment made according to 00195.90, unless otherwise specified in the Contract.

Any retainage withheld on Work performed by a Subcontractor will be released to the Contractor according to 00195.50(d).

00195.50(c)(2) Cash, Alternate B (Retainage Surety Bond) - Replace this subsection, except for the subsection number and title, with the following:

The Contractor may submit a Surety bond in lieu of all or a portion of the retainage required under the Contract. The Agency will accept this Surety bond unless the Agency first finds in writing good cause for rejection based on unique project circumstances in accordance with ORS 279C.560(1)(c).

The Surety bond must be in substantially the form specified in ORS 701.435 (4) (Oregon House Bill 4006, 2024), and executed by a Surety bonding company that is authorized to transact Surety business in the State of Oregon and may not be a Surety obligation of an individual. The Surety bond and any proceeds of the Surety bond must be made subject to all claims and liens and in the same manner and priority specified for retainage under ORS 279C.550 to 279C.570 and ORS 279C.600 to 279C.625. Agency will reduce the cash retainage held by an amount equal to the value of the Surety bond and pay the amount of the reduction to Contractor according to ORS 279C.570. Any retainage withheld on Work performed by a Subcontractor will be released to the Contractor according to 00195.50(d).

When the Agency accepts a Surety bond in lieu of retainage from the Contractor, the Contractor shall accept Surety bonds from Subcontractors or Suppliers from which the Contractor has withheld retainage. At any time before final payment a Subcontractor may submit a Surety bond to the Contractor and request that the Contractor submit a Surety bond as described above for the portion of the Contractor's retainage that pertains to the Subcontractor. The Surety bond the Subcontractor provides to the Contractor must meet the Agency requirements specified in the paragraph above. When a Contractor at a Subcontractor's request obtains and submits a Surety bond under this subsection, the Contractor may withhold from payments to the Subcontractor an amount equivalent to the portion of the Contractor's Surety bond premium for which the Subcontractor is responsible in accordance with ORS 279C.560 (Oregon House Bill 4006, 2024).

Within 30 Days after a Subcontractor's request the Contractor shall provide a Surety bond as described above, and the Agency will accept the Surety bond unless:

- The Agency finds in writing good cause for rejection based on unique project circumstances in accordance with ORS 279C.560;

Insert Project Name Here

- A Surety bond is not commercially available;
- The Subcontractor refuses to pay to the Contractor the Subcontractor's portion of the Surety bond premium; or
- The Subcontractor refuses to provide the Contractor with a Surety bond that meets the requirements of ORS 279C.560(1)(b).

Notwithstanding 00195.50(d), within 30 Days of receiving a Surety bond from Contractor at a Subcontractor's or Supplier's request, Agency will release to the Contractor the amount held as retainage that is equivalent to the amount the Contractor submitted as a Surety bond. Contractor shall, within 30 Days after receiving a Surety bond from a Subcontractor or Supplier, release to the Subcontractor or Supplier the amount the Contractor holds as retainage that is equivalent to the amount of the Surety bond submitted, in accordance with ORS 279C.560(8).

00195.50(c)(3) Bonds, Securities, and Other Instruments - Replace this subsection, except for the subsection number and title, with the following:

Contractor may deposit bonds, securities or other instruments with the Agency or in a bank or other financial institution, to be held by Agency instead of cash retainage for the benefit of the Agency, which the Agency will accept unless the Agency first finds in writing good cause for rejection based on unique project circumstances, in accordance with ORS 279C.560(1)(c).

If the Contractor deposits bonds, securities or other instruments, and Agency does not reject the bonds, securities or other instruments as permitted by ORS 279C.560(1)(c), the Agency will reduce the cash retainage by an amount equal to the value of the bonds, securities and other instruments. Interest or earnings on the bonds, securities and other instruments accrue to the Contractor.

Bonds, securities and other instruments deposited instead of cash retainage shall be of a character approved by the Director of the Oregon Department of Administrative Services, including, but not limited to:

- Bills, certificates, notes or bonds of the United States;
- Other obligations of the United States or agencies of the United States;
- Obligations of a corporation wholly owned by the federal government;
- Indebtedness of the Federal National Mortgage Association;
- General obligation bonds of the State of Oregon or a political subdivision of the State of Oregon;
- Irrevocable letters of credit issued by an insured institution, as defined in ORS 706.008.

00195.50(f) Prompt Payment Policy - Replace this subsection, except for the subsection number and title, with the following:

Payments shall be made promptly according to ORS 279C.560, ORS 279C.570, ORS 279C.580 and other applicable legal requirements.

SECTION 00196 - PAYMENT FOR EXTRA WORK

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00196 of the Standard Specifications.

SP00197 (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-26
Last updated: 08-25-26)

SECTION 00197 - PAYMENT FOR FORCE ACCOUNT WORK

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00197 of the Standard Specifications modified as follows:

00197.20(e) Standby Time - Replace this subsection, except for the subsection number and title, with the following:

If ordered by the Engineer, standby time will be paid at 50% of the hourly rental rate calculated according to this Subsection, excluding the hourly operating rate. Rates for standby time that are calculated at less than \$1 per hour will not be paid. Payment will be limited to not more than 8 hours in a 24-hour period or 40 hours in a 1 week period.

00197.80 Percentage Allowances - Replace the table that shows Subsection and Percent with the following:

Subsection	Percent
00197.10 Materials	19
00197.20 Equipment	19
00197.30 Labor	29
00197.40 Special Services	19

Insert Project Name Here

Replace the paragraph that begins "When a Subcontractor performs ordered..." with the following paragraph:

When a Subcontractor performs ordered Force Account Work, the Contractor will be allowed a supplemental markup of 10% on each Force Account Work order.

SP00199 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-25
Last updated: 05-23-25)**

SECTION 00199 - DISAGREEMENTS, PROTESTS, AND CLAIMS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require State Specifications Engineer approval and the State Specifications Engineer will obtain approval from the Department of Justice.)

Comply with Section 00199 of the Standard Specifications.

SP00205 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 02-26-26)**

SECTION 00205 - FIELD LABORATORY, WEIGHHOUSE, ETC.

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00205 is not a Standard Specification and is included in this Project by Special Provision.

Description

00205.00 Scope - This Work consists of providing facilities for Agency use to perform testing, weighing and other necessary functions during the course of the Project.

Materials and Equipment

(Use the following subsection .10 when a contractor provided field laboratory is required.)

00205.10 Contractor-Provided Field Laboratory - Provide a leveled field laboratory for Agency use in close proximity to the Contractor's plant at least 5 Calendar Days before Aggregate production, paving, or processing Work begins under the Contract, meeting the safety and health requirements of the Oregon Department of Consumer and Business Services, the Oregon Health Division, the State Fire Marshall, and the following minimum requirements:

- Length - 16 feet
- Width - 8 feet
- Ceiling Height - 7 feet
- Floor
- Insulation - Walls and ceiling - R-11
- Doors - At least one, 3 feet wide, all with locks
- Windows:
 - Four
 - Adequate for good lighting
 - Capable of being opened for adequate ventilation
 - One providing a view of the crushing or processing plant
- Interior Walls and Ceiling - White
- Counter - 20 feet long, 30 inches wide, 36 inches high, with a durable, smooth surface
- Sink - One deep double with adequate supply of cold potable, clear, running water
- Electrical Power System:
 - 120/240 V, single phase, 60 A service
 - Wired according to the *National Electrical Code*
- Electrical Service:
 - Continuous, 24 hours per Day during crushing and Aggregate mixing operations
 - For 24 hours following termination or interruption of operations
- Electrical Outlets - six duplex
- Electrical Light Fixtures - Enough to provide good overall lighting
- Heating and Air Conditioning - Adequate to provide suitable heating and cooling
- Exhaust Ventilation System - Adequate for all activities performed in the laboratory
- Toilet - One, portable, for use by Agency employees

Obtain approval of the site before beginning Work.

Remove the field laboratory when the Project is complete.

(Use the following subsection .11 when an Agency provided field laboratory is required.)

00205.11 Agency-Provided Field Laboratory - Provide a level site for an Agency-provided laboratory trailer at least 5 Calendar Days before Aggregate production, paving, or

Insert Project Name Here

processing Work begins under the Contract, at a location in close proximity to the Contractor's plant. Obtain approval of the site before beginning Work.

Employ a commercial hauler to bring the trailer to the Project, relocate at the site if necessary, and to return the trailer to its storage area. Employ a licensed electrician to connect and disconnect the power source. Provide an adequate supply of potable water, electricity, and a portable toilet for use by Agency employees, according to 00205.10.

(Use the following subsection .12 when a Weighhouse is required.)

00205.12 Weighhouse - When Materials are weighed on platform-type scales or by other means and the Contractor chooses to have the Agency provide a weigher, provide a weatherproof weighhouse or other approved shelter for the weighperson. Provide a weighhouse that meets the safety and health requirements of the Oregon Department of Consumer and Business Services, the Oregon Health Division, the State Fire Marshall and the following minimum requirements:

- Length - 9 feet
- Width - 6 feet
- Ceiling Height - 7 feet
- Floor
- Protect scale recording device and Agency's weigher from weather
- Provide space to store scale testing Equipment
- Provide adequate shelf space
- Provide artificial lighting and good visibility throughout
- Provide adequate heat, as required
- Provide stool and other facilities for keeping records and performing other duties of the weigher
- Doors - At least one, all with locks
- Windows:
 - Capable of being opened for adequate ventilation, unless air conditioning is provided
 - One facing the scale
 - One at each end
 - Adequate size and position to permit view of loading operations and movements of hauling vehicles
- Toilet - One, portable, for use by Agency employees

Remove the weighhouse when the Project is complete.

(Use the following subsection .13 when the contractor is required to provide a job inspector trailer for Agency use.)

00205.13 Job Inspector Trailer - At least 15 Calendar Days before beginning On-Site Work, or as otherwise agreed to by the Engineer, provide a leveled office trailer for sole use by the Agency in close proximity to the Project and the Contractor's trailer, if one is present. Obtain approval of the trailer and the proposed trailer location from the Engineer before

Insert Project Name Here

delivery and installation. Provide an inspector trailer that meets the safety and health requirements of the Oregon Department of Consumer and Business Services, the Oregon Health Division, the State Fire Marshall, and the following requirements:

- Be at least 20 feet in length.
- Be at least 8 feet in width.
- Have a minimum ceiling height of 7 feet.
- At a minimum, be insulated in the walls, ceiling, and floor.
- Have at least one exterior door with locks. Provide the Engineer with two sets of keys to the exterior door locks.
- Have at least two windows that:
 - Provide adequate lighting to the interior of the trailer.
 - Can be opened for ventilation.
- Have a light colored ceiling and light colored interior walls.
- Have a counter across one end that is a minimum of 30 inches wide and 30 to 42 inches high with a durable smooth surface on top. Alternately, provide a similarly sized table or desk.
- Be wired according to the *National Electrical Code* with 120/240-volt, single phase, 60-amp minimum service.
- Have electrical service 24 hours per Day for the duration of the Project. The Engineer may waive the continuous requirement if it is unavailable.
- Have high-speed internet service 24 hours per Day for the duration of the Project, at no additional cost to the Agency. The Engineer may waive the high speed requirements if it is unavailable
- Have at least four, evenly spaced, 120-volt duplex electrical outlets.
- Have adequate electrical light fixtures to provide good overall interior lighting.
- Have an adequate heater and air conditioning unit to maintain a temperature of 68 to 72 °F.
- Have adequate parking for two Agency vehicles, near the trailer, on an aggregate pad or other surface free of mud and standing water.
- Have a walkway between the Agency vehicle parking area and the trailer, free of mud and standing water.
- Have steps with a handrail at each exterior door.

Provide and maintain a portable toilet for use by Agency employees.

Similar facilities, such as Agency space in a shared trailer or space in a building close to the Project, may be allowed if approved by the Engineer.

Remove the job inspector trailer when the Project is complete.

(Use the following subsection .14 when the contractor is required to provide a job office trailer for Agency use.)

00205.14 Job Office Trailer - At least 15 Calendar Days before beginning On-Site Work, or as otherwise agreed to by the Engineer, provide a leveled office trailer for sole use by the Agency in close proximity to the Project and the Contractor's trailer, if one is present. Obtain approval of the trailer and the proposed trailer location from the Engineer before delivery and installation. Provide an office trailer that meets the safety and health requirements of the Oregon Department of Consumer and Business Services, the Oregon Health Division, the State Fire Marshall, and the following requirements:

- Be at least 28 feet in length.
- Be at least 8 feet in width.
- Have a minimum ceiling height of 7 feet.
- At a minimum, be insulated in the walls, ceiling, and floor with R 11 insulation.
- Have at least one 3-foot-wide exterior door with locks. Provide the Engineer with two sets of keys to the exterior door locks.
- Have at least two windows, each with an approximate minimum size of 46 by 30 inches, that:
 - Provide adequate lighting to the interior of the trailer.
 - Are equipped with blinds or other window coverings, as approved.
 - Can be opened for ventilation.
- Have a light colored ceiling and light colored interior walls.
- Have a counter across one end that is an approximate minimum of 30 inches wide and 30 to 42 inches high with a durable smooth surface on top.
- Be wired according to the *National Electrical Code* with 120/240-volt, single phase, 60-amp minimum service.
- Have electrical service 24 hours per Day for the duration of the Project. The Engineer may waive the continuous requirement if it is unavailable.
- Have at least four, evenly spaced, 120-volt duplex electrical outlets.
- Have adequate electrical light fixtures to provide good overall interior lighting.
- Have an adequate heater and air conditioning unit to maintain a temperature of 68 to 72 °F.
- Have adequate parking for two Agency vehicles, near the trailer, on an aggregate pad or other surface free of mud and standing water.
- Have a walkway between the Agency vehicle parking area and the trailer, free of mud and standing water.
- Have a minimum of two telephone services, each with local and long distance service at no additional cost to the Agency, a phone number specific to the service, and continuous service at all times during the Project. The Engineer may waive some telephone requirements if they are unavailable.
- Have high -speed internet service 24 hours per Day for the duration of the Project, at no additional cost to the Agency. The Engineer may waive the high speed requirements if it is unavailable.
- Have steps with a handrail at each exterior door.

Provide and maintain a portable toilet for use by the Agency employees.

Insert Project Name Here

Similar facilities, such as Agency space in a shared trailer or space in a building close to the Project, may be allowed if approved by the Engineer.

Remove the job office trailer when the Project is complete.

Measurement

00205.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(Use the following subsection (a) when a Contractor-provided field laboratory is required.)

(a) Contractor-Provided Field Laboratory - Contractor-provided field laboratories will be measured on the unit basis.

(Use the following subsection (b) when an Agency-provided field laboratory is required.)

(b) Agency-Provided Field Laboratory - Agency-provided field laboratory Work described in 00205.11 will be measured on the unit basis for each Agency-provided field laboratory required to be located at the Contractor's site of operations.

(Use the following subsection (c) when the contractor is required to provide a job inspector trailer for Agency use.]

(c) Job Inspector Trailer - Job inspector trailers will be measured on the unit basis.

(Use the following subsection (d) when the contractor is required to provide a job office trailer for Agency use]

(d) Job Office Trailer - Job office trailers will be measured on the unit basis.

(Use the following subsection (e) when a weighhouse is required.)

(e) Weighhouse - No measurement will be made for providing weighhouses.

Payment

00205.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Items from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Contractor-Provided Field Laboratory	Each
(b) Agency-Provided Field Laboratory	Each
(c) Job Inspector Trailer	Each

Insert Project Name Here

(d) Job Office Trailer.....Each

(Use the following paragraph when a Contractor-provided field laboratory, job inspector trailer, or job office trailer is required.)

Payment will be payment in full for providing facilities for Agency use, and for furnishing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph when an Agency-provided field laboratory is required.)

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph when a weighhouse is required.)

No separate or additional payment will be made for providing weighhouses. Payment will be included in payment made for the appropriate items under which this item is required.

SP00210 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00210 - MOBILIZATION

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00210 of the Standard Specifications modified as follows:

00210.90 Payment - Replace the paragraph that begins “No separate or additional...” with the following paragraph:

No separate or additional payment will be made for any costs associated with obtaining and maintaining access to Doc Express® and AASHTOWare Project™ or the use of Doc Express® and AASHTOWare Project™.

SP00220 (Special Provisions for the 2024 Book)

**(Bidding on or after: 12-01-26
Last updated: 08-25-26)**

SECTION 00220 - ACCOMMODATIONS FOR PUBLIC TRAFFIC

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then

Insert Project Name Here

include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00220 of the Standard Specifications modified as follows:

00220.01(b) Abbreviations - Delete this subsection.

(Use the following subsection .02(a) when any of the following bullets are included in the Project Special Provisions. Delete "(s)" or parentheses, as applicable.)

00220.02(a) General Requirements - Add the following bullet(s) to the end of the bullet list:

(Use the following bullet when the pre-construction speed is greater than 35 mph and there is trench excavation or other excavation work to be performed.)

- When performing trench excavation or other excavation across or adjacent to a Traffic Lane on a Roadway having a pre-construction posted speed greater than 35 mph, backfill the excavation, install Surfacing, and open the Roadway to traffic by the end of each work shift. Install a "BUMP" (W8-1-48) sign approximately 100 feet before the backfilled area and a "ROUGH ROAD" (W8-8-48) sign approximately 500 feet ahead of the "BUMP" sign. If this requirement is not met, maintain all necessary lane or shoulder closures and provide additional TCM, including flagging, at no additional cost to the Agency. Do not use temporary steel plating to reopen the Roadway.

(Use the following bullet when flaggers are needed at a single location for 24 or more consecutive hours. Fill in the blanks with appropriate quantities.)

- During stage construction, provide continuous 24-hour flagger operation, with a minimum of _____ flaggers. Occupy the advance flagger stations, as directed.

(Use the following bullet when any of the following apply:

- *A new temporary or permanent STOP sign is installed at an intersection.*
 - *Modifications are made to lane configurations, lane assignments or Roadway geometry that affects traffic patterns.*
 - *A permanent traffic signal is being installed or modified.*
- Before activating a modified traffic signal, revising lane usage, implementing new roadway geometry, or removing a "STOP" sign, protect traffic by installing "NEW TRAFFIC PATTERN AHEAD" (W23-2) signing according to 00222.40. Keep the signs in place for 30 Calendar Days after completing the modifications.

(Use one of the following two options when excavation creates an abrupt edge. Delete the option that does not apply and Include TM800.)

[Option 1 - Use the following bullet when excavation creates an abrupt edge on a freeway Project that has adequate shoulder width.]

Insert Project Name Here

- When an abrupt edge is created by excavation, protect traffic according to the "Excavation Abrupt Edge" and the "Typical Abrupt Edge Delineation" configurations shown on the Standard Drawings. Modify the "Typical Abrupt Edge Delineation" configuration by replacing the tubular markers with temporary plastic drums on 40 foot maximum spacing along the abrupt edge.

[Option 2 - Use the following bullet when option 1 is not used.]

- When an abrupt edge is created by excavation, protect traffic according to the "Excavation Abrupt Edge" and the "Typical Abrupt Edge Delineation" configurations shown on the Standard Drawings.

(Use one of the following three options when paving creates an abrupt edge. Delete the options that do not apply.)

[Option 1 - Use the following bullet when paving operations create an abrupt edge on Multi-Lane, Two-Way Non-Freeways.]

- When paving operations create an abrupt edge, protect traffic by installing a "DO NOT PASS" (R4-1) sign before the Work Area at sign spacing "A" from the TCD Spacing Table" shown on the Standard Drawings. Alternate "ABRUPT EDGE" (CW21-7) signs with appropriate (CW21-8) rider and "DO NOT PASS" (R4-1) signs at 1/2 mile spacings. Install a "BUMP" (W8-1) sign 100 feet prior to the transverse paving edge.

[Option 2 - Use the following bullet when paving operations create an abrupt edge on Two-Lane Freeway Projects. Include Standard Drawing TM861.]

- When paving operations create an abrupt edge, protect traffic by installing signing according to the "Divided Highway or Freeway One Lane Closure" detail shown on the Standard Drawings.

[Option 3 - Use the following bullet when paving operations create an abrupt edge on Multi-Lane Freeway Projects. Include Standard Drawing TM862.]

- When paving operations create an abrupt edge, protect traffic by installing signing according to the "Divided Highway or Freeway Two Lane Closure" detail shown on the Standard Drawings.

(Use the following bullet when longitudinal rumble strips are required. When used, be sure that Standard Drawing TM830 is included in the plans. Include appropriate Pay Items for cold plane pavement removal and surfacing material.)

- Protect traffic by grinding and inlaying existing longitudinal rumble strips before staging traffic across them. Grind and inlay existing rumble strips according to the "Existing Rumble Strip Removal" detail shown on the Standard Drawings. Use Level 2, 1/2 inch ACP, or as directed.

(Use the following bullet any time traffic queues are expected to develop within proximity of a railroad crossing. Include Standard Drawing TM850.)

- When flagging operations may extend traffic queues onto the railroad crossing, protect traffic at the intersection of _____ and _____ by providing an additional flagger. Position additional flagger signs according to the "Advance Flagger for Extended Traffic Queues" configuration shown on the Standard Drawings. Do not allow traffic to stop on the railroad crossing.

(Use the following bullet when pole base excavation covers are required.)

- Protect pedestrians in pole base excavation areas by placing approved covers over all pole base excavations. Place a minimum of two B(II)LR barricades adjacent to and on either side of the excavated area, facing pedestrian traffic, or place covers and barricades as directed.

(Use the following bullet when tow trucks are required.)

- Provide a licensed tow truck service for responding to stranded or disabled vehicles within the Project limits. Provide the tow truck service during the hours designated in 00220.40(h), and as directed by the Engineer.

00220.02(b) Temporary Pedestrian Accessible Route Plan - Replace the title of this subsection with "**Temporary Pedestrian Accessible Route**"

Replace the paragraph that begins "For the safety and accessibility ..." with the following paragraph:

For the safety and accessibility of pedestrians, provide and maintain TPAR for pedestrian pathways impacted by construction or construction staging, and the following:

Replace the bullet that begins "TPAR shall meet ..." with the following bullet:

- Meet the requirements of Part 6 of the MUTCD.

Replace the bullet that begins "Mount signs between the panels..." with the following bullet:

- Mount signs between the panels of a Type II barricade, on a PCD, or on a single-post temporary sign support, as shown. Place signs facing pedestrian traffic.

Add the following bullet(s) to the end of the bullet list:

- Maintain access to bus stops and Pedestrian Accessible Routes.

(Use the following bullet if construction staging makes it unsafe for pedestrian or bicycle traffic to travel through the active work area. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

Insert Project Name Here

- For an active Work Area controlled at each end by flaggers and pilot car, provide transportation for pedestrians (and bicyclists) through the active Work Area according to Section 00223 and Section 00228.

(Use the following bullet on Projects that have Pedestrian Accessible Route work. Fill in the blank with the number of Days, usually 10 to 21 and delete all purple parentheses.)

- For each location where a curb ramp or sidewalk is under construction, once demolition of the existing Pedestrian Accessible Route has begun, complete Pedestrian Accessible Route Work, including concrete sidewalks, curb ramps, and pavement repair and allow pedestrians to use the Pedestrian Accessible Route within (____) consecutive Calendar Days.

(Use the following bullet on Projects that have Pedestrian Accessible Route work at signals. Fill in the blank with the number of Days, usually 21 to 45 and delete all purple parentheses.)

- For each location where a curb ramp or sidewalk is under construction that includes permanent traffic signals, once demolition of the existing Pedestrian Accessible Route has begun, complete construction of the Pedestrian Accessible Route Work, including concrete sidewalks, curb ramps, pedestrian signals and pushbuttons, temporary crosswalks, and pavement repair and allow pedestrians to use the Pedestrian Accessible Route within (____) consecutive Calendar Days.

(Use the following bullets on Projects that have more than 8 curb ramps or sidewalk work locations. Fill in the blank with the number of locations, usually 10 and delete all purple parentheses.)

- A maximum of (____) locations where pedestrians are detoured from an existing Pedestrian Accessible Route, with a curb ramp(s) or sidewalk under construction, are allowed to be closed for pedestrian use at one time, unless otherwise directed by the Engineer.

(Use the following subsection .03(b) when public access(es) to a floatable natural waterway have been identified. Originated from HB2835 (2019). Delete "(s)" or parentheses, as applicable.)

00220.03(b) Closures - Add the following bullet(s) to the end of the bullet list:

- **Floatable Natural Waterway** - A minimum of 35 Calendar Days before restricting or closing the public access site(s), listed below:

(Fill in the blank with the appropriate public access location(s) information and include "as shown" if the access is shown on the Plans. Repeat the bullet as necessary to list all locations. Delete parentheses and the words in the parentheses as needed.)

- **Public Access Location** - _____ (as shown).

(Work Zone Standards Unit and State Specifications Engineer must approve 00220.40(e) on ALL Projects, including Projects where no modifications are made.

Use the following subsection .40(e)(1) only when modifying closed lane restrictions. Fill in the blank with the highway name and insert the route number (e.g. I-5, US97) in the parentheses. When closed lane restrictions apply to a road that is not a highway, delete "Highway (Route No.)" and insert the street name. Submit a Traffic Analysis Work Request Form to the Region Traffic Office for the closed lane restrictions. It's available on the web at <https://www.oregon.gov/odot/Engineering/Pages/Work-Zone.aspx>. Copy and paste the paragraph and bullet list as necessary for additional highways or roads. If closures are shown for Roadways under local jurisdiction obtain permits or indicate local coordination is necessary.)

00220.40(e)(1) Closed Lanes - Replace this subsection, except for the subsection number and title, with the following:

Traffic Lanes may be closed on the (Highway Name) Highway (Route No.) when allowed, shown, or directed during the following periods of time except as specified in 00220.40(e)(2):

(Delete the language that is not required for this Project. Modify the time and Day's and repeat the bullet as necessary to list all locations. Add additional restrictions such as calendar dates and mile point or segment locations if necessary. Delete the language in purple parentheses that does not apply and delete all purple parentheses.

Example:

- **Daily, Monday through Thursday, between 9:00 a.m. and 4:00 p.m.**
- **Friday, between 9:00 a.m. and 3:00 p.m.**
- **Nightly, Sunday night through Friday morning, between 6:00 p.m. and 7:00 a.m.)**

Single Lane Closures - One Traffic Lane (in each direction) on the (Highway Name) (Route No.) may be closed during the following times:

- Daily, (Day) through (Day), between (time) (a.m.)(p.m.) and (time) (a.m.)(p.m.)
- (Day) between (time) a.m. and (time) p.m.
- Nightly, (Day) night through (Day) morning, between (time) p.m. and (time) a.m.

Two-lane Closures - Two Traffic Lanes (in each direction) on the (Highway Name) (Route No.) may be closed during the following times:

- Daily, (Day) through (Day), between (time) (a.m.)(p.m.) and (time) (a.m.)(p.m.)

Insert Project Name Here

- (Day) between (time) a.m. and (time) p.m.
- Nightly, (Day) night through (Day) morning, between (time) p.m. and (time) a.m.

(Use the following paragraph and bullets if approved adjacent incidental closures on side streets or ramps are shown or are necessary for the construction of the Project. Designers should verify closure times with Local Agencies and modify the closure times as necessary.)

One Traffic Lane may be closed on all other adjacent Roadways within the Project Site not listed above, when allowed, shown, or directed during the following periods of time except as specified in 00220.40(e)(2):

- Daily, Monday through Thursday, between 9:00 a.m. and 4:00 p.m.
- Friday, between 9:00 a.m. and 3:00 p.m.
- Nightly, Sunday night through Friday morning, between 6:00 p.m. and 7:00 a.m.

00220.40(e)(2) Opened Lanes - Replace the paragraph that begins "Keep all Traffic Lanes and ..." with the following paragraph:

Keep all Traffic Lanes and pedestrian facilities open during the following periods. Remove all barricades and objects from the Roadway during the periods that Traffic Lanes are to remain open.

00220.40(e)(2)(a) Holidays - Replace the paragraph that begins "When a holiday falls ..." with the following paragraph:

When a holiday falls on Sunday, the following Monday is recognized as a legal holiday. When a holiday falls on Saturday, the preceding Friday is recognized as a legal holiday.

(Use the following subsection .40(e)(2)(b) to list special events. List the names, times, and dates of the events.)

00220.40(e)(2)(b) Special Events - Add the following to the end of this subsection:

The following special events will occur during this Project:

- _____

(Use the following lead-in paragraph and subsection .40(f) when blasting, erecting bridge girders, erecting sign structures, or conducting other short duration work that can be done in periods not exceeding 20 minutes. Contact the Region Traffic Analyst for designated peak hours and days when work is allowed. Add applicable items and delete non-applicable items in the first sentence. Do not change the subsection alpha character (keep it "(f)".)

Add the following subsection:

00220.40(f) Limited Duration Road Closure - Close all Traffic Lanes for periods not to exceed 20 minutes in duration during blasting or erecting Bridge girders and sign structures

Insert Project Name Here

over the Traffic Lanes or _____. This Work will only be permitted between the hours of _____ and _____ on the _____ highway.

Succeeding roadway closures will not be allowed until traffic clears from a preceding closure.

(Use the following lead-in paragraph and subsection .40(g) when the Rolling Slowdown Method is used to temporarily close traffic lanes. Use only on full access controlled highways. Obtain the information from the Traffic Control Designer. Include a Pilot Car pay item when using this subsection. Do not change the subsection alpha character (keep it "(g)".)

Add the following subsection:

00220.40(g) Road Closure Using Rolling Slowdown Method - Use a rolling slowdown method (RSM) for slowing traffic and closing all Traffic Lanes on the _____ Highway for periods not to exceed 20 minutes while _____ (specify type of work here) _____. This Work is allowed only between _____ p.m. and _____ a.m.

Provide written notification to the Engineer and all affected emergency services at least 14 Days before using the RSM. Calculate the location where the pilot cars will begin the RSM and the speed the pilot cars will travel to accommodate the needed time to complete the Work within 20 minutes.

Perform a RSM as shown on the Supplemental Drawings. Use one pilot car for each lane to be slowed. Use only pilot cars to control the flow of traffic on the freeway. Use one additional pilot car as a chase vehicle to follow the last free-flowing vehicle ahead of the blockade. Direct pilot cars to enter the Roadway at the posted speed, form a moving blockade, and slowly reduce traffic speeds to create a gap in traffic to accomplish the work without completely stopping traffic.

Place a PCMS a minimum of 1/2 mile in advance of the start of the rolling slowdown. Place flagger(s), and appropriate devices and signing, at the terminal of all closed on-ramps within the controlled delay area. Establish and utilize radio communications to adjust the speed of the blockade, as necessary. Maintain radio communications at all times among the pilot cars, flaggers, and the construction crew.

Begin Work immediately after the chase vehicle has passed the Work Area. If work is not completed when the pilot cars approach the Work Area, immediately cease all work except what is necessary to clear and reopen the Roadway to traffic. Allow traffic to clear before performing another RSM.

(Use the following lead-in paragraph and subsection .40(h) when tow trucks are required. Do not change the subsection alpha character (keep it "(h)"). Fill in the blank with the highway name and insert the route number (e.g. I-5, US97) in the parentheses. When closed lane restrictions apply to a road that is not a highway, delete "Highway (Route No.)" and insert the street name.)

Add the following subsection:

00220.40(h) Tow Truck Operating Hours - During times a lane is closed on the _____ Highway (Route No. _____), provide an operated tow truck within the Project limits

Insert Project Name Here

meeting the requirements of 00223.28. Use the operated tow truck to keep the open traffic lanes of Route No. unobstructed and open to traffic. During traffic lane closures on Route No., do not remove the operated tow truck from the Project or use the operated tow truck other than to keep the traffic lanes of Route No. open, unless otherwise approved or directed.

(Use the following lead-in paragraph and subsection .41 for bridge pavement work or bridge end work.)

Add the following subsection:

00220.41 Bridge Work - Before starting any grading or Pavement removal at Bridge ends or removal of Pavement from Bridge decks, arrange so that all Equipment, labor, and Materials required to complete the Pavement replacement Work and Bridge deck waterproofing Work are on hand or are guaranteed to be delivered. Once grading and Pavement removal begins, vigorously prosecute and complete this Work. Complete paving and membrane waterproofing Work in the shortest possible time.

Temporarily taper or bevel longitudinal and transverse grade changes or drop-offs resulting from grading and Pavement removal and membrane waterproofing Work with asphalt concrete mixture to provide a smooth and safe transition. Construct tapers according to 00620.40.

(Use the following lead-in paragraph and subsection .42 when the road is to be closed to traffic during construction of bridges.)

Add the following subsection:

00220.42 Bridge Site Road Closure - Close the road to traffic at the Bridge site during reconstruction of the Bridge. Do not close the road until all Materials and Equipment are on hand or guaranteed to be delivered so that the Work can be done in an efficient manner with a minimum period of road closure.

The road closure will not be allowed until the area and the detour route are signed according to the TCP and the requirements of Section 00221 and Section 00222.

(Use the following lead-in paragraph and the applicable following four options on all Projects that have a bridge(s) or culvert(s) within the Project limits or Section 00503 is included on the project. For each option identify the bridge(s) or culvert(s) Structure Number where the restriction applies. Delete the options that do not apply. Obtain information from the Bridge Designer.)

Add the following subsection:

00220.45 Load Restrictions on Bridges -

[Option 1 - Use the following subsection .45 for existing bridges with a H20, HS20 or greater load rating.]

For Structure(s) No.(s) _____, limit the combined weight of construction vehicles, Equipment, and daily Material usage to 65,000 pounds for every 1,000 square feet of surface

Insert Project Name Here

area plus the weight of long term storage of Materials to 25,000 pounds for every 100 square feet of surface area of the Bridge or a total of 200,000 pounds for each span of the Bridge, whichever is less.

The Contractor may request alternate loadings by submitting, 30 Calendar Days before proposed loadings, stamped loading calculations and data according to 00150.35.

[Option 2 - Use the following subsection .45 for existing bridges with a H15- or, HS15 load rating.]

For Structure(s) No.(s) _____, limit the combined weight of construction vehicles, Equipment, and daily Material usage to 45,000 pounds for every 1,000 square feet of surface area plus the weight of long term storage of Materials to 18,000 pounds for every 100 square feet of surface area of the Bridge or a total of 150,000 pounds for each span of the Bridge, whichever is less.

The Contractor may request alternate loadings by submitting, 30 Calendar Days before proposed loadings, stamped loading calculations and data according to 00150.35.

[Option 3 - Use the following subsection .45 for bridges on the Restricted Bridge List or have a condition rating of 4 or less on any part of the bridge.]

Structure(s) No.(s) _____ (is) (are) on the Restricted Bridge List or has a condition rating of 4 or less. If the Contractor plans to park vehicles or Equipment on the Bridge or store Materials on the Bridge submit, 30 Calendar Days before loading, stamped loading calculations and data according to 00150.35.

[Option 4 - Use the following subsection .45 for when Section 00253.46 is included in the Special Provisions.]

For Structure(s) No.(s) _____, limit the combined weight of Equipment, vehicles, and supplies placed in a closed Traffic Lane or Shoulder on the Bridge according to 00253.46.

00220.60(a)(1) Contractor Responsibility - Replace this subsection, except for the subsection number and title, with the following:

If this Work is not completed and in place, the Agency may do the Work according to 00220.60(d).

a. Do the following at no additional cost to the Agency:

- Keep surfaces being used by Public Traffic free of all dirt, mud, gravel, materials, and debris.
- Repair damage to surfaces caused by the Contractor's operations.
- Maintain all detour and stage construction Surfacing as specified or directed.

(Use the following bullet on Emulsified Asphalt Chip Seal (00710 or 00715) Projects, provided the following criteria are met:

- *Compile Field Data Summary*
- *ADT < 5,000 for roadways with posted speed > 45 mph*

- *ADT < 10,000 for roadways with posted speed ≤ 45 mph*
- *Federally funded projects require FHWA approval)*

- During emulsified asphalt chip seal operations, broom the surface being used by bicycles as soon as practicable to keep it free of all dirt, mud, gravel, and other harmful materials. The surface includes bike paths, Bike Lanes, Roadway Shoulders or the outside 6 feet of the Roadway.

b. Before periods of no active Work that last longer than seven consecutive Days, unless otherwise directed, do the following:

- Provide temporary pedestrian surfaces meeting the requirements of the MUTCD and Section 00228.
- Provide traversable bicycle and pedestrian routes with surfaces free of dirt, mud, gravel, and debris.

c. Before periods of no active Work that is anticipated to last or lasts longer than 30 consecutive Days, unless otherwise directed, do the following:

- Pave Traffic Lanes at least 12 feet wide, with 2-foot-wide paved Shoulders for each direction of traffic.
- Do not leave abrupt edges.
- Remove or cover temporary construction signs unless otherwise directed.
- Clean, install, and reinstall all necessary pedestrian, motor vehicle, and bicycle channelization and pavement markings, unless otherwise directed.

00220.60(a)(2) Agency Responsibility - Replace the paragraph that begins "The Agency is responsible ..." with the following paragraph:

The Agency is responsible to do the following at Agency expense:

00220.60(b) During Suspensions - Replace the paragraph that begins "During suspensions of the Work ..." with the following paragraph:

During suspensions of the Work, maintain Surfacing that the Contractor is responsible for under 00220.60(a)(1), and maintain Work Zone traffic control according to the Specifications and the following:

00220.70 Opening to Traffic - Replace the paragraph that begins "When it is in the public interest, the ..." with the following paragraph:

When it is in the public interest, the Engineer may order any portion of the Work opened to traffic. If the portion opened to traffic has been finished in an acceptable manner, it will be designated as "accepted for traffic", and the Contractor will be relieved of maintaining it for legal, Public Traffic. If the portion of the Work to be opened to traffic has not been finished in an acceptable manner, maintain that portion of the Work under traffic in a condition serviceable and adequate for traffic until it is finished in an acceptable manner, except as specified in 00220.60(b).

Replace the paragraph that begins "Maintain portions of the Work designated ..." with the following paragraph:

Insert Project Name Here

Maintain portions of the Work designated "accepted for traffic" if so ordered. Maintain portions of the Work opened to traffic but not "accepted for traffic" at no additional compensation, except watering ordered to protect the Work or to alleviate dust will be paid for according to Section 00340.

Replace the paragraph that begins "If the Contractor delays the completion ..." with the following paragraph:

If the Contractor delays the completion of Shoulders, sidewalks, curb ramps, drainage Structures, or other feature of the Work, the Engineer may order all or any portion of the Work to be opened to traffic. In this case, the Contractor is responsible for maintenance as described in 00220.60(a)(1), during the period the Work is opened to traffic, until Final Acceptance. Conduct the remaining operations to cause the least obstruction to traffic, and pay all additional costs caused by the presence of traffic.

SP00221 (Special Provisions for the 2024 Book) (Bidding on or after: 12-01-26
Last updated: 08-25-26
Requires SP00222, SP00223 and SP00226 when mobile barrier is required
Requires SP00620 when cold plane pavement removal is required.)

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(NOTE: All Federal-aid Projects, including local government Projects, that are advertised and awarded by ODOT require "Method 'A' Unit Basis" measurement [see Standard Specifications 00221.80].)

SECTION 00221 - COMMON PROVISIONS FOR WORK ZONE TRAFFIC CONTROL

Comply with Section 00221 of the Standard Specifications modified as follows:

00221.05 Regulations and Codes - Replace this subsection with the following subsection:

Provide all electrical Equipment, Materials, and Work conforming to NEC requirements and all other laws that apply.

00221.06 Traffic Control Plan - Replace this subsection with the following subsection:

00221.06 Traffic Control Plan and Tourist-Oriented Directional and Business Logo Signs -

(a) Traffic Control Plan - Submit one of the following, 5 Calendar Days before the preconstruction conference:

(1) Agency Traffic Control Plan - If the Contractor intends to use the Agency TCP without modification, a written notification indicating that the Agency TCP will be used without modification.

(2) Contractor-Modified Traffic Control Plan - The Contractor may request to use a Contractor-modified Agency TCP, or a TCP developed by the Contractor. Do not use a modified TCP, or a TCP developed by the Contractor, unless approved by the Engineer. Use the Agency TCP unless a modified TCP, or a TCP developed by the Contractor is accepted.

The Engineer is not obligated to consider any modified Agency TCP or a TCP developed by the Contractor. The Agency will not be liable to the Contractor for failure to accept or act upon any request for a modified Agency TCP or a TCP developed by the Contractor.

To conserve time and funds, the Contractor may first submit a written request for a preliminary review by the Engineer. The request should contain a description of the proposal together with a rough estimate of anticipated dollar and time impacts. The Engineer will, within a reasonable time, respond to the Contractor in writing whether or not the request would be considered by the Agency.

Meet all requirements of the Contract documents and comply with the Project transportation management plan (TMP) if requesting a Contractor-modified Agency TCP, or a Contractor developed TCP. Provide the following information:

- Stamped Working Drawings according to 00150.35 that include the proposed TCP showing all TCM and quantities of TCD.
- A TPAR plan that includes:
 - Details and features used to provide pedestrian accessibility.
 - Pedestrian staging Plans at a scale no smaller than 1 inch = 50 feet.
 - Temporary alternate facilities or detour routes for pedestrian traffic.
- Staging sequences and details for Work affecting vehicular, pedestrian, and bicycle traffic.
- Proposed order and duration of the TCM.
- A detailed temporary striping plan.

If the Contractor's request to use a Contractor-modified Agency TCP, or a TCP developed by the Contractor is approved in whole or in part, acceptance will be made by a Change Order.

The Engineer will establish prices that represent a fair measure of the value of Work to be added, changed, or deleted as a result of any accepted modifications to the Agency TCP or an accepted TCP developed by the Contractor.

Once a TCP has been accepted by the Engineer, submit any additional modifications for Agency review following the procedure described above. The Engineer is not obligated to consider additional modifications to a previously approved TCP.

(b) Tourist-Oriented Directional and Business Logo Signs - Submit one of the following for approval, at least 5 Calendar Days before the preconstruction conference:

(1) No Signs - If there are no tourist-oriented directional (TOD) or business logo signs on the Project, a written notification that no TOD or business logo signs exist within the Project limits or

(2) Signs - Submit one copy of a sketch map of the Project showing all existing TOD and business logo signs and a written narrative describing how these signs will be kept in service and protected throughout all the construction stages. If modifications are necessary, submit updated information to the Engineer for approval at least 21 Calendar Days before the change is needed.

00221.10 General - Replace the paragraph that begins “All Work Zone TCD shall...” with the following paragraph:

Provide Work Zone TCD complying with the crashworthiness requirements of the *National Cooperative Highway Research Program (NCHRP) Report 350* or with the *AASHTO Manual for Assessing Safety Hardware (MASH)*.

00221.20 Safety Apparel - Replace the paragraph that begins “Workers, except flaggers, working ...” with the following paragraph:

Workers, except flaggers, working within Highway Right of Way and exposed to traffic or construction Equipment are required to wear high visibility safety apparel that meets the Performance Class requirements of the most current version of ANSI/ISEA 107, *American National Standard for High Visibility Safety Apparel and Headwear Devices*. Wear safety apparel that at least meets the following minimum requirements:

00221.40 General - Replace the paragraph that begins “Existing operational TCD’s shall remain...” with the following paragraph:

Maintain existing TCD’s in operation throughout the Contract or until replaced by new, permanent TCD as appropriate.

00221.60 Temporary Traffic Control Devices - Replace the paragraph that begins “TCD delivered to the Project Site found...” with the following paragraph:

Repair or replace TCD delivered to the Project Site found to be in “marginal” or “unacceptable” condition, at no additional cost to the Agency.

00221.90(b) Temporary Protection and Direction of Traffic – Replace the bullet that begins “Providing, Surfacing, maintain...” with the following bullet:

- Providing, surfacing, maintaining, removing, and restoring the TPAR.

(Use the following paragraph and bullets when Mobile Barrier is required.)

Add the following bullets to the end of the bullet list:

Insert Project Name Here

- Mobilization of the mobile barrier to and from the project.
- Moving the mobile barrier from one location of actual use to another or to and from the Contractor's storage site.

Insert Project Name Here

(This page is only used to provide a list of standard drawings to the specification writer for listing on the plan title sheet. Remove this page before advance and final.)

NUMBER OF TRAFFIC CONTROL PLAN SHEETS: _____

(Add or delete Standard Drawings, as applicable.)

To be accompanied by Standard Drawings:

RD410 Guardrail Parts (Thrie Beam)
RD420 Energy Absorbing Terminal
RD425 Non Energy-Absorbing Terminal 3' or 4' Flare

RD500 Precast Concrete Barrier Pin and Loop Assembly
RD510 Concrete Barrier Terminal
RD530 Guardrail Transition to Concrete Barrier
RD535 Concrete Barrier (Modified) Around Median Obstacle
RD545 Precast Tall (42") Concrete Barrier
RD560 Cast-in-Place Tall Barrier Transition to Standard Concrete Barrier

BR203 Transition Concrete Bridge Rail to Guardrail

TM204 Flag Board Mounting Details
TM211 Signing Details US & Interstate Route Shields
TM212 Signing Details Oregon Route Signs
TM570 Traffic Delineators
TM575 Traffic Delineator Installation for Freeways
TM576 Traffic Delineator Installation for Non-Freeways
TM670 Wood Post Sign Supports
TM671 3 Second Gust Wind Speed Map
TM677 Sign Mounts
TM681, TM687, TM688 .. Perforated Steel Square Tube (PSST) Sign Support Installation
and Foundation
TM800 Tables, Abrupt Edge and PCMS Details
TM810 Temporary Pavement Markers
TM820 Temporary Barricades
TM821, TM822 Temporary Sign Supports
TM830 Temporary Concrete Barrier & Rumble Strip Details
TM831, TM832, TM833 .. Temporary Impact Attenuators
TM840 Closure Details
TM841 Intersection Work Zone Details
TM842 Signalized Intersection Details
TM843 Multi-Lane Signalized Intersection Details
TM844 Temporary Pedestrian Access Routing
TM850 2 Lane, 2-Way Roadways
TM851, TM852, TM853, TM854, TM855 Non-Freeway Multi-Lane Sections
TM860, TM861, TM862 .. Freeway Sections
TM870 Bridge Construction
TM871 Blasting Zones
TM880 Freeway or Divided Highway Speed Reduction (Paving
Operations)

SP00222 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26
Last updated: 07-23-26
Requires SP02110 & SP02910.
*Requires SP00221,
SP00223 and SP00226 when
mobile barrier is required)*

SECTION 00222 – TEMPORARY TRAFFIC CONTROL SIGNS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00222 of the Standard Specifications modified as follows:

00222.10 Temporary Signs - Replace the paragraph that begins "Furnish temporary signs meeting ..." with the following paragraph:

Furnish temporary signs meeting the requirements of the "Acceptable" category shown in the ATSSA *Quality Guidelines for Temporary Traffic Control Devices and Features* handbook, available from the ATSSA website. Use Materials and fabricate signs according to Section 00940, Section 02910 and the following:

00222.11(b) Portable Sign Supports - Replace the paragraph that begins "Use portable sign supports ..." with the following paragraph:

Use portable sign supports from the QPL and according to the following:

00222.12(b) Permanent Signs - Replace the paragraph that begins "Sign covers for permanent signs ..." with the following paragraph:

Provide sign covers for permanent signs according to Section 00941.

00222.13 Sign Flags - Replace the paragraph that begins "Sign flags shall be ..." with the following paragraph:

Provide sign flags that are:

(Use the following subsection .15(b) when Freeway or Divided Highway Speed Reduction (Paving Operations) measures (as shown on Standard Drawing TM880) are required.)

00222.15(b) Portable Changeable Message Signs - Add the following paragraph to the end of this subsection:

For PCMS mounted on rollers, use 2-line PCMS from the QPL.

(Use the following subsection .40(e) when adding any of the following temporary signs.)

00222.40(e) Temporary Sign Placement - Add the following to the end of the bullet list:

(Use the following bullet if a flagger is to be used to provide pedestrian guidance through the TPAR during flagging operations.)

- Place a “WAIT FOR FLAGGER” (CR4-23) sign approximately 50 feet in advance of each flagger station, facing incoming pedestrian traffic when a flagger is required to coordinate pedestrian movements. Install the sign on a conical marker or other temporary sign support, as shown or as directed. Do not allow the sign installation height or location to block the visibility of the flagger for incoming Public Traffic.

(Use the following two bullets when closing a pedestrian pathway or sidewalk and detouring pedestrians 24 hours per day , see CW11-4. Use either "a pedestrian pathway" or "the sidewalk(s) at ____" and delete the option that is not used. If using "the sidewalk(s) at ____", delete "(s)" or parentheses and fill in the blank with a brief description of the sidewalk location or segment. Delete all purple parentheses.)

- At least ten Calendar Days before closing (a pedestrian pathway) (the sidewalk(s) at ____), continuously lasting longer than 24 hours, place a “SIDEWALK CLOSED, Full Time” (CW11-4) sign in advance of each future closure point. Locate the sign so it is legible from the nearest alternate pedestrian pathway facing incoming pedestrian traffic. The sign may be mounted between the panels of a Type II barricade or on a single-post TSS. Do not place the sign or sign support such that it narrows the pedestrian pathway to a width of less than 4 feet.
- Before opening the TPAR, place TPAR signing and other TCM as shown, or as directed. Maintain the “SIDEWALK CLOSED, Full Time” (CW11-4) signs while the TPAR is open to pedestrian traffic.

(Use the following two bullets when closing a pedestrian pathway and detouring pedestrians during specific hours of the day , see CW11-5. Use either "a pedestrian pathway" or "the sidewalk(s) at ____" and delete the option that is not used. If using "the sidewalk(s) at ____", delete "(s)" or parentheses and fill in the blank with a brief description of the sidewalk location or segment. Delete all purple parentheses.)

- At least ten Calendar Days before closing (a pedestrian pathway) (the sidewalk(s) at ____), daily for periods less than 24 hours, place a “SIDEWALK CLOSED, Daily” (CW11-5) sign in advance of each future closure point. Locate the sign so it is legible from the nearest alternate pedestrian pathway facing incoming pedestrian traffic. The sign may be mounted between the panels of a Type II barricade, or on a single-post TSS. Do not place the sign or sign support such that it narrows the pedestrian pathway to a width of less than 4 feet.

Insert Project Name Here

- Before opening the TPAR, place TPAR signing and other TCM as shown, or as directed. Maintain the "SIDEWALK CLOSED, Daily" (CW11-5) signs while the TPAR is open to pedestrian traffic.

(Use the following two bullets when maintaining pedestrian access through the work area using the existing roadway shoulder or other portion of the Roadway.)

- At least ten Calendar Days prior to the start of work, when the TPAR is open through the work area, place a "SIDEWALK OPEN" (CW11-3) sign in advance of each end of the Work Area as shown in the TCP or as directed. Locate the sign so it is legible from the nearest alternate pedestrian pathway facing incoming pedestrian traffic. The sign may be mounted between the panels of a Type II barricade, or on a single-post TSS. Do not place the sign or support such that it narrows the pedestrian pathway to a width less than 4 feet. Maintain "SIDEWALK OPEN" (CW11-3) signs while work is affecting the pedestrian pathway.
-
- Place a "PEDESTRIANS ON ROADWAY" (CW11-2) sign, when the TPAR is located on a Roadway or paved Shoulder, at the beginning of each end of the Work Area, facing incoming traffic as shown, or as directed.

(Use the following bullet when construction vehicles are leaving or entering the Roadway.)

- Install a 54-inch "TRUCKS LEAVING HIGHWAY XXXX FT" sign, when construction vehicles are leaving a Roadway, in advance of each entrance point to the Work Area at sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings.

(Use the following bullet when construction vehicles are entering the Roadway.)

- Install a 54-inch "TRUCKS ENTERING HIGHWAY XXXX FT" sign, when construction vehicles are entering a Roadway, in advance of each exit point from the Work Area at sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings.

(Use the following bullet when requested by the Local Agency or when the Project is located on ODOT right-of-way and meets one or more of the following criteria:

- *Project is on a freeway.*
- *An engineer's estimate of \$5 million or more.*
- *Project duration longer than one year.*
- *Other high-profile projects as determined by the ODOT Region or Local Agency.*

The Project Identification sign is normally only applied to the project mainline. Limit placement of additional signs on crossroads to other State highways or roads with ADT > 5,000. Fill in the blank.)

Insert Project Name Here

- Install a "PROJECT IDENTIFICATION" (CG20-8) sign with an "ODOT" logo rider on the _____ Highway. Place the sign according to sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings or as modified by the Supplemental Drawings, in advance of the "ROAD WORK AHEAD" sign at each end of the Project, facing incoming traffic. The Engineer will determine the sign legend.

(Use the following two bullets when using initial "ROAD WORK AHEAD" and "END ROAD WORK" signing. Fill in the blank.)

- Install "ROAD WORK AHEAD" (W20-1-48) signs with a 36 by 24-inch "FINES DOUBLE" (R2-6aP) rider on the _____ Highway, according to the "TCD Spacing Table" shown on the Standard Drawings or as modified by the Plans except do not install the "FINES DOUBLE" rider on concrete barrier mounted signs.
- Install beyond each end of the Project, facing outgoing traffic, an "END ROAD WORK" (CG20-2A-24) sign a distance of $(A \div 2)$ according to the "TCD Spacing Table" shown on the Standard Drawings or as modified by the Plans.

(Use the following bullet when it is necessary to reduce the overall roadway width between positive barriers [for example: concrete barrier, guardrail, and falsework] to less than 19 feet.)

- When the horizontal clearance for the Roadway is less than 19 feet, install horizontal clearance (CW21-12-48) signs, identifying the narrowest width of the Roadway. Locate these horizontal clearance signs as shown or as directed.

(Use the following bullet when it is necessary to reduce the overall vertical clearance to less than 15 feet 6 inches.)

- When the vertical clearance is less than 15 feet 6 inches, install low clearance (W12-2-48) and (OW12-2-36) signs. The clearance shown on the signs shall be 4 inches less than the shortest height of the opening. Locate these low clearance signs as shown or as directed.

(Use the following bullet on 2-mile-long or longer freeway projects when sign flag boards are required to enhance the visibility of the signs.)

- On freeway post mounted signs, install two sign flag boards, as shown on the Standard Drawings, above the "ROAD WORK NEXT XX MILES" (CG20-1) signs and the initial "ROAD (or BRIDGE) WORK AHEAD" (W20-1-48) signs.

(Use the following three bullets on Projects that include a detour route.)

- Install two sign flag boards, as shown on the Standard Drawings, above the following detour and road closed advance warning signs, where applicable:
 - "DETOUR AHEAD", "DETOUR XXXX FT", "DETOUR X/X MILE" (W20-2) signs.
 - "ROAD CLOSED AHEAD", "ROAD CLOSED XXXX FT", "ROAD CLOSED X/X MILE" (W20-3) signs.

(Use the following bullet when the Project will result in ground disturbance within Portland city limits. Fill in the first blank with the highway name and the second blank with the phone number. Check with the Environmental Coordinator.)

- Install an "EROSION CONCERNS" sign on the _____ Highway, at each end of the Project. Place the sign according to sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings, or as shown in the Plans. Install the sign so that the sign face is rotated 90 degrees to approaching traffic and faces the Roadway centerline. Replace "(XXX) XXX-XXXX" shown on the sign design detail with "(____) ____-____".

(Use the following Emulsified Asphalt Surface Treatment language on Emulsified Asphalt Surface Treatment projects, provided the following criteria are met:

- *Compile Field Data Summary*
- *ADT < 5,000 for roadways with posted speed > 45 mph*
- *ADT < 10,000 for roadways with posted speed ≤ 45 mph*
- *Federally funded projects require FHWA approval*

Fill in all blanks.)

[Begin Emulsified Asphalt Surface Treatment language]

- During Emulsified Asphalt surface treatment operations, protect traffic by installing signing according to the "LOOSE GRAVEL IN ROADWAY SIGNING" detail shown on the Standard Drawings. The maximum length of loose Sand or Gravel shall not exceed 5 miles.
- When the existing centerline striping on the _____ Highway is obliterated, do the following:
 - Place a "NO CENTER LINE" (W8-12) sign with a 24 by 18-inch "NEXT __ MILES" (W7-3aP) plaque, approximately 2,500 feet in advance of each end of the Project.
 - Place "NO CENTER LINE" (W8-12) signs on approximately 2 mile intervals for each direction of traffic.

(In the next two bullets, use the language in the purple parentheses and delete the parentheses when the Project meets the following criteria:

- *ADT < 1,000;*
- *Project Length is > 10 miles; and*
- *Engineering judgment determines the additional "DO NOT PASS" signs are needed.*

Delete the language in the purple parentheses, and the language within them, when the above criteria are not met.)

- Place a "DO NOT PASS" (R4-1) sign on each side of the Roadway at the beginning of each existing no passing zone, as necessary, except, if the length between two

consecutive existing no passing zones is 1,300 feet or less, combine the no passing zones and place one "DO NOT PASS" sign on the right side of the Roadway at the beginning of each subsequent no passing zone within the combined zones).

- Place a "PASS WITH CARE" (R4-2) sign on the right side of the Roadway at the end of each existing no passing zone. If the length between no passing zones is 1,300 feet or less, do not install the "PASS WITH CARE" signs(within the combined zones. Instead, place one "PASS WITH CARE" sign on the right side of the Roadway at the end of the last no passing zone in a combined zone). Cover the "PASS WITH CARE" signs with a non-transparent weather and wind proof cover each time they are within an active Work Area controlled by flaggers with or without pilot cars, or when directed.
- Install two sign flag boards above "ROAD WORK NEXT __ MILES", "ROAD WORK AHEAD", and "NO CENTER LINE" (with "NEXT __ MILES" rider) post mounted signs.

[End Emulsified Asphalt Surface Treatment language]

(Use the bullet when flaggers are needed at a single location for 24 or more consecutive hours.)

- Install a "24 HR FLAGGING AHEAD" (CW20-9) sign in each direction approximately 250 feet prior to the "BE PREPARED TO STOP" sign. Remove the temporary signs when 24-hour flagging is no longer required, or as directed.

(Use the following bullet when a new temporary or permanent STOP sign is installed at an intersection. Insert with the appropriate distances based on the pre-construction posted speed and according to the TCD Spacing Table in the ODOT Standard Drawings. If the STOP and "Stop Ahead" signs are permanent, the permanent "Stop Ahead" sign may be used in lieu of a temporary sign.)

- Install the following warning signs for each new "STOP" sign installed in the intersection. Install a "Stop Ahead" (W3-1) symbol sign approximately ____ feet in advance of the "STOP" sign. Install a "NEW TRAFFIC PATTERN AHEAD" (W23-2) sign approximately ____ feet in advance of the "Stop Ahead" sign. Keep the "NEW TRAFFIC PATTERN AHEAD" signs in place 30 Calendar Days after installing the "STOP" sign.

(Use the following bullets and bullets for the installation of, or modification to, a permanent traffic signal. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Insert the appropriate distances based on the pre-construction posted speed and according to the TCD Spacing Table in the ODOT Standard Drawings. If a yellow permanent "Signal Ahead" sign is included in the plans, this sign may be installed as the needed temporary sign. Be sure additional language or notes are on the plans to make this intention clear.)

- For each leg of the intersection affected by (the new)(changes to the) traffic signal, install the following warning signs:
 - A "Signal Ahead" (W3-3) symbol sign approximately ____ feet in advance of the intersection, shown on the Standard Drawings or as modified by the Plans.

Insert Project Name Here

- A "NEW TRAFFIC PATTERN AHEAD" (W23-2) sign approximately ____ feet in advance of the "Signal Ahead" sign. Keep the "NEW TRAFFIC PATTERN AHEAD" signs in place 30 Calendar Days after installing the "Signal Ahead" sign.

(Use the following two bullets when modifications are made to lane configurations, lane assignments, or roadway geometry that affects traffic patterns. Insert the appropriate distance based on the pre-construction posted speed and according to the TCD Spacing Table in the ODOT Standard Drawings. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Copy and paste bullets, as necessary, to address all affected directions or legs of the intersection(s).)

- Install a "NEW TRAFFIC PATTERN AHEAD" (W23-2) sign approximately ____ feet in advance of ____ (location details), ____ facing (northbound)(southbound)(eastbound)(westbound) incoming traffic.

(Fill in the blank describing the appropriate modification.)

- Keep the "NEW TRAFFIC PATTERN AHEAD" signs in place 30 Calendar Days after installing the _____.

(Use the following bullet when parking restrictions are necessary.)

- Install an 18 by 24-inch "NO PARKING" (R8-3a) sign in every block where on-street parking is prohibited, facing incoming traffic.

(Use the following ACP language on Level 1, 2, or 3 ACP Overlay (00744 or 00745) Preservation projects, provided the following criteria are met:

- *Obtain Region Technical Center Manager's approval*
- *Perform and/or document enough traffic analysis to confirm traffic volumes meet the following criteria:*
- *ADT < 5,000 for roadways with posted speed > 45 mph*
- *ADT < 10,000 for roadways with posted speed ≤ 45 mph*

Fill in all blanks.)

[Begin ACP Language]

- When the existing centerline striping on the _____ Highway is obliterated, do the following:
 - Place a "NO CENTER LINE" (W8-12) sign with a 24 by 18-inch "NEXT __ MILES" (W7-3aP) rider, approximately 2,500 feet in advance of each end of the Project.
 - Place "NO CENTER LINE" (W8-12) signs on approximately 2 mile intervals for each direction of traffic.
 - Place a "DO NOT PASS" (R4-1) sign on each side of the Roadway at the beginning of each existing no passing zone.

Insert Project Name Here

- Place a "PASS WITH CARE" (R4-2) sign on the right side of the Roadway at the end of each existing no passing zone. If the length between no passing zones is 1,300 feet or less, do not install the "PASS WITH CARE" signs. Cover the "PASS WITH CARE" signs with a non-transparent weather and wind proof cover each time they are within an active Work Area controlled by flaggers with or without pilot cars, or when directed.
- Install two sign flag boards above "ROAD WORK NEXT ____ MILES", "ROAD WORK AHEAD", and "NO CENTER LINE" (with "NEXT ____ MILES" rider) post mounted signs.

[End ACP Language]

(Use the following bullet for Projects on freeways.)

- For paving operations on freeways, place "ABRUPT EDGE" (CW21-9) and "ROAD WORK XX MPH" (CW20-1a) signs as shown. Use an "XX" value equal to 15 mph below the current posted regulatory speed. If a speed is posted for a temporary regulatory speed reduction, that speed is the current posted regulatory speed.

(Use the following bullet(s) for Projects on non-freeways.)

- For paving operations on non-freeways, place "ABRUPT EDGE" (CW21-9) and "ROAD WORK XX MPH" (CW20-1a) signs as shown. Use an "XX" value equal to 10 mph below the current posted regulatory speed. If a speed is posted for a temporary regulatory speed reduction, that speed is the current posted regulatory speed.
- For all other moving operations that do not create an abrupt edge adjacent to traffic, omit the "ABRUPT EDGE" signs.

(Use the following bullet on all projects 2 miles or greater in length when work is not intermittent. For non-freeway projects, use "a", delete "(s)", and delete the last sentence. For freeway projects, use "two", "s", and the last sentence. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Fill in the blanks.)

- Install (a)(two) 60 by 24-inch "ROAD WORK NEXT ____ MILES" (CG20-1) sign(s) on the _____ Highway, in advance of the "ROAD WORK AHEAD" (W20-1) sign according to sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings. (Install the median sign approximately 30 feet ahead of the shoulder sign.)

(Use the following bullet on all projects 2 miles or greater in length when work is intermittent. For non-freeway projects, use "a" and delete "(s)". For freeway projects, use "two" and delete parentheses around "(s)". Delete the language in purple parentheses that does not apply and delete all purple parentheses. Fill in the blanks.)

- Install (a)(two) 60 by 36-inch "INTERMITTENT ROAD WORK NEXT ____ MILES" (CG20-13) sign(s) on the _____ Highway, in advance of the "ROAD WORK

AHEAD" (W20-1) sign on each end of the Project according to sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings.

(Use the following bullet on urban projects where there is an existing bike lane, designated "Bicycle Route", or when a significant volume of bicycle traffic can be expected and is required to use the travel lane.)

- When construction requires bicycles to use the Traffic Lanes, install a "Bicycle ON ROADWAY" (CW11-1) symbol sign on 1/2 mile spacing through the affected area. Keep the signs in place until completion of the Shoulder or bikeway final surface.

(Use the following bullet on bridge projects where there is an existing bike lane on the bridge, designated "Bicycle Route", or when a significant volume of bicycle traffic can be expected and is required to use the travel lane.)

- When construction requires bicycles to use the Traffic Lanes on Structures, install a "Bicycle ON ROADWAY" (CW11-1) symbol sign according to "Sign Spacing A", from the "TRAFFIC CONTROL DEVICES SPACING TABLE" shown on the Standard Drawings, in advance of the Structure or the initial point where the bicycle facility is impacted by construction. Keep the signs in place until completion of the bikeway final surface.

(Use the following bullet on rural preservation projects where there is a designated "Bicycle Route" or a significant volume of bicyclists can be expected.)

- Install a "Bicycle ON ROADWAY" (CW11-1) symbol sign and a 24 by 18-inch "NEXT XX MILES" (W7-3aP) plaque according to "Sign Spacing A", from the "TRAFFIC CONTROL DEVICES SPACING TABLE" shown on the Standard Drawings, after the "ROAD WORK AHEAD" sign. Install a "Bicycle ON ROADWAY" symbol sign on 1 mile spacing through the affected area. Keep the signs in place until completion of the Shoulder or bikeway final surface.

(Use the following bullet for all Freeway and high-speed, multi-lane projects.)

- Install a 72 by 24-inch "CONSTRUCTION VEHICLE DO NOT FOLLOW" (CW23-14) sign on rigid substrate on the back of all Material or Equipment delivery vehicles.

(Use the following bullet when Speed Reduction measures (as shown on Standard Drawing TM880) are required and when all of the following criteria are met:

- *Moving operations (e.g. paving) on Interstate freeways or multilane divided highways.*
- *Pre-construction posted speed $\geq$ 45mph.*
- *Workers will be adjacent to live traffic, but not working behind concrete barrier, guardrail or other positive protection barrier system.*
- *Work will be performed at night or work will be performed during the daytime on freeways or other high-speed facilities with ADT > 10,000.*

NOTE: A “Work Zone Speed Reduction Request” MUST be completed and submitted when using this bullet. See ODOT Traffic Control Plans Unit website for details and the Request Form.)

- During (brief work description) operations on the _____ Highway, install temporary signing and other required TCD as shown. Install temporary speed zone signing according to and as shown in the Temporary Speed Zone Order.

(Use the following Pilot Car Language on projects that include a pilot car in the bid schedule. See ODOT Sign Policy & Guidelines, Chapter 6 for application details and sign designs.)

[Begin Pilot Car Language]

(Use one of the following three options, as instructed below. Delete the option that does not apply.)

[Option 1 - Use the following bullet when plan sheets are being developed for the Traffic Control Plan and qualifying side road locations can be shown.]

- During pilot car operations, install a 15 by 24-inch "WAIT FOR PILOT CAR" (CR4-20) sign at stop-controlled side roads and accesses intersecting the Highway within the limits of the pilot car operation, as shown.

[Option 2 - Use the following bullets when plan sheets are not being developed for the Traffic Control Plan. Fill in the blanks with the location of each “WAIT FOR PILOT CAR” sign.]

- During pilot car operations, install a 15 by 24-inch "WAIT FOR PILOT CAR" (CR4-20) sign at stop-controlled side roads and accesses intersecting the Highway within the limits of the pilot car operation at the following locations:
 - ____ (Side road name, STA XXX+XX) ____
 - ____ (Side road name, STA XXX+XX) ____
 - ____ (Side road name, STA XXX+XX) ____
- During pilot car operations, install a 12 by 12-inch "WAIT FOR PILOT CAR" (CR4-20a) sign in private residential driveways accessing the Highway within the limits of the pilot car operation. Place the sign in the driveway facing the private residence and so the sign face is not visible to Public Traffic on the Highway. Do not use the sign for apartments, condominiums or business accesses.
- At accesses, side roads, or residential driveways where "WAIT FOR PILOT CAR" (CR4-20) signs are installed, do not allow traffic to be stopped or held for longer than 20 minutes.
- In addition to the signs, public notification (e.g. flyers, door hangers) may be used to inform the residents that may be affected by the pilot car operations and the "WAIT FOR PILOT CAR" signs.

[End Option 2]

[Option 3 - Use the following bullets when plan sheets are not being developed for the Traffic Control Plan and it is not practical to list all locations of each "WAIT FOR PILOT CAR" sign.]

- During pilot car operations, install a 15 by 24-inch "WAIT FOR PILOT CAR" (CR4-20) sign at stop-controlled side roads and accesses intersecting the Highway within the limits of the pilot car operation.
- During pilot car operations, install a 12 by 12-inch "WAIT FOR PILOT CAR" (CR4-20a) sign in private residential driveways accessing the Highway within the limits of the pilot car operation. Place the sign in the driveway facing the private residence and so the sign face is not visible to Public Traffic on the Highway. Do not use the sign for apartments, condominiums or business accesses.
- At accesses, side roads, or residential driveways where "WAIT FOR PILOT CAR" (CR4-20) signs are installed, do not allow traffic to be stopped or held for longer than 20 minutes.
- In addition to the signs, public notification (e.g. flyers, door hangers) may be used to inform the residents that may be affected by the pilot car operations and the "WAIT FOR PILOT CAR" signs.

[End Option 3]

(Use the following bullet only on preservation projects that include a pilot car in the bid schedule.)

- For each location of the "WAIT FOR PILOT CAR" sign, closely monitor for traffic compliance, operation, and safety at least once per hour during pilot car operations. If operational issues are observed, or if notified of operational issues, at stop-controlled accesses or side roads utilizing the "WAIT FOR PILOT CAR" (CR4-20) sign, remove the sign and replace it with a flagger.

[End Pilot Car Language]

(Use the following lead-in paragraph and subsections .40(f) when a "Support Letter" for a temporary speed zone order has been received from the State Traffic Engineer. The Approval Letter allows you to include sign quantities and determine recommended locations in the Plans only (show signs as a blank sign with dashed outline, no legend). Do not draft specific temporary regulatory speed zone signs into the Plans. Exact signs and locations will be discussed during Pre-Construction Meeting when the actual Order is issued to the contractor.)

Add the following subsection:

00222.40(f) Temporary Speed Zone Reduction - Install a temporary regulatory speed zone, as directed. Use regulatory signs for all required temporary speed zone signage.

Insert Project Name Here

(Use the following lead-in paragraph and subsections .40(g) when temporary pedestrian and bicycle route maps are required. Fill in the blank with the number of route maps.)

Add the following subsection:

00222.40(g) Temporary Pedestrian and Bicycle Route Maps - Furnish and mount commercially available brochure boxes to temporary sign posts, as shown. Fill each brochure box with a minimum of ____ temporary pedestrian and bicycle route maps. Furnish 8 ½" x 11" paper copies of the Agency-supplied route maps. Monitor brochure boxes daily and replenish copies as needed to maintain a minimum of ____ copies in each brochure box. Monitor the condition of the brochure boxes and repair or replace, as directed.

00222.41(d) Temporary Sign Supports - Replace the bullet that begins "Provide reflective sheeting ..." with the following bullet:

- Furnish reflective sheeting on TSS posts as shown in the Standard Drawings.

00222.45(b) Portable Changeable Message Signs - Replace the bullet that begins "Messages shall not scroll ..." with the following bullet:

- Do not use messages that scroll horizontally or vertically across the face of the sign.

(Use the following when longitudinal paving operations are included in the scope of work and Freeway or Divided Highway Speed Reduction (Paving Operations) measures (as shown on Standard Drawing TM880) are required OR when a PCMS is used in advance of a roadway closure or ramp closure. Delete "(s)" or parentheses as applicable.)

Add the following bullet(s) to the end of this subsection:

(Use the following two bullets when longitudinal paving operations are included in the scope of work and Freeway or Divided Highway Speed Reduction (Paving Operations) measures (as shown on Standard Drawing TM880) are required.)

- During paving operations, provide one 2-line PCMS on the finish roller. Display the following messages on the PCMS:

Panel 1	Panel 2
WORKERS IN ROAD	SLOW TO XX MPH

- During paving operations, provide one 2-line PCMS on the intermediate roller. Display the following messages on the PCMS:

Panel 1	Panel 2
SLOW FOR WORKERS	WORKERS IN ROAD

(Use the following bullet when a PCMS is used in advance of a roadway closure or ramp closure. Fill in the blank with the name of the road that will be closed. Modify

Insert Project Name Here

the PCMS messages to reflect the name of the road that will be closed and the time frame for the closure.)

- At least seven Calendar Days before the _____ closure, place one or more PCMS displaying the following message as shown, or as directed:

Panel 1	Panel 2
(Name/# of highway)	CLOSURE
(Location)	(Time Frame)
CLOSURE	(Time Frame)

(Use the following subsection .45(c) when including a Radar Speed Trailer on the project, or when Speed Reduction measures (as shown on Standard Drawing TM880) are required.)

00222.45(c) Radar Speed Trailers - Replace the bullet that begins "Use a blackout speed threshold ..." with the following bullet:

- Use a blackout speed threshold of 85 mph, that does not allow the radar speed trailer to display a speed or message when the measured speed exceeds 85 mph.

[Begin Radar Speed Trailer Language]

Add the following bullet(s) to the end of the bullet list:

(Use the following bullet only when Speed Reduction Measures are required.)

- Place a radar speed trailer approximately 1000 feet beyond the end of the lane closure taper, as shown on Standard Drawing TM880

[Use only one of the following two speed limit sign bullets]

(Use the following bullet on projects using TM880 when a Speed Zone Order will be included in the TCP or Speed Reduction Measures are required.)

- Install a 30 by 36-inch "SPEED LIMIT XX" (R2-1) sign below the trailer display panel. The "XX" value is the legal speed limit as determined by a Speed Zone Order signed by the State Traffic Engineer.

(Use the following bullet for projects when using the Radar Speed Trailer with advisory speed signing. Fill in the blank with a value for "XX" between 10 and 20 mph below the regulatory posted speed for the Work Zone. Contact the Traffic Control Plans designer.)

- Install a 36 by 36-inch "ROAD WORK XX MPH" (CW20-1a) sign below the trailer display panel. Use a value of _____ for "XX" on the sign

[End Option]

(Use the following bullets when Speed Reduction Measures are required and the moving operations involve longitudinal paving on a freeway.)

- When the paving machine reaches a location that is approximately 1/2 mile beyond the start of the work shift paving operations, place a second radar speed trailer as shown

on Standard Drawing TM880. Install a 36 by 36-inch "ROAD WORK XX MPH" (CW20-1a) sign above or below the trailer display panel. Use a "XX" value equal to 15 mph below the current posted regulatory speed. If a speed is posted for a temporary regulatory speed reduction, that speed is the current posted regulatory speed.

(Use the following bullet when Speed Reduction Measures are required and the moving operations involve longitudinal paving on non-freeways.)

- When the paving machine reaches a location that is approximately 1/2 mile beyond the start of the work shift paving operations, place a second radar speed trailer as shown on Standard Drawing TM880. Install a 36 by 36-inch "ROAD WORK XX MPH" (CW20-1a) sign above or below the trailer display panel. Use a "XX" value equal to 10 mph below the current posted regulatory speed. If a speed is posted for a temporary regulatory speed reduction, that speed is the current posted regulatory speed.

(When Speed Reduction Measures are required, a temporary speed zone reduction is to be included in the TCP, and the project includes moving, non-paving-related activities, (e.g. barrier replacement, cable barrier installation, guardrail work, etc.) include one of the following bullets, as applicable.)

[For projects on freeways, use the following bullet.]

- When the Work Area for the (brief work description from subsection .02(a)) extends approximately 1/2 mile beyond the start of the operations, place a second radar speed trailer as shown on Standard Drawing TM880. Install a 36 by 36-inch "ROAD WORK XX MPH" (CW20-1a) sign above or below the trailer display panel. Use a "XX" value equal to 15 mph below the current posted regulatory speed. If a speed is posted for a temporary regulatory speed reduction, that speed is the current posted regulatory speed.

[For projects on non-freeways, use the following bullet.]

- When the Work Area for the (brief work description from subsection .02(a)) extends approximately 1/2 mile beyond the start of the operations, place a second radar speed trailer as shown on Standard Drawing TM880. Install a 36 by 36-inch "ROAD WORK XX MPH" (CW20-1a) sign above or below the trailer display panel. Use a "XX" value equal to 10 mph below the current posted regulatory speed. If a speed is posted for a temporary regulatory speed reduction, that speed is the current posted regulatory speed.

(Use the following subsection .46 when including Mobile Barrier on the project.)

Add the following:

00222.46 Mobile Barrier - During mobile barrier operations, provide one 2-line PCMS on the rear of the mobile barrier trailer according to the mobile barrier manufacturer's recommendations. Display the following messages on the PCMS:

Panel 1
SLOW FOR
WORKERS

Panel 2
WORKERS
IN ROAD

[End Radar Speed Trailer Language]

Insert Project Name Here

(Use the following subsection .80(a) for all Freeway and high-speed, multi-lane projects or when a "Support Letter" for a temporary speed zone order has been received from the State Traffic Engineer.)

00222.80(a) Area Basis -

(Use the following two paragraphs for all Freeway and high-speed, multi-lane projects.)

Add the following sentence to the end of the paragraph that begins "Temporary signs will...":

No measurement of quantities will be made for "CONSTRUCTION VEHICLE DO NOT FOLLOW" (CW23-14) signs.

(Use the following two paragraphs when a "Support Letter" for a temporary speed zone order has been received from the State Traffic Engineer. Estimate the worst case square feet of temporary signage required for your application and include this quantity in the pay item, "Temporary Signs".)

Add the following sentence to the end of this subsection:

Temporary signing quantities include temporary regulatory speed zone signage.

(Use the following subsection .80(b) when Speed Reduction Measures are required.)

00222.80(b) Unit Basis - Add the following sentence to the end of this subsection:

PCMS installed on finish rollers or intermediate rollers will be measured on the unit basis.

00222.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, installing, moving, operating, maintaining, inspecting, and removing the Materials and TCD, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

(Use the following paragraphs to limit the number of signs paid for when a project contains multiple Work Zones. Delete "(s)" or parentheses as applicable.)

Add the following to the end of this subsection:

Payment will be made for not more than _____ set(s) of Work Area signs. All additional sets of Work Area signs will be at no additional cost to the Agency.

(Use the following paragraph for all Freeway and high-speed, multi-lane projects. If the paragraph above is used delete the sentence in parentheses)

(Add the following to the end of this subsection:)

Insert Project Name Here

No separate or additional payment will be made for furnishing, installing, and maintaining 72 by 24-inch "CONSTRUCTION VEHICLE DO NOT FOLLOW" (CW23-14) signs. Payment will be included in 00221.90(b).

(Use the following pay item (e) when Freeway or Divided Highway Speed Reduction (Paving Operations) measures are required.)

Add the following Pay Item(s) to the Pay Item list:

(e) Portable Changeable Message Signs, Roller Mounted Each

(Use the following three paragraphs when pay item (e) is included in the pay item list.)

Add the following to the end of the paragraph that begins "Items (b) and (c)...":

Payment for PCMS mounted on rollers will be made separately under payment for the item "Portable Changeable Message Signs, Roller Mounted".

Item (e) includes furnishing, mounting, operating, moving, maintaining, and removing the portable changeable message signs. No additional payment will be made for the roller or roller operator.

(Use the following two paragraphs when mobile barrier is required.)

Add the following paragraph after the paragraph that begins "Items (b) and (c) includes...":

Item (c) includes portable changeable messages signs attached to mobile barrier trailer(s).

(Use the following subsections .90 when temporary pedestrian and bicycle route maps are required.)

00222.90 Payment - Add the following paragraph after the paragraph that begins "No separate or additional payment...":

No separate or additional payment will be made for furnishing, mounting, maintaining and replenishing brochure boxes with route maps.

SP00223 (Special Provisions for the 2024 Book)

**(Bidding on or after: 10-01-26
Last updated: 06-22-26
This Section requires SP00221,
SP00222 and SP00226 when
mobile barrier is required)**

SECTION 00223 - WORK ZONE TRAFFIC CONTROL LABOR AND VEHICLES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then

Insert Project Name Here

include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00223 of the Standard Specifications modified as follows:

00223.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

In addition to the requirements of Section 00221, this Work consists of providing flaggers, traffic control supervisors, and providing, operating, and maintaining associated Work Zone traffic control vehicles.

00223.22 Flagger Station Lighting - Replace the paragraph that begins "Use flagger station lighting ..." with the following paragraph:

Use flagger station lighting from the QPL and according to the following:

Replace the bullet that begins "Illuminates the flagger so that ..." with the following bullet:

- Illuminate the flagger station so that it is visible, and is discernable as a flagger station, from a distance of 1,000 feet.

Replace the bullet that begins "Illuminates the flagger from above ..." with the following bullet:

- Illuminate the flagger station from above at a height of 18 feet ± 3 feet.

00223.23 Automated Flagger Assistance Device - Replace the paragraph that begins "Furnish an automated flagger ..." with the following paragraph:

Provide an automated flagger assistance device (AFAD) from the QPL. Submit the following information for approval for the use of an AFAD to the Engineer, according to 00150.37, a minimum of 21 Calendar Days in advance of using an AFAD. The Engineer will respond within 14 Calendar Days after receipt of the submittal.

00223.26 Pedestrian Transport Vehicle - Replace the bullet that begins "A roof or post-mounted rotating ..." with the following bullet:

- A roof or post-mounted rotating amber light or strobe light that is visible for 360 degrees. Provide a light that is visible and functioning at all times while operating within the Project limits.

(Use the following if construction staging plan does not provide a safe, adequate space for bicycle traffic to ride through the active Work Area and a PTV is included in the Contract Schedule of Items.)

Add the following bullet:

- A commercially available bicycle rack capable of securely carrying a minimum of three bicycles. Do not loosely load bicycles onto the pedestrian transport vehicle.

(Use the following lead in sentence and subsection .28 when a tow truck is required. Use only one of the following three options when tow trucks are required. Delete the options that do not apply.)

Add the following subsection:

[Option 1 - Use the following subsection for urban, non-freeway projects to include a Class "A" tow truck.]

00223.28 Tow Truck - Use a Class "A" tow truck according to the following:

- 10,000 pounds minimum manufacturers gross vehicle weight rating.
- Single rear axle with dual wheels.
- 6 Ton boom rating - dual or single boom.
- Minimum 100 feet of 3/8" cable.
- In good operating condition.
- Equipped with roof or post mounted rotating red or amber lights or strobe lights that are visible for 360°.
- Equipped with all Equipment and materials necessary to perform the required operation.
- Portable, self-contained two-way radio and repeaters, as required, with a range suitable for communication throughout each Work Zone, unless otherwise directed.

[End Option 1]

[Option 2 - Use the following subsection for rural non-freeway Projects, or freeway Projects to include a Class "B" tow truck.]

00223.28 Tow Truck - Use a Class "B" tow truck according to the following:

- 17,000 pounds minimum manufacturers gross vehicle weight rating.
- 10 Ton boom rating - dual or single boom.
- Single or tandem rear axle with dual wheels.
- Minimum 150 feet of 7/16" cable.
- In good operating condition.
- Equipped with roof or post mounted rotating red or amber lights or strobe lights that are visible for 360°.
- Equipped with all Equipment and materials necessary to perform the required operation.
- Portable, self-contained two-way radio and repeaters, as required, with a range suitable for communication throughout each Work Zone, unless otherwise directed.

[End Option 2]

[Option 3 - Use the following subsection for freeways reduced to one lane and where trucks are on a grade over 3%.]

00223.28 Tow Truck - Use a Class "C" tow truck according to the following:

- 27,500 pounds minimum manufacturers gross vehicle weight rating.
- 25 Ton boom rating - dual or single boom.
- Minimum 150 feet of 5/8" cable.
- Tandem rear axle truck chassis (3 axle truck).
- Air brakes and capable of supplying air to towed vehicles.
- In good operating condition.
- Equipped with roof or post mounted rotating red or amber lights or strobe lights that are visible for 360°.
- Equipped with all Equipment and materials necessary to perform the required operation.
- Portable, self-contained two-way radio and repeaters, as required, with a range suitable for communication throughout each Work Zone, unless otherwise directed.

[End Option 3]

00223.31(a) Traffic Control Supervisor - Replace the paragraph that begins "When the Schedule of Items ..." with the following paragraph:

When the Schedule of Items includes an item for a TCS, provide a TCS who meets the requirements of 00223.30. Do not designate the Project superintendent as the TCS. The TCS is required to possess a current ODOT "Oregon Certified Traffic Control Supervisor" card. A TCS with a current card from another state's transportation department, or from the American Traffic Safety Services Association, may obtain an Oregon Certified TCS card upon successful completion of ODOT's Recertification Class.

Replace the paragraph that begins "Before beginning Work ..." with the following paragraph:

Before beginning Work on the Project, the TCS is required to:

Replace the bullet that begins "File with the Engineer and ..." with the following bullet:

- File with the Engineer and local police, their name and a telephone number where the TCS can be contacted at all times.

Replace the bullet that begins "If the Contractor requests to ..." with the following bullet:

- If the Contractor requests to use a modified Agency TCP or a TCP developed by the Contractor, ensure stamped Working Drawings showing the revisions are submitted according to 00221.06 and 00150.35.

Replace the paragraph that begins "The TCS shall not act as ..." with the following paragraph:

Insert Project Name Here

The TCS cannot perform the duties of a flagger or pilot car operator, except in the event of an emergency. The TCS may relieve the flagger or pilot car operator for a period of less than 15 minutes, not to exceed 1 hour per construction work shift.

Replace the paragraph that begins "Make arrangements so that the ..." with the following paragraph:

Make arrangements so that the TCS is available every Day, on call at all times, and available upon the Engineer's request at other than normal working hours.

Replace the paragraph that begins "The TCS shall report to the ..." with the following paragraph:

The TCS is required to report to the Project Site within 1 hour after being notified in the event of a Work Zone incident during non-work periods. Have appropriate personnel, Equipment, and Material available at all times to expeditiously correct any deficiency in the TCM for the Project.

Replace the paragraph that begins "Notify the Engineer of an alternate ..." with the following paragraph:

Notify the Engineer of an alternate TCS who can assume the duties of the assigned TCS in the event of that person's inability to fulfill the duties of the position. Provide an alternate TCS adequately trained and certified according to 00223.30 and 00223.31. Notify the Engineer at least 12 hours before designating the TCS for the following 12-hour period. Make succeeding notifications within 24 hours every time a subsequent TCS is appointed to the Project.

(Use the following when Speed Reduction measures (as shown on Standard Drawing TM880) are required.)

Note: Include sufficient TCS Pay Item quantities to provide at least one construction work shift for each shift where the work described in subsection 00220.40(e), will be active. A TCS is required for the speed reduction measure work.)

Add the following paragraph and bullets to the end of this subsection:

Provide a TCS who is available and on site at all times that a temporary regulatory speed zone reduction is in effect for the (brief work description) operations. In addition to the duties listed in this subsection, the TCS duties also include the following:

- Inspect temporary TCD used during (brief work description) operations immediately following initial placement or installation of TCD. Inspect TCD at least one additional time during each construction work shift.
- When law enforcement is providing enforcement services for the Project, coordinate and communicate work locations and schedules with the Engineer and law enforcement agency before and during each work shift.

(Use the following two paragraphs when Mobile Barrier operations are required.)

Insert Project Name Here

Add the following paragraph to the end of this subsection:

Provide a TCS that has completed at least 4 hours of training on use and operation of the mobile barrier within the past 2 years. Obtain training from the mobile barrier manufacturer or mobile barrier vendor listed in 00226.16.

00223.31(b) Traffic Control Inspection Without TCS - Replace the paragraph that begins "When the Schedule of Items does ..." with the following paragraph:

When the Schedule of Items does not include an item for a TCS, or when TCS is not on-site for a work shift, designate a trained person who is on the Project Site during work hours and on call at all other times, and who:

Replace the bullet that begins "Notifies the Engineer of any ..." with the following bullet:

- Notifies the Engineer of any corrective measures made to the TCP if the TCP is not functioning as required, or to accommodate site conditions. Follow the TCP and do not implement changes to the TCP before revisions are approved by the Engineer.

Replace the bullet that begins "Shall report to the Project ..." with the following bullet:

- Reports to the Project Site within 1 hour after being notified in the event of a Work Zone incident during non-work periods.

Replace the bullet that begins "Designate an area for ..." with the following bullet:

- Designates an area for pedestrians to wait for, load and unload the transport vehicle.

00223.32 Automated Flagger Assistance Device Operator - Replace this subsection, except for the subsection number and title, with the following:

Use a certified flagger who has been trained in the operation of the AFAD.

The AFAD operator duties include:

- Attending the AFAD at all times during the operation of the device.
- Not flagging traffic and operating an AFAD at the same time.
- Operating a single AFAD. Each AFAD is required to have a separate AFAD operator.

(Use the following lead-in paragraph and subsection .34 when a BPA safety watcher is required in 00150.50(f).)

Add the following subsection:

00223.34 Bonneville Power Administration (BPA) Safety Watcher - When Work requires the presence of a BPA-certified safety watcher (see 00150.50(f)), provide personnel possessing a current, valid certification from BPA. For coordination of BPA Safety Watchers, contact _____ at BPA, _____. The duties of the BPA safety watcher are to watch work that could impact the BPA facilities. Equip each safety watcher according to 00223.21, except that "STOP/SLOW" paddles are not required.

Insert Project Name Here

BPA-certified safety watchers can be obtained through the following providers:

Provide BPA safety watchers when and where required according to 00150.50(f). BPA safety watchers are responsible for limiting the movement of personnel or equipment to prevent electrical contact accidents.

BPA safety watchers have the authority to halt the operation whenever any unsafe act or condition is imminent.

(Insert current BPA providers, as supplied by BPA below. List the firm's name, the firms contact name, and On-Site contact number. Delete the example.)

Example:

Safety Watcher, Inc. - Benny Beaver, 503-555-0100 (office) or 503-555-0111 (cell)

-
-
-

(Use the following lead-in paragraph and subsection .35 when Railroad flaggers are required on UPRR Railroad. Check with the State Utility and Railroad Liaison.)

Add the following subsection:

00223.35 Railroad Flagger Services - Work near or within Railroad property requires Railroad flagger services provided by a third party flagging vendor. Provide Railroad flagger services from Union Pacific's approved third party list of Railroad flagger vendors. A list of Union Pacific's approved Railroad flagger vendors can be found at the following website:

https://www.up.com/real_estate/third-party-flagging/index.htm

(Use the following lead-in paragraph and subsection .38 when tow trucks are required.)

Add the following subsection:

00223.38 Tow Truck Operator - Provide a tow truck operator who has:

- The mental and physical ability to safely operate the tow truck
- The training and experience required to operate the tow truck
- ANSI Performance Class 2 or 3 upper body garment to be worn while on the Roadway retrieving a disabled vehicle
- Valid Commercial Driver License

00223.40 Flaggers - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Locate flaggers far enough in advance of the Work Area to permit adequate time for the motorist to respond to the flagger's instructions. All flaggers, including advance flaggers, are required to use a STOP/SLOW paddle. Do not use roll-up STOP/SLOW paddles for non-emergency flagging operations.

During advance flagging operations, the advance flagger is required to only display the "SLOW" face of the paddle. Cover the "STOP" face of the paddle with a sign cover according to 00222.12(a).

Position flaggers, as directed, at locations where traffic can enter the Highway within the limits of the Work Zone.

Direct vehicles entering the Highway to follow the pilot car line.

Direct pedestrians to wait for flagger instructions. Stop and hold motor vehicle traffic to allow pedestrians to enter the TPAR or exit the TPAR. Ensure pedestrians are clear of all Traffic Lanes before flaggers release motor vehicle traffic.

Direct pedestrians to use the pedestrian transport vehicle to pass through or around the Work Zone. Direct pedestrians to wait for the pedestrian transport vehicle in designated areas identified under 00223.31.

If a TPAR is designed and installed with a width less than 5 feet, and 5-foot-by-5-foot passing spaces at 200-foot intervals are not provided, inform pedestrians of the narrowed TPAR. Before allowing pedestrians in wheelchairs or similar devices to use the TPAR, direct the flagger at the opposite end of the TPAR to stop and hold opposing pedestrian traffic until the pedestrian in the wheelchair has reached the other end of the narrowed TPAR.

Provide flaggers at flagging stations continuously or until the Engineer determines flagging is no longer required.

(Use the following paragraph when flaggers are required to escort bicycles and pedestrians through the work area.)

During *(Insert a brief description of construction work. Refer to specific phases/stages of traffic control if applicable)*, provide a dedicated flagger station and flagger to escort bicycle and pedestrian traffic through the affected Work Area.

00223.41 Flagger Station Lighting - Replace this subsection, except for the subsection number and title, with the following:

Provide continuous flagger station lighting for nighttime flagging as follows:

- Locate the light Equipment on the same side of the Roadway as the flagger station between 5 and 10 feet from the edge of the Traffic Lane, on or beyond the Roadway Shoulder, or as directed.
- Position and orient the flagger station lighting to direct the maximum amount of light toward the flagger station and away from the approaching traffic in the near lane.
- Aim all of the luminaires directly at the flagger station.

Insert Project Name Here

- Increase the output wattage or number of luminaires as the luminance from, and number of, surrounding and background lights increases. Do not provide a total output greater than 2,500 watts, unless otherwise directed.

00223.43 Automated Flagger Assistance Device - Replace this subsection, except for the subsection number and title, with the following:

Use the AFAD to control traffic through the Work Zone and as follows:

- Position the AFAD operator's control location a safe distance from traffic.
- Install and operate the AFAD according to the manufacturer's instructions and as shown.
- Do not use the AFAD to control more than one lane of approaching traffic. If necessary, close additional Traffic Lanes, left turn lanes or right turn lanes approaching the AFAD to limit approaching traffic to one lane.
- Provide flagger station lighting when using an AFAD during nighttime hours. Provide flagger station lighting according to 00223.22 and 00223.41.
- Do not use an AFAD to replace a continuously operating temporary traffic control signal. The Engineer may order adjustments to the operation of the AFAD or substitute flagging for the AFAD based on traffic delay, field conditions, and safety concerns.
- When providing an AFAD for each direction of traffic, use AFADs of the same type and from the same manufacturer.
- When an AFAD is not in use during a work shift either turn it off or switch the yellow lens to flash mode. When the AFAD is not in use for more than one work shift, remove it and all accompanying signing from the Roadway.

(Use the following lead-in paragraph and subsection .48 when tow trucks are required.)

Add the following subsection:

00223.48 Tow Truck - Position the tow truck in a location as directed. Use the tow truck to remove disabled vehicles from the Traffic Lanes as needed. Tow the vehicles to the nearest off-ramp and out of traffic, or to an alternate site previously arranged with the Engineer. Return the tow truck immediately to the assigned station.

00223.80 Measurement - Replace the bullet that begins "The replacement of TCD and TCM..." with the following bullet:

- The replacement of flagger station lighting damaged by Public Traffic and replaced by the Contractor.

Add the following paragraph to the end of the bullet list:

No additional measurement will be made for automated flagger assistance devices damaged by Public Traffic and replaced or repaired by the Contractor.

Insert Project Name Here

(Use the following subsection .80(a)(1) when Speed Reduction Measures are required.)

00223.80(a)(1) Traffic Control Supervisor - Add the following bullet to the end of the bullet list:

- Freeway or Divided Highway Speed Reduction (Paving Operations) according to TM880 is active.

(Use the following lead-in paragraph and subsection .80(a)(4) when third party Railroad flaggers are required on UPRR Railroad. Check with the State Utility and Railroad Liaison.)

Add the following subsection:

00223.80(a)(4) Railroad Flagger Services - The quantity of Railroad flagger services will be measured on the unit basis. A unit is considered to be up to 12 consecutive hours in a Day. When more than one flagger is required due to Work at separate locations, each Railroad flagger will be measured as a separate unit. A maximum of two units per Day is allowed at each separate location or operation where Railroad flagger services are required by the Railroad unless otherwise approved or directed.

(Use the following lead-in paragraph and subsection .80(b)(5) when BPA is listed as Utility with anticipated conflicts in 00150.50(g) and when requested by the Utility Coordinator.)

Add the following subsection:

00223.80(b)(5) BPA Safety Watchers - BPA Safety Watchers will be measured on the time basis, of the actual number of hours BPA Safety Watchers are staffed as required according to 00150.50(f).

(Use the following lead-in paragraph and subsection .80(b)(6) when tow trucks are required.)

Add the following subsection:

00223.80(b)(6) Tow Truck - The quantity for tow trucks will be measured on the time basis, of the actual number of hours tow trucks are operated.

00223.90 Payment - Replace the paragraph that begins "Item (c) includes furnishing..." with the following paragraph:

Item (c) includes providing, operating, moving, and removing the flagger station lighting. No separate or additional payment will be made for backup unit in event it is used or not.

Replace the paragraph that begins "Item (f) includes furnishing..." with the following paragraph:

Insert Project Name Here

Item (f) includes furnishing, operating, maintaining, repairing, replacing moving and removing each AFAD device, regardless of size or type. No separate or additional payment will be made for AFAD replacement or repair. The AFAD operator will be paid for as a flagger.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, installing, moving, operating, maintaining, inspecting, and removing the Materials and TCD, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

(Use the following when adding Pay Items or when a bicycle rack is included in the PTV. Delete Pay Items not included in the Schedule of Items. Do not change the alpha characters next to the Pay Items. Delete paragraphs not required.)

Add the following Pay Item(s) to the Pay Items list:

- (g) Railroad Flagger Services.....Each
- (h) BPA Safety WatcherHour
- (i) Tow TruckHour

(Use the following two paragraphs if a bicycle rack is included in the PTV)

Replace the paragraph that begins "Item (e) includes..." with the following paragraph:

Item (e) includes fully operated pedestrian transport vehicles, two-way radios, the "CONSTRUCTION VEHICLE DO NOT FOLLOW" sign, the ADA-pedestrian loading/unloading mechanism, the bicycle rack, and the rotating amber lights or strobe lights mounted on each vehicle.

(Use the following two paragraphs when third party Railroad flaggers are required on UPRR Railroad. Check with the State Utility and Railroad Liaison.)

Payment for item (g) performed beyond the quantity shown in the Contract Schedule of Items will be made at the Contract unit price if the Engineer determines that the Contract unit price does not exceed the value of the Work as determined according to Section 00197. If the Engineer determines that the Contract unit price exceeds the value of the Work, payment for the Additional Work will be made according to 00195.20.

Payment for item (g) includes all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following two paragraphs when a BPA Safety Watcher is required.)

Payment for item (h) performed beyond the quantity shown in the Contract Schedule of items will be made at the Contract unit price if the Engineer determines that the Contract unit price does not exceed the value of the work as determined according to Section 00197. If the Engineer determines that the Contract unit price exceeds the value of the Work, payment for the Additional Work will be made according to 00195.20.

Item (h) includes all necessary Equipment, special apparel, and two-way radios.

Insert Project Name Here

(Use the following two paragraphs when a Tow Truck is included in the Project.)

Payment for item (i) performed beyond the quantity shown in the Contract Schedule of items will be made at the Contract unit price if the Engineer determines that the Contract unit price does not exceed the value of the Work as determined according to Section 00197. If the Engineer determines that the Contract unit price exceeds the value of the Work, payment for the Additional Work will be made according to 00195.20.

Item (i) includes fully operated tow truck, two-way radios, and warning lights on each vehicle.

SP00224 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00224 - TEMPORARY TRAFFIC CHANNELIZING DEVICES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00224 of the Standard Specifications modified as follows:

00224.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

In addition to requirements of Section 00221, this Work consists of providing, installing, moving, maintaining, inspecting, and removing channelizing devices including, but not limited to, tubular markers, conical markers, surface mounted tubular markers, plastic drums, and delineators throughout the Project area as shown or specified.

00224.14 Delineators - Replace the paragraph that begins "Use new delineators from ..." with the following paragraph:

Use new delineators from the QPL or salvaged reflectorized delineators (W-1) or (Y-1), as appropriate, and according to the requirements of Section 00840 and the following:

00224.90 Payment - Replace the paragraph that begins "Item (a) includes ..." with the following paragraph:

Item (a) includes providing and installing the complete assembly of each device in its initial location and for removing the device from the surface.

Replace the paragraph that begins "Item (b) includes ..." with the following paragraph:

Item (b) includes providing new or refurbished devices to replace damaged or missing devices.

Insert Project Name Here

Replace the paragraph that begins "In item (e), the type ..." with the following paragraph:

In item (e), the type of barricade is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, installing, moving, operating, maintaining, inspecting, and removing the Materials and TCD, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

SP00225 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26)

SECTION 00225 - TEMPORARY PAVEMENT MARKINGS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00225 of the Standard Specifications modified as follows:

00225.40 Temporary Pavement Markers - Replace the paragraph that begins "Temporary pavement markers..." with the following paragraph:

Maintain temporary pavement markers in place until the permanent markings are complete. Replace damaged or missing markers when directed by the Engineer. On the final Pavement wearing Course and along final alignment, place permanent markings a maximum of 28 Calendar Days after placing temporary pavement markers, or as directed.

(Use the following paragraph on Emulsified Asphalt Chip Seal (Section 00710 or 00715) projects, or on Level 1, 2, or 3 ACP Overlay (00744 or 00745) Preservation projects)

Replace the paragraph that begins "Unless otherwise shown..." and the three bullets with the following paragraphs and bullets:

(Use one of the following two options as instructed. Delete the option that does not apply.)

[Option 1 - Use the following paragraphs and bullet lists on Emulsified Asphalt Chip Seal (00710 or 00715) projects, provided the following criteria are met:

- Compile Field Data Summary*
- ADT < 5,000 for roadways with posted speed > 45 mph*

Insert Project Name Here

- *ADT < 10,000 for roadways with posted speed ≤ 45 mph*
- *Federally funded projects require FHWA approval]*

Install temporary flexible oiling pavement markers for temporary centerline marking as follows:

- Place and maintain one temporary flexible oiling pavement marker on 40-foot spacing in tangent and curve sections except as below.
- Place and maintain one temporary flexible oiling pavement marker on 20-foot spacing in curved alignment sections identified by a speed rider displaying less than the posted speed and channelization areas.

Establish alignment for placing the temporary flexible oiling pavement markers as follows:

- Control markers at:
 - 200-foot intervals on tangents
 - 50-foot intervals on curves
 - 40-foot intervals on curves with speed rider
- Use string line or other appropriate means to maintain proper alignment of the markers. Adjust placement to avoid straddling a longitudinal joint, while maintaining a suitable alignment of markers.
- Remove and replace misaligned markers at no additional cost to the Agency.

[End Option 1]

[Option 2 - Use the following paragraphs and bullet lists on Level 1, 2, or 3 ACP Overlay (00744 or 00745) Preservation projects, provided the following criteria are met:

- *Perform and/or document enough traffic analysis to confirm traffic volumes meet the following criteria:*
- *ADT < 5,000 for roadways with posted speed > 45 mph*
- *ADT < 10,000 for roadways with posted speed ≤ 45 mph]*

Install temporary flexible overlay pavement markers for temporary centerline marking as follows:

- Place and maintain one temporary flexible overlay pavement marker on 40-foot spacing in tangent and curve sections except as below.
- Place and maintain one temporary flexible overlay pavement marker on 20-foot spacing in curved alignment sections identified by a speed rider displaying less than the posted speed and channelization areas.

Establish alignment for placing the temporary flexible overlay pavement markers as follows:

- Control markers at:
 - 200-foot intervals on tangents
 - 50-foot intervals on curves
 - 40-foot intervals on curves with speed rider

Insert Project Name Here

- Use string line or other appropriate means to maintain proper alignment of the markers. Adjust placement to avoid straddling a longitudinal joint, while maintaining a suitable alignment of markers.
- Remove and replace misaligned markers at no additional cost to the Agency.

[End Option 2]

(Use the following subsection .40(b) on Emulsified Asphalt Chip Seal (00710 or 00715) projects, provided the following criteria are met:

- *Compile Field Data Summary*
- *ADT < 5,000 for roadways with posted speed > 45 mph*
- *ADT < 10,000 for roadways with posted speed ≤ 45 mph*
- *Federally funded projects require FHWA approval)*

00225.40(b) Flexible Oiling Pavement Markers - Add the following paragraphs to the end of this subsection:

Remove the markers on underlying surfaces before placing the next full Lift of paving that would obliterate the marker.

Use flexible oiling pavement markers with double covers, as directed, when a surface treatment requires two oil applications for a single Pavement Lift. Remove the marker covers, as directed, before reopening the Roadway to traffic.

00225.45 Pavement Marking Removal - Replace the bullet that begins "Do not use grinding to ..." with the following bullet:

- Do not use grinding to remove stripes, durable markings, legends, or bars from the wearing Course or existing surfaces, unless the area is paved over, obliterated, or the pavement markings are replaced to match the original striping configuration.

00225.60 Temporary Traffic Pavement Markings - Replace the paragraph that begins "Temporary pavement markings ..." with the following paragraph:

Maintain temporary pavement markings in place until the permanent markings are complete. Replace missing or damaged temporary markings when directed by the Engineer. On the final Pavement wearing Course and along final alignment, place permanent markings a maximum of 28 Calendar Days after placing temporary pavement markings, or as directed.

Replace the paragraph that begins "If permanent pavement ..." with the following paragraph:

If permanent pavement markings are not placed within 28 Calendar Days after placing temporary pavement markings, replace missing or damaged temporary pavement markings on wearing Course and along final alignment at no additional cost to the Agency, unless otherwise directed.

00225.80 Measurement - Replace the paragraph that begins "(a) Unit Basis - Temporary ..." with the following paragraph:

Insert Project Name Here

(a) Unit Basis - Temporary reflective pavement markers, temporary flexible pavement markers, and temporary pavement legends, will be measured on the unit basis, by actual count.

00225.90 Payment -

(Use the following two paragraphs when Temporary Transverse Rumble Strips are required.)

Replace the Pay Item Temporary Transverse Rumble Strips with the following Pay Item:

Pay Item	Unit of Measurement
-----------------	----------------------------

(I) Temporary Transverse Rumble Strips, _____	Foot
---	------

Replace the paragraph that begins "Item (a)..." with the following paragraph:

Item (a) includes installation and removal of temporary pavement markers having either one or two reflective faces.

Replace the paragraph that begins "Item (b)..." with the following paragraph:

Item (b) includes installation of flexible temporary pavement markers and removal of flexible temporary pavement markers and temporary flexible pavement marker covers.

Add the following paragraph after the paragraph that begins "Item (b)...":

Items (c) and (e) include removal of the temporary tape.

(Use the following two paragraphs when Pay Item (I) is included.)

Add the following paragraph after the paragraph that begins "Item (k)...":

In item (I), the type of temporary transverse rumble strips is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

SP00226 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00221, SP00222 and SP00223 when mobile barrier is required.

Requires SP00810 when temporary guardrail is required.

Requires SP00820 when temporary barrier is required.

Requires SP02001 when minimum deflection bridge temporary barrier is required)

SECTION 00226 - TEMPORARY ROADSIDE BARRIERS AND IMPACT ATTENUATORS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00226 of the Standard Specifications modified as follows:

00226.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

In addition to the requirements of Section 00221, this Work consists of providing, installing, moving, operating, maintaining, and removing guardrail, barrier, and impact attenuators for temporary traffic control, as shown and directed.

00226.11(a)(2) Temporary Concrete Barrier - Replace the paragraph that begins "The concrete barrier shall ..." with the following paragraph:

Provide concrete barrier with functioning scuppers, unless otherwise approved.

(Use the following when concrete barrier terminals or barrier transitions are required. Delete "(s)" or the parentheses as applicable.)

Add the following paragraph(s) after the bullet list:

(Use the following paragraph when cast-in-place concrete barrier transition to Bridge rail or cast-in-place tall concrete barrier transition to Bridge rail are required. Include Standard Drawing RD520 or RD550 (tall concrete barrier). Delete "(tall)" or the parentheses as applicable.)

Furnish cast-in-place (tall) concrete barrier transitions as shown on the Standard Drawings.

(Use the following paragraph when cast-in-place tall concrete barrier transition to standard concrete barrier is required. Include Standard Drawing RD560.)

Furnish cast-in-place tall concrete barrier transitions to standard concrete barrier as shown on the Standard Drawings.

00226.12 Temporary Impact Attenuators - Replace this subsection, except for the subsection number and title, with the following:

Provide temporary impact attenuators from the QPL and as shown on the Standard Drawings.

(Use the following lead-in paragraph and subsection .15 when Temporary Glare Screens are required. Do not use Temporary Glare Screens on permanent Bridge concrete barrier or rail without Technical Resource approval.)

Add the following subsection:

Insert Project Name Here

00226.15 Temporary Glare Screens - Use temporary glare screens from the QPL or Conditional Use List.

(Use the following lead-in paragraph and subsection .16 when mobile barrier is required.)

Add the following subsection:

00226.16 Mobile Barrier - Use a mobile barrier from the QPL or conditional use list.

00226.23 Truck Mounted Attenuator - Replace the title of this subsection with “**Temporary Impact Attenuator, Truck Mounted**”.

Replace the paragraph that begins "The support vehicle ..." with the following paragraph:

Provide a support vehicle for a TL-2 rated TMA with a minimum weight of 9,900 pounds.
Provide a support vehicle for a TL-3 rated TMA with a minimum weight of 22,000 pounds.

Replace the paragraph that begins "If used in a mobile ..." with the following paragraph:

If a TMA support vehicle is used in a mobile operation, maintain a consistent distance from the mobile operation, as shown in Table 00226-1, or as directed.

(Use the following lead-in paragraph and subsection .24 when mobile barrier is required.)

Add the following subsection:

00226.24 Mobile Barrier - Use a semi-tractor truck according to the mobile barrier manufacturer's recommendations to haul and operate the mobile barrier and conforming to the following:

- Equipped to perform with all mobile barrier functions and operations.
- Equipped with portable, self-contained two-way radios with a range suitable for communications throughout each Work Zone, unless otherwise directed.

Equip mobile barrier with a temporary impact attenuator, truck mounted.

(Use the following lead-in paragraph and subsection .30 when mobile barrier is required.)

Add the following subsection:

00226.30 Mobile Barrier - Provide semi-tractor truck operator to haul and operate the mobile barrier and a mobile barrier technician qualified to set up and operate the features of the mobile barrier. Each person has to have completed at least 4 hours of training on use and operation of the mobile barrier within the past 2 years. Obtain training from the mobile barrier manufacturer or mobile barrier vendor listed in 00226.16. Provide a mobile barrier technician on-site while the mobile barrier is in use.

00226.41(c) Glare Shields - Replace the bullet that begins "Firmly attach the base plate ..." with the following bullet:

- Firmly attach the base plate anchor bolts to the Temporary Barrier to withstand a 1,000-pound vertical pull and to prevent horizontal and rotational displacement. The maximum spacing between anchor bolts on modular units is 30 inches.

Replace the bullet that begins "Modular or single element ..." with the following bullet:

- Use modular or single element glare shields from the same manufacture and of like appearance throughout the entire installation when installed in a continuous run.

(Use one of the following subsection .43 options.)

00226.43 Truck Mounted Attenuator - Replace the title of this subsection with "Temporary Impact Attenuator, Truck Mounted".

[Option 1 – On Freeway and Multi-lane highway projects with lane and shoulder closures and no positive protection, provide one TMA for each shoulder or each lane closed, not to exceed the maximum number of shoulder or lane closures that will occur at any given time.

Replace the paragraph that begins "When workers or construction Equipment..." with the following paragraphs:

Use a temporary truck mounted impact attenuator (TMA), when workers or construction Equipment are exposed to Public Traffic on a Freeway or Multi-Lane Highway and are not located behind a rigid barrier system, as follows unless otherwise shown or directed:

- Each Shoulder or each lane closure where the preconstruction posted speed is 45 mph or more.

(Use the following bullet when TMA is required on multi-lane highways where the preconstruction posted speed is 40 mph or less. TMA is required on multi-lane highway projects with lane closures and no positive protection and intermediate duration work is located in the traffic lane. Provide one TMA for each lane closed, not to exceed the maximum number of lane closures that will occur at any given time.)

- Each lane closure, when (brief description of Work) on the _____ Highway is occurring in the Traffic Lane, where the preconstruction posted speed is 40 mph or less.

Place the TMA in advance of the exposed workers or Equipment, located as shown in the TMA Support Vehicle Placement tables, or as directed. If the TMA is not available when the Work requires its use, postpone the Work until the TMA is available.

[End Option 1]

[Option 2 – Use this option when a TMA is not required]

Insert Project Name Here

Replace the paragraph that begins “When workers or construction Equipment...” with the following paragraph:

If a Contractor elects to use a truck mounted impact attenuator (TMA) when not required, place the TMA in advance of the exposed workers or Equipment, located as shown in the TMA Support Vehicle Placement tables, or as directed.

[End Option 2]

(Use the following lead-in paragraph and subsection .45 when Temporary Glare Screens are required.)

Add the following subsection:

00226.45 Temporary Glare Screens - Install temporary glare screens as shown or directed, and according to the following:

- Install according to manufacturer's instructions.
- Install vertical and true to line.
- Install using a QPL approved pipe from the same manufacturer as the temporary glare screen.
- Install on concrete barrier by drilling holes as shown and placing the manufacturer's QPL approved pipe in the holes. Submit for approval, in writing, any other proposed method of installation.
- Immediately repair any temporary barrier segment that is damaged during temporary glare screen installation at no additional cost to the Agency.
- Do not install on permanent Bridge rail or permanent Bridge barrier.
- Furnish temporary glare screens that are installed in a continuous run from the same manufacturer and of like appearance throughout the entire installation.

For any segment of concrete barrier used for permanent installations, fill holes and repair according to Section 00820 after removing the temporary glare screen.

(Use the following lead-in paragraph and subsection .46 when mobile barrier is required.)

Add the following subsection:

00226.46 Mobile Barrier - Configure, place, and move the mobile barrier according to the manufacturer's recommendations, according to the TCP, or as directed.

00226.63 Truck Mounted Attenuators - Replace this subsection with the following subsection:

00226.63 Temporary Impact Attenuator, Truck Mounted - Repair damage to support vehicles that TMAs are mounted on at no additional cost to the Agency.

(Use the following lead-in paragraph and subsection .65 when Temporary Glare Screens are required.)

Insert Project Name Here

Add the following subsection:

00226.65 Temporary Glare Screens - Immediately replace or repair any temporary glare screen segment that is damaged. Repair to the Engineer's satisfaction or replace with an undamaged segment. If the temporary glare screen segment is damaged by the Contractor, repair or replace at no additional cost to the Agency.

(Use the following lead-in paragraph and subsection .66 when mobile barrier is required.)

Add the following subsection:

00226.66 Mobile Barrier - Maintain the mobile barrier according to the manufacturer's recommendations. Perform routine maintenance of the mobile barrier at no additional cost to the Agency. Be responsible for all necessary service and maintenance of the mobile barrier while in use.

(Use the following subsection .80(b)(2) when temporary barrier is required.)

00226.80(b)(2) Temporary Barrier - Add the following to the end this subsection:

The quantities will be limited to those shown in Table 00226-1. The estimated quantity of Temporary Barrier is:

TABLE 00226-1

Stage/Phase	Location (STA to STA)	Temporary Barrier (foot)	Temporary Barrier, Minimum Deflection (foot)
	Total Quantity		

(Use the following subsection .80(b)(4) when minimum deflection Bridge temporary barrier is required.)

00226.80(b)(4) Minimum Deflection Bridge Temporary Barrier - Add the following to the end this subsection:

The quantities will be limited to those shown in Table 00226-2. The estimated quantity of Minimum Deflection Bridge Temporary Barrier is:

TABLE 00226-2

Stage/Phase	Location (STA to STA)	Minimum Deflection Bridge Temporary Barrier (foot)

Insert Project Name Here

Stage/Phase	Location (STA to STA)	Minimum Deflection Bridge Temporary Barrier (foot)
Total Quantity		

(Use the following lead-in paragraph and subsection .80(b)(5) when Temporary Glare Screens are required.)

Add the following subsection:

00226.80(b)(5) Temporary Glare Screens - Temporary glare screens and moving temporary glare screens will be measured on the length basis, determined by measuring from end to end of the devices, as installed on temporary barrier along the line and grade of each separate run.

(Use the following lead-in paragraph and subsection .80(c) when mobile barrier is required.)

Add the following subsection:

00226.80(c) Time Basis - The quantity of mobile barrier will be measured on the time basis, of the number of Days the mobile barrier is in actual use on the Project according to the approved Traffic Control Plan. One mobile barrier will be allowed per Day unless otherwise approved.

00226.90 Payment -

(Use the following when Pay Item (g) Temporary Impact Attenuator, mobile barrier or temporary glare screens are required. Delete Pay Items that do not apply, and delete "(s)" or parentheses as applicable.)

Add the following Pay Item(s) to the end of the Pay Item list:

- (o) Mobile Barrier.....Day
- (p) Temporary Glare Screens..... Foot
- (q) Moving Temporary Glare Screens Foot

Replace the paragraph that begins "In items (a) and (b), the ..." with the following paragraph:

In items (a) and (b), the type of guardrail or terminal is inserted in the blank.

Replace the paragraph that begins "Item (e) includes Type 5 ..." with the following paragraph:

Item (e) includes Type 5 delineators, including removing and replacing Type 5 delineators on the barriers, as necessary. Item (e) also includes providing, installing, connecting, securing, unsecuring, maintaining, temporary storage, and final removal of the Temporary Barrier, including Minimum Deflection Temporary Barrier.

Replace the paragraph that begins "Item (f) includes Type ..." with the following paragraph:

Insert Project Name Here

Item (f) includes Type 5 delineators, including removing and replacing Type 5 delineators on the barriers, as necessary. Item (f) also includes providing, installing, connecting, securing to the Bridge deck, unsecuring, maintaining, temporary storage, and final removal of the Minimum Deflection Bridge Temporary Barrier.

(Use the following paragraph when Pay Item (g) Temporary Impact Attenuator is required.)

Add the following paragraphs after the paragraph that begins "In items (g) and (h)...":

Payment for items (g) performed beyond the quantity shown in the Contract Schedule of Items will be made at the Contract unit price if the Engineer determines that the Contract unit price does not exceed the value of the Work as determined according to Section 00197. If the Engineer determines that the Contract unit price exceeds the value of the Work, payment for the Additional Work will be made according to 00195.20.

Replace the paragraph that begins "In items (g) and (h) ..." with the following paragraph:

In items (g) and (h), the type of attenuator is inserted in the blank.

Replace the paragraph that begins "In item (i), the ..." with the following paragraph:

In item (i), the words "Sand Module" or the type of attenuator is inserted in the blank.

(Use the following three paragraphs when mobile barrier is required.)

Add the following paragraphs after the paragraphs that begins "Item (l) includes...":

Item (o) will be payment in full for all labor, training, Equipment, and Materials required for mobile barrier, regardless of length and number of moves. Item (s) will also be payment in full for operation of the semi-tractor truck in conjunction with the mobile barrier, training, service, maintenance, and all Incidentals necessary to complete the Work as specified.

Items (g) and (i) include truck mounted temporary impact attenuators attached to mobile barrier(s).

(Use the following three paragraphs when temporary glare screens are required.)

Add the following paragraphs after the paragraph that begins "Item (l) includes...":

Item (p) includes furnishing, installing, and removing temporary glare screens.

Item (q) includes moving the temporary glare screens from one location of actual use to another location of actual use on the temporary barrier.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, stockpiling, installing, moving, operating, maintaining, inspecting, placing, and removing the Materials and TCD, and for providing all

Insert Project Name Here

Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

Add the following paragraph to the end of this subsection:

No separate or additional payment will be made for TMAs when the Contractor elects to use them where they otherwise are not required.

SP00227 (Special Provisions for the 2024 Book)

**(Bidding on or after: 12-01-26
Last updated: 08-25-26
Requires SP02120 & SP02926)**

SECTION 00227 - TEMPORARY TRAFFIC SIGNALS AND ILLUMINATION

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00227 of the Standard Specifications modified as follows:

00227.12 Temporary Traffic Signals - Replace the paragraph that begins "Use Materials for temporary traffic ..." with the following paragraph:

Use Materials for temporary traffic signals according to Sections 00960, 00990, 02120, and the following:

00227.12(c) Wood Poles - Replace this subsection, except for the subsection number and title, with the following:

Use poles that are of acceptable condition without visible signs of deterioration or significant longitudinal splits. Furnish poles having no more than 8 drilled holes, with holes at least 6 inches apart, for messenger and tether cable eyebolt attachments.

(Use the following subsection .13 when using portable traffic signals with extra features. Contact the Region Traffic Engineer for extra features that are required. Delete the extra features that are not required.)

00227.13 Portable Traffic Signals - Replace this subsection, except for the subsection number and title, with the following:

Use new or like-new portable traffic signals from the QPL with the following features:

(Use the following subsection (a) when live remote video monitoring of traffic and Work Zone is required.)

(a) Live Remote Video Monitoring - Provide live remote video monitoring of traffic conditions and the work zone. Provide the Engineer remote access to the video monitoring through the internet.

(Use the following subsection (b) when wait time display changeable message sign is required.)

(b) Wait Time Display Changeable Message Sign - Provide wait time display consisting of a changeable message sign (CMS) that is interconnected with the temporary traffic signal. The display provides the motorist with wait time information.

(1) Physical Requirements - Include the following minimum requirements on the CMS:

- Minimum dimensions of 18" H x 28" W
- 1-2 line message capability
- Line 1: characters of 10-1/4" H x 5- 3/4" W (4 per line)
- Line 2: characters of 7" H x 4" W (6 per line)
- Up to 2 screens per message

(2) Operational Requirements - Power the CMS by the power plant used to power the temporary traffic signal. Provide a wait time display (WTD) with the capability to be remotely programmed in real-time and function in traffic signal applications of fixed time operation and actuated operation as follows:

- When the signal displays a green indication, the CMS may display a "SLOW"/ "WORK ZONE" message. When the signal display changes to a yellow indication, display a "WAIT TIME"/ "UP TO # MIN" message on the CMS. When the signal display changes to a red indication, display "WAIT TIME"/ "UP TO # MIN" on the CMS where # is the remaining red time in minutes and changed with 1 minute intervals, holding on 1 minute until the signal display changes back to a green indication.

(Use the following (c) when bicycle clearance time extension pushbutton is required.)

(c) Bicycle Clearance Time Extension Pushbutton - When the pushbutton is pressed, it will call the signal system to provide an extended all-red clearance interval immediately following the green cycle termination. This call will be made whether the signal system is in an active green cycle for the direction of the call, or if it is a state of red. Pushbutton can be hardwired or be a wireless connection to the signal system.

00227.14 Temporary Flashing Beacons - Replace the paragraph that begins "Use materials for temporary ..." with the following paragraph:

Use materials for temporary flashing beacons according to Sections 00960, 00990, and the following:

00227.16 Work Zone Presence Lighting System - Replace the paragraph that begins "Furnish Work Zone presence lighting ..." with the following paragraph:

Insert Project Name Here

Provide Work Zone presence lighting system using flagger station lighting devices from section 00223.22 of the QPL and meeting the following requirements:

(Use the following subsection .40 only when vehicular traffic will be passing beneath falsework.)

00227.40 Temporary Illumination - Add the following paragraph to the end of this subsection:

Install 25-watt, steady-burning, amber lights on 36-inch spacing around the perimeter of the falsework as shown, facing oncoming traffic.

00227.42(a) Removal - Replace this subsection, except for the subsection number and title, with the following:

Remove the temporary traffic signal when directed. Remove all wood poles and guy anchors in their entirety. Abandon vehicle detector loops in place. Contractor provided Equipment remains the property of the Contractor. Return all Agency-furnished Materials according to 00160.30. Contact the Traffic Systems Service Unit at 503-378-2645 to confirm delivery of Agency-furnished Materials 48 hours prior to delivery.

00227.42(e) Testing and Turn-on - Replace this subsection, except for the subsection number and title, with the following:

Certify that all traffic signal cabinets and related control Equipment for temporary signals for all stages of construction have passed the ODOT laboratory tests. Successfully tested cabinets and related control Equipment are assigned permanent certification tags and will not require further environmental testing. Deliver controllers to the Traffic System Services Unit for functional testing.

00227.43(a) Location and Setup - Delete the sentence that begins "Do not install portable..."

00227.43(c) Testing and Turn-on - Replace the paragraph that begins "Before turning on the portable ..." with the following paragraph:

Before turning on the portable temporary traffic signal, correct all deficiencies identified by the Engineer. Do not change the timing parameters without the approval of the Engineer. Use flaggers according to Section 00223 to control traffic during initial turn on of the signal. The flaggers are required to remain on standby for 2 hours after the signal is turned on and operating properly.

(Use the following subsection .43(d) only when portable traffic signals are required to have a wait time display changeable message sign feature.)

Add the following subsection:

00227.43(d) Wait Time Display Changeable Message Signs - Locate the changeable message at a height between 7'-0" and 18'-6" as measured from the bottom of the CMS to the road surface. Do not locate the CMS over the travelled Roadway. Provide 12-inch

Insert Project Name Here

minimum separation between the edge of the CMS and the edge of nearest traffic signal head.

For fixed time operation, calculate the initial # for the "WAIT TIME"/ "UP TO # MIN" display by adding the programmed red clearance and yellow times of all signals plus the green time of the opposing signals.

For actuated operation, calculate the initial # for the "WAIT TIME"/ "UP TO # MIN" display by adding the programmed red clearance and the yellow times of all signals plus the maximum green of the opposing signals.

(Add the following subsection .43(e) only when portable traffic signals are required to have a bicycle clearance time extension pushbutton feature)

Add the following subsection:

00227.43(e) Bicycle Clearance Time Extension Pushbutton - Locate the pushbutton installation with sign at the stop bar. Post mount the wired pushbutton. Wireless pushbutton may be post mounted or mounted on a TSS. Furnish a mount with a maximum 24-inch reach to pushbutton. If needed, furnish a manufacturer supplied pushbutton extension to achieve 24-inch reach.

00227.45 Work Zone Presence Lighting System - Replace the paragraph and bullets that begins "Turn off system ..." with the following paragraph and bullets:

Turn off system lights:

- During daytime hours;
- When no active Work is taking place; or
- All TCD have been removed from the Shoulders and Traffic Lanes.

00227.46(a) Removal - Replace this subsection, except for the subsection number and title, with the following:

Remove the temporary flashing beacons when directed. Contractor provided Equipment remains the property of the Contractor.

00227.62 Temporary Traffic Signals - Replace the paragraph that begins "The operation and maintenance ..." with the following paragraph:

The operation and maintenance of the Equipment inside the controller cabinet is the responsibility of the Agency, including:

Replace the paragraph and bullets that begins "The Contractor is responsible..." with the following paragraph and bullets:

The Contractor is responsible for:

- Providing replacement parts that fail within the controller cabinet while the temporary traffic signal is in use.

Insert Project Name Here

- Installing new field wiring as shown without terminating into the controller cabinet.

00227.63 Portable Traffic Signals - Replace the paragraph that begins "The log shall ..." with the following paragraph:

Keep the log with the corresponding portable traffic signal at all times.

00227.66 Temporary Flashing Beacons - Replace this subsection, except for the subsection number and title, with the following:

After successful turn-on of the temporary flashing beacons assume maintenance of the temporary flashing beacons until it is removed. The operation of the equipment inside the controller cabinet is the responsibility of the Agency, except the Contractor is required to provide replacement parts that fail within the controller cabinet while the temporary flashing beacons are in use.

00227.80 Measurement Replace this subsection, except for the subsection number and title, with the following:

No measurement of quantities will be made for temporary traffic signals, portable traffic signals, temporary flashing beacons, or temporary illumination.

The Work Zone presence lighting system will be measured on the unit basis, for each complete system, where initially installed on the Project. A complete system consists of the number of flagger station lighting from the "PRESENCE LIGHTING SPACING TABLE" as shown.

(Use the following subsection .90 when temporary traffic signal, portable traffic signal, temporary flashing beacons, or temporary falsework illumination are required.)

00227.90 Payment -

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Replace the Pay Items (b), (c), (e) with the following Pay Item(s):

Pay Item	Unit of Measurement
(b) Temporary Traffic Signal, _____	Lump Sum
(c) Portable Traffic Signal, _____	Lump Sum
(e) Temporary Flashing Beacons, _____	Lump Sum

Add the following paragraph to the end of this subsection:

Item (a) includes all Materials called for by the Plans and Specifications, and providing electrical power and providing, placing, maintaining, adjusting, and removing temporary falsework illumination.

(Use the following when temporary traffic signals are required.)

Insert Project Name Here

In item (b), the location(s) is inserted in the blank.

(Use the following when portable traffic signals are required.)

In item (c), the location(s) is inserted in the blank.

(Use the following when temporary flashing beacons are required.)

In item (e), the location(s) is inserted in the blank.

Replace the paragraph that begins "Item (c) includes furnishing ..." with the following paragraph:

Item (c) includes providing, operating, moving, and removing the signals and all required earthwork, Bases, Surfacing, and hard-wired interconnections.

Replace the paragraph that begins "Item (d) includes furnishing ..." with the following paragraph:

Item (d) includes providing, operating, moving, maintaining and removing the Work Zone presence lighting system.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, installing, moving, operating, maintaining, inspecting, and removing the Materials and TCD, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

SP00228 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP00765 when truncated domes are required.)

SECTION 00228 - TEMPORARY PEDESTRIAN AND BICYCLIST ROUTING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00228 of the Standard Specifications modified as follows:

(Use the following subsection .13 when temporary curb ramps are required.)

00228.13 Temporary Curb Ramps - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish temporary curb ramps from the QPL or the Conditional Use List; or construct temporary curb ramps on site according to the Standard Drawings. Use ACP, PCC, or other approved Materials for on-site constructed temporary curb ramps. Furnish truncated dome detectable warning surface for temporary curb ramps from the QPL according to Section 00765.

(Use the following subsection .40 when pedestrian channelizing devices are required.)

00228.40 Pedestrian Channelizing Devices - Replace this subsection, except for the subsection number and title, with the following:

Install PCD as shown or directed. Provide a continuous route by interconnecting all adjacent PCD. Provide a clean unobstructed path for pedestrians according to 00220.02 and MUTCD requirements.

(Use the following subsection .42 when bicycle channeling devices are required.)

00228.42 Bicycle Channelizing Devices - Replace this subsection, except for the subsection number and title, with the following:

Install bicycle channelizing devices as shown or directed. Provide a continuous route by interconnecting all adjacent BCD. Provide a clean unobstructed path according to 00220.02(c).

(Use the following subsection .43 when temporary curb ramps are required.)

00228.43 Temporary Curb Ramps - Replace the paragraph that begins "Install or construct temporary curb ..." with the following paragraph:

Install or construct temporary curb ramps as shown or directed. Temporary curb ramp dimensions and grades are required to comply with the Standard Drawings or requirements approved by the Engineer. Repair or reconstruct unacceptable temporary curb ramps before opening to pedestrian traffic.

(Use the following subsection .63 when temporary curb ramps and temporary walks are required.)

00228.63 Temporary Curb Ramps and Temporary Walks - Replace the paragraph that begins "After completion of the Work ..." with the following paragraph:

After completion of the Work, restore the area occupied by the temporary curb ramp or temporary walk as directed.

00228.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

The quantities of Work performed under this Section will be measured according to the following. The quantities for Work Zone Traffic Control Measures will be limited to the following:

Insert Project Name Here

- The initial installation of Pedestrian channelizing devices and bicycle channelizing devices necessary to complete the Project based on the Contract Schedule of Items further limited to the maximum simultaneous use as shown, specified, or directed.
- The initial installation of additional Pedestrian channelizing devices and bicycle channelizing devices that the Engineer and Contractor agree are necessary to ensure a safe Work Zone.
- The replacement of TCD and TCM damaged by Public Traffic and replaced by the Contractor.

(a) Length Basis - Pedestrian channelizing devices and bicycle channelizing devices will be measured on the length basis upon delivery to the Project.

(b) Unit Basis - Temporary curb ramps will be measured on the unit basis, at each location where a temporary curb ramp is constructed or placed as shown or directed.

(c) Area Basis - Temporary walks will be measured on the area basis, at each location where a temporary walk is constructed or placed limited to the Neat Lines as shown or directed.

00228.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Items not included in the Schedule of Items. Do not change the alpha characters next to the Pay Items. Delete the paragraphs that correspond to the Pay Item that is being deleted.)

Pay Item	Unit of Measurement
(a) Pedestrian Channelizing Devices	Foot
(b) Bicycle Channelizing Devices	Foot
(c) Temporary Curb Ramp, _____	Each
(d) Temporary Walks	Square Foot

In item (c), the type of temporary curb ramp is inserted in the blank.

Payment for items (a) and (b) will be payment in full for furnishing, installing, moving, operating, maintaining, inspecting, and removing the Materials and TCD, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

Payment for items (c) and (d) will be payment in full for furnishing, installing, operating, maintaining, inspecting, and removing the Materials, Surfacing, restoring the occupied area, and providing all Equipment, labor, and Incidentals necessary to complete the Work as specified, except as covered in 00221.90(b).

TCD items included under this Section damaged by Public Traffic and replaced by the Contractor will be paid for at the Contract price for the Pay Items listed in the Contract

Insert Project Name Here

Schedule of Items or in approved Contract Change Orders, unless otherwise specified. Payment for replacing damaged TCD will only be made when:

- The Engineer orders it.
- The replacement devices are used on the Project.
- The damaged devices are disposed of to the Engineer's satisfaction.

SP00229 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26)

Last updated: 02-26-26)

(Use this Specification when a Smart Work Zone System is needed for one or more of the following functions:

- *Construction Access System: Warns approaching traffic of construction vehicles entering live traffic from the work area (e.g., material hauling, blasting, large earthwork operations, etc.).*
- *Queue Detection System: Detects traffic queues in work zones, and warns drivers of changed traffic flow conditions in advance of the work area.*
- *Traffic Information System: Provides real-time advance notification of traffic flow conditions, estimated delay, travel times, and alternate route options.*

NOTE: A Project specific plan sheet is required for all Smart Work Zones showing the generic layout of the system. The Smart Work Zone System Vendor will design the final system. ODOT needs to provide adequate quantities for components in the system. Read all instructional notes carefully.)

SECTION 00229 - SMART WORK ZONE SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00229 is not a Standard Specification and is included in this Project by Special Provision.

Description

00229.00 Scope - This Work consists of designing, providing, installing, moving, operating, maintaining, inspecting, and removing temporary Smart Work Zone Systems.

00229.01 Definitions -

Smart Work Zone System - An automated system composed of a combination of traffic sensors, PCMS, video cameras, communication Equipment, and other hardware and software components. The Smart Work Zone System is used to provide real time work zone information, warnings, and guidance to Public Traffic.

Construction Access System - A smart Work Zone System used for warning Public Traffic of construction vehicles entering into the traffic stream from the construction site.

Queue Detection System - A smart Work Zone System used to warn traffic approaching the Work Zone of slowed or stopped traffic well in advance of the Project Site.

Traffic Information System - A smart Work Zone System used to inform approaching road users about traffic flow conditions, estimated delays, alternate routes, and other information.

Equipment

00229.20 Smart Work Zone System - Provide a Smart Work Zone System from the QPL.

00229.21 Work Zone Traffic Control Devices - Provide portable changeable message signs (PCMS), barricades and drums according to Section 00222, Section 00224 and the QPL.

(Use the following subsection .22 when a Construction Access System is needed. If construction access locations are known, it is recommended that the placement of the system be shown in the plans.)

00229.22 Construction Access System - Provide and install a Construction Access System for each construction access where Material or Equipment delivery vehicles merge into the live traffic stream. Include the following system components:

- 1 portable traffic sensor
- 1 PCMS
- A dedicated website or other wireless remote system for monitoring Smart Work Zone System functions and remotely managing PCMS messages.

Use the Construction Access System components to provide the following:

- Real-time messages on a dedicated PCMS that warns approaching traffic of construction vehicles entering the Roadway.
- Detection of construction vehicles passing by the traffic sensor to activate the system and trigger the PCMS display.

Locate the traffic sensor so that the PCMS message is displayed no more than 5 seconds after the construction vehicle reaches the access point. Time can be changed as directed by the Engineer.

Provide traffic sensors that count each construction vehicle passing the sensor, record the date and time each vehicle passes the sensor, and save the construction vehicle count data.

Insert Project Name Here

(Use the following subsection .23 when a Queue Detection System is needed. Show in the plans the “Approximate Limits” for the system. The system should cover from the work site to a (worst-case) point upstream where queuing may develop.

NOTES:

- *For estimating purposes, the nearest PCMS to the work area may be 3 - 4 miles, or more, from the point where queuing first develops (e.g., due to a lane closure). Work Zone Traffic Analysis should be used to determine the extent of potential queuing.*
- *Locate traffic sensors approximately 1/2 mile to 1 mile apart.*
- *Include a minimum of 4 sensors and 1 PCMS in the blanks for each affected direction.*
- *Include additional sensors and PCMS for queues anticipated to exceed 4 miles. Tighter sensor spacing increases system accuracy for queue detection.*

Assume the first traffic sensor is placed at the beginning of the work area, lane closure, or other point where delays or impacts to speed are likely to begin.

Fill in the blanks with the required number of portable traffic sensors and PCMS.)

00229.23 Queue Detection System - Provide and install a Queue Detection System at each location shown. Include the following system components:

- ____ portable traffic sensors
- ____ PCMS
- A dedicated website or other wireless remote system for monitoring Smart Work Zone System functions, and to remotely manage PCMS messages

(Use the following bullet if a PTZ camera is needed.)

- 1 Pan-Tilt-Zoom (PTZ) camera

Use the Queue Detection System components to provide the following:

- Real-time messages on the PCMS, warning approaching traffic of slowed or stopped traffic ahead, including dynamic advisory speeds based on measured speeds of traffic before and within the work area.
- Traffic sensors to continually monitor and measure traffic speeds before and within the work area.

(Use the following bullet if the PTZ camera bullet was used above.)

- Remote accessibility to live PTZ camera feeds and images being captured by the PTZ camera and, if applicable, remote operation capabilities for the PTZ camera.

Provide traffic sensors that trigger the system PCMS to display appropriate messages.

Insert Project Name Here

Provide traffic sensors that count vehicles, record speeds for all vehicles passing the sensor, and record the date and time each vehicle passes the sensor.

(Use the following subsection .24 when a Traffic Information System is needed. Show in the plans the “Approximate Limits” for the system.

NOTES:

- *System traffic sensors are normally set up before (up to 1 mile) and within the work area. PCMS are placed in advance of major junctions, and on intersecting major routes.*
- *Include a minimum of 4 traffic sensors and 1 PCMS in the blanks for each affected direction. Assume 1/2 - 1 mile spacing for traffic sensors. Tighter sensor spacing increases system accuracy.*
- *For Projects with long work areas (> 1.5 miles), add 1 additional traffic sensor for every additional 1/2 mile in work area length. Consider 1 additional PCMS for every mile of additional work area length.*
- *System may extend several miles in advance of the work area, including onto intersecting roads, depending on accesses and interchanges within project limits, available alternate routes, etc.*
- *Consider including additional traffic sensors (one per 1/2 mile) and additional PCMS in advance of the work zone and on intersecting highways for the following conditions:*
- *Long projects (> 5 miles) with multiple inputs to mainline – particularly major routes or State highways*
- *Complex projects with a duration of more than one year*
- *Projects with the potential for frequent extended queues or excess delays*

Fill in the blanks with the required number of portable traffic sensors and PCMS.)

00229.24 Traffic Information System - Provide and install a Traffic Information System at each location shown. Include the following system components:

- ____ portable traffic sensors
- ____ PCMS
- A dedicated website or other wireless remote system for monitoring Smart Work Zone System functions, and to remotely manage PCMS messages.

(Use the following bullet if a PTZ camera is needed.)

- 1 Pan-Tilt-Zoom (PTZ) camera

Use the Traffic Information System components to provide the following:

- Real-time advance warning messages on PCMS, displaying dynamic work zone travel time information, alternate route options, detour route information, or other project-specific information, as shown or as directed.
- Traffic sensors to continually monitor and measure traffic speeds before and within the work area.

Insert Project Name Here

(Include the following bullet if the PTZ camera bullet was used above.)

- Remote accessibility to live PTZ camera feeds and images being captured by the PTZ camera; and, if applicable, remote operation capabilities for the PTZ camera.

Provide traffic sensors that trigger the system PCMS to display appropriate messages.

Provide traffic sensors that count vehicles, record speeds for all vehicles passing the sensor, and record the date and time each vehicle passes the sensor.

Labor

00229.30 Smart Work Zone System Technician - Provide a Smart Work Zone System technician skilled in the operation of all system Equipment and software. Provide a system technician who is locally available while the system is in use, and able to respond to system issues in person within 4 hours of notification. The system technician may be an employee of the Smart Work Zone System vendor. Duties of the system technician include the following:

- Perform all testing and debugging of the system before system turn-on.
- Service and maintain all system components during operation of the system.
- Move portable components, as needed or directed.
- Respond to emergency situations, as needed.
- Maintain all system Equipment maintenance logs.

Construction

00229.40 Smart Work Zone System - At least 48 hours before system turn on:

- Coordinate the installation and operation of the Smart Work Zone System with the Engineer.
- Provide a copy of the TCP showing the location of each Smart Work Zone System.
- Provide a schedule of the anticipated operation times, dates and durations.

Install Smart Work Zone Systems to the "PCMS Installation" detail shown on the Standard Drawings.

(Use one or more of the following three subsections as instructed. Fill in all blanks and replace text that is underlined and in italics.)

[Use subsection .42 when a Construction Access System is needed.]

00229.42 Construction Access System - Use a Construction Access System to monitor the construction access on the (northbound, eastbound, etc.) side of the _____ Highway, at approximate engineering station XXX+XX, during (Insert a brief description of construction work. Refer to specific Phases or Stages if applicable.) activities.

(Use the following paragraph when more than one system is needed in multiple locations at the same or overlapping times.)

Insert Project Name Here

Use an additional Construction Access System to monitor the construction access on the (northbound, eastbound, etc.) side of the _____ Highway, at approximate engineering station XXX+XX, during (Insert a brief description of construction work. Refer to specific Phases or Stages if applicable.) activities.

(Insert "500" in the blank for low-speed roads (< 45 mph). Insert a value of 1000 to 1500 in the blank for high-speed roads (≥ 45 mph). Use, "LEFT" or "RIGHT" in Panel 2, as appropriate.)

Program the following messages into the PCMS, or as directed:

Panel 1
TRUCKS
ENTERING
_____ FT

Panel 2
SLOW FOR
TRUCKS
ON RIGHT (LEFT)

Locate traffic sensors and PCMS as shown, or as recommended by the Smart Work Zone System technician.

[Use subsection .43 when a Queue Detection System is needed.]

00229.43 Queue Detection System - Use a Queue Detection System on the _____ Highway to monitor traffic queuing in the (northbound, eastbound, etc.) direction during (Insert a brief description of construction work. Refer to specific phases/stages of traffic control if applicable.) activities.

(Use the following paragraph when more than one Queue Detection System is needed in multiple locations at the same or overlapping times.)

Use an additional Queue Detection System to monitor traffic queuing on the _____ Highway in the (northbound, eastbound, etc.) direction during (Insert a brief description of construction work. Refer to specific phases/stages of traffic control if applicable.) activities.

(Use the following paragraphs and PCMS message if sporadic queuing is anticipated. Fill in the blank with the same value used in subsection (a) Traffic Sensor Thresholds below.)

[Begin Sporadic Queuing language]

Locate traffic sensors and PCMS as shown, or as directed. Program PCMS messages as shown below, or as directed:

Panel 1
PREPARE
TO STOP
AHEAD

Panel 2
SLOW
TO
XX MPH

Program the PCMS to stop displaying the message three minutes after an extended traffic queue is no longer detected.

[End Sporadic Queuing language]

Insert Project Name Here

(Use the following paragraphs and PCMS messages if frequent or significant extended traffic queuing is anticipated, and two PCMS are included in the system to manage traffic queues (see 00229.13 above). Fill in the blank with the same value used in subsection (a) Traffic Sensor Thresholds below.)

[Begin Frequent or Significant Queuing language]

Program the following messages into the system PCMS closest to the work area:

Panel 1
STOPPED
TRAFFIC
AHEAD

Panel 2
WARNING
PREPARE
TO STOP

Program the following messages into the next closest system PCMS to the work area:

Panel 1
SLOWED
TRAFFIC
AHEAD

Panel 2
SLOW
TO
XX MPH

Program the PCMS to stop displaying the message 3 minutes after an extended traffic queue is no longer detected.

[End Frequent or Significant Queuing language]

(a) Traffic Sensor Thresholds - Locate traffic sensors and PCMS as shown or directed. Program traffic sensors as follows:

(Use the following paragraph if using only one PCMS in the system. Fill in the blank with a value as indicated for the pre-construction posted speed and highway type:

- > 55 mph, divided highways/freeways: Use 30 mph below posted speed*
- 45 –55 mph, other high-speed roads: Use 25 mph below posted speed*
- < 45 mph, low-speed roads: Use 20 mph below posted speed)*

Program traffic sensors to trigger messages for the PCMS when the average measured traffic speed drops below ____ mph.

(Use the following two paragraphs if using two PCMS in the system. Fill in the blank with a value as indicated for the pre-construction posted speed and highway type:

- > 55 mph, divided highways/freeways: Use 40 mph below posted speed*
- 45 –55 mph, other high-speed roads: Use 30 mph below posted speed*
- < 45 mph, low-speed roads: Use 20 mph below posted speed)*

For the PCMS closest to the work area, program traffic sensors to trigger the display of the messages when the average measured traffic speed drops below ____ mph.

(Fill in the blank with a value as indicated for the pre-construction posted speed and highway type:

- > 55 mph, divided highways/freeways: Use 35 mph below posted speed*

Insert Project Name Here

- *45 –55 mph, other high-speed roads: Use 25 mph below posted speed*
- *< 45 mph, low-speed roads: Use 15 mph below posted speed)*

For the next closest PCMS to the work area, program traffic sensors to trigger the display of the messages when the average measured traffic speed drops below ____ mph.

[Use subsection .44 when a Traffic Information System is needed.]

00229.44 Traffic Information System - Use a Traffic Information System to display real-time traffic information on the _____ Highway in the (northbound, eastbound, etc.) direction during Stage ____, Phase ____, during (brief description of construction work) activities.

(Include the following paragraph when more than one system is needed in multiple locations at the same or overlapping times.)

Use an additional Traffic Information System to display real-time traffic information on the _____ Highway in the (northbound, eastbound, etc.) direction during Stage ____, Phase ____, during (brief description of construction work) activities.

Locate system PCMS and traffic sensors, and program PCMS messages, as directed.

00229.45 Traffic Data Logs - Maintain a traffic data log with date and time stamps for each Smart Work Zone System. At the completion of the Project, provide all traffic data logs electronically in Microsoft Excel format, or other format acceptable to the Engineer.

00229.46 Agency Access to System and System Data - Provide password protected access to the Smart Work Zone System components and website. Provide passwords to the Engineer and identified Agency personnel. Allow authorized personnel access to:

- Retrieve and graph collected volume and time data
- Within collected data, view when the system sensor was triggered and what message was displayed on the PCMS
- Change PCMS messages
- Operate system cameras

Maintenance

00229.60 Smart Work Zone System - Maintain the required Smart Work Zone System according to the manufacturer's recommendations and as directed. When directed, repair or replace Smart Work Zone Systems that are damaged or destroyed before continuing Work that requires use of the system.

If a Smart Work Zone System or any of its components malfunctions:

- Notify the Engineer.
- Take the Smart Work Zone System out of service and make repairs.
- Place the system back in service within 48 hours of the notification.

Insert Project Name Here

While Smart Work Zone Systems are in use:

- Have repair Equipment and parts on hand as recommended by the manufacturer.
- Keep repair Equipment and parts on the Project Site, or other location that allows system repairs to be completed within 48 hours of the notification of malfunction to the Engineer.

Maintain a service and repair log for the Smart Work Zone System that includes dates, times and descriptions for the following information:

- When service and maintenance were performed.
- Equipment that was serviced and why service was necessary.
- Durations of operational and Equipment failures.
- All operational and Equipment failures.
- All repairs that were made.

Keep the log with the Smart Work Zone System.

(Use the following paragraph when a Construction Access System is included.)

If a Construction Access System goes out of service, immediately install temporary signing as directed, or immediately install a "TRUCKS ENTERING HIGHWAY XXXX FT" (CW23-7-54) sign in advance of the construction vehicle access at sign spacing "A" from the "TCD Spacing Table" shown on the Standard Drawings. Locate the sign on the same side of the Roadway as the access. The sign may be installed on a TSS.

(Use the following paragraph and PCMS Message when a Queue Detection System is included. Do not fill in the blank.)

If the Queue Detection System being used to monitor traffic queues goes out of service, immediately provide a PCMS to display the following messages until the system is repaired and functioning properly. Locate the PCMS and program PCMS messages as directed:

Panel 1

TRAFFIC
SLOWED
AHEAD

Panel 2

SLOWED
TRAFFIC
NEXT XX MI

Measurement

00229.80 Measurement - The quantities of providing Smart Work Zone Systems will be measured on the unit basis. The quantities will be limited to those shown in the approved TCP unless otherwise approved.

The quantities for using the Smart Work Zone System will be measured on the time basis. If the Smart Work Zone System malfunctions for more than a total of 2 hours within a single Day, no measurement will be made for the Smart Work Zone System for that Day unless otherwise approved.

Insert Project Name Here

The quantities of PCMS will be measured according to 00222.80.

Barricades, and drums will be measured according 00224.80.

The quantities for Work Zone Traffic Control Measures will be limited to the following, unless otherwise specified:

- The initial installation of quantities necessary to complete the Project based on the Contract Schedule of Items.
- The initial installation of additional TCD and TCM that the Engineer and Contractor agree are necessary to ensure a safe Work Zone.
- The replacement of TCD and TCM except for temporary electrical signs, damaged by Public Traffic and replaced by the Contractor. Temporary electrical signs damaged by Public Traffic and replaced or repaired by the Contractor will not be measured.

Payment

00229.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Provide Smart Work Zone System.....	Each
(b) Smart Work Zone System.....	Day

Item (a) includes moving personnel, Equipment, supplies, and Incidentals to and from the Project Site.

(Delete PTZ cameras when not used and delete all purple parentheses.)

Item (b) includes all hardware, software, traffic sensors, (PTZ cameras), and other Equipment needed for the system to operate properly.

If a Smart Work Zone System malfunctions for more than a total of 2 hours within a single Day, no payment will be made for the Smart Work Zone System for that Day unless otherwise approved.

PCMS will be paid for according to 00222.90.

Barricades, and drums will be paid for according to 00224.90.

Payment will be payment in full for designing, providing, installing, moving, operating, maintaining, inspecting, and removing the Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- relocating and repositioning the Smart Work Zone System.
- the services of the Smart Work Zone System technician.

Insert Project Name Here

- providing and installing temporary signs or PCMS while required systems are out of service.

SP00230 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

May require SP00350, SP01030 or SP02320

Requires SP00730

if emulsified asphalt tack coat is required)

(Use this Section for temporary diversions and cross-overs. Use when a diversion/cross-over is being constructed separate from the main (permanent) alignment [e.g. with temporary bridge]. It may also be used with a diversion that consists of a temporary widening of the existing alignment when most of the temporary diversion will be removed and use of this section will create significant cost savings, earlier completion, or reduced construction times.)

SECTION 00230 – TEMPORARY ROADBED AND SURFACING

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00230 is not a Standard Specification and is included in this Project by Special Provision.

Description

00230.00 Scope - This Work consists of constructing, maintaining, and removing temporary Roadbeds and Surfacing, as shown or directed.

Materials

(Delete Materials from the list that are not required.)

00230.10 Materials - Furnish Materials meeting the following requirements:

Aggregate Base.....	00640.10
Asphalt Concrete Pavement (ACP).....	00745.50
Emulsified Asphalt Tack Coat	00730.11
Geotextile	002320
Riprap.....	00390

Insert Project Name Here

00230.11 Earthwork - Furnish Materials required to construct the Roadbed according to Section 00330 and as shown.

Construction

00230.40 Earthwork - Construct temporary embankments and excavation outside the permanent Roadbed according to the applicable parts of Section 00330, except density testing to verify compaction will not be required. Compact the embankment material according to 00330.43(c). Ensure that Earthwork that remains in place as permanent Roadbed meets all requirements of Section 00330.

(Delete any of subsections .41 through .45 when the corresponding Material was deleted from the Materials List.)

00230.41 Geotextile - Place embankment geotextile according to Section 00350.

00230.42 Riprap - Place riprap according to the applicable parts of Section 00390.

00230.43 Aggregate Base - Place and compact Aggregate Base according to the applicable parts of Section 00640.

00230.44 Asphalt Concrete Pavement - Place ACP to the lines and grade shown or directed. Compact ACP according to 00745.49(d).

00230.45 Emulsified Asphalt Tack Coat - Apply Emulsified Asphalt according to the applicable parts of Section 00730.

Maintenance

00230.60 Surface Maintenance - Maintain temporary surfaces according to 00220.60.

Finishing and Cleaning Up

00230.70 General - When temporary surfaces are no longer needed, do the following:

- Remove all related materials.
- Restore the area the temporary Surfacing and associated Roadbed occupied to the original ground contours, or as directed.
- Apply permanent seeding to the area occupied by the temporary Surfacing and associated Roadbed, if required, according to Section 01030.
- Dispose of excess materials according to 00330.41(a)(4).

Measurement

00230.80 Measurement - No measurement of quantities will be made for Work performed under this Section. It is estimated that the following approximate quantities of Materials will be required:

(Obtain quantities from the Designer. Delete items that do not apply to the Project.)

Insert Project Name Here

Material	Amount
Construct Temporary Roadbed and Surfacing:	
Embankment	_____ cu. yd.
Excavation	_____ cu. yd.
Geotextile	_____ sq. yd.
Riprap	_____ sq. yd.
Aggregate Base	_____ ton
Asphalt Concrete Mixture	_____ ton
Emulsified Asphalt Tack Coat	_____ ton

Remove Temporary Roadbed and Surfacing:

Embankment	_____ cu.yd.
Excavation	_____ cu.yd.

Quantities include only those quantities placed or removed outside the permanent Roadbed Neat Line.

Permanent seeding will be measured according to 01030.80.

Payment

00230.90 Payment - The accepted quantities of Work performed under this Section, except for permanent seeding Work, will be paid for at the Contract lump sum amount for the item "Construct and Remove Temporary Roadbed and Surfacing".

Payment will be payment in full for constructing, maintaining, and removing Roadbeds and Surfacing, and for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Permanent seeding will be paid for according to 01030.90.

SP00231 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

May require SP01030 or SP02320)

SECTION 00231 - TEMPORARY ACCESS ROAD

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00231 is not a Standard Specification and is included in this Project by Special Provision.

Description

00231.00 Scope - This Work consists of constructing, maintaining, and removing temporary, unpaved access roads for the use of Contractor and Agency Equipment and personnel as needed, shown, or directed.

Materials

00231.11 Geotextile - Furnish subgrade geotextile, embankment geotextile, or riprap geotextile, at the Contractor's option that meets the requirements of Section 02320, with documentation according to 02320.10(c).

00231.12 Geogrid - Furnish subgrade reinforcement geogrid, if used, that meets the requirements of Section 02320.

00231.13 Road Material - Furnish crushed Aggregate Base, stone embankment, or other suitable Granular Material capable of supporting the weight of Equipment intended to use the temporary access road.

Construction

00231.41 Clearing - Clearing brush and vegetation for temporary access roads is allowed in the areas shown or where directed. Preserve and protect trees as shown or directed.

00231.42 Temporary Access Road - Construct temporary access roads to the width, grade, profile, and depth of base sufficient to support the weight of Equipment using the road. Install geotextile or geogrid prior to placement of road material.

00231.43 Not for Public Traffic - Do not direct or allow Public Traffic to use temporary access roads constructed according to this Section.

(Use the following subsection .44 when it is anticipated that the ground occupied by a temporary access road will later support permanent embankment. Check with the designer.)

00231.44 Verification of Subgrade - In areas where permanent earthwork construction is required on ground that has been occupied by a temporary access road, rework or replace unstable Materials to avoid and correct, according to 00330.40(c), excessive stress or strain that could be detrimental to the Subgrade.

00231.45 Verification of Original Ground - Test the density of the original ground according to TM 158, in the presence of the Engineer, before beginning construction of the temporary access road and after removing it. If post-removal density testing indicates that the original ground has been weakened by construction activities, or the presence or use of the temporary access road, correct the deficient condition in an approved manner and at no additional expense to the Agency.

Insert Project Name Here

Maintenance

00231.60 Surface Maintenance - Maintain temporary access roads so that the road surfaces remain firm, smooth, free of ruts or standing water, and are graded to prevent concentrations of runoff water. Promptly remove accumulations of mud or debris.

Finishing and Cleaning Up

00231.70 General - When a temporary access road is no longer needed, do the following:

- Remove all Materials.
- Restore areas occupied by the temporary access road to the original ground contours or as directed.
- Apply permanent seeding to the area occupied by the temporary access road according to Section 01030.
- Dispose of excess materials according to 00330.41(a)(5).

Measurement

00231.80 Measurement - Except for permanent seeding, no measurement of quantities will be made for Work performed under this Section.

Permanent seeding will be measured according to 01030.80.

Payment

00231.90 Payment - The accepted quantities of Work performed under this Section, except for permanent seeding work, will be paid for at the Contract Lump Sum amount for the item "Construct and Remove Temporary Access Road".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for removing and disposing of temporary access road materials or for restoring the areas to original ground contours.

Permanent seeding Work will be paid for according to 01030.90.

SP00235 (Special Provisions for the 2024 Book)

(Bidding on or after: 10-01-26

Last updated: 06-22-26

This Section requires SP00270, SP00335, SP01030, and SP01060 if blasting, temporary fence, seeding or cattle guards are required.

This Section requires SP02320 when sediment fence is used)

(Use this Section when Agency provided material sources are to be included in projects. If more than one material source is required, subsections may be copied and

Insert Project Name Here

edited to reflect the conditions/requirements of each source. This boilerplate is set up with tables to demonstrate 2 prospective and 2 mandatory sources. Modify the tables as necessary to only list the prospective and mandatory sources for the Project)

SECTION 00235 - AGENCY PROVIDED MATERIAL SOURCES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00235 is not a Standard Specification and is included in this Project by Special Provision.

Description

00235.00 Scope - This Work consists of utilizing Agency provided prospective or mandatory material source(s) as the Contractor elects or as required for the construction of the Contract.

(Use the following subsection .01 as instructed below when the Agency will provide prospective material sources. When only one prospective material source will be listed, delete "(s)" and "are". Copy and paste subsection .01(b) as necessary to list more than two prospective material sources, but ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Fill in the blanks with the appropriate information. Modify as needed. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete.)

(Use this subsection .01 for prospective material sources.)

[Begin Prospective Material Source Option]

00235.01 Material Source Specific Requirements - The following prospective material source(s), for the production of (list the specific aggregate products that are allowed) or state "for all the aggregate products for this Project" , that may warrant investigation and consideration for use by the Contractor on this Project (is) (are) as follows:

(a) Prospective Material Source, (name):

- **Source Number** - OR- _____
- **DOGAMI Number** - _____

Insert Project Name Here

- **Location** - Approximately _____ miles _____ (insert location and direction from the project or closest town here) _____ on (Interstate) (US) (OR) _____ in the _____ 1/4 of Section _____, T. _____ (insert N. or S.) _____, R. _____ (insert W. or E.) _____ W.M.
- **Access** - Adjacent _____ (east, west, north, south) _____ of MP _____ of (Interstate) (US) (OR) _____, _____ (if off the highway a distance, include travel directions here) _____
- **Available Area for Equipment Setup, Stockpiling, and Processing Aggregate:**
 - **Existing** - _____ acres
 - **Development** - _____ acres

(b) Prospective Material Source, (name):

- **Source Number** - OR- _____
- **DOGAMI Number** - _____
- **Location** - Approximately _____ miles _____ (insert location and direction from the project or closest town here) _____ on (Interstate) (US) (OR) _____ in the _____ 1/4 of Section _____, T. _____ (insert N. or S.) _____, R. _____ (insert W. or E.) _____ W.M.
- **Access** - Adjacent _____ (east, west, north, south) _____ of MP _____ of (Interstate) (US) (OR) _____, _____ (if off the highway a distance, include travel directions here) _____
- **Available Area for Equipment Setup, Stockpiling, and Processing Aggregate:**
 - **Existing** - _____ acres
 - **Development** - _____ acres

If the Contractor elects not to utilize the above listed source(s) 00160.60 applies.

[End Prospective Material Source Option]

(Use the following subsection .02 for mandatory material sources. Delete "(s)" or parentheses as necessary and fill in all blanks. When only one mandatory disposal site is listed, delete "(s)". Copy and paste subsection .02(b) as necessary to list more than two mandatory disposal sites, but ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Delete all purple parentheses. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete.)

[Begin Mandatory Material Source Option]

00235.02 Material Source Specific Requirements - The following mandatory material source(s), for the production of _____ (list the specific aggregate products that are allowed) or state "for all the aggregates products for this Project" _____, (is) (are) to be used on this Project:

(a) Mandatory Material Source, (name):

- **Source Number** - OR- _____
- **DOGAMI Number** - _____

Insert Project Name Here

- **Location** - Approximately _____ miles _____ (insert location and direction from the project or closest town here) on (Interstate) (US) (OR) _____ in the _____ 1/4 of Section _____, T. _____ (insert N. or S.) _____, R. _____ (insert W. or E.) _____ W.M.
- **Access** - Adjacent _____ (east, west, north, south) of MP _____ of (Interstate) (US) (OR) _____, _____ (if off the highway a distance, include travel directions here) _____
- **Available Area for Equipment Setup, Stockpiling, and Processing Aggregate:**
 - **Existing** - _____ acres
 - **Development** - _____ acres

(b) Mandatory Material Source, (name):

- **Source Number** - OR- _____
- **DOGAMI Number** - _____
- **Location** - Approximately _____ miles _____ (insert location and direction from the project or closest town here) on (Interstate) (US) (OR) _____ in the _____ 1/4 of Section _____, T. _____ (insert N. or S.) _____, R. _____ (insert W. or E.) _____ W.M.
- **Access** - Adjacent _____ (east, west, north, south) of MP _____ of (Interstate) (US) (OR) _____, _____ (if off the highway a distance, include travel directions here) _____
- **Available Area for Equipment Setup, Stockpiling, and Processing Aggregate:**
 - **Existing** - _____ acres
 - **Development** - _____ acres

[End Mandatory Material Source Option]

00235.03 Laws - Conduct operations within the material source(s) according to all applicable State, county, and federal laws including mining and fire laws. Provide, operate, and maintain wildland firefighting equipment appropriate for the current fire levels on-site at all times during all material source operations.

00235.04 Permits - Copies of the Plans, permits, agreements and the material source narrative(s) for the material source(s) are available for inspection at the Project Manager's office. Conform operations within the material source(s) to the stipulations and conditions of these documents and to all of the requirements of the Contract.

(Fill in the table below with the appropriate permits/plans listed below for each source. Delete the list when finished. Modify the table as needed to add or delete sources.)

Department of Geology and Mineral Industries (DOGAMI) Permit
Operating and Reclamation Plan
County Land Use Permit
Intergovernmental Agreement
Cooperative Improvement Agreement
Bureau of Land Management (BLM) Permit
United States Forest Service (USFS) Permit
Division of State Lands (DSL) Permit

Insert Project Name Here

Oregon Department of Fish and Wildlife (ODFW) Permit
Oregon Department of Environmental Quality (DEQ) Permit)

Subsection	Source Name	Documents
00235.01(a)	(name)	(from list above)
00235.01(b)	(name)	(from list above)
00235.02(a)	(name)	(from list above)
00235.02(b)	(name)	(from list above)

00235.05 Pre-Work Meeting - Before occupying a material source, attend a pre-work meeting at the material source with the Engineer and the following owners or representatives:

(In the table below, select representatives from the following list and fill in the blanks with the contact name(s) and phone number(s) as appropriate for each source. Include the items that apply to each source. Add or delete rows in the table as necessary to list all applicable sources.

ODOT Geologist
ODOT Region Environmental Coordinator
U.S. Forest Service representative(s) _____
BLM representative(s) _____
County representative(s) _____
Other _____)

Subsection	Source Name	Contact Names and phone numbers
00235.01(a)	(name)	ODOT Geologist ODOT Region Environmental Coordinator U.S. Forest Service representative(s) _____ BLM representative(s) _____ County representative(s) _____ Other _____
00235.01(b)	(name)	(from list above)
00235.02(a)	(name)	(from list above)
00235.02(b)	(name)	(from list above)

00235.06 Source Occupancy - Coordinate material source occupancy with the Engineer. The material source information listed in Table 00235-1 below is as shown (and as staked). Do not operate beyond the material source Project boundary or in no Work area(s) as shown (and as staked) unless otherwise directed in writing.

(In the table below, fill in the blank with the appropriate source information listed below for each source. Add or delete rows in the table as necessary to list all applicable sources.)

<i>project boundary</i>	<i>excavation area(s)</i>
<i>reject fines stockpile</i>	<i>straw bale sediment barrier(s)</i>
<i>scalpings stockpile</i>	<i>oversize storage area</i>
<i>overburden storage area(s)</i>	<i>no work area(s)</i>
<i>stormwater control berm(s)</i>	<i>safety berm(s)</i>
<i>slash disposal area</i>	<i>log deck</i>
<i>bench access road(s)</i>	<i>stockpile and processing area</i>
<i>access road(s)</i>	<i>sediment fence(s))</i>

Table 00235-1

Subsection	Source Name	Source items shown
00235.01(a)	<i>(name)</i>	<i>(from list above)</i>
00235.01(b)	<i>(name)</i>	<i>(from list above)</i>
00235.02(a)	<i>(name)</i>	<i>(from list above)</i>
00235.02(b)	<i>(name)</i>	<i>(from list above)</i>

00235.07 Source Development - If proposing changes to a material source development plan, submit a source development plan as an unstamped Working Drawing according to 00150.35. Do not begin Work in a material source until the source development plan has been approved in writing by the Engineer.

Develop a site-specific Erosion and Sediment Control Plan for each material source according to 00280.04 and submit it to the Engineer at or before the pre-work meeting. Construct stormwater control berm(s) as shown (and as needed) to control runoff. Do not allow any materials, including sediments, Aggregate or crushing by-products to enter into waterways or Wetlands.

Develop a site-specific Pollution Control Plan for each material source according to 00290.30(b) and submit it to the Engineer at or before the pre-work meeting. Include the following requirements in the Pollution Control Plan:

- Do not discharge waste or by-product if it contains any substance in concentrations that could contaminate Soils or result in harm to fish, wildlife, or water sources.
- Store bag-house sludge, lime, and all potentially hazardous materials and solid waste in a manner that prevents seepage into the ground or groundwater sources. Lined sumps or pits are allowable options for storage. If pits or sumps are used, construct adequate berms or provide other measures to prevent breaching of the pits or sumps.
- For materials capable of causing water pollution if discharged, locate storage facilities in an area that prevents spillage into waterways or Wetlands.

Construction

00235.40 General - Steam clean all debris (soil, dirt, plant parts, and vegetative matter) all vehicles and Equipment, prior to entering the site for the first time, and each subsequent time if the vehicle has left the Roadway outside the construction Project limits, before being brought back to the site. Notify the Engineer before moving each vehicle onto the site. Certify, in writing, that the Equipment has been steam cleaned.

00235.41 Restrictions and Protection of Resources - Comply with the following for all operations within the material source:

- Protect cultural resources according to 00290.50.
- Protect migratory birds according to 00290.36(a).

(Use the following bullet when clearing, grubbing, and overburden removal is required. Modify dates when directed by Environmental Coordinator. If modified dates are different for different sources list the sources and dates or put them in a table.)

- Clear trees and shrubs and strip and stockpile soil overburden between September 1 and March 1.
- Do not utilize, contaminate, or disperse material from existing stockpiles. If existing stockpiles interfere with the Contractor's operations, move the stockpiles to other locations within the material source area as directed, at no additional cost to the Agency.

(Use the following bullet when specific restrictions are addressed in land use or other permits. If times are different for different sources list the sources and times or put them in a table.)

- Limit mineral and Aggregate extraction, crushing, processing, and Equipment operation activities including drilling activities to the hours of ____:00 a.m. to ____:00 p.m., Monday through Saturday unless modifications to these hours are requested in writing and approved by the Engineer. Do not conduct any operation on Sundays or legal holidays, as defined in ORS 279C.540.

(Use the following subsection (a) when county owned sources are utilized. Fill in the blank of the first paragraph with the name of the county. Fill in the blanks of the second paragraph with the name of the contact person(s), the county name, and the phone number. Fill in the blank of the third paragraph with the royalty fee amount and unit, for example cubic yard, ton. Be sure to include an anticipated item to pay the county royalty fee for each source. Repeat the paragraphs as necessary for each County owned source and number sequentially, (a)(1), (a)(2) etc..)

(a) County Owned Sources - Material source **(Name)** **(subsection)** is under Agency control through an agreement with the _____ County Department of Public

Insert Project Name Here

Works. Conform all operations within this material source to the requirements of this agreement, the Plans, and the Specifications.

For information contact _____ or _____ at the _____ County Department of Public Works, at _____, to make arrangements to visit the site.

A \$ _____ per _____ (unit) royalty charge for all material removed from the Prospective Source will be deducted from monies due the Contractor in the progress payments.

(Use the following subsection (b) on USDA Forest Service owned sources. Use the appropriate agreement. Delete the agreement that does not apply. Fill in the administrative/road use fee amount and unit in the second paragraph. Be sure to include an anticipated item to pay the fee for each source. Repeat the paragraphs as necessary for each Forest Service owned source and number sequentially, (b)(1), (b)(2) etc.)

(b) USDA Forest Service Owned Sources - Material source **(Name) (subsection)** is under Agency control through a "Contract for the Sale of Mineral Materials" or a "Special Use Permit" agreement with USDA Forest Service. Conform all operations within this material source to the requirements of this agreement, the Plans, and the Specifications.

A \$ _____ per _____ (unit) administrative and road use fee charge for material removed from the Prospective Source will be deducted from monies due the Contractor in the progress payments.

(Use the following subsection (c) on BLM owned sites. Repeat the paragraphs as necessary for each BLM owned source and number sequentially, (c)(1), (c)(2) etc)

(c) Bureau of Land Management Sources - Material source **(Name) (subsection)** is under Agency control through a "Free Use Permit" or a "Temporary Use Permit" agreement with the Bureau of Land Management. Conform all operations within this material source to the requirements of this agreement, the Plans, and the Specifications.

(Use the following subsection (d) on privately owned sources. Fill in the appropriate property owner in the blank of the first paragraph. Fill in the property owner contact and phone number in the second paragraph. Fill in the royalty fee amount and unit in the third paragraph. Be sure to include an anticipated item to pay the royalty fee. Repeat the paragraphs as necessary for each privately owned source and number sequentially, (d)(1), (d)(2) etc.)

(d) Privately Owned ODOT Controlled Sources - Material source **(Name) (subsection)** is under Agency control through a lease agreement with _____. Conform all operations within this material source to the requirements of this lease agreement, the Plans, and the Specifications.

For information contact _____ at _____, to make arrangements to visit the site.

Insert Project Name Here

A \$_____ per _____(unit)_____ royalty charge for all material removed from the Prospective Source will be deducted from monies due the Contractor in the progress payments.

00235.42 Source Setup - Before proceeding with Work in the material source, the following apply:

(Use the following bullet when fences are required to secure no Work areas. Fill in the blanks with the length, type, and location of fencing. Copy and paste the following bullet as needed. Repeat the bullet for each source that requires fences)

- For material source **(Name) (subsection)** construct approximately _____feet of type _____fencing along _____the no Work area as shown (and as staked). Do not disturb the no Work area.

(a) Access:

(Use the following bullet when road access is to be constructed. Fill in the blank with the source number if applicable. Repeat the bullet for each source that requires access road development or maintenance.)

- For material source **(Name) (subsection)** develop and maintain an access road from the developed stockpile and processing area to the newly developed excavation floor or from the _____to the _____as applicable. Construct this road with a width of 12 feet and reasonably uniform grade, no steeper than a 16 percent grade (1V:6H), for access to the quarry floor. An approximate location for development of this road is shown on the Plans. Determine the exact location in the field. Obtain the Engineer's approval before constructing the access road.

(Use the following bullet when realignment and/or widening of an existing access road is required. Insert the road name or number in the first bullet blank and road name or access location in the second bullet blank. Repeat the bullet(s) for each source that requires realignment and/or widening of an existing access road.)

- For material source **(Name) (subsection)** minor realignment and widening of _____, to accommodate the Contractor's operations in the material source, is anticipated. An approximate location for the minor realignment and widening Work is shown on the Plans. Determine the exact location in the field. Obtain the Engineer's approval before performing this Work.
- For material source **(Name) (subsection)** routine road maintenance activities such as grading and watering of the access road do not need review or approval. Maintain or develop drain dips, water bars, road crowning, in-slopes and out-slopes during road maintenance.

(Use the following bullet when bench access roads are to be realigned and regraded. Repeat the bullet for each source that requires bench access road development.)

- For material source **(Name) (subsection)** realign and regrade (construct) the bench access road as shown. Construct the road with a width of 12 feet and a reasonably

uniform grade, no steeper than 50 percent (1V:2H), for access to the upper bench by tracked vehicles.

(Use the following bullet when a stormwater control berm is required. Repeat the bullet for each source that requires a stormwater control berm.)

- For material source **(Name) (subsection)** using existing, loose and non-stockpiled material or clean soil or a combination of clean soil and rock, construct a stormwater control berm(s). Grade and leave level, all areas of the material source disturbed during construction of the stormwater control berm(s). Construct the stormwater control berm 3 feet high, with side slopes of 1V:2H. (Furnish erosion control protection for the stormwater control berm by placing, with minimal amount of separation, 3-foot diameter and larger oversize material along the creek-side toe of the berm. Maintain a minimum 10-foot wide buffer strip between the oversize material of the stormwater control berm and the creek, as detailed on the cross sections.) After completion of the stormwater control berm, seed according to 00235.46.

(Use the following bullet when safety berms are required. Repeat the bullet for each source that requires safety berms)

- For material source **(Name) (subsection)** use overburden or existing, loose and non-stockpiled material or imported or clean soil or a combination of clean soil and rock, to construct a safety berm along the top edge of the new excavation or existing slopes as shown. Maintain a 10-foot buffer between the top edge of the excavation or slope and the toe of the safety berm. Construct the berm 3 feet high, with side slopes of 1V:2H.

(b) Clearing and Grubbing - Before stripping of overburden clear and grub all trees within the excavation area, to be developed for stockpile and processing and the area to be developed as access roads. Place all logs in the log decks and other woody debris in the slash disposal area as shown (and as staked).

(c) Overburden - Before excavating, including drilling and blasting when required, strip and stockpile all soil overburden from within the excavation area, from the area to be developed for stockpile and processing, and from areas to be developed as access road(s). Incorporate grass and small shrubs into the stockpiles. Do not remove grass or small shrubs from the overburden. Place stockpiles in the overburden storage area(s). Maintain a minimum 10-foot buffer strip between the toe of the overburden storage area(s) and the excavation area. Store overburden stripped from the stockpile and processing area as shown, a minimum of 10 feet from the toe of the Aggregate stockpiles. Smooth and contour overburden storage berms to form side Slopes no steeper than 1V:2H.

(Use the following subsection .43 when blasting is required.)

[Begin Blasting Option]

00235.43 Blasting - Perform blasting operations according to this Section and Section 00335, except that perimeter controlled blasting as described in 00335.40(a) is not required in the material source.

Insert Project Name Here

(Use the following paragraph when blasting restrictions are required. Fill in the blanks with the appropriate times. Repeat the paragraph for each source that requires blasting hours.)

For material source **(Name) (subsection)** restrict blasting to the hours of ____:00 a.m. to ____:00 p.m. Monday through Friday. Do not blast on Saturdays, Sundays, or legal holidays as defined in ORS 279C.540.

(Use the following paragraph when specific fire precautions are required. Fill in the blank with the name and phone number of the appropriate interagency notification centers. . Repeat the paragraph for each source that requires specific fire precautions.)

For material source **(Name) (subsection)** notify and obtain approvals from _____ at least 48 hours before blasting.

(Use the following paragraph when blasting near wells and aquifers and when ground vibrations are anticipated. Fill in the first and third blanks with the number of days required. Fill in the second blank with the location of the well or aquifer. Repeat the paragraph for each source that requires blasting near wells and aquifers.)

For material source **(Name) (subsection)** before blasting and within ____ Days after blasting, measure water level or flow rate in the well located at _____. Sample and test water quality for nitrates and total coliform bacteria before blasting and again within ____ Days after blasting. Collect water samples according to OAR 333-061-0335. Have water samples tested for nitrates and total coliform bacteria by a certified laboratory according to OAR 333-061-0330. Notify the well owner 48 hours before conducting the water measurement, sampling, and testing.

[End Blasting Option]

00235.44 Source Operations - The following apply during material source operations:

- Construct slopes, bench(es), and floor(s) of the excavation area(s) as shown.
- To control dust, apply water to material source access, haul road(s), and crushing and processing operations.

(Use the following bullet when an off-site water source may be available. Use only when water rights are obtained or all permits are secured. If the proposed water source is a natural source, include 00290.34(c)(3) water intake screening if it is required. Repeat the bullet for each source when an off-site water source may be available.)

- For material source **(Name) (subsection)** a water source is not available on-site within the material source. A possible water source is located at ____ (insert location name, legal description, address, highway and mile point) ____.
- Stockpile scalpings and reject fines in separate and accessible stockpiles as shown.

(Use the following bullet when an existing road is to be maintained for a prospective source. Fill in the blank with the road name. Repeat the bullet for each prospective source when an existing road is to be maintained.)

- For material source **(Name) (subsection)** if the Contractor chooses to utilize this material source, maintain the condition of _____ at all times. Provide traffic control related to ingress and egress movements in a manner that allows a safe work zone and safe passage of vehicles.

(Use the following bullet when an existing road is to be maintained for a mandatory source. Fill in the blank with the road name. Repeat the bullet for each mandatory source when an existing road is to be maintained.)

- For material source **(Name) (subsection)** maintain the condition of _____ at all times. Provide traffic control related to ingress and egress movements in a manner that allows a safe work zone and safe passage of vehicles.

(Use the following bullet when cattle guards or livestock gates are present. Fill in blank with the appropriate location(s). Repeat the bullet for each source when cattle guards or livestock gates are present.)

- For material source **(Name) (subsection)** maintain the cattle guard and livestock gate _____ into the source at all times.

(Use the following bullet when cattle guards installation is required. Fill in the blank with the appropriate locations(s). Be sure to include cattle guard details on the project detail sheet(s). Repeat the bullet for each source when cattle guard installation is required.)

- For material source **(Name) (subsection)** construct cattle guard(s) at _____ according to details shown.

00235.45 Source Clean-up - The following apply at the completion of operations:

(Delete "(s)" when only one exception is required. Delete the parentheses when additional exceptions are added.)

- Leave no loose material on the site exceeding 1 foot diameter, except as noted below. Process existing oversize material, and all material loosened in the source by the Contractor that meets quality requirements, with the following exception(s):

(Fill in the blank with the appropriate quantity. Repeat the bullet for each source when stockpiling oversize material is required.)

- For material source **(Name) (subsection)** a maximum of _____ cubic yards of oversize material with a maximum dimension of 2.5 feet may be stockpiled in the material source. Consolidate oversize material as shown.

Insert Project Name Here

- Place all excess produced Aggregate remaining at the end of operations in separate and accessible stockpiles on Agency owned or controlled property in areas designated by the Engineer, at no additional cost to the Agency.
- Leave the material source haul road and bench access road open. Do not rip or block the roads except a few boulders greater than approximately three feet in diameter may be used to block off access to the upper bench areas.
- Remove all loose, hanging or potentially dangerous Rock on or above the excavated surface.
- Pile and burn all construction slash and combustible debris resulting from use and development of the source, including the preexisting refuse identified at the pre-work meeting, even if it is from outside the material source project boundary except for grass and small shrubs that are incorporated into the overburden. Comply with all open burning regulations in effect at the time of source occupancy. If burning is not allowed, all construction slash and combustible debris become the property of the Contractor, to be treated as noncombustible and removed from material source.

(Use the following bullets and paragraph when placing reject fines on final slope. Fill in the horizontal blank with appropriate number. Modify as needed. Repeat the bullet for each source when placing reject fines on final slope.)

- Before final seeding and mulching, do the following:
 - For material source **(Name) (subsection)** place reject fine material against the excavated slope as shown to construct the final 1V:___H Slope.
 - Cover the newly constructed slope with reject fines with at least 6 inches of scalping material.
 - Evenly distribute the stockpiled overburden over the slope(s).

If inadequate reject fines exist to completely construct the slope(s) utilize additional scalpings over top the reject fines to finalize construction of the slope(s) prior to the redistribution of overburden.

00235.46 Seeding:

(In the bullet below, fill in the blank with the appropriate area information listed below. Delete "(s)" or parentheses as appropriate. Delete the list when finished. Repeat the first two bullet(s) for each source.)

*excavation area(s) (if being reclaimed in the operation)
overburden storage area(s)
stormwater control berm(s)
safety berm(s)
soil/scalpings stockpile(s)
bench(es) and access road(s)
other)*

- For material source **(Name) (subsection)** in addition to other areas with soil cover within the site disturbed by the Contractor's operations, stabilize the _____ by seeding, mulching, and tackifying, as directed.

Insert Project Name Here

- For material source *(Name) (subsection)* furnish the following seed mixture:

(Insert seed mix and application rates here. Note: The seed mixture is almost always site specific. Obtain information from the Region Environmental Coordinator. Specify a material source subsection and name if necessary.)

•

(In the following bullet, include the third sentence when clover or alfalfa is required, otherwise delete it.)

- Use only certified weed free seed. Provide copies of the certification to the Engineer. Inoculate the clover and alfalfa prior to incorporation into the seed mixture.
- Furnish straw mulch according to 01030.15(b).
- Apply a commercial straw mulch tackifier according to the manufacturer's directions and at the recommended rate.
- Apply seed and mulch according to Section 01030.
- If conditions allow and the Contractor chooses, the area may be stabilized by applying seed using a range drill with a roller attachment. All areas seeded with the range drill and roller do not need to be subsequently covered with mulch and tackifier.
- All variations to these requirements require written approval by the Engineer.

00235.47 Source Vacating - Before vacating the material source the following apply:

- Remove all structures, noncombustible debris, and equipment from the material source, even if it was pre-existing, except for grass and small shrubs incorporated into the overburden.
- Remove solid waste and hazardous material from the site and dispose of properly. These include, but are not limited to, bag-house sludge or fines, lime, excess liquid asphalt, rejected and excess asphalt mixture, plant cleanings, materials placed in sumps, tires, pipes, belts, screens and truck cleanings. Provide documentary evidence of proper disposal and verify the amount of material removed.
- If a spill or dumping has occurred or if a spill or dumping is suspected to have occurred, clean up the contaminated materials according to Section 00290. After clean up, the Engineer may, sample and test materials at the spill or dumping locations to verify the clean up has been completed. If the Engineer's verification testing demonstrates remaining contamination, perform additional clean up until the requirements of Section 00290 including 00290.20(g) are met
- Attend a post-work meeting at the material source to evaluate material source rehabilitation work with the Engineer and attendees listed under 00235.05.

(When a mandatory material source is specified and fence or additional Work is required, measure the additional Work and pay for it in both Section .80 and .90. When a prospective source is specified, fence and additional Work is considered incidental to the prospective source.)

Measurement

Insert Project Name Here

00235.80 Measurement - No measurement of quantities will be made for Work performed under this Section, (except for seeding, temporary fence, and cattle guard in mandatory material source(s)).

(Use the following paragraph when a mandatory material source is specified and seeding is required.)

Seeding will be measured according to 01030.80.

(Use the following paragraph when a mandatory material source is specified and temporary fence, not orange plastic mesh fence, is required.)

Temporary fence will be measured according to 00270.80.

(Use the following paragraph when a mandatory material source is specified and a cattle guard is required.)

Cattle guards will be measured according to 01060.80.

Payment

(If mandatory material source is specified and seeding, temporary fence and/or cattle guard is required, delete the language in purple parentheses that does not apply and delete all purple parentheses.)

00235.90 Payment - No separate or additional payment will be made for Work performed under this Section. Payment will be included in payment made for the appropriate items under which this Work is required (except for seeding, temporary fence, and cattle guard in mandatory material source(s)).

(Use the following paragraph when a mandatory material source is specified and seeding is required.)

Seeding will be paid for according to 01030.90.

(Use the following paragraph when a mandatory material source is specified and temporary fence, not orange plastic mesh fence, is required.)

Temporary fence will be paid for according to 00270.90.

(Use the following paragraph when a mandatory material source is specified and a cattle guard is required.)

Cattle guards will be paid for according to 01060.90.

SP00236 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 02-26-26

This Section requires SP00270, SP01030, and SP01060 if temporary fence, seeding or cattle guards

Insert Project Name Here

are required. This Section requires
SP02320 when sediment fence is used)

(Use this Section when Agency provided disposal sites are to be included in projects. If more than one disposal site is required subsections may be copied and edited to reflect the conditions/requirements of each site.)

SECTION 00236 - AGENCY PROVIDED DISPOSAL SITES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00236, is not a Standard Specification and is included in this Project by Special Provision.

Description

00236.00 Scope - This Work consists of utilizing Agency provided prospective or mandatory disposal sites as the Contractor elects or as required for the construction of the Contract.

(Use the following subsection .01 as instructed below when the Agency will provide disposal sites. When only one prospective disposal site is listed, delete "(s)" and "are". Copy and paste subsection .01(b) as necessary to list more than two prospective disposal sites, but ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Fill in the blanks with the appropriate information. Modify as needed. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Use the source number bullet only if the site is an ODOT identified material site with a recognized source number, otherwise delete.)

[Begin Prospective Disposal Site Option]

00236.01 Prospective Disposal Site Specific Requirements - The following prospective disposal site(s) for (list acceptable material) , as long as the material does not contain hazardous substances, that may warrant investigation and consideration for use by the Contractor on this Project *(is) (are)* as follows:

(a) Prospective Disposal Site, *_(name)_*_____:

- **Source Number** - OR- _____
- **Location** - Approximately _____ miles (insert location and direction from the project or closest town here) on *(Interstate)* **(US) (OR)** _____ in the 1/4 of Section , T. *(insert N. or S.)* _____, R. *(insert W. or E.)* _____ W.M.

Insert Project Name Here

- **Access** - Adjacent (east, west, north, south) of MP _____ of (Interstate) (US) (OR) _____, (if off the highway a distance, include travel directions here)
- **Disposal Quantity Limit** - (Insert the quantity that can be disposed of in this site if there is a limit.)
- **Available Area for Material Disposal of Waste Material:**
 - Existing - _____ acres
 - Development - _____ acres

(b) Prospective Disposal Site, (name):

- **Source Number** - OR- _____
- **Location** - Approximately _____ miles (insert location and direction from the project or closest town here) on (Interstate) (US) (OR) _____ in the _____ 1/4 of Section _____, T. (insert N, or S.), R. (insert W. or E.) W.M.
- **Access** - Adjacent (east, west, north, south) of MP _____ of (Interstate) (US) (OR) _____, (if off the highway a distance, include travel directions here)
- **Disposal Quantity Limit** - (Insert the quantity that can be disposed of in this site if there is a limit.)
- **Available Area for Material Disposal of Waste Material:**
 - Existing - _____ acres
 - Development - _____ acres

If the Contractor elects not to utilize the above listed disposal site(s) and unless otherwise specifically allowed and subject to the requirements of 00280.05, dispose of materials, classed as waste materials in 00330.41(a)(3) and 00330.41(a)(4), outside and beyond the limits of the Project and Agency controlled property according to 00290.20. Do not dispose of materials on Wetlands, either public or private, or within 300 feet of rivers or streams.

[End Prospective Disposal Site Option]

(Use the following subsection .02 as instructed below for mandatory disposal sites. Delete "(s)" and "are" or parentheses as necessary and fill in all blanks. Copy and paste subsection .02(b) as necessary to list more than two mandatory disposal sites, but ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Delete all purple parentheses. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete..)

[Begin Mandatory Disposal Site Option]

00236.02 Mandatory Disposal Site Specific Requirements - The following mandatory disposal site(s) for (list acceptable material), as long as the material does not contain hazardous substances, (is) (are) to be used on this Project:

(a) Mandatory Disposal Site, (name):

- **Source Number** - OR- _____

Insert Project Name Here

- **Location** - Approximately _____ miles _____ (insert location and direction from the project or closest town here) _____ on (Interstate) (US) (OR) _____ in the ____ 1/4 of Section _____, T. _____ (insert N. or S.) _____, R. _____ (insert W. or E.) _____ W.M.
- **Access** - Adjacent _____ (east, west, north, south) _____ of MP _____ of (Interstate) (US) (OR) _____, _____ (if off the highway a distance, include travel directions here) _____
- **Disposal Quantity Limit** - _____ (Insert the quantity that can be disposed of in this site if there is a limit or insert the required quantity.) _____
- **Available Area for Material Disposal of Waste Material:**
 - **Existing** - _____ acres
 - **Development** - _____ acres

(Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

If material contains hazardous substances do not dispose of the material in the mandatory disposal site. Dispose of materials that contain hazardous substances according to (Section 00294)(00290.20).

(b) Mandatory Disposal Site, __ (name) __:

- **Source Number** - OR- _____
- **Location** - Approximately _____ miles _____ (insert location and direction from the project or closest town here) _____ on (Interstate) (US) (OR) _____ in the ____ 1/4 of Section _____, T. _____ (insert N. or S.) _____, R. _____ (insert W. or E.) _____ W.M.
- **Access** - Adjacent _____ (east, west, north, south) _____ of MP _____ of (Interstate) (US) (OR) _____, _____ (if off the highway a distance, include travel directions here) _____
- **Disposal Quantity Limit** - _____ (Insert the quantity that can be disposed of in this site if there is a limit or insert the required quantity.) _____
- **Available Area for Material Disposal of Waste Material:**
 - **Existing** - _____ acres
 - **Development** - _____ acres

(Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

If material contains hazardous substances do not dispose of the material in the mandatory disposal site. Dispose of materials that contain hazardous substances according to (Section 00294)(00290.20).

[End Mandatory Disposal Site Option]

00236.03 Laws - Conduct operations within the disposal site according to all applicable State, county, and federal laws including mining and fire laws. Provide, operate, and maintain wildland firefighting equipment appropriate for the current fire levels on-site at all times during all disposal site operations.

Insert Project Name Here

00236.04 Permits - Copies of the Plans, permits, agreements and the disposal site narrative(s) are available for inspection at the Project Manager's office. Conform all operations within the disposal site(s) to the stipulations and conditions of these documents and to all of the requirements of the Contract.

(Fill in the table below with the appropriate permits/plans listed below for each site. Delete the list when finished. Modify the table as needed to add or delete sites.

*Department of Geology and Mineral Industries (DOGAMI) Permit
Operating and Reclamation Plan
County Land Use Permit
Intergovernmental Agreement
Cooperative Improvement Agreement
Bureau of Land Management (BLM) Permit
United States Forest Service (USFS) Permit
Division of State Lands (DSL) Permit
Oregon Department of Fish and Wildlife (ODFW) Permit
Oregon Department of Environmental Quality (DEQ) Permit)*

Subsection	Site Name	Documents
00236.01(a)	(name)	(from list above)
00236.01(b)	(name)	(from list above)
00236.02(a)	(name)	(from list above)
00236.02(b)	(name)	(from list above)

00236.05 Pre-Work Meeting - Before occupying a disposal site, attend a pre-work meeting at the disposal site with the Engineer and the following owners or representatives:

(In the table below, select representatives from the following list and fill in the blanks with the contact name(s) and phone number(s) as appropriate for each site. Include the items that apply to each site. Add or delete rows in the table as necessary to list all applicable sources.

*ODOT Geologist
ODOT Region Environmental Coordinator
U.S. Forest Service representative(s) _____
BLM representative(s) _____
County representative(s) _____
Other _____)*

Subsection	Site Name	Contact Names for pre-work meeting
00236.01(a)	(name)	<i>ODOT Geologist ODOT Region Environmental Coordinator U.S. Forest Service representative(s) _____</i>

Insert Project Name Here

		<i>BLM representative(s)</i> _____ <i>County representative(s)</i> _____ <i>Other</i> _____
<i>00236.01(b)</i>	<i>(name)</i>	<i>(from list above)</i>
<i>00236.02(a)</i>	<i>(name)</i>	<i>(from list above)</i>
<i>00236.02(b)</i>	<i>(name)</i>	<i>(from list above)</i>

00236.06 Site Occupancy - Coordinate disposal site occupancy with the Engineer. The disposal site items listed in Table 00236-1 below are as shown (and as staked). Do not operate beyond the disposal site Project boundary or in no Work area(s) as shown (and as staked) unless otherwise directed, in writing.

(In the table below, fill in the blank with the appropriate site information listed below for each site. Add or delete rows in the table as necessary to list all applicable sites.)

<i>project boundary</i>	<i>disposal area(s)</i>
<i>reject fines stockpile</i>	<i>scalpings stockpile</i>
<i>oversize storage area</i>	<i>overburden storage area(s)</i>
<i>no work area(s)</i>	<i>stormwater control berm(s)</i>
<i>safety berm(s)</i>	<i>slash disposal area</i>
<i>log deck</i>	<i>bench access road(s)</i>
<i>stockpile and processing area</i>	
<i>access road(s)</i>	<i>sediment fence(s)</i>
<i>straw bale sediment barrier(s))</i>	

Table 00236-1

Subsection	Site Name	Site items shown and staked
<i>00236.01(a)</i>	<i>(name)</i>	<i>(from list above)</i>
<i>00236.01(b)</i>	<i>(name)</i>	<i>(from list above)</i>
<i>00236.02(a)</i>	<i>(name)</i>	<i>(from list above)</i>
<i>00236.02(b)</i>	<i>(name)</i>	<i>(from list above)</i>

00236.07 Site Development - If proposing changes to a disposal site development plan, submit a site development plan as an unstamped Working Drawing according to 00150.35. Do not begin Work in a disposal site until the site development plan has been approved, in writing, by the Engineer.

Develop a site-specific Erosion and Sediment Control Plan for each disposal site according to 00280.04 and submit it to the Engineer at or before the pre-work meeting. Construct

Insert Project Name Here

stormwater control berm(s) as shown and as needed to control runoff. Do not allow any materials, including sediments, or Aggregate to enter into waterways or Wetlands.

Develop a site-specific Pollution Control Plan for each disposal site according to 00290.30(b), and submit it to the Engineer at or before the pre-work meeting. Include the following requirements in the Pollution Control Plan:

- Do not discharge waste or by-product if it contains any substance in concentrations that could contaminate Soils or result in harm to fish, wildlife, or water sources.
- Store all potentially hazardous materials and solid waste in a manner that prevents seepage into the ground or groundwater sources. Lined sumps or pits are allowable options for storage. If pits or sumps are used, construct adequate berms or provide other measures to prevent breaching of the pits or sumps.
- For Materials capable of causing water pollution if discharged, locate storage facilities in an area that prevents spillage into waterways or Wetlands.

Construction

00236.40 General - Steam clean of all debris (soil, dirt, plant parts, and vegetative matter) all vehicles and Equipment, prior to entering the site for the first time, and each subsequent time if the vehicle has left the Roadway outside the construction Project limits, before being brought back to the site. Notify the Engineer before moving each vehicle onto the site. Certify, in writing, that the Equipment has been steam cleaned.

00236.41 Restrictions and Protection of Resources - Comply with the following for all operations within the disposal site:

- Protect cultural resources according to 00290.50.
- Protect migratory birds according to 00290.36(a).

(Use the following bullet when clearing, grubbing, and overburden removal is required. Modify dates when directed by Environmental Coordinator. If modified dates are different for different sites list the sites and dates or put them in a table.)

- Clear trees and shrubs and strip and stockpile soil overburden between September 1 and March 1.
- Do not utilize, contaminate, or disperse material from existing stockpiles. If existing stockpiles interfere with the Contractor's operations, move the stockpiles to other locations within the disposal site area as directed, at no additional cost to the Agency.

(Use the following bullet when specific restrictions are addressed in land use or other permits. If times are different for different sites list the sites and times or put them in a table.)

- Limit Equipment operation activities and disposal activities to the hours of ____:00 a.m. to ____:00 p.m., Monday through Saturday unless modifications to these hours are requested in writing and approved by the Engineer. Do not conduct any operation on Sundays or legal holidays, as defined in ORS 279C.540.

(Use the following subsection (a) when county owned sites are utilized. Fill in the blank of the first paragraph with the name of the county. Fill in the blanks of the second paragraph with the name of the contact person(s), the county name, and the phone number. Fill in the blank of the third paragraph with the royalty fee amount and unit, for example cubic yard, ton. Be sure to include an anticipated item to pay the county royalty fee.)

(a) County Owned Disposal Sites - This disposal site **(Name) (subsection)** is under Agency control through an agreement with the _____ County Department of Public Works. Conform all operations within this disposal site to the requirements of this agreement, the Plans, and the Specifications.

For information contact _____ or _____ at the _____ County Department of Public Works, at _____, to make arrangements to visit the site.

A \$ _____ per _____ (unit) _____ royalty charge for all material imported into the Prospective/Mandatory Site will be deducted from monies due the Contractor in the progress payments.

(Use the following subsection (b) on USDA Forest Service owned sites. Use the appropriate agreement. Delete the agreement that does not apply. Fill in the administrative/road use fee amount and unit in the second paragraph. Be sure to include an anticipated item to pay the fee.)

(b) USDA Forest Service Owned Sites - This disposal site **(Name) (subsection)** is under Agency control through a "Contract for the Sale of Mineral Materials" or a "Special Use Permit" agreement with USDA Forest Service. Conform all operations within this disposal site to the requirements of this agreement, the Plans, and the Specifications.

A \$ _____ per _____ (unit) _____ administrative and road use fee charge for disposal of material will be deducted from monies due the Contractor in the progress payments.

(Use the following subsection (c) on BLM owned sites.)

(c) Bureau of Land Management Sites - This disposal site **(Name) (subsection)** is under Agency control through a "Free Use Permit" or a "Temporary Use Permit" agreement with the Bureau of Land Management. Conform all operations within this disposal site to the requirements of this agreement, the Plans, and the Specifications.

(Use the following subsection (d) on privately owned sites. Fill in the appropriate property owner in the blank of the first paragraph. Fill in the property owner contact and phone number in the second paragraph. Fill in the royalty fee amount and unit in the third paragraph. Be sure to include an anticipated item to pay the royalty fee.)

(d) Privately Owned ODOT Controlled Sources - This disposal site **(Name) (subsection)** is under Agency control through a lease agreement with _____. Conform all operations within this disposal site to the requirements of this lease agreement, the Plans, and the Specifications.

Insert Project Name Here

For information contact _____ at _____, to make arrangements to visit the site.

A \$_____ per _____ (unit) _____ royalty charge for all material imported into the Prospective Site will be deducted from monies due the Contractor in the progress payments.

00236.42 Site Setup - Before proceeding with Work in the disposal site, the following apply:

(Use the following bullet when fences are required to secure no Work areas. Fill in the blanks with the length, type, and location of fencing. Copy and paste the following bullet as needed. Repeat the bullet for each disposal site that requires fences.)

- For disposal site **(Name) (subsection)** construct approximately _____ feet of type _____ fencing along _____ the no Work area as shown and as staked. Do not disturb the no Work area.

(a) Access:

(Use the following bullet when road access is to be constructed. Fill in the blank with the disposal site name and subsection. Delete all purple parentheses. Repeat the bullet for each site that requires access road development or maintenance.)

- For disposal site **(Name) (subsection)** develop and maintain an access road from the _____ to the _____ as applicable. Construct this road with a width of 12 feet and reasonably uniform grade, no steeper than a 16 percent grade (1V:6H), for access to the disposal area. An approximate location for development of this road is shown on the Plans. Determine the exact location in the field. Obtain the Engineer's approval before constructing the access road.

(Use the following bullet when realignment and/or widening of an existing access road is required. Insert the road name or number in the first bullet blank and road name or access location in the second bullet blank. Repeat the bullet(s) for each source that requires realignment and/or widening of an existing access road.)

- For disposal site **(Name) (subsection)** minor realignment and widening of _____, to accommodate the Contractor's operations in the disposal site, are anticipated. An approximate location for the minor realignment and widening Work is shown on the Plans. Determine the exact location in the field. Obtain the Engineer's approval before performing this Work.
- For disposal site **(Name) (subsection)** routine road maintenance activities such as grading and watering of the access road do not need review or approval. Maintain or develop drain dips, water bars, road crowning, in-slopes and out-slopes during road maintenance.

(Use the following bullet when a stormwater control berm is required. Repeat the bullet for each site that requires a stormwater control berm.)

- For disposal site **(Name) (subsection)** using existing, loose and non-stockpiled material or clean soil or a combination of clean soil and rock, construct a stormwater control berm(s). Grade and leave level, all areas of the disposal site disturbed during construction of the stormwater control berm(s). Construct the stormwater control berm 3 feet high, with side slopes of 1V:2H. Furnish erosion control protection for the stormwater control berm by placing, with minimal amount of separation, 3-foot diameter and larger oversize material along the creek-side toe of the berm. Maintain a minimum 10-foot wide buffer strip between the oversize material of the stormwater control berm and the creek, as detailed on the cross sections. After completion of the stormwater control berm, seed according to 00236.46.

(Use the following bullet when safety berms are required. Repeat the bullet for each site that requires safety berms.)

- For disposal site **(Name) (subsection)** using overburden or existing, loose and non-stockpiled material or imported or clean soil or a combination of clean soil and rock, construct a safety berm along the top edge of the new disposal area or existing slopes as shown. Maintain a 10-foot buffer between the top edge of the disposal or slope and the toe of the safety berm. Construct the berm 3 feet high, with side slopes of 1V:2H.
- For disposal site **(Name) (subsection)** place and arrange straw bales and or sediment fences as shown and according to Section 00280. Maintain a 10-foot buffer between the toe of the disposed of material slopes and the straw bales.

(b) Clearing and Grubbing - Before stripping of overburden clear and grub all trees within the disposal area and the area to be developed into access roads. Place all logs in the log decks and other woody debris in the slash disposal area as shown **(and as staked)**.

(c) Overburden - Before disposal activity, strip and stockpile all soil overburden within the disposal area to be developed as access road(s). Incorporate grass and small shrubs into the stockpiles. Do not remove grass or small shrubs from the overburden. Place stockpiles in the overburden storage area(s). Maintain a minimum 10-foot buffer strip between the toe of the overburden storage area(s) and the disposal area. Smooth and contour overburden storage berms to form side slopes no steeper than 1V:2H.

00236.44 Site Operations - The following apply during disposal site operations:

- Construct slopes, benches, top, and floor of the disposal area(s) as shown.
- Track-walk all slopes with a grade at or flatter than 1V:1.5H so that track impressions run parallel to slope contours. Maintain at least 1 3/8-inch tall track grousers.

(Use the following bullet when lift height is required. Insert lift height in the blank. Repeat the bullet for each site that requires lift height.)

- For disposal site **(Name) (subsection)** place material in Lifts of no more than ____ feet, and as shown.
- To control dust, apply water to disposal site access, haul road(s), and disposal operations.

Insert Project Name Here

(Use the following bullet when an off-site water source may be available. Use only when water rights are obtained or all permits are secured. If the proposed water source is a natural source, include 00290.34(c)(3) water intake screening in the project special provisions if it is required. Repeat the bullet for each site when an off site water source may be available.)

- A water source is not available on-site within the disposal site. A possible water source is located at ____ (insert location name, legal description, address, highway and mile point) ____.
- Place only material that is identified as acceptable for this site in the disposal area as shown. Maintain a minimum 10-foot wide buffer strip between the toe of the disposal area and the property boundary. Smooth and contour the disposal area to form side slopes no steeper than 1V:2H.

(Use the following bullet when an existing road is to be maintained for a prospective site. Fill in the blank with the road name. Repeat the bullet for each prospective disposal site when an existing road is to be maintained.)

- For disposal site **(Name) (subsection)** if the Contractor chooses to utilize this disposal site, maintain the condition of _____ at all times. Provide traffic control related to ingress and egress movements in a manner that allows a safe work zone and safe passage of vehicles.

(Use the following bullet when an existing road is to be maintained for a mandatory site. Fill in the blank with the road name. Repeat the bullet for each mandatory disposal site when an existing road is to be maintained.)

- For disposal site **(Name) (subsection)** maintain the condition of _____ at all times. Provide traffic control related to ingress and egress movements in a manner that allows a safe work zone and safe passage of vehicles.

(Use the following bullet when cattle guards or livestock gates are present. Fill in blank with the appropriate location(s). Repeat the bullet for each site when cattle guards or livestock gates are present.)

- For disposal site **(Name) (subsection)** maintain the cattle guard and livestock gate _____ into the source at all times.

(Use the following bullet when cattle guard installation is required. Fill in the blank with the appropriate locations(s). Be sure to include cattle guard details on the project detail sheet(s). Repeat the bullet for each site when cattle guard installation is required.)

- For disposal site **(Name) (subsection)** construct cattle guard(s) at _____ according to details shown.

00236.45 Site Clean-up - The following apply at the completion of operations:

Insert Project Name Here

- Leave no loose material on the site exceeding 1 foot diameter, except as noted below.

(Fill in the blank with the appropriate quantity. Repeat the bullet for stockpiling oversized material for each site when required.)

- For disposal site **(Name) (subsection)** a maximum of _____ cubic yards of oversize material with a maximum dimension of 2.5 feet may be stockpiled in the disposal site. Consolidate oversize material as shown.

(Use the bullet below if applicable. Modify as needed. Specify a site subsection and name if necessary.)

- Redistribute the stockpiled overburden over the disposed material to a uniform depth as shown.
- Pile and burn all construction slash and combustible debris resulting from use and development of the site, including the preexisting refuse identified at the pre-work meeting, even if it is from outside the disposal site project boundary except for grass and small shrubs that are incorporated into the overburden. Comply with all open burning regulations in effect at the time of site occupancy. If burning is not allowed, all construction slash and combustible debris become the property of the Contractor, to be treated as noncombustible and removed from disposal site.

00236.46 Seeding:

(In the bullet below, fill in the blank with the appropriate area information listed below. Delete "(s)" or parentheses as appropriate. Delete the list when finished. Repeat the first two bullets for each site if required.

*disposal area(s) (If being reclaimed in the operation)
overburden storage area(s)
stormwater control berm(s)
safety berm(s)
soil/scalpings stockpile(s)
bench(es) and access road(s)
other)*

- For disposal site **(Name) (subsection)** in addition to other areas with soil cover within the site disturbed by the Contractor's operations, stabilize the _____ by seeding, mulching, and tackifying, as directed.
- For disposal site **(Name) (subsection)** furnish the following seed mixture:

(Insert seed mix and application rates here. Note: The seed mixture is almost always site specific.)

(In the following bullet, include the third sentence when clover or alfalfa is required, otherwise delete it.)

- Use only certified weed free seed. Provide copies of the certification to the Engineer. Inoculate the clover and alfalfa prior to incorporation into the seed mixture.

Insert Project Name Here

- Furnish straw mulch according to 01030.15(b).
- Apply a commercial straw mulch tackifier according to the manufacturer's directions and at the recommended rate.
- Apply seed and mulch according to Section 01030.
- If conditions allow and the Contractor chooses, the area may be stabilized by applying seed using a range drill with a roller attachment. All areas seeded with the range drill and roller do not need to be subsequently covered with mulch and tackifier.
- All variations to these requirements require written approval by the Engineer.

00236.47 Site Vacating - Before vacating the disposal site the following apply:

- Remove all structures, noncombustible debris, and Equipment from the disposal site, even if it was pre-existing, except for grass and small shrubs incorporated into the overburden.
- Remove solid waste and hazardous material from the site and dispose of properly. Provide documentary evidence of proper disposal and verify the amount of material removed.
- If a spill or dumping has occurred, or is suspected to have occurred, clean up contaminated materials according to Section 00290. After clean up, the Engineer may, sample and test materials at the spill or dumping locations to verify the cleanup has been completed. If the Engineer's verification testing demonstrates remaining contamination, perform additional clean up until the requirements of Section 00290 including 00290.20(g) are met.
- Attend a post-work meeting at the disposal site to evaluate disposal site rehabilitation work with the Engineer and attendees listed under 00236.05.

(When a mandatory disposal site is specified and fence or additional Work is required, measure the additional Work and pay for it in both Section .80 and .90. When a prospective disposal site is specified, fence and additional Work is considered incidental to the prospective disposal site.)

Measurement

00236.80 Measurement - No measurement of quantities will be made for Work performed under this Section (except for (seeding), (temporary fence), (and) (cattle guard) in mandatory disposal area(s)).

(Use the following paragraph when a mandatory disposal site is specified and seeding is required.)

Seeding will be measured according to 01030.80.

(Use the following paragraph when a mandatory disposal site is specified and temporary fence, not orange plastic mesh fence, is required.)

Temporary fence will be measured according to 00270.80.

(Use the following paragraph when a mandatory disposal site is specified and a cattle guard is required.)

Insert Project Name Here

Cattle guards will be measured according to 01060.80.

Payment

(If mandatory disposal site is specified and seeding, temporary fence and/or cattle guard is required, delete the language in purple parentheses that does not apply and delete all purple parentheses.)

00236.90 Payment - No separate or additional payment will be made for Work performed under this Section. Payment will be included in payment made for the appropriate items under which this Work is required (except for (seeding), (temporary fence), (and) (cattle guard) in mandatory disposal area(s)).

(Use the following paragraph when a mandatory disposal site is specified and seeding is required.)

Seeding will be paid for according to 01030.90.

(Use the following paragraph when a mandatory disposal site is specified and temporary fence, not orange plastic mesh fence, is required.)

Temporary fence will be paid for according to 00270.90.

(Use the following paragraph when a mandatory disposal site is specified and a cattle guard is required.)

Cattle guards will be paid for according to 01060.90.

SP00237 (Special Provisions for the 2024 Book)

**(Bidding on or after: 12-01-26
Last updated: 08-25-26
This Section requires SP00270,
SP01030, and SP01060 if temporary
fence, seeding or cattle guards
are required.))**

SECTION 00237 - AGENCY-PROVIDED STAGING AREAS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.

Insert Project Name Here

If the staging area is an ODOT material source, consider providing a plan sheet delineating the staging area boundaries within the source. If there are specific restrictions or required site work to use the source, list these in subsections .41 and .44.)

Section 00237, is not a Standard Specification and is included in this Project by Special Provision.

Description

00237.00 Scope - This Work consists of utilizing Agency provided prospective or mandatory staging areas as the Contractor elects or as required for the construction of the Contract.

Locate staging area(s) in previously improved area(s) that have been paved or compacted and graveled, unless otherwise shown or approved.

(This boilerplate is set up with two alternatives, a short simple alternative when none of the optional language applies, and a regular (long) alternative that includes all of the typical optional language. ONLY use one alternative, if in doubt, use the regular (long) alternative. If any improvements like fence or cattle guards are required use the regular (long) alternative.)

[Begin Prospective Staging and Mandatory staging short Alternative]

(Use this subsection .01 for prospective staging areas. Do not use this subsection if subsection .02 mandatory staging area option is used.)

00237.01 Prospective Staging Areas - The following prospective staging area(s) have been cleared for use. If the Contractor elects not to utilize the listed prospective staging area(s) or elects to use other or additional staging areas, 00290.10 applies. Do not stage Equipment, store Materials, or operate beyond the staging area boundary shown or delineated unless otherwise directed in writing.

(Fill in the first blank with a description/name of the staging area. Fill in the remaining blanks with location, access, and available area. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete. Copy and paste subsection .01(a) as necessary to list more than one staging area. Ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Modify as needed. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

(a) Prospective Staging Area, _(name)_____:

- Source Number - OR- _____
- Location - _____ (Highway/MP, TRS, etc.)
- Access - _____ (directions)
- Available Area - _____ (acreage, dimensions, etc.)

[Begin Mandatory Staging Area Option]

Insert Project Name Here

(Use this subsection .02 for mandatory staging areas. Do not use this subsection / option if subsection .01 prospective staging area option is used.)

00237.02 Mandatory Staging Areas - No staging areas may be used on this Project, including non-Agency sites, except for the following mandatory staging area(s) :

(Fill in the first blank with a description/name of the staging area. Fill in the remaining blanks with location, access, and available area. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete. Copy and paste subsection .02(a) as necessary to list more than one staging area. Ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Modify as needed. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

(a) Mandatory Staging Area, __*(name)*__:

- **Source Number** - OR- _____
- **Location** - _____ (*Highway/MP, TRS, etc.*)
- **Access** - _____ (*directions*)
- **Available Area** - _____ (*acreage, dimensions, etc.*)

Do not stage Equipment, store Materials, or operate beyond the staging area boundary shown or delineated unless otherwise directed in writing.

Measurement

00237.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00237.90 Payment - No separate or additional payment will be made for Work performed under this Section.

[End Prospective Staging and Mandatory staging short Alternative]

[Begin Prospective Staging and Mandatory staging regular (long) Alternative]

(Use the following subsection .01 as instructed below when the Agency will provide staging areas. When only one staging area is listed, delete "(s)". Copy and paste subsection .01(b) as necessary to list more than two staging areas. Ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Modify as needed. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

[Begin Prospective Staging Area Option]

Insert Project Name Here

(Use this subsection .01 for prospective staging areas. Do not use this subsection if subsection .02 mandatory staging area option is used.)

00237.01 Prospective Staging Areas - If the Contractor elects not to utilize the listed prospective staging area(s) or elects to use other or additional staging areas, 00290.10 applies.

(Fill in the first blank with a description/name of the staging area. Fill in the remaining blanks with location, access, and available area. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete.)

(a) Prospective Staging Area, _(name)_:

- **Source Number** - OR- _____
- **Location** - _____ (Highway/MP, TRS, etc.)
- **Access** - _____ (directions)
- **Available Area** - _____ (acreage, dimensions, etc.)

(Use the following paragraph when the Contractor is required to install fencing around the staging area. Use either "work zone fencing from the QPL" or "temporary fence according to Section 00270", delete the option that does not apply and delete all purple parentheses.)

Delineate the limits of each site with (work zone fencing from section 00221.13 of the QPL) (temporary fence according to Section 00270) for the duration of the Project. Remove the fencing when the Project is complete and the site has been restored to preconstruction conditions. Do not stage Equipment, store Materials, or operate beyond the staging area boundary shown or delineated unless otherwise directed in writing.

If used, restore the site to preconstruction condition, as directed, by:

(Delete bullets that do not apply.)

- Removing all imported fabric, rock, and other construction and non-combustible debris
- Removing all solid waste and hazardous materials, including spills, and dispose properly
- Removing work zone fencing
- Leveling and scarifying the ground
- Applying seed and mulch to all disturbed earth according to Section 01030

(Use the following "Prospective Staging Area, _____" lead-in and bullets when more than one prospective staging area has been identified. Fill in the first blank with a description/name of the staging area. Fill in the remaining blanks with location, access, and available area. Copy and paste as necessary to list all prospective staging areas on the project. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete.)

(b) Prospective Staging Area, __(name)___:

- Source Number - OR- _____
- Location - _____ (Highway/MP, TRS, etc.)
- Access - _____ (directions)
- Available Area - _____ (acreage, dimensions, etc.)

(Use the following paragraph when the Contractor is required to install fencing around the staging area. Use either "work zone fencing from the QPL" or "temporary fence according to Section 00270", delete the option that does not apply and delete all purple parentheses. Use additional prospective staging area as needed.)

Delineate the limits of each site with (work zone fencing from section 00221.13 of the QPL) (temporary fence according to Section 00270) for the duration of the Project. Remove the fencing when the Project is complete and the site has been restored to preconstruction conditions. Do not stage Equipment, store Materials, or operate beyond the staging area boundary shown or delineated unless otherwise directed in writing.

If used, restore the site to preconstruction condition, as directed, by:

(Delete bullets that do not apply.)

- Removing all imported fabric, rock, and other construction and non-combustible debris
- Removing all solid waste and hazardous materials, including spills, and dispose properly
- Removing work zone fencing
- Leveling and scarifying the ground
- Applying seed and mulch to all disturbed earth according to Section 01030

[End Prospective Staging Area Option]

(Use the following subsection .02 when specifying one or more mandatory staging areas, that means that the Contractor is not allowed to stage anywhere else. Specifying a mandatory staging area on a Federal funded project requires an LPIF.

When only one mandatory staging area is listed, delete "(a)" before the "Mandatory Staging Area, _____" heading and delete "(s)". Copy and paste subsection .02(b) as necessary to list more than two mandatory staging areas. Ensure subsections are sequentially labeled (e.g. (a), (b), (c), etc.). Delete all purple parentheses.)

[Begin Mandatory Staging Area Option]

00237.02 Mandatory Staging Areas - No staging areas may be used on this Project, including non-Agency sites, except for the following mandatory staging area(s) :

(Fill in the first blank with a description/name of the staging area. Fill in the remaining blanks with location, access, and available area. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete.)

(a) Mandatory Staging Area, __ (name) ____:

- **Source Number** - OR- _____
- **Location** - _____ (Highway/MP, TRS, etc.)
- **Access** - _____ (directions)
- **Available Area** - _____ (acreage, dimensions, etc.)

(Use the following paragraph when the Contractor is required to install fencing around the staging area. Use either "work zone fencing from the QPL" or "temporary fence according to Section 00270", delete the option that does not apply and delete all purple parentheses.)

Delineate the limits of each site with (work zone fencing from section 00221.13 of the QPL) (temporary fence according to Section 00270) for the duration of the Project. Remove the fencing when the Project is complete and the site has been restored to preconstruction conditions. Do not stage Equipment, store Materials, or operate beyond the staging area boundary shown or delineated unless otherwise directed in writing.

Restore the site to preconstruction condition, as directed, by:

(Delete bullets that do not apply.)

- Removing all imported fabric, rock, and other construction and non-combustible debris
- Removing all solid waste and hazardous materials, including spills, and dispose properly
- Removing work zone fencing
- Leveling and scarifying the ground
- Applying seed and mulch to all disturbed earth according to Section 01030

(Use the following "Mandatory Staging Area, _____" lead-in and bullets when more than one mandatory staging area has been identified. Fill in the first blank with a description/name of the staging area. Fill in the remaining blanks with location, access, and available area. Copy and paste as necessary to list all mandatory staging areas on the project. Use the source number bullet only if the source is an ODOT identified material source with a recognized source number, otherwise delete.)

(b) Mandatory Staging Area, __ (name) ____:

- **Source Number** - OR- _____
- **Location** - _____ (Highway/MP, TRS, etc.)
- **Access** - _____ (directions)

Insert Project Name Here

- **Available Area** - _____ (acreage, dimensions, etc.)

(Use the following paragraph when the Contractor is required to install fencing around the staging area. Use either "work zone fencing from the QPL" or "temporary fence according to Section 00270", delete the option that does not apply and delete all purple parentheses.)

Delineate the limits of each site with (work zone fencing from section 00221.13 of the QPL) (temporary fence according to Section 00270) for the duration of the Project. Remove the fencing when the Project is complete and the site has been restored to preconstruction conditions. Do not stage Equipment, store Materials, or operate beyond the staging area boundary shown or delineated unless otherwise directed in writing.

Restore the site to preconstruction condition, as directed, by:

(Delete bullets that do not apply.)

- Removing all imported fabric, rock, and other construction and non-combustible debris
- Removing all solid waste and hazardous materials, including spills, and dispose properly
- Removing work zone fencing
- Leveling and scarifying the ground
- Applying seed and mulch to all disturbed earth according to Section 01030

[End Mandatory Staging Area Option]

(Use the following subsection .05 if a pre-work meeting is required.)

00237.05 Pre-Work Meeting - Before occupying a staging area, attend a pre-work meeting at the staging area with the Engineer and the following owners or representatives:

(In the table below, select representatives from the following list and fill in the blanks with the contact name(s) and phone number(s) as appropriate for each source. Include the items that apply to each staging area. Add or delete rows in the table as necessary to list all applicable sources.

ODOT Geologist
ODOT Region Environmental Coordinator
Other _____)

Subsection	Source Name	Contact Names and phone numbers
00237.01(a)	(name)	ODOT Geologist ODOT Region Environmental Coordinator Other _____
00237.01(b)	(name)	(from list above)
00237.02(a)	(name)	(from list above)

Insert Project Name Here

00237.02(b)	(name)	(from list above)

00237.40 General - Steam clean of all debris (soil, dirt, plant parts, and vegetative matter) all vehicles and Equipment, prior to entering the site for the first time, and each subsequent time if the vehicle has left the Roadway outside the construction Project limits, before being brought back to the site. Notify the Engineer before moving each vehicle onto the site. Certify, in writing, that the Equipment has been steam cleaned.

00237.41 Restrictions and Protection of Resources - Comply with the following for all operations within the staging area operations:

- Protect cultural resources according to 00290.50.
- Protect migratory birds according to 00290.36(a).

(Use the following subsection .44 when a pre-work meeting is required or cattle guards or livestock gates are present. Fill in blank with the appropriate location(s). Repeat the bullet for each staging area when cattle guards or livestock gates are present.)

00237.44 Staging Area Operations - The following apply during staging area operations:

(Use the following bullets when a pre-work meeting is required. Delete the bullets that do not apply.)

- Develop a site-specific Pollution Control Plan for the staging area(s) according to 00290.30(b) and submit it to the Engineer at or before the pre-work meeting. In addition to the requirements of 00290.30(b) include the following in the Pollution Control Plan:
 - For materials capable of causing water pollution if discharged, locate storage facilities in an area that prevents spillage into waterways or Wetlands.
- Provide, operate, and maintain wildland firefighting equipment appropriate for the current fire levels on-site at all times during all staging operations.
- To control dust, apply water to staging area access road(s) and staging operations.

(Use the following bullet when cattle guards or livestock gates are present. Fill in blank with the appropriate location(s). Repeat the bullet for each site when cattle guards or livestock gates are present.)

- For staging area **(Name) (subsection)** maintain the cattle guard and livestock gate _____ into the site at all times.

(Use the following bullet when cattle guard installation is required. Fill in the blank with the appropriate locations(s). Be sure to include cattle guard details on the project detail sheet(s). Repeat the bullet for each site when cattle guard installation is required.)

For staging area **(Name) (subsection)** construct cattle guard(s) at _____ according to details shown.

(Use the following subsection .47 if Staging Area Vacating is required.)

00237.47 Staging Area Vacating - Before vacating the staging area(s) the following apply:

- Remove all structures, construction debris and trash, and equipment from the staging area.
- Remove solid waste and hazardous material from the site and dispose of properly. Provide documentary evidence of proper disposal and verify the amount of material removed.
- If a spill or dumping has occurred or if a spill or dumping is suspected to have occurred, 00290.20(g) applies.
- Attend a post-work meeting at each staging area to evaluate staging area rehabilitation work with the Engineer.

(When a mandatory staging area is specified and fence or additional Work is required, measure the additional Work and pay for it in both measurement and payment. When a prospective staging area is specified, fence and additional Work is considered incidental to the prospective staging area.)

Measurement

00237.80 Measurement - No measurement of quantities will be made for Work performed under this Section (except for (seeding), (temporary fence), (and) (cattle guard) in mandatory staging area(s)).

(Use the following paragraph when a mandatory staging area is specified and seeding is required as part of the site restoration.)

Seeding will be measured according to 01030.80.

(Use the following paragraph when a mandatory staging area is specified and temporary fence, not orange plastic mesh fence, is required.)

Temporary fence will be measured according to 00270.80.

(Use the following paragraph when a mandatory staging area is specified and a cattle guard is required.)

Cattle guards will be measured according to 01060.80.

Payment

(If mandatory staging is specified and seeding, temporary fence and/or cattle guard is required, delete the language in purple parentheses that does not apply and delete all purple parentheses.)

00237.90 Payment - No separate or additional payment will be made for Work performed under this Section (except for (seeding), (temporary fence), (and) (cattle guard) in mandatory staging area(s)).

Insert Project Name Here

(Use the following paragraph when a mandatory staging area is specified and seeding is required as part of the site restoration.)

Seeding will be paid for according to 01030.90.

(Use the following paragraph when a mandatory staging area is specified and temporary fence, not orange plastic mesh fence, is required.)

Temporary fence will be paid for according to 00270.90.

(Use the following paragraph when a mandatory staging area is specified and a cattle guard is required.)

Cattle guards will be paid for according to 01060.90.

SP00240 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00240 - TEMPORARY DRAINAGE FACILITIES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00240 of the Standard Specifications modified as follows:

00240.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, placing, maintaining, and removing temporary drainage facilities, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00245 (Special Provisions for the 2024 Book)

**(Bidding on or after: 11-01-26
Last updated: 07-22-26
May require SP00820 or SP02340)**

(Use this Section when the Contractor is to provide temporary water management facilities.)

SECTION 00245 - TEMPORARY WATER MANAGEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00245 is not a Standard Specification and is included in this Project by Special Provision.

Description

00245.00 Scope - This Work consists of providing, installing, operating, maintaining, and removing temporary water management facilities in regulated Work areas.

00245.01 Abbreviations:

TWM - Temporary Water Management
TWMF - Temporary Water Management Facility
TWMP - Temporary Water Management Plan

00245.02 Definitions:

Temporary Water Management Facility - A TWMF that conveys water around or through Work areas, removes water from Work areas, and treats and discharges water at locations outside Work areas.

00245.03 Temporary Water Management Plan - The Agency TWMP is a concept plan. 28 Calendar Days before beginning Work in regulated Work areas, submit stamped Working Drawings of a Contractor-developed TWMP, according to 00150.35, based on either the Agency's concept plan or an independent plan that meets water quality and environmental guideline requirements and does not negatively affect neighboring properties or water rights.

Include the following minimum information in the TWMP:

- The sequence and schedule for dewatering and re-watering, including when to contact the Engineer prior to dewatering and re-watering.
- How the Work area is isolated from the active stream flow upstream, through, and downstream.
- How the stream flow is routed and conveyed around or through the isolated Work area.
- How fish passage is provided around the Work area, if required.
- How the isolated Work area is de-watered.
- How the pumped water is treated, if necessary, before it is discharged downstream.
- Description of all construction stages, including appropriate contact points for each stage.
- A list of on-site backup Materials and Equipment.

Insert Project Name Here

- Provide the name of the TWM Subcontractor (if applicable) and Contractor's superintendent, and their 24-hour contact phone number 10 Days before the pre-Work meeting. If changes in the appointment of the TWM Subcontractor or Contractor's superintendent occur during the term of the Contract, provide written notice to the Engineer within 5 Calendar Days of the change.
- Calculations of water withdraw pump's capacity.
- Details of the proposed water intake screen used to isolate in-water Work area and how it meets the requirements of 00290.34(c)(3).

Any change to the TWMP during construction requires approval prior to implementation.

Obtain the Engineer's written approval before beginning Work in in-water Work areas.

00245.04 Pre-Work Meeting - Before beginning any TWM Work, attend a pre-work meeting at the Project Site with the Engineer no more than 8 Calendar Days prior to implementation of TWM. Required meeting attendees include:

- Engineer
- Contractor
- TWM Subcontractor (if applicable)
- Agency Environmental Coordinator or their appointed representative

The pre-Work meeting agenda typically includes the method of TWM, the TWMP, fish salvage plan and strategy, describe environmental risks, turbidity monitoring, energy dissipation, dewatering and re-watering plan and strategy, site clean-up expectations, and the circumstances when contacting the Engineer is required.

Materials

(Delete Material items that do not apply and include other Materials as necessary.)

00245.10 Materials - Furnish Materials meeting the following requirements:

Concrete Barrier	00820.11
Pipe	00445.11
Plastic Sheeting.....	00280.14(a)
Riprap.....	00390.11
Rock Gabion Baskets.....	02340
Sandbags	00280.15(a)
Water Intake Screening.....	00290.34(c)

Provide pumps that are:

- Self-priming.
- Equipped with a variable speed governor.
- Equipped with a power source.
- Able to pump water that contains soft and hard solid.

Construction

00245.40 Fish Removal - Qualified Agency, ODFW, or ODOT consultant biologists will remove fish and other aquatic organisms from the isolation Work areas. Coordinate fish removal with the Engineer at least 28 Calendar Days before beginning Work in regulated Work areas. Allow access into the isolation Work areas before, during and after installation of the TWMF to perform the specified tasks as follows:

- **Before Installation of TWMF** - Before any in-water Work, including installing TWMF, qualified personnel will remove fish and other native aquatic organisms from within the proposed isolated Work area.
- **After Installation of TWMF** - After installing TWMF and the reduction of the water level through the isolated Work area has begun, qualified personnel will remove all fish and aquatic organisms as the water level is reduced. Do not completely de-water the isolation area until all fish and aquatic organisms have been removed.

00245.41 Installation - During installation of the temporary water management facility, maintain a downstream water flow rate of at least 50 percent of the upstream water flow rate.

00245.42 Operation - Operate temporary water management as follows:

- Protect fish and fish habitat according to 00290.34.
- Maintain and control water flow downstream of the isolated Work area for the duration of the diversion to prevent downstream de-watering.
- Clean, maintain and repair water intake screening to ensure adequate flows and protection of aquatic organisms.
- In the event of containment failure immediately notify the Engineer so arrangements can be made to remove fish and aquatic organisms from the isolation Work areas prior to the continuation of Work within the ordinary high water limits.

(Use the following bullet when a bypass pump is required.)

- When using a pump for bypassing water during temporary water management, physically monitor the pump in-person and maintain the pump at all times including non-work hours. Provide a back-up pump on-site and ready for use as necessary. Provide the Engineer with a daily report documenting monitoring activities.

Maintenance

00245.60 Maintenance - Monitor water turbidity according to 00290.30(a)(8).

Finishing and Cleaning Up

00245.70 Removal - Prior to removal of the TWMF, obtain approval from the Engineer after completion of all Work within ordinary high water limits. Remove the TWMF and re-water and restore the stream flow. Maintain downstream water flow during removal of the facility. Staged or metered re-watering may be required as determined by the Engineer.

Insert Project Name Here

Measurement

00245.80 Measurement - No measurement of quantities will be made for temporary water management facilities.

The estimated quantities of Materials required for the temporary water management facility are:

(Identify temporary water management facilities by station and list Materials for each facility. Delete Material items that do not apply and include other Materials as necessary. List each facility separately. Copy and paste for multiple facilities.)

Temporary Water Management Facility at Station _____ :

Concrete Barrier	_____	Feet
Pipe	_____	Feet
Plastic Sheeting.....	_____	Square Yard
Riprap.....	_____	Cubic Yard
Rock Gabion Baskets.....	_____	Square Foot
Sandbags	_____	Each

(Use the following sentence when a bypass pump is required.)

The quantities of bypass pump monitoring will be measured on the time basis, of the actual number of Days the bypass pump is in operation and a daily monitoring report is received.

Turbidity monitoring will be measured according to 00290.80.

Payment

00245.90 Payment - The accepted quantities of temporary water management facilities will be paid for at the Contract lump sum amount for the item "Temporary Water Management Facility at Station _____".

The location of the facility is inserted in the blank.

(Use the following sentence when a bypass pump is required.)

The accepted quantities of bypass pump monitoring will be paid for at the Contract unit price, per Day, for the item "Bypass Pump Monitoring".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Turbidity monitoring will be paid for according to 00290.90.

No separate or additional payment will be made for TWMP, maintaining, operating, monitoring, moving, or removing the facility.

SP00250 (Special Provisions for the 2024 Book) **(Bidding on or after: 08-01-26)**

Last updated: 04-23-26
Requires SP02520, SP02130 and SP02530
*This Section requires SP00230
When temporary surfacing
is required.)*

(Use this Section when the Contractor is to provide a diversion structure. This Section is for diversion bridges.)

SECTION 00250 - DIVERSION BRIDGES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00250 is not a Standard Specification and is included in this Project by Special Provision.

Description

00250.00 Scope - This Work consists of designing, constructing, inspecting, maintaining, and removing diversion bridges as shown or directed.

00250.03 Submittals - Submit the following at least 14 Calendar Days before the preinstallation conference:

- The Diversion Bridge Design Checklist, signed and stamped by the designer (see 00150.35(b)(1)) and is included at the end of this Section.
- Stamped Working Drawings and calculations, including hydraulic, scour, and foundation calculations, according to 00150.35.
- For used material, provide the following:
 - The locations of all acceptable defects on the Working Drawings with supporting design calculations.
 - Documentation that all primary and secondary members to be incorporated into the diversion bridge meet the requirements of 00250.10.
 - A statement that the Design Engineer of Record has inspected the used Material to be incorporated into the diversion bridge.

00250.04 Preinstallation Conference - Hold a preinstallation conference with the Engineer, Contractor personnel, fabricator, Design Engineer of Record, and all other personnel involved in installing the diversion bridge. Meet at a mutually agreed time two

weeks before installation work begins. Present and discuss all phases of the diversion bridge installation work.

Materials

00250.10 Material - Furnish new or used material for diversion bridges.

(a) New and Used Material - New and used material for diversion bridges may contain the following defects:

- Precast prestressed concrete members with spalling, cracking, section loss, or other distress that still satisfy the strength and serviceability requirements for the intended use.
- Structural steel members with notches, gouges, flame cuts, welds that have been repaired according to AWS D1.5, or holes meeting the requirements of AWS D1.5 that still meet the structural design and fatigue requirements for the intended use.

(b) New Material - Furnish new material for diversion bridges according to the applicable Sections of Part 00500.

(c) Used Material - Used materials are defined as materials that:

- Are reclaimed from previous projects.
- Performed satisfactorily on previous projects.
- Have no damage that affects the strength or serviceability required for the application intended.
- The Design Engineer of Record can certify for use as a part of the diversion bridge according to 00250.44.

(1) Precast Prestressed Concrete Members - Furnish precast prestressed concrete members that:

- Meet the requirements of Section 00550.
- Are permanently marked, in a location that is visible after assembly, with the manufacture's initials, cast date, job number, piece number, bridge number, and contract number.

Provide copies of the original shop drawings.

(2) Structural Steel Members - Furnish primary and secondary members that meet one of the following criteria:

Documented Steel:

- Meet the requirements of AASHTO M 160 (ASTM A6).
- All existing welds were tested for discontinuities using magnetic particle, ultrasonic, or radiographic testing as appropriate according to AWS D1.5. Evaluate all full penetration welds using tension criteria. Submit copies of all nondestructive testing (NDT) test reports to the Engineer.

- Meet the requirements of Section 02530. Verify by providing original material test reports or test reports on samples tested for yield and tensile strength, elongation, and Charpy Impact strength (zone 2).

Undocumented Steel:

- Meet the requirements of AASHTO M 160 (ASTM A6).
- For the purpose of this Section, all design calculations for undocumented steel are limited to the minimum requirements of ASTM A36 steel.
- All existing welds were tested for discontinuities using magnetic particle, ultrasonic, or radiographic testing as appropriate according to AWS D1.5. Evaluate all full penetration welds using tension criteria. Submit copies of all NDT test reports to the Engineer.

(3) Timber Members - Furnish timber members that:

- Meet the requirements of Section 02130.
- Do not contain rot, physical damage, or undue distortion.

(4) Piling:

a. Steel Piles - Furnish steel piles meeting the requirements of Section 02520.

Verify the grade of steel piles by providing original material test reports or test reports on samples tested for yield and tensile strength, and elongation.

For the purpose of this Section, all design calculations for undocumented steel are limited to the minimum requirements of ASTM A252, Grade 1 steel for pipe piles and ASTM A36 steel for H-Piles.

b. Timber Piles - Used timber piles are not allowed.

Construction

00250.41 Design - Design diversion bridges according to the "Bridge Temporary Works" section of the ODOT *Bridge Design Manual*. Use the ODOT *Bridge Design Manual* edition that is current on the date of Advertisement.

Project geotechnical and hydraulic specific reports are available for viewing at the office of the Engineer. Prints of these reports are available upon request.

(Use the following subsection (a) when spread footings are allowed, otherwise delete. Check with the Geotechnical and Hydraulic designers.)

(a) Spread Footings - For diversion bridges supported on spread footings, provide the following information:

- Soil or rock properties, ground water levels and all assumptions used to characterize the subsurface conditions for footing design.

- Estimated scour depths used in the analysis.
- Bearing capacity design calculations and recommendations.
- Recommended footing elevations.
- Estimated footing settlements and differential settlement, if applicable, based on the service conditions.
- Global stability analysis of spread footing locations.
- Method of providing adequate footing scour protection.

(b) Driven Piles - For diversion bridges supported on driven piles:

- Include the following information on the drawings:
 - Pile type, size, and steel grade.
 - Pile layout and spacing.
 - Required ultimate bearing capacity (nominal resistance).
 - Method for field determination of ultimate (nominal) bearing capacity (dynamic formula, wave equation, or dynamic load test).
 - Minimum pile tip elevations.
- Provide the following information and calculations:
 - Subsurface material properties, ground water levels and all assumptions used to characterize the subsurface conditions for pile design.
 - Estimated scour depths used in the analysis.
 - Pile bearing capacity design calculations and recommendations.
- Provide the following analysis and recommendations when applicable:
 - Lateral pile load analysis.
 - Pile tip protection.
 - Pile uplift capacity.

(c) Stream Crossings - For stream crossings, provide vertical and horizontal clearances as required by the applicable permitting agencies, but not less than a 5-year flood. Provide scour calculations to support the estimated scour depth used in the foundation design.

(d) Roadway and Railroad Crossings - For Roadway and Railroad crossings, provide the vertical and horizontal clearances as shown and the following:

(1) Bents Adjacent to Highways - For bents located adjacent to highway traffic openings, furnish:

- Temporarily pinned, pin and loop concrete barrier to protect the Structure from damage by adjacent traffic. Provide at least 1.5 feet clearance between the barrier and the bent.
- Posts designed for 150 percent of the calculated vertical loading.
- Mechanical connections (2,000 pounds minimum capacity) between the bottom of post and footing.

- Mechanical connections (1,000 pounds minimum capacity) between the top of post and cap.
- Connections (500 pounds minimum capacity) between the beams and cap.
- 5/8-inch diameter minimum bolts at timber bracing connections.

(2) Bents Adjacent to Railroads - For bents located adjacent to railroad traffic openings, in addition to the requirements of (d)(1) above, furnish the following:

- Collision posts as shown.
- For bents located within 20 feet of the centerline of track, solid sheathing 3 feet and 16 feet above top of rail with 5/8-inch-thick minimum plywood, properly blocked at the edges.
- For bents located within 20 feet of the centerline of the track, bracing adequate to resist the required horizontal design loading or a minimum 5,000 pounds horizontal loading.

(e) Width - Design diversion bridges to match the temporary roadway width and vertical and horizontal alignment as shown.

(f) Surfacing - Except for concrete decks, furnish the Structure with a minimum 2-inch asphalt concrete or equivalent wearing surface. Immediately prior to placing the asphalt concrete:

- Clean and dry the surface to be covered.
- Apply a hot asphalt prime coat at a uniform rate of 0.20 to 0.25 gallons per square yard of deck surface or as directed by the Engineer.
- Apply a spread of aggregate, 1/4 inch to 1/2 inch in size, to give the appearance of 50 percent coverage.
- Roll the surface to secure the maximum embedment of the aggregate into the prime coat and surface.

(g) Roadway Openings - At roadway openings, provide 25-watt amber lights at 3-foot centers around the perimeter of each side of the diversion bridge opening. Illuminate the lights from 30 minutes before sunset to 30 minutes after sunrise.

(h) Bridge Rail - Design diversion bridge rail systems meeting MASH TL-3 performance criteria.

(i) Drainage – Design and detail temporary bridge deck drainage according to *AASHTO Drainage Manual Appendix 17A* and restrict spread to the shoulder width.

00250.43 Construction - Construct diversion bridges according to the applicable Sections of Part 00500 and the requirements of applicable permitting agencies.

Perform structural steel welding according to 00560.26(a) and steel piling welding according to 00520.43(g). Do not begin welding until all of the following have been approved:

- WPS-Welding Procedure Specification

Insert Project Name Here

- PQR-Procedure Qualification Records
- WQTR-Welder Qualification Test Records
- MTR-Material Test Report
- CWI-AWS Certified Welding Inspector

Field welding to girders, beams, stringers, crossbeams, and floor beams is not allowed.

00250.44 Opening to Traffic:

(a) Before Opening to Traffic - Before opening diversion bridges to traffic, have the Design Engineer of Record perform the following:

- Inspect the soils to confirm that bearing capacity equals or exceeds design assumptions.
- Accompany the Engineer on an inspection of the Structure to confirm the Structure and Materials conform to the Plans and Specifications.
- Provide a written statement that the Structure and the Materials used will serve the intended use and that they comply with the Design Engineer of Record's submitted Plans and drawings.

(b) After Opening to Traffic - On diversion bridges that are open to traffic for more than one year, do the following:

- On or before each anniversary of the opening of the diversion structure, have the Design Engineer of Record inspect the Structure and certify that a hands-on inspection of the Structure has been performed and a determination has been made that the Structure is consistent with the approved design and is currently adequate for its design loads.
- Provide a signed and stamped report of the inspection results and certification within 30 Calendar Days of the inspection.

(Use the following heading and subsection .50 when "diversions" are required.)

Temporary

00250.50 Diversion - Furnish temporary Roadbed and Surfacing according to Section 00230.

Maintenance

00250.60 Structure Maintenance - Maintain diversion bridges, including wearing surfaces, in a safe and functional condition. Keep bracing and connections tight and immediately replace any damaged members, as directed or approved by the Engineer. For stream crossings, remove all debris or drift from the Structure.

Finishing and Clean Up

Insert Project Name Here

00250.70 Structure Removal - When diversion bridges are no longer needed, remove them according to Section 00310. Unless otherwise shown or specified, all diversion bridge materials will remain the property of the Contractor.

Satisfy all requirements of applicable permitting agencies during bridge removal.

Restore all areas occupied by the diversion bridges to original condition or as shown.

Measurement

00250.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00250.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Diversion Bridges".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for designing, constructing, maintaining, inspecting, or removing the diversion bridges.

(Use the following paragraph when "diversions" are required.)

Temporary Roadbed and Surfacing will be paid for according to 00230.90.

DIVERSION BRIDGE DESIGN CHECKLIST

Instructions - This checklist was developed to facilitate the design, review, and erection of diversion bridges. It is intended to remind the Design Engineer of Record to design and to check for specific aspects of construction. It is not a substitute for plan and design criteria or specification requirements.

The checklist is to be completed and signed by the diversion bridge Design Engineer of Record. Answer every question. Attach explanations of all negative responses to this checklist. Submit this checklist with the submittals.

	YES	NO	N/A
A. Contract Plans, Specifications, and Permits			
1. Are the diversion bridge's plans prepared, stamped and signed by an engineer registered to practice in Oregon?	_____	_____	_____
2. Are the design calculations signed by both the designer and the checker, and stamped by the designer and included in the submittal?	_____	_____	_____
3. Have three complete sets (five if railroad approval is required) of the design calculations been included with the diversion bridge drawings submittal?	_____	_____	_____
4. Are diversion bridge plans in compliance with the requirements of the construction plans and specifications?	_____	_____	_____
5. Are diversion bridge plans in compliance with the requirements of the Oregon Standard Specifications for Construction, subsection 00150.35?	_____	_____	_____
6. Are all existing, adjusted or new utilities in proximity with the proposed diversion bridge shown on the diversion bridge plans and is protection of these utilities addressed?	_____	_____	_____
7. Are clearance requirements satisfied and shown on the diversion bridge plans?	_____	_____	_____
8. For construction in or over navigable waters, have all requirements for construction of the diversion bridge that are called for in the Coast Guard Permit been incorporated?	_____	_____	_____
9. Has possible damage from traffic been considered?	_____	_____	_____
10. Has damage from stream drift been considered?	_____	_____	_____

B. Foundation Requirements

- | | | | |
|--|-------|-------|-------|
| 1. Is the diversion bridge supported on driven piling? | _____ | _____ | _____ |
| a. Are minimum pile tip elevations or penetration depths indicated on the drawings? | _____ | _____ | _____ |
| b. If timber diversion bridge piles are used, are the lengths sufficient to eliminate the possibility of pile splices? | _____ | _____ | _____ |
| c. Is a static pile capacity analysis included in the calculations? | _____ | _____ | _____ |
| d. If lateral loads are applied to the piling by equipment, dead loads, flowing water, or drift, is a detailed lateral load analysis included in the calculations? | _____ | _____ | _____ |
| e. When piling are in an active waterway, have the potential effects of scour on axial and lateral pile support been addressed in the calculations? | _____ | _____ | _____ |
| f. If the FHWA Gates Equation is used to determine bearing capacity, does the proposed pile hammer meet the minimum field energy requirements as listed in 00520.20(d)(2)? | _____ | _____ | _____ |
| g. Will a driving criteria graph, plotting blow count versus stroke for an acceptable pile hammer, be provided for the project inspector? | _____ | _____ | _____ |
| 2. Is the diversion bridge supported on spread footings? | _____ | _____ | _____ |
| a. Are the spread footing elevations shown on the drawings? | _____ | _____ | _____ |
| b. Has a rational method for determining the ultimate bearing capacity of the foundation materials been presented and described in the calculations? | _____ | _____ | _____ |
| c. Have the soil parameters used in calculating the ultimate bearing capacity been listed and confirmed by the Design Engineer of Record? | _____ | _____ | _____ |
| d. Has an appropriate Factor of Safety, or resistance factor, been used for calculating the allowable (or factored) bearing capacity of the foundation materials? | _____ | _____ | _____ |

Insert Project Name Here

- e. Are spread footing settlement estimates included in the calculations? _____
- f. Have effective stresses been used in the calculations, when applicable? _____
- g. When spread footings are founded near the top of a slope or in a slope, have the ultimate bearing capacity calculations been modified accordingly? _____
- h. When spread footings may be subjected to flowing water, have the potential effects of scour on ultimate bearing capacity been addressed in the calculations? _____

C. Loads

- 1. Has the mass of the contractor's heavy equipment units crossing the diversion bridge been included in the calculations? _____
- 2. Are design loads and material properties used to determine design stresses for each different diversion bridge member shown on the diversion bridge plans? _____
- 3. Is the worst loading and member property condition, rather than the average condition, used to obtain design loads? _____
- 4. Are concentrated loads included in the analysis of supporting beams or steel beam caps? _____

D. Allowable Stresses

- 1. Has the method used for diversion bridge design of all members except for manufactured assemblies been noted in the design calculations? _____
- 2. Are manufactured assemblies identified as to manufacturer, model, rated working capacity and ultimate capacity? _____
- 3. Is the allowable stress and the calculated stress listed in the summary for each different diversion bridge member, except for manufactured assemblies? _____

E. Timber Diversion bridge Construction

- 1. Are timber grades consistent with material to be delivered to the construction site, and noted on diversion bridge drawings, and in accompanying calculations for all timber diversion bridge material? _____

- | | | | | |
|----|--|-------|-------|-------|
| 2. | If "rough" lumber is used, are the actual lumber dimensions used in the calculations? | _____ | _____ | _____ |
| 3. | If timber spans are governed by the strength of the timber, are the allowable stress and the calculated stress shown in the calculations? | _____ | _____ | _____ |
| 4. | If timber spans are governed by the allowable spacing of supporting joists or beams, are the allowable and the proposed spacing shown on the diversion bridge plans? | _____ | _____ | _____ |
| 5. | Has timber been checked for bending, shear, bearing stresses, and deflection? | _____ | _____ | _____ |
| 6. | Is deck timber identified as being continuous over three or more spans when they are not analyzed as simple spans? | _____ | _____ | _____ |
| 7. | Have deck timber and cap beams been checked for bearing stresses perpendicular to the grain as well as for bending and shear stresses? | _____ | _____ | _____ |
| 8. | Have posts been checked as columns as well as for compression parallel to the grain? | _____ | _____ | _____ |

F. Prestressed Concrete Members

- | | | | | |
|----|---|-------|-------|-------|
| 1. | Are manufacturer initials, cast date, job number, piece number, bridge number, and contract number either permanently cast into each member or on a permanently attached stamped steel plate? | _____ | _____ | _____ |
| 2. | Are members adequate for indented use? | _____ | _____ | _____ |
| 3. | Are members free of spalls, cracks, section loss or any other distress? | _____ | _____ | _____ |
| 4. | Is location of each member marked on plans? | _____ | _____ | _____ |
| 5. | Is location of spalls or section loss of each member marked on plans? | _____ | _____ | _____ |

G. Steel Diversion Bridge Construction

- | | | | | |
|----|---|-------|-------|-------|
| 1. | Are steel structural shapes and plates identified by ASTM number on the diversion bridge plans and in the calculations? | _____ | _____ | _____ |
|----|---|-------|-------|-------|

Insert Project Name Here

- | | | | | |
|----|---|-------|-------|-------|
| 2. | Have exiting holes, notches, gouges, flame cuts, and welds been repaired according to AWS D1.5,? | _____ | _____ | _____ |
| 3. | Have exiting welds been ground flush and tested for discontinuities? | _____ | _____ | _____ |
| 4. | Have steel beams been checked for bending, shear, web crippling and buckling of the compression flange? | _____ | _____ | _____ |
| 5. | Has horizontal plane bracing been shown where required to limit compression flange buckling? | _____ | _____ | _____ |
| 6. | Are holes meeting the requirement of AWS D1.5, shown in the diversion bridge plans? | _____ | _____ | _____ |
| 7. | Are supporting calculations showing the adequacy of steel sections with existing holes included? | _____ | _____ | _____ |
| 8. | Are fatigue category D, E and E' marked on the diversion bridge plans and is supporting analysis showing adequacy for each fatigue category provided? | _____ | _____ | _____ |

H. Deflections and Settlement

- | | | | | |
|----|---|-------|-------|-------|
| 1. | Is diversion bridge deflection for concrete dead load shown on the plans for all spans? | _____ | _____ | _____ |
| 2. | Do stringers supporting cast-in-place concrete compensate for estimated camber? | _____ | _____ | _____ |
| 3. | Are provisions shown for taking up diversion bridge settlement? | _____ | _____ | _____ |

I. Compression Members, Connections and Bracing

- | | | | | |
|----|---|-------|-------|-------|
| 1. | Has general buckling been evaluated for all compression members? | _____ | _____ | _____ |
| 2. | Has bracing been provided at all points of assumed support for compression members? | _____ | _____ | _____ |
| 3. | Has bracing in each direction been considered in establishing the effective length used to check post capacity? | _____ | _____ | _____ |
| 4. | Is bracing strength and stiffness sufficient for the intended purpose? | _____ | _____ | _____ |

- | | | | | |
|-----|--|-------|-------|-------|
| 5. | If temporary bracing is required during intermediate stages of diversion bridge erection, is it shown on the plans? | _____ | _____ | _____ |
| 6. | Have all connections been designed and detailed? | _____ | _____ | _____ |
| 7. | Are web stiffeners required on steel cap beams or steel beams to resist eccentric loads? | _____ | _____ | _____ |
| 8. | Are wedges required between longitudinal beams and cap beams to accommodate longitudinal slope or to reduce eccentric loading? | _____ | _____ | _____ |
| 9. | Have sloping diversion bridge members that exert horizontal forces on the diversion bridge been braced or tied to resist these loads? | _____ | _____ | _____ |
| 10. | Have timber headers set on shoring towers been checked for eccentric loads, and for shear and bending stresses produced by the eccentricity? | _____ | _____ | _____ |

J. Highway and Railroad Traffic Openings (For diversion bridge over or adjacent to highway or railroad traffic openings.)

- | | | | | |
|----|--|-------|-------|-------|
| 1. | Does the diversion bridge have a minimum of 25 feet of horizontal clearance from center of the outside track to the bridge abutment? | _____ | _____ | _____ |
| 2. | Does the diversion bridge have a minimum of 23 feet 6 inch vertical clearance from the top of rail to the bottom of the bridge beam? | _____ | _____ | _____ |
| 3. | Does the diversion bridge meet all of the railroad permit requirements? | _____ | _____ | _____ |

_____	_____
Design Engineer of Record Signature	Date

SP00251 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-02-26

***This Section requires SP00230 when
temporary surfacing is required.)***

(Use this Section when the Agency is to provide a diversion structure for temporary use by the Contractor. This Section is for temporary highway bridges.)

SECTION 00251 - AGENCY PROVIDED TEMPORARY BRIDGES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00251 is not a Standard Specification and is included in this Project by Special Provision.

Description

00251.00 Scope - This Work consists of transporting, erecting, maintaining, removing, and returning to its original location a temporary bridge provided by the Agency as shown or directed.

Materials

(Fill in the blank with the location of the temporary bridge.)

00251.10 Material - The temporary bridge is located at _____.

Furnish materials that are not supplied by the Agency according to the applicable Sections of Part 00500.

Construction

00251.40 Construction - Provide stamped Working Drawings and calculations of the support system for the temporary structure according to 00150.35.

Erect the temporary bridge according to the applicable Sections of Part 00500.

Construct the temporary bridge so it satisfies all the requirements of applicable permitting agencies.

(Use the following heading and subsection .50 when "diversions" are required.)

Temporary

00251.50 Diversion - Furnish temporary roadbed and surfacing according to Section 00230.

Maintenance

00251.60 Structure Maintenance - Maintain the temporary bridge in a safe and functional condition.

Finishing and Clean Up

00251.70 Structure Removal - When the temporary bridge is no longer needed, remove and return it to its original location. All other temporary bridge materials remain the property of the Contractor and be disposed of according to Section 00310.

Satisfy all requirements of applicable permitting agencies during bridge removal.

Restore all areas occupied by the temporary bridge to original condition.

Measurement

00251.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00251.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item " Diversion Bridges, Agency Provided".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for transporting, erecting, maintaining, removing, or returning the temporary bridge to its original location.

(Use the following paragraph when " diversions" are required.)

Roadbed and Surfacing will be paid for according to 00230.90.

SP00252 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

(Use this Section when the Contractor is to construct temporary work bridges or trestles for Contractor workers.)

SECTION 00252 - TEMPORARY WORK BRIDGES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Section 00252 is not a Standard Specification and is included in this Project by Special Provision.

Description

00252.00 Scope - This Work consists of designing (if applicable), constructing, maintaining, and removing temporary work bridges or trestles necessary to construct the new structure.

Materials

00252.10 Material - Furnish materials for temporary work bridges or trestles meeting the requirements of the applicable Sections of Part 00500.

Construction

00252.40 Construction - Provide stamped Working Drawings and calculations of the work bridges or trestles according to 00150.35.

Design work bridges or trestles according to AASHTO *Guide Design Specifications for Bridge Temporary Works*.

Construct work bridges or trestles at the locations shown and according to AASHTO *Construction Hand Book for Bridge Temporary Works*.

Construct the work bridges or trestles so they satisfy all the requirements of applicable permitting agencies.

Maintenance

00252.60 Maintenance - Maintain work bridges or trestles in a safe and functional condition.

Provide and place suitable approved barriers on or near the work bridges or trestles to prevent public access.

Finishing and Cleaning Up

00252.70 Structure Removal - When the temporary work bridges or trestles are no longer needed, remove them according to Section 00310.

Satisfy all requirements of applicable permitting agencies during work bridge or trestle removal.

Restore all areas occupied by the work bridges or trestles to original condition.

Measurement

00252.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00252.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Temporary Work Bridges".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for designing, constructing, maintaining, or removing temporary work bridges.

SP00253 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-08-26
Requires SP00960 when electrical service is required)

SECTION 00253 - TEMPORARY WORK ACCESS AND CONTAINMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00253 of the Standard Specifications modified as follows:

(Use the following subsection .00 to describe the required temporary work access and containment for the project. Repeat the paragraph as necessary to list all work surfaces requiring containment. Delete "(s)" or parentheses as applicable.)

00253.00 Scope - Add the following paragraph(s) to the end of this subsection:

(Insert the Structure No. in the first blank. Insert a description of the work surfaces requiring temporary work access and containment in the second blank. Insert the applicable bridge spans in the third and fourth blanks. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

On Structure No. _____, provide (temporary work access, containment, barges, heating, and ventilating) system(s) for _____ *(Insert description of work surfaces requiring work access and containment)* (on spans _____ through _____).

(Use the following subsection .01 when work platforms and containment are only allowed on a bridge during a restricted time period. Fill in the blanks with the dates that work platforms and containment are allowed on the bridge.)

00253.01 General - Add the following paragraph to the end of this subsection:

Work platforms and containment are allowed on the Bridge only between _____ and _____.

00253.03(a) Work Access Submittal - Replace the bullet that begins "Maximum wind speed ..." with the following bullet:

- Maximum wind speed where work access structure(s) may remain on the Structure

00253.03(b) Work Containment Submittal - Replace the bullet that begins "Maximum wind speed ..." with the following bullet:

- Maximum wind speed where containment wall materials may remain on the Structure.

00253.04 Design Services - Replace the paragraph that begins "If barges will be ..." with the following paragraph:

If barges are used, provide marine design services by an engineer licensed in the State of Oregon to practice in the field of Naval Architecture and Marine Engineering or other Professional Engineer licensed in the State of Oregon with relevant naval architecture experience as accepted by the Engineer.

(Use the following subsection .07 if Section 00252 is included.)

00253.07 Work Bridge Structural Design Requirements - Replace this subsection, except for the subsection number and title, with the following:

Unless otherwise specified in Section 00252, design work Bridges according to *AASHTO Guide Design Specifications for Bridge Temporary Works*. Furnish materials for temporary work Bridges meeting the requirements of the applicable Sections of Part 00500. Comply with all requirements of applicable permitting agencies according to Section 00290.

00253.08(a) Contractor-Designed - Replace the bullet that begins "Detail the anchoring system ..." with the following bullet:

- Detail the anchoring system that is used to connect the temporary platform or scaffolding to the existing Structure.

(Use the following lead in paragraph and subsection .09 when the Tier 2 inventory rating factor is less than 1.0 or significant temporary Structures will be suspended from the existing Structure.)

Add the following subsection:

00253.09 Work Platform, Scaffolding and Containment Structural Design Requirements -

Design work platforms, scaffolding, and containment Structures for dead load, live load, and wind load. Obtain basic wind speed as shown on Standard Drawing TM671 and applied in the most critical direction. For Structures with fundamental frequency less than 1 Hz, design for wind loads accounting for structural dynamic effects.

Provide designs with a factor of safety of at least six for wire ropes and connecting hardware and at least four for all other components for containment Structure and work platform components.

Verify structural adequacy of the Bridge with added loading from containment Structures and work platforms using AASHTO *Standard Specifications for Highway Bridges*, Group II, III, V, and VI load combinations.

(Use the following subsection to describe conditions that are allowable without structural analysis of the span if the work platforms and containments are placed symmetrically on the span [i.e. each end of the span is loaded equally]. This language may be repeated as necessary to address different spans of the bridge. List the span description, allowable work platform loading, allowable point loading & spacing, allowable projected area of containment(s) above and below a limiting wind speed for wind transverse to roadway, allowable projected area of containment(s) above and below a limiting wind speed for wind parallel to Roadway, and allowable protrusion of platform(s) & containment(s) below the Structure.)

(a) Containment Structures Positioned Symmetrically on any Span - For containment structures positioned symmetrically on any span, design calculations for the bridge structural members are not required if all of the following conditions are satisfied:

- Total combined live load and dead load of all work platforms and containment Structures supported by the span, including all personnel, Equipment, Materials, and collected debris or water, does not exceed ____ pounds per square foot.
- Point loads do not exceed ____ pounds at each point and point loads are spaced at least ____ feet in both horizontal directions. Point loads are applied to deck within one foot of a girder, cross beam, or diaphragm, or directly to a girder, cross beam or diaphragm.

*(Use the following bullet when a temporary structural system is **NOT** provided to fully resist transverse wind forces applied to the platform(s) & containment(s). Fill in the first blank with "a single" or a description of a specific span, depending on the need for specific loading requirements.)*

- For winds transverse to Roadway, total combined projected area of containments installed on ____ span does not exceed ____ square feet if wind speeds are at or below ____ mph and does not exceed ____ square feet if wind speeds are above ____ MPH.

*(Use the following bullet when a temporary structural system is **NOT** provided to fully resist longitudinal wind forces applied to the platform(s) & containment(s). Fill in the first blank with "a single" or a description of a specific span, depending on the need for specific loading requirements.)*

- For winds parallel to Roadway, total combined projected area of containments installed on ____ span does not exceed ____ square feet if wind speeds are at or below ____ mph and does not exceed ____ square feet if wind speeds are above ____ mph.

(Use the following subsection to describe conditions that are allowable without structural analysis of the span if the work platforms and containments are placed

asymmetrically on the span [i.e. each end of the span is loaded differently]. This paragraph may be repeated as necessary to address different spans of the bridge. List the span description, allowable work platform loading, allowable point loading & spacing, allowable projected area of containment(s) above and below a limiting wind speed for wind transverse to roadway, allowable projected area of containment(s) above and below a limiting wind speed for wind parallel to roadway, and allowable protrusion of platform(s) & containment(s) below the Structure. Fill in the blank with "a single" or a description of a specific span, depending on the need for specific loading requirements.)

(b) Containment Structures Positioned Asymmetrically on any Span - For containment structures positioned asymmetrically on ___ span, design calculations for the bridge structural members are not required if all of the following conditions are satisfied:

- Total combined live load and dead load of all work platforms and containment Structures supported by the span, including all personnel, Equipment, Materials, and collected debris or water, does not exceed ___ pounds per square foot.
- Point loads do not exceed ___ pounds at each point and point loads are spaced at least ___ feet in both horizontal directions. Point loads are applied to deck within one foot of a girder, cross beam, or diaphragm.

(Use the following bullet when a temporary structural system is NOT provided to fully resist transverse wind forces applied to the platform(s) & containment(s). Fill in the first blank with "a single" or a description of a specific span, depending on the need for specific loading requirements.)

- For winds transverse to Roadway, total combined projected area of containments installed on ___ span does not exceed ___ square feet if wind speeds are at or below ___ mph and does not exceed ___ square feet if wind speeds are above ___ mph.

(Use the following bullet when a temporary structural system is NOT provided to fully resist longitudinal wind forces applied to the platform(s) & containment(s). Fill in the first blank with "a single" or a description of a specific span, depending on the need for specific loading requirements.)

- For winds parallel to Roadway, total combined projected area of containments installed on ___ span does not exceed ___ square feet if wind speeds are at or below ___ mph and does not exceed ___ square feet if wind speeds are above ___ mph.

(Replace "XX.XXXXX" with the latitude and "XXX.XXXXX" with the longitude of nearest weather station, in 5 decimal place format in degrees (Example: Replace "XX.XXXXX" with "43.381159" and "XXX.XXXXX" with "124.23273").)

(c) High Wind Events - If removal of containment walls is used to comply with projected area limits at high wind speed, removal is required when actual wind speed or predicted wind speed exceeds allowable limits. 24-hour weather watch is required during non-work times. Predicted wind speeds are obtained from:

Insert Project Name Here

forecast.weather.gov/MapClick.php?lat=XX.XXXX&lon=-
XXX.XXXX&unit=0&lg=english&FcstType=graphical

(Select one of the options in purple parentheses, delete the option that does not apply, and delete all purple parentheses.)

Actual wind speeds are measured using (a handheld wind speed measuring instrument with certified accuracy 3% of reading)(an ODOT provided wind meter).

(Use the following subsection .40 when there is a limitation on how far the containment or work platform can extend below the Structure.)

00253.40 General - Add the following paragraph to the end of this subsection:

Containment and work platforms do not extend more than ____ feet below bottom of existing Structure.

(Use the following lead in paragraph and subsection .43 when there is a need to list the plan sheets detailing structural repairs that must be completed before platform and containment installation.)

Add the following subsection:

00253.43 Structural Repairs - Complete the structural repairs detailed on plan sheets _____ through _____ before installation of work platform or containment.

(Use the following lead in paragraph and subsection .44 when the project contains a bridge over navigable water.)

Add the following subsection:

00253.44 Marine Traffic Restrictions -

(Use the following paragraph when a bridge may NOT be closed to marine traffic. Fill in the blank with the bridge number.)

Bridge No. _____ may not be closed to marine traffic.

(Use ONE of the following options to list the dates of allowable marine traffic partial closure. Fill in the blank with the bridge number, span number, and the dates of allowable partial closure. Repeat as necessary for multiple Structures.)

[Option 1 – Time restriction only]

U.S. Coast Guard approval has been obtained for partial closure of Bridge No. _____ to marine traffic between _____ and _____.

[Option 2 – Span restriction only]

Insert Project Name Here

U.S. Coast Guard approval has been obtained for partial closure of span ____ of Bridge No. ____ to marine traffic.

[Option 3 – Time and span restriction]

U.S. Coast Guard approval has been obtained for partial closure of span ____ of Bridge No. ____ to marine traffic between ____ and ____.

(Use the following sentence if multiple spans can be closed but not all. Fill in the blank with number of spans.)

No more than ____ span(s) may be closed at any time.

00253.45 Navigation Lighting - Replace the paragraph that begins "Mark each work platform ..." with the following paragraph:

Mark each work platform with flashing yellow lights along the outside edge at 100-foot intervals. Mark each work platform from the outer end near the navigation channel to the first set of pilings near the bank. Provide flashing yellow lights visible to boat traffic from either side of the platform. Flashing yellow lights may be equivalent to flashing yellow lights on construction barricades.

(Use the following lead in paragraph and subsection .46 when loads can be placed on Structure(s). Include the language in purple parenthesis when 00253.09 identifies allowed loading. This is in addition to any loading for the containment Structure itself, use caution not to overload the Structure.

Coordinate with 00220.45, suggest using option 4.

Repeat as necessary for multiple Structures. Delete each bullet that does not apply to the respective Structure No. to communicate where loads are allowed/disallowed.)

Add the following subsection:

00253.46 Loads Placed on Structure Roadway, Shoulders, and Sidewalks - When a Traffic Lane, Shoulder or sidewalk is closed the following loading may be applied to the Structure(s) ***(in addition to the loading identified in 00253.09)***:

When a Traffic Lane or Shoulder closures are allowed on Structure No. ____:

- Equipment, vehicles, and Materials may be placed in the closed:
 - Traffic Lane
 - Shoulder
 - Sidewalk
- Equipment, vehicles, and Materials may NOT be placed in or on:
 - Active Traffic Lane
- No more than one vehicle operating under D.O.T. overload permit will be allowed within the closed area on each span of the Structure.

The combined effect of all loads in the closed area(s) will be limited to the lesser of:

(Fill in the blank with allowable loading. Delete the bullet(s) if not required.)

- _____ pounds in any single square foot;
- _____ pounds in any 100 square feet of surface area of the Structure;
- total of _____ pounds for each span of the Structure;
- total of _____ pounds between two adjacent girders;

(Fill in the blank with allowable equivalent vehicle load such as H-20, HS-20, HS20-44, Oregon Type-3S2 etc. This bullet is required.)

- Bending moment and maximum shear produced by one lane of _____ on each span of the Structure;

00253.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00255 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00255 - TEMPORARY BRIDGE JACKING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00255 is not a Standard Specification and is included in this Project by Special Provision.

Description

(Use the following subsection .00 to describe the Work. For example, removing existing bridge bearings and installing new bearing, or reset rocker bearing, or

Insert Project Name Here

replace timber caps. Fill in the blanks with the appropriate information. Delete (s) or parentheses as appropriate. Obtain information from the Bridge Designer.)

00255.00 Scope - This Work consists of temporarily raising and shoring the existing Spans located at bents _____, with jacking system for the purpose of _____. Once the Work is completed, lower the span back into place and remove the jacking system.

The term "jacking system" includes jacking equipment, temporary support seat, falsework jacking bent or temporary corbel.

00255.02 Plans - Plans for the existing Structure are available from the Engineer. Prints of these plans are available upon request.

00255.03 Submittals - Submit a stamped and detailed Bridge jacking work plan according to 00150.35, to the Engineer for review four weeks prior to Bridge jacking work. Design the work plan according to with the current AASHTO *LRFD Bridge Design Specifications* and jacking load diagram shown on the Plans. Design the temporary support to carry all Structure dead loads, live loads if allowed and construction loads.

Include the following information in the submittal:

- The proposed method of the jacking, and shoring.
- Descriptions of equipment to be used
- Descriptions and values of all loads, including construction equipment loads
- Justification for allowable bearing stresses used to support the falsework bent.
- Complete details and calculations for jacking and supporting the existing Structure

This review does not relieve the Contractor of the responsibility for the safety of the method or Equipment. Do not perform Work until the work plan has been approved by the Engineer and all comments are adequately addressed.

(Delete bullet items that do not apply.)

00255.04 Methods and Monitoring System - The Bridge jacking work plan includes, but is not limited to, the following:

- Detailed time schedule of the planned operations.
- Details to temporarily strengthen the existing Bridge members. Provide temporary supports to bear directly on girder stems or bent caps or bear on support sills that are structurally adequate to transmit the load to the stems or cap without overstressing any member of the new or existing Structure. Design temporary supports not to induce permanent forces into the completed Structure or produce cracking.
- Contingency plans to address potential malfunctions or interruptions in the work plan.
- Details to ensure stability of the Bridge while the Bridge is being raised, during the removal of the existing bearings, installation of the new bearing and lowering of the Bridge.
- Details of how secondary supports, such as blocking and cribbing, are to be installed after the Bridge has been raised.

Insert Project Name Here

- Lateral stability of the Bridge and jacking system.
- Equipment that ensures uniform lifting of the Bridge.
- Provide a redundant system of supports during the entire jacking operation for backup should any of the jacks fail. Include stacks of steel plates added as necessary to maintain the redundant supports at each jack location within 1/4 inch of the jacking sill or corbels.
- Descriptions of the displacement monitoring system. Include in the displacement monitoring system, but not limited to:
 - Equipment to be used,
 - Location of control points,
 - Method and schedule of taking measurements,
 - Provisions to jack the Structure if settlement occur in the temporary supports during construction.

Construction

00255.50 Jacking Operations:

(a) General - Control and monitor the jacking operations to ensure that the jacking loads are applied simultaneously to prevent distortion and excessive stresses that would damage the Structure. Jack the Superstructure as necessary to maintain the total vertical displacements at control points to less than 1/4 inch from the elevations recorded prior to jacking or as modified by the Engineer.

Remove attachments from the existing Structure and concrete surfaces to restore to original conditions, except where permanent alterations are shown on the plans.

(b) Unanticipated Displacements - If, during construction, unanticipated displacements, cracking or other damage occur, do the following:

- Discontinue the construction until corrective measures satisfactory to the Engineer are performed.
- Repair damage to the structure as a result of the Contractor's operations.

Measurement

00255.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00255.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Bridge Jacking at Bent _____".

The Bent number is inserted in the blank.

Insert Project Name Here

Payment will be payment in full for providing the Bridge jacking work plan, furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for designing, constructing, maintaining, inspecting, or removing the temporary Bridge jacking.

SP00256 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

(Use this Section when the Contractor is to construct temporary retaining walls.)

SECTION 00256 - TEMPORARY RETAINING WALLS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00256 is not a Standard Specification and is included in this Project by Special Provision.

Description

00256.00 Scope - This Work consists of designing, furnishing, constructing, maintaining, and removing temporary retaining walls at locations shown or specified.

Temporary retaining wall locations and limits shown are approximate. Adjust wall stationing, vertical alignments, and horizontal alignments as necessary to facilitate construction and staging requirements. Construct the following temporary retaining walls at the location(s) listed in Table 00256-1:

(Use the following table to list all temporary retaining wall(s). Add or delete rows in the table as necessary. Provide location identifier to tie to plans, e.g. Structure XXXX stage construction.)

Table 00256-1

Temporary Retaining Wall name	Location
Temporary Retaining Wall 'A'	
Temporary Retaining Wall 'B'	

Insert Project Name Here

00256.04 Working Drawings, Calculations, and Design Submittals - Submit temporary retaining wall stamped Working Drawings and design calculations according to 00150.35, except as modified by this Section. Design temporary retaining walls according to Section 15.3.27, and other applicable sections, of the most current version of the ODOT *Geotechnical Design Manual* (GDM) at the time of Advertisement.

(Use one of the following two options as instructed.)

[Option 1 - Use the following paragraph if Railroad approval is NOT required.]

Submit five sets of the stamped Working Drawings, and three copies of the design calculations, summary, and checklist.

[Option 2 - Use the following paragraph if Railroad approval is required.]

Submit nine sets of the stamped Working Drawings, and five copies of the design calculations, summary, and checklist.

(Use only one of the following two options as instructed below. Check with the designer)

[Option 1 - Use this option when all temporary retaining wall systems listed in Section 15.3.27 of the GDM are allowed.]

[Begin Option 1]

(a) Defined Temporary Retaining Wall Systems - Select temporary retaining wall systems for construction from the list of defined temporary retaining walls according to Section 15.3.27 of the ODOT GDM.

[End Option 1]

[Option 2 - Use this option when specific retaining wall system types listed in the GDM are required Fill in the blanks to indicate retaining wall system type(s) that are allowed and the height limitation. Obtain information from the designer.]

[Begin Option 2]

(a) Defined Temporary Retaining Wall Systems - Construct the following temporary retaining walls listed in Table 00256-2 below:

(Use the following table to list temporary retaining walls with specific retaining wall system types. Add or delete rows in the table as necessary.)

Table 00256-2

Temporary Retaining Wall name	Retaining Wall System
Temporary Retaining Wall 'A'	
Temporary Retaining Wall 'B'	

[End Option 2]

(b) Atypical Temporary Retaining Wall Systems - Temporary retaining wall systems that are not on the list of retaining walls according to Section 15.2.4.2 of the ODOT GDM are considered atypical retaining wall systems. If proposing an atypical temporary retaining wall system, submit stamped Working Drawings according to 00150.35. The review and response time allowed for the Agency to return the Working Drawings is 120 Calendar Days. Submit calculations and other data to satisfy the requirements of the Special Provisions and include sufficient detail and explanation of the design for the Agency to process and comment on the Working Drawings. If the Engineer requests additional information or explanation related to the review of the atypical retaining wall system, the Engineer may restart the 120 Calendar Day review period.

Include the following additional information in the atypical retaining wall system submittal:

- If applicable, a list of projects that used the atypical retaining wall system. Include reference contacts.
- A list of supervisory personnel that will be on-site during construction of the atypical retaining wall system and documentation of their experience and qualifications to perform the Work.

Perform temporary retaining wall design according to the most current version at the time of Advertisement of one or more of the following design standard:

- ODOT *Geotechnical Design Manual* (GDM)
- AASHTO *Standard and Guide Design Specifications*
- U.S. Department of Transportation Federal Highway Administration (FHWA) design manuals

Geotechnical and structural analysis and design for the temporary retaining wall includes but is not limited to the items listed in the temporary retaining wall design checklist. Submit a completed temporary retaining wall design checklist and a written temporary retaining wall design summary, prepared by the retaining wall design engineer, to accompany the stamped Working Drawings and calculations. Include the following in the design summary:

- Identification of the design manuals and specific methodologies used for the analysis and design.
- Identification of the methods of analysis and all computer programs used.
- Soil and material properties used in the retaining wall design. Include any additional boring logs and laboratory test data performed.
- Design loading assumptions and loading diagrams for each wall (including all construction staging loads).
- Design performance requirements, including design life, allowable settlement, and alignment tolerance.
- Performance requirements and methods and frequency for monitoring performance requirements during construction. Performance requirements include actual

threshold limits of tolerable differential foundation settlement and lateral movement that could result in structural damage to adjacent construction.

- Construction requirements (specifications), including Materials, Equipment, and labor necessary for construction of the atypical temporary retaining wall system.
- Quality control plan, including required performance and verification tests.
- If applicable, temporary wall removal plan.
- All other applicable information for design, detail, sequencing, and construction of the temporary retaining wall.

Materials

00256.10 General - Furnish Materials with design properties according to the design requirements and reviewed Working Drawings for the temporary retaining wall and applicable subsections of Sections 00596A and 00596B.

Labor

00256.30 Personnel Qualifications - Perform the temporary retaining wall construction Work using personnel experienced in retaining wall construction work. Submit a list to the Engineer for approval identifying the on-site supervisors and Equipment operators assigned to the Project and their experience relevant to the Project. The Engineer will respond within 21 Calendar Days after receipt of the submittal.

Do not begin Work on any temporary retaining walls until the qualifications have been approved. The Engineer may suspend the temporary retaining wall construction if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of on-site supervisors, Equipment operators, or testing personnel to the Engineer, who will have 7 Calendar Days to respond to each request. Additional costs resulting from the suspension of Work due to the changing of personnel will be at no additional cost to the Agency, and no adjustment in Contract Time resulting from the suspension of Work will be allowed.

Construction

00256.40 General - Construct temporary retaining walls according to the reviewed Working Drawings and the applicable subsections of Section 00596A and Section 00596B.

Maintenance

00256.50 General - Maintain temporary retaining walls in a safe and functional condition as long as the walls are in service. Keep all wall facing elements intact. Repair or replace damaged wall elements as necessary to maintain the retaining walls integrity and safe operational function. Submit stamped Working Drawings for replacement of damaged wall elements or for any wall repairs to the Engineer for review.

Finishing and Cleaning Up

Insert Project Name Here

00256.70 General - Temporary retaining walls may be incorporated into the finished embankment only if approved by the Engineer. Bury or remove portions of temporary walls as necessary and according to Section 00310 to accommodate cover requirements.

In areas where temporary retaining walls are to be completely removed, partially removed, or abandoned, restore and mitigate the affected area to meet applicable permitting and project requirements.

Measurement

00256.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00256.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Temporary Retaining Wall _____".

The temporary wall name is inserted in the blank.

Payment will be payment in full for designing, furnishing Materials, constructing, inspecting, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for maintaining, removing, repairing, or replacing temporary retaining walls.

TEMPORARY RETAINING WALL DESIGN CHECKLIST

Instructions - This checklist was developed to facilitate the design, review, and construction of temporary retaining walls. It is intended to remind the Design Engineer of Record to design and to check for specific aspects of construction. It is not a substitute for plan and design criteria or specification requirements.

The checklist is to be completed and signed by the temporary retaining wall Design Engineer of Record. Submit a checklist with each temporary retaining wall submittal. Answer every question. Attach explanations of all "No" or "N/A" responses to this checklist. Submit this checklist with the submittals.

	YES	NO	N/A
A. General			
1. Are the temporary wall stamped Working Drawings and supporting calculations prepared, stamped and signed by an engineer registered to practice in Oregon?	_____	_____	_____
2. Are the temporary retaining wall location, construction sequence, and removal plan compatible with the project construction staging?	_____	_____	_____
B. Design Standards			
1. Does the temporary retaining wall design comply with the standards identified in ODOT GDM 15.3.27 and related sections?	_____	_____	_____
2. Is the design standard and edition identified in the temporary retaining wall design calculations and summary?	_____	_____	_____
C. Loading			
1. Have the anticipated design loads, including live load and construction surcharge loads, and changing conditions, for different stages of construction been considered and included in the calculations?	_____	_____	_____
2. Have the appropriate load and resistance factors or factors of safety on the retaining wall been identified, for all applicable load combinations or load cases?	_____	_____	_____
3. Have construction equipment loads been included in the calculations for the temporary walls?	_____	_____	_____
4. Have the construction loads for different stages of construction been considered and included in the calculations?	_____	_____	_____

5. Have loading diagrams been included? _____

D. Geotechnical and Structural Analysis

1. Has Internal stability been evaluated? _____
2. Has external stability been evaluated? _____
3. Has global stability been evaluated? _____
4. Are all existing, adjusted or new utilities in proximity with the proposed temporary retaining wall shown on the temporary wall stamped Working Drawings and is protection of these utilities addressed? _____
5. Has a rational method for determining the ultimate bearing capacity of the foundation materials been presented and described in the calculations? _____
6. When spread footings are founded near the top of a slope or in a slope, have the ultimate bearing capacity calculations been modified accordingly? _____
7. Are wall settlement and lateral deflection estimates provided, including consideration of any settlement effects on adjacent structures or facilities? _____
8. Are mitigation measures required to limit the amount(s) of wall settlement? _____

E. Materials

1. Have the soil parameters and groundwater elevations used in the design calculations been provided and confirmed by the design EOR? _____
2. Are retaining wall material specifications and dimensions identified in the stamped Working Drawings and calculations? _____

F. Temporary Retaining Wall Working Drawings

1. Is the field verified ground topography above and below the wall shown? _____
2. Are all existing, adjusted or new utilities, structures, “no work zones”, and Right-of-Way in proximity to the proposed retaining wall shown on the temporary retaining wall stamped Working Drawings? _____

3. Are plan view, elevation and cross sections drawn to scale, with dimensions defining location and size of the retaining wall including top and bottom of wall elevations, horizontal and vertical alignment, original and final ground lines, excavation and fill limits? _____

Design Engineer of Record Signature

Date

SP00270 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00820)

SECTION 00270 - TEMPORARY FENCES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00270 of the Standard Specifications as modified:

00270.10 Material - Replace the sentence that begins “Provide new Material...” with the following paragraph:

Furnish new Material meeting the requirements of 01050.10. Used Materials in like new condition may be furnished if approved. See 00270.70.

00270.90 Payment - Replace the sentence that begins “In item (a) the type ...” with the following paragraph:

In item (a) the type of fence is inserted in the blank.

Replace the sentence that begins “Payment will be payment...” with the following paragraph:

Payment will be payment in full for furnishing, placing, maintaining, and removing all Materials, including the temporary barrier, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00280 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP01030 & SP03020

Requires SP02320 when sediment fence or geotextile is used.

Requires SP02410, SP02415, SP02420 when pipe is used.

Requires SP02510 when Type 4 inlet protection is used.

Insert Project Name Here

Requires SP02630 when Type 2 inlet protection is used.)

(This Section is not required for Projects classed as “No Risk” per Advisory GE12-01(A), i.e., Projects with no ground disturbance. It is required for Projects classed as “Low Risk” and “High Risk” per Advisory GE12-01(A)).

SECTION 00280 - EROSION AND SEDIMENT CONTROL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00280 of the Standard Specifications modified as follows:

00280.00 Scope - Replace the paragraph that begins "This Work also consists of providing temporary ..." with the following paragraphs and bullets:

This Work also consists of providing temporary erosion and sediment control (ESC) measures and furnishing, installing, moving, operating, maintaining, inspecting, and removing ESC throughout the Project area according to the Standard Drawings, the erosion and sediment control plan (ESCP), the Specifications, or as directed, until the site is permanently stabilized. Included also is the monitoring of weather, of stormwater and receiving waters, the reporting of monitoring observations, the reporting of corrective actions (when necessary) and the updates and revisions of the ESCP, including ESCP cover sheet, necessary to keep it representative of current site conditions and compliant with the NPDES 1200-CA, 1200-CN, OR 1200-C permit if applicable.

Conditions requiring NPDES 1200 permits are as follows:

- Projects with one acre of ground disturbance or more on Agency owned land are regulated under the Agency's 1200-CA permit.
- When Project Work on Agency owned land disturbs less than one acre, but ground disturbances on non-Agency owned lands combined with Project ground disturbances on Agency owned land total one acre or more the Agency Project Work will be regulated by the Agency's 1200-CA permit. The Contractor is responsible for acquiring the 1200-C permit for all areas of disturbance on non-Agency owned land.

When the combined areas of disturbance of all Project related activities is less than one acre, no NPDES 1200 permit coverage is required.

(Insert the number of acres in the blank. Include all ground disturbance from Work, staging areas, haul roads, access routes and any other activities associated with the Work that disturb soil.)

The area of ground disturbance on Agency owned land is _____ acres.

Insert Project Name Here

Delete the paragraph that begins “When contaminants, pollutants or hazardous materials...”.

(Use one of the following three options as instructed on Projects that involve one acre of ground disturbance or more. One acre of ground disturbance or more triggers compliance with NPDES 1200 permit. Delete the option that does not apply. Check with the Local Agency Liaison, the Erosion Control Program Leader, or the Region Environmental Coordinator.)

[Option 1 - Use the following paragraph when ODOT's NPDES 1200-CA Permit is applicable to the Project.]

Add the following paragraph to the end of this subsection:

The Agency's NPDES 1200-CA permit is applicable to the Project.

[Option 2 - Use the following paragraph when the Contractor is required to use the Local Agency's NPDES 1200 CA Permit or obtain an NPDES 1200-C Permit.]

Add the following paragraph to the end of this subsection:

The Agency's NPDES 1200-CA permit is not applicable to the Project. Before beginning Work on the Project, obtain a NPDES 1200-CA permit from the applicable local jurisdiction or a NPDES 1200-C permit that is applicable to the Project.

[Option 3 - Use the following paragraph for Projects that disturb less than one acre.]

Add the following paragraph to the end of this subsection:

The Agency's NPDES 1200-CA permit is not applicable to this Project. Comply with all applicable conditions of this Section.

00280.01 Abbreviations - Replace this subsection with the following subsection:

00280.01 Abbreviations and Definitions:

BMP - Best Management Practices
EMP - Environmental Management Plan
ESC - Erosion and Sediment Controls
ESCP - Erosion and Sediment Control Plan
ESCM - Erosion and Sediment Control Manager

Effective Functioning - Preventing Erosion, controlling Runoff, or controlling Sediment in each location where an ESC is needed so Erosion-related impacts of site construction are mitigated as required.

Erosion - The wearing away of the land surface by water, wind, ice, gravity or other geological agents.

Insert Project Name Here

Perimeter Controls - Perimeter Controls include sediment fences, ditches, filter berms in flatter areas, and other methods for preventing Sediment and other construction-generated pollutants from leaving the construction site.

Permanent Stabilization - Maintenance-free measures or methods necessary to prevent Erosion or Sediments from leaving the Project Site.

Runoff - That portion of precipitation that flows from drainage area on the land surface, in open channels or in stormwater conveyance systems.

Sediment - Fragmented material originated from weathering and Erosion of Rock and unconsolidated deposits. Sediment also includes fragmented materials from man-made materials. The material is transported by, suspended in, or deposited by water.

Temporary Stabilization - Covering soil or other measures to prevent Erosion until Permanent Stabilization measures are in place and established.

00280.02 Definitions - Replace this subsection with the following subsection:

00280.02 Submittals - Submit documentation that the compost material meets the requirements of Section 03020 for its intended use and is available for use according to the Project schedule in 00180.41 according to 00150.37, within 30 Calendar Days of Award of the Contract.

00280.04 Erosion and Sediment Control Plan on Agency Controlled Lands - Replace the bullet that begins "Information required under 1200-CA..." with the following bullet:

- Information required under 1200-CA permit, if applicable.

Replace the bullet that begins "When using a Contractor developed ..." with the following bullet:

- When using a Contractor developed ESCP, develop, provide, and stamp the ESCP by a professional with one of the following credentials. Include their name and credentials in the ESCP.

Replace the paragraph that begins "Ensure that the Contractor's construction ESCP ..." with the following paragraph:

Ensure that the Contractor's construction ESCP and implementation schedules are prepared by an individual who meets qualifications of 00280.30. Provide a signed copy of the ESCP with individual's name, title, state certifications, and employing firm if different than Contractor's firm.

(Use the following three paragraphs when ODOT's NPDES 1200 CA Permit is applicable to the Project.)

Add the following paragraphs to the end of this subsection:

Insert Project Name Here

When required on the Project fill in the required information listed on the ESCP cover sheet prior to the beginning of construction and submit revised cover sheet to Engineer 10 Days before the preconstruction meeting. Monitor weather, stormwater runoff, and receiving waters, and document monitoring observations. Immediately upon discovery, notify Engineer if a 1200-CA permit non-compliance occurs. Provide updates and revisions of the ESCP, including ESCP cover sheet, necessary to keep it representative of current site conditions and compliant with the 1200-CA permit.

When contaminants, pollutants or hazardous materials are discovered in the Project location in soils or groundwater comply with 00290.20(f), and provide an environmental management plan (EMP) as required by the 1200-CA permit if applicable.

(Use the following subsection .06 when the NPDES 1200-CA permit is NOT applicable to the Project.)

00280.06 Erosion and Sediment Control Manager - Delete this subsection.

00280.14(a) Plastic Sheeting - Replace the bullet that begins “**Plastic Sheeting** - Minimum 6-mil thick...” with the following bullet:

- **Plastic Sheeting** - Minimum 6-mil thick polyethylene plastic sheeting or plastic sheeting that meets or exceeds the performance properties outlined in ASTM D4397.

Replace the bullet that begins “**Rock** – Class 50...” with the following bullet:

- Class 50 riprap according to Section 00390.

(Use the following subsection .14(e) when Type A matting is applied hydraulically or is a rolled product.)

00280.14(e) Slope and Channel Liner Matting - Replace the bullet that begins “Type A – Slope...” with the following bullets:

- **Type A: Hydraulically-Applied** - Hydraulically-applied material composed of long strand, thermally processed wood fibers, crimped, interlocking fibers and performance enhancing additives meeting the following criteria:
 - Flexural rigidity when wet, and equal to or greater than 5 oz-yd.
 - Permissible shear stress 1.0 lbs/sqft or greater
 - Thermally processed wood fibers – 73%
 - Crosslinked hydro-colloid tackifiers and activators – 10% + 1%
 - Crimped, interlocking fibers - 5% +1%
 - Moisture content – 12% + 3%
 - Fully Biodegradable
 - A cure time of less than 2 hours during wet weather.

(Use the following bullet when Type A matting is a rolled product.)

Insert Project Name Here

- **Type A: Rolled** - Rolled slope protection mat, fully biodegradable, for Clay Soil Slopes 1V:3H or flatter.

00280.15(a) Check Dams - Replace the bullet that begins "**Type 5: Prefabricated System** - Prefabricated ..." with the following bullet:

- **Type 5: Prefabricated System** - Prefabricated check dam system according to the manufacturer's recommendations and on the QPL. Field fabricated systems are not acceptable.

(Use the following subsection .15(d) when temporary slope drains are used.)

00280.15(d) Temporary Slope Drains - Replace this subsection, except subsection number and title, with the following:

Furnish either plastic pipe and flared end sections meeting the requirements of Section 02415 or metal pipe and flared end sections meeting the requirements of Section 02420.

(Use the following subsection .15(f)(1) when compost filter socks are required. Fill in the blank with the diameter of the filter sock. Obtain information from the Erosion Control Designer.)

00280.15(f)(1) Filter Sock Material - Add the following sentence to the end of this subsection:

Furnish filter sock Material with a diameter of _____ inches.

(Use the following .16(a) when construction entrances are required.)

00280.16(a) Construction Entrances - Replace the bullet that begins "**Geotextile...**" with the following bullet:

- **Geotextile** - Riprap geotextile meeting the requirements of 02320.20 Table 02320-2. Provide documentation according to 02320.10(c).

Replace the bullet that begins "**Prefabricated Construction Entrance ...**" with the following bullet:

- **Prefabricated Construction Entrance** - Provide reusable prefabricated construction entrance mats (track out mats) with the following characteristics:

(Use the following .16(b) when tire wash facilities are required.)

00280.16(b) Tire Wash Facility - Replace the bullet that begins "**Geotextile...**" with the following bullet:

- **Geotextile** - Riprap geotextile meeting the requirements of 02320.20 Table 02320-2. Provide documentation according to 02320.10(c).

(Use the following .16(c) when sediment fence is required.)

00280.16(c) Sediment Fence - Replace the bullet that begins “**Geotextile...**” with the following bullet:

- **Geotextile** - Geotextile meeting requirements of 02320.20 Table 02320-3. Provide documentation according to 02320.10(c).

(Use the following .16(d) when inlet protection is required.)

00280.16(d) Inlet Protection - Replace the bullet that begins “**Geotextile...**” with the following bullet:

- **Geotextile** - Type 1 geotextile meeting the requirements of 02320.20 Table 02320-1. Provide documentation according to 02320.10(c).

Replace the bullet that begins “Sand bags conforming...” with the following bullet:

- Sandbags according to 00280.15(a).

(Use the following .16(e) when type 5 brush barriers are required.)

00280.16(e) Sediment Barriers - Replace the paragraph that begins "Furnish sediment barriers and ..." with the following paragraph:

Provide sediment barriers and sediment barrier stakes meeting the following requirements:

Replace the bullet that begins “**Type 5: Brush Barrier...**” with the following bullet:

- **Type 5: Brush Barrier** - Maximum 6-inch diameter woody debris brush or Topsoil strippings for brush barriers. Furnish Type 1 sediment fence geotextile meeting the requirements of 02320.20 Table 02320-1. Provide documentation according to 02320.10(c).

Replace the bullet that begins “**Type 6: Aggregate Barrier...**” with the following bullet:

- **Type 6: Aggregate Barrier** - Clean, well-graded, angular Aggregate with maximum size between 4 inches and 1 inch, meeting the requirements of 00330.16, except no more than 5 percent of the material (by weight) passing the No. 40 sieve.

(Use the following .16(g) when a temporary energy dissipater is required.)

00280.16(g) Temporary Energy Dissipater - Replace the bullet that begins “**Geotextile...**” with the following bullet:

- **Geotextile** - Type 1 riprap geotextile meeting the requirements of 02320.20 Table 02320-2. Provide documentation according to 02320.10(c).

00280.16(i) Concrete Washout - Replace the paragraph that begins "Furnish impermeable, spill resistant ..." with the following paragraph:

Insert Project Name Here

Provide impermeable, spill resistant, leak proof concrete washout basin of sufficient size and quantity to retain all concrete wash water and concrete waste developed during construction, meeting the following requirements:

00280.16(k) Active Treatment System - Add the following sentence to the end of this subsection:

Obtain approval of the active treatment system from DEQ prior to use.

(Use the following subsection .30 on Projects when the ODOT 1200-CA, or other NPDES 1200 permit is applicable.)

00280.30 Erosion and Sediment Control Manager -

Add the following bullet to the beginning of the bullet list under “The ESCM duties include:”

- Be present at the Project Site during all ground disturbing activities.

Replace the bullet that begins “Monitor rainfall, snow melt and runoff ...” with the following bullet:

- Visually monitor rainfall, snow melt and runoff at the Project Site.

Replace the bullet that begins “Monitor water quality in receiving streams in ...” with the following bullet:

- Visually monitor water quality in receiving streams in the vicinity of the Project Site.

Replace the bullet that begins “Monitor water in sediment traps receiving ...” with the following bullet:

- Monitor the pH of the water in sediment traps receiving runoff from soils amended with cementitious material for acidity or alkalinity.

(Use the following bullet when Section 00294 is included on the Project and when the ODOT 1200-CA, or other NPDES 1200 permit is applicable. Must include bullets and caption above as well.)

Add the following bullet to the end of the bullet list:

- Monitor locations identified in Section 00294 for compliance.

00280.41(a) Disturbance Limits - Replace this subsection, except for the subsection number and title, with the following:

Prior to any ground disturbing activity, delineate all construction site clearing limits with high visibility markings and do not disturb areas outside the clearing limits. Prior to beginning construction activities, delineate and protect riparian areas including trees, root zones and

Insert Project Name Here

vegetation to be preserved and delineate and protect vegetated buffer zones according to 00280.41(e). Protect post-construction stormwater facilities, unless used during construction as sediment trap, then repair according to 00280.46(h).

00280.41(c) Wet Season Work and Temporary Work Suspension - Replace this subsection with the following subsection:

00280.41(c) Temporary Work Interruption - Update the ESCP and schedule for Work proposed between October 1 and May 31 to ensure that all appropriate controls, including ESC during Work interruption, are implemented and maintained. Submit the updated ESCP and schedule to the Agency and receive approval before beginning any Work between October 1 and May 31.

Between October 1 and May 31, limit excavation and bare ground activities to only those required for immediate operations. Stabilize stockpiles at the end of each workday by diverting flows, placing covers, or installing Sediment barriers.

00280.41(d) Disturbance Restrictions - Replace this subsection, except for the subsection number and title, with the following:

Limit the amount of disturbed areas to what can be effectively controlled.

00280.41(f) Hauling Material - Replace this subsection, except for the subsection number and title, with the following:

Cover loads carrying soil or sediment that may generate dust. Haul saturated loads in watertight beds or drain saturated loads prior to leaving the Project Site.

00280.41(g) Underground Injection Controls (UIC) - Replace this subsection, except for the subsection number and title, with the following:

Do not allow storm water from work area to enter Underground Injection Control (UIC) inlets, UIC catch basins or UIC wells.

00280.44(d) Temporary and Permanent Mulching and Seeding - Replace the bullet that begins "**Mulching** - Evenly apply ..." with the following bullet:

- **Mulching** - Evenly apply dry mulch and tackifier materials according to Section 01030. In areas not accessible to heavy Equipment, mulch by hand or by other approved methods. Areas not prepared according to 01040.48(d) require a greater rate of application to obtain complete coverage, at no additional cost to the Agency.

(Use the following .46(k) when floating turbidity barriers are required.)

Add the following subsection:

00280.46(k) Floating Turbidity Barrier . Construct floating turbidity barriers as shown or directed.

(Use the following subsection .48 on Projects that require emergency Materials. Obtain information from the Erosion Control Designer. Include in the Schedule of

Insert Project Name Here

Items all items listed in this subsection. The listed items do not need to be shown on the plans if they are for emergency replacement use and are not otherwise part of the Agency's ESCP.)

00280.48 Emergency Materials - Add the following paragraphs after the paragraph that begins "Provide, stockpile, and protect...":

Furnish and stockpile the following emergency Materials on the Project Site:

Item	Quantity
.....	
.....	
.....	

When emergency materials are used, restock emergency materials within 48 hours of use.

00280.61 Ineffective Controls - Replace this subsection, except for the subsection number and title, with the following:

If an ESC device does not meet Effective Functioning, repair, replace, or provide additional devices. Provide devices repaired, replaced, or added due to improper installation, insufficient maintenance, or damage from Contractor operations at no additional cost to the Agency.

00280.62 Inspecting and Monitoring - Delete the paragraph that begins "Inspect the Project Site...".

00280.62(a) Inspection - Replace the paragraph that begins "Perform site inspection, complete..." with the following paragraph:

Inspect the Project Site and all ESC devices for Effective Function and potential erosion or sediment movement and complete all applicable parts of the ODOT Erosion Control Monitoring Form, and submit the form to the Agency as follows:

(Use the following subsection .62(b) when a rain gauge is required. Designer to insert the web address of the closest on-line rain gauge to the Project. Replace "XX.XXXXX" with the latitude and "XXX.XXXXX" with the longitude of nearest weather station, in 5 decimal place format in degrees (Example: Replace "XX.XXXXX" with "43.381159" and "XXX.XXXXX" with "124.23273").)

00280.62(b) Rainfall - Replace this subsection, except for the subsection number and title, with the following:

Provide and install a temporary rain gauge at the Project Site. Upon approval, storm event information may be derived from weather stations that are representative of precipitation levels at the site.

The closest on-line rain gauge is located at:

Insert Project Name Here

forecast.weather.gov/MapClick.php?lat=XX.XXXX&lon=-
XXX.XXXX&unit=0&lg=english&FcstType=graphical

00280.64(a) Corrective Action Timelines - Delete the bullet that begins "If completion of corrective action is not feasible..."

Delete the bullet that begins "Provide a schedule for clean-up and corrective actions..."

Delete the bullet that begins "Provide all corrective action documentation and photographs..."

(Use the following subsection .64(b) when ODOT's NPDES 1200-CA, or other NPDES 1200 permit is applicable to the Project.)

00280.64(b) Corrective Action Documentation - Add the following bullets to the beginning of the bullet list:

- If completion of corrective action is not feasible within 24 hours, document the reasons why the time line cannot be met.
- A schedule for clean-up and corrective actions that restores Effective Functioning as soon as feasible. If schedule cannot be met document the reasons for the delay.
- All corrective action documentation and photographs to Agency within 24 hours of completion of corrective actions.

(Use the following .80(c) when floating turbidity barriers are required.)

00280.80(c) Length Basis – Add the following bullet to the end of the bullet list:

- Floating turbidity barriers will be measured along the horizontal axis of the protection perimeter, limited to the Neat lines as shown or directed.

00280.90 Payment - Replace the paragraph that begins "In item (f), the word ..." with the following paragraph:

In item (f), the word "Hydromulch", "Straw", or "Compost" is inserted in the blank.

Replace the paragraph that begins "In items (g), the ..." with the following paragraph:

In item (g), the type is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

00280.91 Payment –

(Use the following Pay Item (p) or (q) as required by the Project.)

Add the following Pay Items to the Pay Item list:

Insert Project Name Here

- (p) Floating Turbidity Barrier..... Foot
- (q) Active Treatment System..... Lump Sum

Replace the paragraph that begins “In items (a), (f), (g)...” with the following paragraph:

In items (a), (f), (g), (j), and (k), the type is inserted in the blank.

Replace the paragraph that begins “Emergency Materials that are incorporated...” with the following paragraph:

Materials listed in 00280.48 that are incorporated into the Project will be paid for under the appropriate items listed in the Contract Schedule of Items.

Replace the paragraph that begins “Payment will be payment ...” with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00290 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
*This Section requires SP00245 when
temporary water management is required.)*

SECTION 00290 - ENVIRONMENTAL PROTECTION

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval. Modify these subsections only for site specific conditions.)

Comply with Section 00290 of the Standard Specifications modified as follows:

00290.00 Scope - Replace the paragraph that begins “If any provision of the Specifications ...” with the following paragraph:

If any provision of the Specifications appears to conflict with one or more Laws, the more stringent requirement applies, unless the Engineer directs otherwise in situations where the Specifications are more stringent.

(Use the following subsection .10 when Section 00236 or Section 00237 is included in the Special Provisions. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

00290.10 Staging and Disposal Sites - Replace the paragraph that begins "Locate staging areas..." with the following paragraph:

Locate staging areas and disposal sites in previously improved or disturbed sites, including existing Roadways, pullouts, turnouts, parking lots, and storage yards that have been compacted, and graveled or paved, unless otherwise specified in (Section 00236) (or) (Section 00237) or approved, in writing, by the Engineer.

(Use the following subsection .20(c)(2) only when Section 00294 is included in the Special Provisions.)

00290.20(c)(2) Clean Fill - Add the following paragraph to the end of this subsection:

Manage all excavated soil that does not meet the definition of clean fill according to Section 00294.

00290.20(c)(3)d. Concrete and Masonry - Replace the paragraph that begins "If the Engineer provides written ..." with the following paragraph:

If the Engineer provides written approval, concrete may be reused as Aggregate as directed.

00290.20(c)(3)f. Off-Site Disposal - Replace the paragraph that begins "Subject to local zoning codes ..." with the following paragraph:

Subject to local zoning codes and the requirements of 00280.05, materials that meet the definition of clean fill may be placed on other properties in a manner consistent with environmental requirements, and with the written permission of the property owner. Provide the Engineer a copy of the signed agreement with the owner before placing the clean fill material. Do not place the clean fill material at locations that are visible from a public Highway, road, or street unless the site is zoned and licensed for landfill.

00290.20(d) Hazardous Waste Management - Replace the bullet that begins "Fill in the Comments section with ..." with the following bullet:

- Fill in the Comments section with the following statement:
"[Contractor name] is responsible for the following: All hazardous waste management on-site for the duration of this construction Project, for delivery of the waste to a permitted recycling or disposal facility, and for all forms and fees associated with the hazardous waste management including cancellation of the RCRA site identification number at the end of the Project. ODOT is the owner of the waste and maintains long-term responsibility for the waste as required by RCRA, excluding all wastes generated solely from materials brought to the site by the Contractor that remain the property of the Contractor."

Replace the bullet that begins "All employees involved in the handling ..." with the following bullet:

- The Contractor is responsible to ensure that all employees involved in the handling and waste management of CEG hazardous waste comply with the federal and State Laws for hazardous waste management. Train all employees involved in the handling of SQG and LQG hazardous waste according to federal and State Laws. For LQG hazardous waste projects, keep employee training records on-site and readily available.

Insert Project Name Here

Replace the bullet that begins "If hazardous waste is treated on-site ..." with the following bullet:

- If hazardous waste is treated on-site, obtain approval from DEQ and the Engineer for each specific treatment or recycling process, treat wastes within accumulation tanks or closed containers that meet RCRA requirements, conduct treatment within the storage time for the applicable generator category, maintain current copies of all required notifications and waste analysis plans readily available on-site and request DEQ technical assistance prior to starting any on-site recycling or treatment.

00290.20(f) Unexpected Contamination - Replace the paragraph that begins "The Engineer will attempt to resolve ..." with the following paragraph:

The Engineer will attempt to resolve the unanticipated situation expeditiously according to 00140.40. Delays to Work due to the discovery of unexpected contamination may be considered for exclusion from Contract Time according to 00180.50(e).

00290.20(g) Spills and Releases - Replace the bullet that begins "Provide a written report to the Engineer ..." with the following bullet:

- Provide a written report to the Engineer, using the DEQ Spill/Release Report form, within 10 Calendar Days of completing spill response, but no more than 30 Calendar Days after the initial event. If the spill was reported to DEQ, submit the report to DEQ concurrently. Include a description of how to prevent future releases.

00290.30 Pollution Control - Replace the paragraph that begins "Prevent, control, and abate..." with the following paragraph:

Prevent, control, and abate pollution of the environment.

00290.30(a)(1) General - Replace this subsection, except for the subsection number and title, with the following:

- Do not allow any foreign substances or objects to enter waters of the State and U.S. that exceed regulated or permit limits.
- Do not cause turbidity in waters of the State and U.S. that exceeds regulated or permit limits.

(Use the following lead-in paragraph and subsection .30(a)(7) when there is Work in, adjacent to, or over a regulated waterway, even if there is no Work within the stream's wetted perimeter and any time that more distant work has the potential to discharge pollutants to a regulated waterway through a ditch, pipe or similar conveyance.)

Add the following subsection:

00290.30(a)(7) Water Quality:

Insert Project Name Here

- Do not discharge water contaminated by pollutants including sediment, drilling fluids and waste, concrete, grout, or water contained within a work area isolation, into any waters of the State or U.S. or conveyances draining thereto until it has been treated using Materials such as those listed in 00280.15 or 00280.16 or by pumping to a vegetated upland location. Do not allow Project discharges to increase the concentration of any pollutant in the receiving water to a level that exceeds the limits prescribed by OAR 340-041.
- Do not use permanent stormwater quality treatment facilities to treat construction runoff unless prescribed by an ESCP approved under Section 00280.
- If construction discharge water is released using an outfall or diffuser port, do not exceed velocities more than 4 feet per second, and do not exceed an aperture size of 1 inch.
- Implement containment measures adequate to prevent pollutants from entering waters of the State or U.S. Such pollutants include but are not limited to construction and demolition materials, waste spoils, fuel or petroleum products, detergents, silt, welding slag and grindings, concrete sawcutting by-products and sandblasting abrasives.

(Use the following when there is Work in, adjacent to, or over a regulated waterway, even if there is no work within the stream's wetted perimeter, regardless of whether more distant work has the potential to discharge pollutants to a regulated waterway through a ditch, pipe, or similar conveyance. When this block of text is included, do not delete any individual bulleted items, even if they are not expected to apply to the Project.)

- Do not allow curing concrete or grout to be submerged within waters of the State or U.S. less than 24 hours after placement, except within work area isolation. Do not end-dump riprap into the waters of the State or U.S. Place riprap from above the ordinary high water line.
- Monitor weather and streamflow forecasts and conditions to anticipate high flows that may unintentionally inundate any portion of the Project Site.
- If high flow conditions occur or are anticipated to occur that may unintentionally inundate any portion of the Project Site, remove all potentially affected Equipment, Materials, and debris from the potential inundation area. Cease Work in the area until water recedes and the risk of further high water events passes. The Engineer retains the authority to temporarily halt or modify the Work in case of excessive turbidity or damage to natural resources.
- If Work in or around waters of the State or U.S. violate permit conditions or any requirement of this subsection, stop such Work and notify the Engineer.

(Use the following lead-in paragraph and subsection .30(a)(8) if the Project includes work inundated by, or within dewatered portions of, waters of the State or U.S. (except wetlands). Use one of the following two options as instructed below. Delete any option that does not apply. This subsection may require modification for consistency with applicable regulatory approvals including but not limited to: Clean Water Act Section 401 water quality certification, a programmatic or individual biological opinion, and any applicable local approvals.)

Add the following subsection:

[Option 1 - Use the following subsection if the Project includes work inundated by, or within dewatered portions of, waters of the State or U.S. (except wetlands), but the project does not have a Clean Water Act Section 401 water quality certification or any other permit or regulation requiring meter turbidity monitoring.]

00290.30(a)(8) Turbidity Monitoring - In addition to the requirements of 00280.62(c) to monitor the receiving stream to identify water quality issues, during Work in waters of the State or U.S., implement best management practices (BMPs) to minimize turbidity and monitor turbidity according to the following:

- Every four hours, make observations at an upcurrent location outside the influence of the Project, and at a downcurrent location representative of turbidity caused by the Project.
- Document all turbidity monitoring observations including date, time, and location on form 734-2755, "Turbidity Monitoring Report" or another form approved by the Engineer. Submit reports to the Engineer weekly while working in waters of the State or U.S. and keep copies of the reports at the Project Site.
- A visible downcurrent turbidity plume emanating from the work area requires a presumption that project-caused turbidity is more than 10% above the upcurrent background level and is therefore in violation of DEQ's turbidity water quality standard (OAR 340-041-0036), unless turbidity meter analyses of samples taken from an upcurrent location and from a location within the visible plume show that the actual turbidity increase is no more than 10% above the upcurrent background level.
- If observations indicate that the Project has increased turbidity to more than 10% above the upcurrent background level, modify work procedures and repair or upgrade BMPs. If turbidity is still more than 10% above the upcurrent background level at the next four-hour observation, stop turbidity-causing Work and repair or upgrade BMPs. Resume such Work when downcurrent turbidity returns to no more than 10% above the upcurrent background level.

[End Option 1]

[Option 2 - Use the following subsection when meter turbidity monitoring is required by a Clean Water Act Section 401 water quality certification or any other permit or regulation.]

00290.30(a)(8) Meter Turbidity Monitoring - In addition to the requirements of 00280.62(c) to monitor the receiving stream to identify water quality issues, during Work in waters of the State or U.S., implement best management practices (BMPs) to minimize turbidity, and monitor turbidity using a turbidity meter that has been maintained and calibrated according to the manufacturer's specifications and according to the following:

- Measure upcurrent and downcurrent turbidity at two-hour intervals and perform work based on turbidity measurements according to the following:
 - Take upcurrent samples at a location representative of background turbidity approximately 100 feet from the work area.
 - Take downcurrent samples at a location approximately 100 feet from the work area at approximately mid-depth of the water body and within any visible turbidity plume.

- If the downcurrent reading is less than 5 nephelometric turbidity units (NTU) higher than the upcurrent reading, continue to Work and take readings every two hours.
- If the downcurrent reading is greater than or equal to 5 and less than 30 NTU higher than the upcurrent reading, modify work procedures and repair or upgrade BMPs, continue Work, and continue to take readings every two hours. If after four hours the downcurrent reading is still greater than or equal to 5 NTU higher than the upcurrent reading, stop all work in water and repair or upgrade BMPs. Resume work in water only after the downcurrent reading is less than 5 NTU above the upcurrent reading.
- If the downcurrent reading is greater than or equal to 30 and less than 50 NTU higher than the upcurrent reading, modify work procedures, repair or upgrade BMPs and continue Work. If, at the subsequent two-hour reading, the downcurrent reading is still more than 30 NTU higher than the upcurrent reading, stop all work in water and repair or upgrade BMPs. Resume work in water only after the downcurrent reading is less than 5 NTU above the upcurrent NTU reading.
- If the downcurrent reading is 50 NTU or more higher than the upcurrent reading, stop all work in water, repair or upgrade BMPs, and inform the Engineer. Resume work in water only after the downcurrent reading is less than 5 NTU above the upcurrent NTU, as determined by continued readings made no more than two hours apart.
- Document all turbidity monitoring observations on form 734-2755, "Turbidity Monitoring Report", or another form approved by the Engineer. Submit reports to the Engineer weekly during work in water and keep copies of the reports at the Project Site.
- Meter turbidity monitoring may be temporarily suspended if all of the following conditions are met:
 - Temporary water management and work area isolation measures have been installed and are functioning as designed.
 - The Engineer, after consultation with DEQ, has authorized the suspension of turbidity monitoring. The Engineer will provide information to be documented on the turbidity monitoring form, including the date of the DEQ authorization and the name of the DEQ employee providing the authorization.
- Resume the turbidity monitoring protocol if Work during a temporary suspension of meter turbidity monitoring causes a release of a visible turbidity plume.

[End Option 2]

(Use the following subsection .30(b) when the project meets the criteria listed below. Contact the State Specifications Engineer with any questions. State Specifications Engineer must approve the use of 00290.30(b).)

- 1) The Interstate 5 Rose Quarter Project;***
- 2) The Interstate 205 Abernethy Bridge Project;***
- 3) The Interstate 205 Freeway Widening Project;***
- 4) The State Highway 217 Northbound Project;***
- 5) The State Highway 217 Southbound Project.***
- 6) Contracts that have an advertisement date on or after January 1, 2025 when all of the following apply:***

Insert Project Name Here

- a) The Region engineer's estimates a bid value over \$10 million; and*
- b) The contracting agency is a state contracting agency; and*
- c) The majority of the project site is located within Clackamas, Multnomah, or Washington County;*
- 7) Contracts that have an advertisement date on or after January 1, 2029 when all of the following apply:**
 - a) The Region engineer's estimates a bid value over \$7 million; and*
 - b) The contracting agency is a state contracting agency; and*
 - c) The majority of the project site is located within Clackamas, Multnomah, or Washington County.)*

00290.30(b) Pollution Control Plan - Add the following to the end of this subsection:

Comply with the following, and, as applicable, with OAR 731-005-0800 for contracts subject to OAR chapter 731, division 5 or 7 or with OAR 731-149-0020 for contracts subject to OAR chapter 731, division 149.

Prior to beginning On-Site Work, submit a listing of proposed non-road diesel equipment and on-road trucks to the Engineer as required in (1) and (2) below that demonstrates how compliance with OAR 731-005-800 or OAR 731-149-0020 will be achieved. Update the listing of non-road diesel equipment and on-road trucks specified in (1) and (2) below when additional pieces of non-road diesel equipment or on-road trucks, not previously accounted for, are brought onto the Project Site. Provide the updated list to the Engineer upon request.

On a monthly basis certify compliance with OAR 731-005-800 or OAR 731-149-0020 and submit the certification with a list of non-road diesel equipment and on-road trucks specified in (1) and (2) below utilized to date on the Project Site to the Engineer and include calculations demonstrating compliance according to OAR 731-005-800 or OAR 731-149-0020.

Failure to submit the monthly listings, certifications and calculations may result in withholding payments according to 00195.50(e).

Immediately remove from the Project Site, according to 00180.30, non-road diesel equipment and on-road trucks used on the Project Site in violation of OAR 731-005-800 or OAR 731-149-0020, or 00290.30. Update the listing of non-road diesel equipment and on-road trucks with a notation for any that were removed.

(1) Non-Road Diesel Equipment - Demonstrate compliance with OAR 731-005-800 or OAR 731-149-0020 by listing all non-road diesel equipment (as defined in OAR 731-005-0430) that is 25 horsepower or greater utilized to date on the Project Site and including the following:

- Equipment owner and whether the piece of equipment is owned and operated by a COBID certified firm
- Equipment type
- Manufacturer
- Model number
- Vehicle identification number or serial number
- Engine certification (Tier rating)

Insert Project Name Here

- If not equipped with a Tier 4 compression ignition diesel engine, specify whether the engine has been retrofitted with a Verified Diesel Oxidation Catalyst or Verified Diesel Particulate Filter
- Specify whether the equipment qualifies for an exemption provided in OAR 731-005-0800(5) or OAR 731-149-0020(4) and which exemption applies
- The above required certifications and calculations

(2) On-Road Concrete Mixer Trucks and Dump Trucks - Demonstrate compliance with OAR 731-005-800 or OAR 731-149-0020, by listing all diesel powered on-road concrete mixer trucks and on-road dump trucks utilized to date on the Project Site that are owned or operated by the Contractor, Subcontractors and those operated under trucking services agreements, including:

- Equipment owner and whether the piece of equipment is owned and operated by a COBID certified firm
- Vehicle identification number or serial number
- Engine model year
- Motor vehicle license plate number
- The above required certifications and calculations

(Use the following subsection .30(c)(1) when the .30(b) is included. Contact the State Specifications Engineer with any questions. State Specifications Engineer must approve the use of 00290.30(c)(1).)

00290.30(c)(1) Vehicle and Equipment Idling - Replace this subsection, except for the subsection number and title, with the following:

Establish truck staging areas for diesel-powered vehicles located where truck emissions have a minimum impact on sensitive populations, such as residences, schools, hospitals and nursing homes.

Ensure that all diesel powered Equipment has a decal visible to the operator, reminding them to limit idling to a maximum of 5 minutes. Post at least 1 notice in a location frequented by employees or workers stating diesel equipment idling is limited to 5 minutes.

Limit idling of trucks and other diesel powered Equipment to 5 minutes, when the Equipment is not in use or in motion, except as follows:

- When safety of contractors, Subcontractors or Suppliers or their employees may be compromised.
- Frequent shutdowns may be detrimental to the exhaust control system.
- When traffic conditions or mechanical difficulties, over which the operator has no control, force the Equipment to remain motionless.
- When operating the Equipment's heating, cooling or auxiliary systems is necessary to accomplish the Equipment's intended use.
- To bring the Equipment to the manufacturer's recommended operating temperature.
- When the outdoor temperature is below 20 °F.

Insert Project Name Here

- When needed to repair Equipment.
- Under other circumstances specifically authorized by the Engineer.

00290.32 Noise Control - Replace the bullet that begins "Notify nearby residents whenever extremely ..." with the following bullet:

- Notify nearby residents whenever extremely noisy Work is planned to occur.

(Use one of the following three options within Local Agency boundaries where applicable.)

Add the following paragraph(s) to the end of this subsection:

[Option 1 - Use the following option on Projects within the City limits of Portland where applicable.]

Review City of Portland Title 18 that describes noise control regulations. Comply with the applicable noise control requirements of the permit for Project Work.

Copies of the noise variance permit for this Project are available from the Engineer.

[Option 2 - Use the following option on projects within Local Agency boundaries where applicable. Replace the examples in parentheses and delete parentheses]

Review *(City / County) (list code or title)* that describes noise control regulations. Comply with the applicable noise control requirements of the permit for Project Work.

Copies of the noise variance permit for this Project are available from the Engineer.

[Option 3 - Use the following option within Local Agency boundaries where applicable and where local requirements exist for obtaining a noise variance, and only if the Local Agency will not provide a permit prior to construction or will only provide the permit to the Contractor.]

Review *(City / County) (list code or title)* that describes noise control regulations. Obtain and be responsible for necessary permits described in *(City / County) (list code or title)*. Comply with the applicable noise control requirements for Project Work.

(Use the following subsection .34 when fish or fish habitat resources require protection. Modify as needed for site-specific conditions. Check to make sure applicable and consistent with project permit conditions. Obtain information from the Environmental Coordinator.)

00290.34 Protection of Fish and Fish Habitat - Add the following paragraph:

Meet with the Agency Biologist, Resource Representative, Engineer, and inspector on site, before moving equipment on-site or beginning any work, to ensure that all parties understand the locations of sensitive biological sites and the measures that are required to be taken to protect them.

Insert Project Name Here

(Use the following subsections .34(a) when regulated work areas are required. Fill in the blanks as necessary. Obtain information from the Environmental Coordinator.)

00290.34(a) Regulated Work Areas - Add the following to the end of this subsection:

(Use the following three options as instructed below. Delete any options that do not apply.)

[Option 1 - Use the following paragraph when the Agency will delineate the regulated work area on the plans]

The regulated work area is the area at or below the ordinary high water (OHW) elevation shown on the plans.

[Option 2 - Use the following paragraph when the Agency will identify and mark the regulated work area in the field.]

The regulated work area is defined as the area at or below the ordinary high water (OHW) elevation. The Engineer will identify and mark the regulated work area.

[Option 3 - Use the following paragraph when the Agency will NOT identify and mark the regulated work area in the field. Fill in the blanks. If the project has any gradient change through the project area, the elevation could be different from station to station. If gradient is significant this option should not be used.]

The regulated work area is the area at or below _____ feet elevation and between stations _____ and _____.

[End Options]

(Delete the following paragraph if it does not apply. Fill in the blanks with dates.)

Perform work within the regulated work area only during the in-water work period. The in-water work period is from ____ (date) ____ to ____ (date) ____.

(Delete the following paragraph if it does not apply. Fill in the blank.)

Do not exceed ____ cubic yards total volume of material filled or discharged into waters of the State and waters of the U.S..

(Delete the following paragraph if it does not apply. Fill in the blank.)

Do not exceed ____ cubic yards total volume of material excavated from the waters of the State and waters of the U.S..

Submit a schedule to complete all work within the regulated work area within the in-water work period at least 10 Days prior to the preconstruction conference.

Insert Project Name Here

(Use the following subsection .34(b) when regulated work areas are required. Fill in the blanks as necessary. Delete what does not apply. Obtain information from the Environmental Coordinator.)

00290.34(b) Prohibited Operations - Add the following to the end of this subsection:

- Allow entry within the regulated work area or between stations _____ and _____.

(Use the following bullet for projects permitted under the Endangered Species Act Consultation (ESA) on the Federal-Aid Highway Program (FAHP) or the Standard Local Operating Procedures for Endangered Species (SLOPES), unless modified by consultation with NMFS.)

- Install steel piles greater than 24 inches in diameter or H-pile larger than designation HP 24 within the regulated work area.

(Use the following lead-in paragraph and subsection .34(c) to list required environmental permits. Edit buffer distances as relevant to project permits. Obtain information from the Environmental Coordinator. (Include paragraphs (1) through (14) as necessary. When paragraphs are NOT included, renumber the remaining paragraphs beginning with the appropriate number.)

[Begin subsection .34(c)]

Add the following subsection:

00290.34(c) Aquatic Species Protection Measures Required by Environmental Permits:

(1) General Requirements:

- Do not install fish ladders (for example: pool and weirs, vertical slots, fishways) or fish trapping systems.
- Do not apply surface fertilizer within 50 feet of any stream channel.

Use heavy equipment as follows:

- Choose equipment that has the least adverse effects on the environment (for example: minimally sized, low ground pressure).
- Secure absorbent material around all stationary power equipment (for example: generators, cranes, drilling equipment) operated within 150 feet of wetlands, waters of the State, waters of the U. S., drainage ditches, or water quality facilities to prevent leaks, unless suitable containment is provided to prevent spills from entering waters of the State or waters of the U.S.
- Do not cross directly through a stream for construction access, unless shown or approved. If shown or approved, cross perpendicular to the stream and do not block stream flow. When a crossing is no longer needed, completely remove the crossing and restore the soils and vegetation to the original condition.

- Store fuel and maintain all equipment in staging areas that are at least 150 feet away from any waters of the State, waters of the U.S., or storm inlet or on an impervious surface that is isolated from any waters of the State, waters of the U.S., or storm inlet.
- If temporary access roads are needed within 150 feet of any body of water, use existing routes unless new routes are shown or approved.
- Before beginning work on temporary access routes that are not shown, submit a proposal to the Engineer for approval.

(Use this subsection (2) when Section 00245 is required.)

(2) Work Area Isolation - Provide work isolation according to Section 00245. Provide safe passage around or through the isolated work area for adult and juvenile migratory fish unless passage did not previously exist.

(3) Water Intake Screening - Install, operate, and maintain fish screens on each water intake used for project construction, including pumps used to isolate an in-water work area. When drawing or pumping water from any stream, protect fish by equipping intakes with screens having a minimum 27 percent open area and meeting the following requirements:

- Furnish perforated plate openings 3/32 inch or smaller.
- Furnish mesh or woven wire screen openings 3/32 inch or smaller in the narrowest direction.
- Furnish profile bar screen or wedge wire openings 1/16 inch or smaller in the narrow direction.

Choose size and position of screens to meet the following criteria in Table 00290-1:

Table 00290-1

Type	Approach Velocity ¹ (Ft./Sec.)	Sweeping Velocity ² (Ft./Sec.)	Wetted Area of Screen (Sq. Ft.)	Comments
Ditch Screen	≤ 0.4	Exceed approach velocity	Divide max. water flow rate (cfs) by 0.4 fps	If screen is longer than 4 feet, angle 45° or less to stream flow
Screen with proven self-cleaning system	≤ 0.4	—	Divide max. water flow rate (cfs) by 0.4 fps	—
Screen with no cleaning system other than manual	≤ 0.2	—	Divide max. water flow rate (cfs) by 0.2 fps	Pump rate 1 cfs or less
¹ Velocity perpendicular to screen face at a distance of approximately 3 inches ² Velocity parallel to screen				

Furnish ditch screens with a bypass system to transport fish safely and rapidly back to the stream.

(Use the following subsection (4) when special aquatic habitats are required. Obtain information from the Environmental Coordinator.)

(4) Special Aquatic Habitats - The following exploration or construction activities are not allowed in special aquatic habitats:

- Use of pesticides and herbicides, unless allowed according to Section 01030.
- Use of short pieces of plastic ribbon to determine flow patterns.
- Temporary roads or drilling pads built on steep slopes, where grade, soil type, or other features suggest a likelihood of excessive erosion or slope failure.
- Exploratory drilling in estuaries that cannot be conducted from a work barge, or an existing bridge, dock, or wharf.
- Installation of a fish screen on any permanent water diversion or intake that is not already screened.
- Drilling or sampling in an EPA-designated Superfund Site, a state-designated clean-up area, or the likely impact zone of a significant contaminant source, as identified by historical information, U. S. Army Corps of Engineers representative, or the Agency.

(5) Site Restoration - Restore damaged streambanks to a natural slope, pattern, and profile suitable for establishment of permanent woody vegetation unless precluded by pre-project conditions (for example: natural rock substrate):

- Replant all damaged streambanks before the first April 15 following construction.
- If use of large wood, native topsoil, or native channel material is required for the site restoration according to the roadside development plans, stockpile all large wood, native vegetation, weed-free topsoil, and native channel material displaced by construction. Cut trees or large wood and trees into pieces of no less than 20 feet in length, or as shown on the roadside development plans or as directed. Stockpiled native wood and vegetation remain the property of the Agency.
- Stabilize all disturbed soils, including obliteration of temporary access roads, following any break in work unless construction will resume in 4 Calendar Days.

(6) Surface Water Diversions - Surface water may be diverted to meet construction needs other than work area isolation, consistent with Oregon law, only if water from sources that are already developed, such as municipal supplies, small ponds, reservoirs, or tank trucks, is unavailable or inadequate, and meeting the following conditions:

- When alternative surface sources are available, divert from the stream with the greatest flow.
- Install, operate, and maintain a temporary fish screen.
- Do not exceed a pumping rate and volume of 10 percent of the available flow. For streams with less than 5 cubic feet per second, do not exceed drafting of 18,000 gallons per Day. Do not use more than one pump for each site.

(7) Hydro-Acoustic - Unless otherwise shown or approved, steel piling may be installed below the ordinary high water as follows:

- Minimize the number and diameter of pilings, as feasible.
- Repairs, upgrades, and replacement of existing pilings consistent with these conditions are allowed. In addition, up to 5 single pilings or 1 dolphin consisting of 3 to 5 pilings may be added to an existing facility.
- Whenever feasible, use vibratory hammer for piling installation. Otherwise, use the smallest drop or impact hammer necessary to complete the job, and set the drop height to the minimum necessary to drive the piling.
- For all pile installed or removed, maintain a pile installation and removal log and submit the log when the related work is completed. Include types, sizes, locations, installation or removal methods, and dates in the log.
- When using an impact hammer to drive or proof steel piling within a body of water, or as directed, use one of the following sound attenuation devices to effectively dampen sound:
 - Completely isolate the pile from the waters of the State and waters of the U.S. by dewatering the area around the pile according to Section 00245.
 - If water velocity is 1.6 feet per second or less, surround the pile being driven with a bubble curtain that distributes small air bubbles around 100 percent of the piling perimeter for the full depth of the water column and is in accordance to the guidance in the Appendix of The ODOT-FHWA Federal Aid Highway Program Programmatic User's Guide titled *NMFS and USFWS Impact Pile Driving Sound Attenuation Specifications*. The FAHP User's Guide is available on the Agency's website at:

<https://www.oregon.gov/ODOT/GeoEnvironmental/Pages/Manuals.aspx>
 - If water velocity is greater than 1.6 feet per second, surround the piling being driven by a confined bubble curtain (for example: a bubble ring surrounded by a fabric or metal sleeve) that will distribute air bubbles around 100 percent of the piling perimeter for the full depth of the water column and is in accordance to the guidance in the Appendix of The ODOT-FHWA FAHP User's Guide titled *NMFS and USFWS Impact Pile Driving Sound Attenuation Specifications*.

(8) Drilling, Boring, or Jacking - If drilling, boring, or jacking is used, the following conditions apply:

- Design, build, and maintain facilities to collect and treat all construction and drilling discharge water using the best available technology applicable to site conditions. Provide treatment to remove debris, nutrients, sediment, petroleum hydrocarbons, metals, and other pollutants likely to be present. An alternate to treatment is collection and proper disposal offsite.
- Isolate drilling operations from wetted stream to prevent drilling fluids from contacting waters of the State or waters of the U.S.
- Use casing to prevent loss of drilling fluid to the subsurface formation. Do not drill without a containment method to keep drilling fluids and slurry isolated.

- If it is necessary to drill through an over-water bridge deck, use containment measures to prevent drilling debris from entering the stream channel.
- If drilling fluid or waste is released to surface water, wetland or other sensitive environment, cease all drilling pending written approval from appropriate regulatory agencies through the Engineer to resume drilling.
- Recover all waste and spoils if precipitation is falling or imminent. Recover, recycle, or dispose of all drilling fluids and waste to prevent entry into flowing water.
 - Recycle drilling fluids using a tank instead of drill recovery/recycling pits, whenever feasible.
 - When drilling is completed, make attempts to remove the remaining drilling fluid from the sleeve (for example: by pumping) to reduce turbidity when the sleeve is removed.

(9) Treated Wood - Treated wood includes any wood treated with any pesticide or wood preservatives. Do not use lumber, pilings, or other wood products that are treated or preserved with pesticidal compounds below the ordinary high water (OHW) or as part of an in-water or over-water structure, except as described below:

- Store treated wood shipped to the Project out of contact with standing water and wet soil, and protected from precipitation.
- Visually inspect each load and piece of treated wood. Reject for use in or above aquatic environments if visible residues, bleeding of preservative, preservative-saturated sawdust, contaminated soil, or other matter is present.
- Use pre-fabrication to the extent feasible. When field fabrication is necessary, perform all cutting and drilling of treated wood, and field preservative treatment of wood exposed by cutting and drilling, above the OHW. Use tarps, plastic tubs, or similar devices to contain the bulk of any fabrication debris, and wipe off any excess field preservative.
- Furnish all treated wood structures, including pilings, that have design features to avoid or minimize impacts and abrasion by livestock, pedestrians, vehicles, vessels, and floats.
- Treated wood may be used to construct a bridge, over-water structure or an in-water structure, with the exception of the work containment system, provided that all surfaces exposed to leaching by precipitation, overtopping waves, or submersion are coated with a water-proof seal or barrier are maintained. Apply and contain coatings and paint-on field treatment to prevent contamination. Surfaces that are not exposed to precipitation or wave attack, such as parts of a timber bridge completely covered by the bridge deck, are exempt from this requirement.
- During demolition of treated wood, ensure that no treated wood debris falls into the water. If treated wood debris does fall into the water, remove it immediately.
- Store removed treated wood debris in appropriate dry storage areas, at least 150 feet away from the regulated work area.

(10) Piling Removal - Remove temporary or permanent piling according to the following:

- Dislodge the piling with a vibratory hammer, whenever feasible.

- Once loose, place the piling onto the construction barge or other appropriate dry storage site.

(Use the following bullet when future river dredging is anticipated where piles are being removed.)

- When piles are not completely removed, locate each unremoved pile and submit the locations to the Agency. Submit pile locations accurate to within 10 feet of the actual pile location.

a. Non-Treated Piling - Use the following methods to remove non-creosote piling:

(Use the following bullet when piling will be removed from uncontaminated sediment. Check with the Region HazMat Coordinator.)

- If a pile in uncontaminated sediment cannot be removed or breaks, cut or push the pile or stump off at least 3 feet below the surface of the sediment and cover with a cap of clean, native substrates that match surrounding streambed materials.

(Use the following bullet when piling will be removed from contaminated sediment. Check with the Region HazMat Coordinator.)

- If a pile in contaminated sediment cannot be removed or breaks above the sediment line, cut the pile or stump off at the sediment line. If the pile breaks below the sediment line, make no further effort to remove it.
- Fill holes left by each pile with clean, native sediments whenever feasible.
- Do not excavate to remove piling.

b. Treated Piling - To minimize toxic release, sediment disturbance, and total suspended solids, use the following methods to remove treated piling:

- Install a floating surface boom to capture floating surface debris.
- Keep all equipment out of the water, grip piles above the waterline, and complete all work during low water and low current conditions.
- Dislodge the piling with a vibratory hammer, whenever feasible. Do not intentionally break a pile by twisting or bending.
- Slowly lift the pile from the sediment and through the water column.
- Place the pile in a containment basin on a barge deck, pier, or shoreline without attempting to clean or remove any adhering sediment.

(Use the following bullet when piling will be removed from uncontaminated sediment. Check with the Region HazMat Coordinator.)

- If a pile in uncontaminated sediment cannot be removed or breaks, cut or push the pile or stump at least 3 feet below the surface of the sediment and cover with a cap of clean, native substrates that match surrounding streambed materials.

(Use the following bullet when piling will be removed from contaminated sediment. Check with the Region HazMat Coordinator.)

- If a pile in contaminated sediment cannot be removed or breaks above the sediment line, cut the pile or stump off at the sediment line. If the pile breaks below the sediment line, make no further effort to remove it.
- Fill the hole left by each removed or partially removed pile with clean, native sediments and cap with clean, native substrates that match surrounding streambed materials immediately after removal.
- Dispose of all removed piles, floating surface debris, contaminated supplies, and sediment spilled on work surfaces at a permitted upland disposal site.

(11) Ditch and Culvert Cleaning - Complete ditch cleaning, culvert and trash rack cleaning by working from the top of bank, unless work area isolation would result in less habitat disturbance.

- Do not work more than 20 feet upstream or downstream the culvert or trash rack.
- Remove only the minimum amount of wood, sediment, or other natural debris necessary to maintain the facility's function, without disturbing spawning gravel or changing the configuration of the original ditch, unless the new configuration is part of the project design.
- Place all large wood, cobbles, and gravels recovered from during culvert and trash rack cleaning downstream from the structure.
- Complete drift removal in the following priority, as directed:
 - Pull and release whole logs or trees downstream.
 - Pull whole logs and trees and place in the riparian area, as directed.
 - Remove whole logs or trees only if roadside development plans have been developed for replacement in-kind.
 - Pull, cut only as necessary, and release logs and trees downstream.

(12) Floating Structures - The following types of over-water or in-water structures are not allowed:

- boat house
- boat ramp made of asphalt
- buoy or float in an active anchorage or fleeting area
- covered moorage
- floating storage unit
- houseboat
- marine
- pier
- non-water related facilities (including staging areas) inside riparian management areas

Insert Project Name Here

- any other over-water structure more than 6-feet wide unless otherwise approved in writing by appropriate regulatory agencies through the Engineer

The following conditions apply to over-water or in-water structures:

- Concrete boat ramps that consist of pre-cast concrete slabs below the ordinary high water elevation, and higher elevation portions that are completed in the dry so that no wet concrete that has cured less than 24 hours is allowed to contact any wetland or waters of the State or waters of the U.S.
- Rock may be used to construct a boat ramp footing, or other protection necessary to prevent scouring, down-cutting, or failure of the boat ramp, provided that the rock does not extend further than 4 feet from the edge of the ramp in any direction.
- Furnish translucent materials or skylights for any replacement roof, wall, or garage door for covered moorages and boat houses. In addition, each side, except the door, of the boat house is required to have windows at least 4 feet wide installed the length of the boat house, subject to breaks only for structural support.
- An existing marina may be modified within the existing footprint of the moorage, or in the water more than 50 feet from the shoreline and more than 20 feet deep, except do not place structures in areas that support aquatic vegetation or areas where boat operations may damage aquatic vegetation.
- Fit all pilings, mooring buoys, and navigational aids with devices to prevent perching by piscivorous birds.
- Permanently encapsulate all synthetic flotation material to prevent breakup into small pieces and dispersal in water.
- Install small temporary floats less than 7 Calendar Days before a scheduled event, remove them 5 Days after a scheduled event is concluded, and do not leave them in place longer than 21 Calendar Days.
- Install mooring buoys and temporary floats (for example: shellfish traps) more than 300 feet from native submerged aquatic vegetation, more than 50 feet from the shoreline, and in water deeper than 20 feet deep at all times, or as necessary to ensure that gear does not ground out unnecessarily, and boats do not prop wash the bottom.

(Use the following barge language when using a barge. Delete bullets within the barge language that do not apply to the project.)

[Begin barge language.]

(Use one of following two bullets depending on permit conditions. Fill in the blank with the barge location (stream, pier, bridge, etc.) and reference the plan sheet(s) that show restricted areas. Delete "(s)" or parentheses as applicable.)

- Prohibit barge use at _____, as shown on sheet(s) _____ of the Plans.
- Barge use is allowed only at _____, as shown on sheet(s) _____ of the Plans.

When using a barge:

- Before moving the barge to the Project Site, unless the barge is transported solely by water and entirely within the State, inspect the barge and ballast for invasive species to ensure that invasive species are not brought to the Project Site. Notify the Oregon State Marine Board if invasive species are found.
- Before moving the barge to the Project Site, clean and pressure wash the barge deck.
- Do not use impact hammers for spud placement.
- Install and maintain containment measures to prevent barge surface runoff from flushing oil, fuel, or other contaminants into the water.
- Secure all Equipment, portable toilet facilities, and containers with fuel, hazardous materials, or waste to the barge deck.
- If the barge is equipped with a toilet facility, pump it out into an approved waste removal system when work requiring a barge is complete, or as often as is necessary. Move temporary toilet facilities to shore before pumping them out.
- If a fuel container is used on the barge, provide a double-walled fuel container and place an absorbent containment boom around the container when it is on the barge.
- Remove hand carried fuel containers from the barge at the end of each work shift unless containers are secured to the barge and stored within a secondary containment vessel of sufficient capacity to hold the entire volume of liquid available.
- Refill hand carried fuel containers within a secondary containment vessel of sufficient capacity to hold the entire volume of liquid available.
- Provide individual containment for each piece of Equipment on the barge, including containment pans or absorbent booms to locally contain minor spills.
- Remove waste material from the barge at least every 3 working days and:
 - Before any pause in work that is longer than 1 Day; or
 - Before reaching the calculated safe load weight of the barge according to Section 00253.

[End barge language.]

(13) Temporary Power, Communication and Water Lines - Before installing temporary power, communication, or water lines across streams or bodies of water, submit a proposed plan to the Engineer for approval. Do not begin installation before receiving approval from the Engineer. Utilize the following design methods in the listed order of priority for proposed plans for installation of temporary power, communication, and water lines and stream crossings:

1. Aerial lines, including lines hung from existing bridges.
2. Directional drilling, boring and jacking that spans the channel migration zone and any associated wetland.
3. Trenching is restricted to intermittent streams and may only be used when the stream is naturally dry. For all sections of trenches below the ordinary high water line, backfill with native material and cap with clean gravel suitable for fish use in the project area.

Insert Project Name Here

Align each crossing as perpendicular to the watercourse as possible. For drilled, bored, or jacked crossings, ensure that the line is below the total scour prism. Return any large wood displaced by trenching or plowing as nearly as possible to its original position, or otherwise arranged to restore habitat functions.

(14) Injured Fish Notification - If a dead or injured fish is found in the project area, immediately notify the Agency. If the injured fish is in a location where further injury or stress may take place, attempt to move the fish to a safer location, if one is available, near the capture site while keeping the fish in the water and reducing its stress as much as possible. Do not disturb the fish after it has been moved. If the fish is dead or dies while being captured or moved, save the fish and any tags. The Agency will notify appropriate regulatory agencies about the injured or dead fish and provide additional direction to the Contractor.

[End subsection .34(c)]

(Use the following lead-in paragraph and subsection .35 when the Marine Mammal Protection Act applies to the project. Check with the Environmental Coordinator and the ODOT NMFS Liaison.)

Add the following subsection:

00290.35 Protection of Marine Mammals - *[Coordinate with the ODOT NMFS Liaison to develop appropriate specification language.]*

(Use the following subsection .36(a) when migratory birds may be encountered. Check with the ODOT Region Environmental Coordinator.)

00290.36(a) Migratory Birds - Replace the paragraph that begins "Comply with the Migratory Bird Treaty Act ..." with the following paragraph:

Comply with the Migratory Bird Treaty Act (16 U.S.C. 703-712) that protects most species of birds in Oregon and prohibits the removal of nests containing eggs or dependent young (i.e., active nest) without a permit. Migratory birds include most birds in Oregon; the few exceptions include rock pigeons, house sparrows, and European starlings.

Replace the paragraph that begins "Except where allowed by the Contract ..." with the following paragraph:

Except where allowed by the Contract and by permit, do not disturb an active migratory bird nest, do not inhibit the ability of adult birds to care for eggs or dependent young, and do not impact the supporting structure where an active nest is built.

Add the following to the end of this subsection:

(Use the following paragraph when nesting habitat is within the project limits and there will be no bird management. Obtain information from the Environmental Coordinator.)

Do not disturb migratory bird nesting habitat (shrubs, trees, and structures), or clear vegetation from March 1 to September 1 of each year without prior written approval from the

Insert Project Name Here

Engineer. Notify the Engineer, in writing, a minimum of 10 Calendar Days prior to starting activities that could harm nesting birds.

(Use one of the following .36(a)(1) options if bird management is anticipated and as instructed below. Delete the options that do not apply. Obtain information from the Environmental Coordinator.)

[Option 1 - Use this option when the project will be covered under the ODOT Migratory Bird Treaty Act (MBTA) permit and ODOT Biological Staff or USDA APHIS Wildlife Services will oversee bird management on the project.

(1) Bird Management - Bird management activities to comply with the Migratory Bird Treaty Act (16 U.S.C. 703 712) will be performed by the Agency. Ensure that the Agency and its permitted agents have access to the project area, as needed to prevent migratory bird nesting. Nesting prevention may include daily bird harassment and the installation and maintenance of devices that exclude birds.

Do not disturb migratory bird nesting habitats (shrubs, trees, and structures), or clear vegetation from March 1 to September 1 of each calendar year without prior written approval from the Engineer. Notify the Engineer, in writing, a minimum of 10 Calendar Days prior to starting activities that could harm nesting birds.

[Option 2 - Use this option when the project will be covered under the ODOT Migratory Bird Treaty Act (MBTA) permit but ODOT Biological Staff or USDA APHIS Wildlife Services requires contractor assistance with bird management because of the large size and/or complexity of the project. Modify as needed. This option requires approval by the Technical Resource.]

(1) Bird Management - Submit a migratory bird protection plan and implementation schedule for review and approval at least 10 Calendar Days before the pre-construction conference. Do not begin Work until the migratory bird protection plan and implementation schedule are approved.

Do not disturb migratory bird nesting habitats (shrubs, trees, and structures), or clear vegetation from March 1 to September 1 of each calendar year without prior written approval from the Engineer. Notify the Engineer, in writing, a minimum of 10 Calendar Days prior to starting activities that could harm nesting birds.

Include the following elements in the migratory bird protection plan:

(a) The name of the individual who will oversee bird management activities for the project and a summary of their qualifications. Provide an individual that has a biology or related natural resources degree and a minimum of 2 years of work experience identifying nesting birds, preferably in the Pacific Northwest.

(b) A description of measures to prevent birds from nesting on structures or vegetation at the project site, from March 1 to September 1 of each calendar year, that could result in project conflicts; include the timing, intensity and location of the activities. If using exclusionary devices (e.g., netting), install them prior to March 1 and remove them at the completion of the project or by September 1 each calendar year, whichever comes first. Include how exclusionary devices will be installed and document their inspection

schedule. Inspect exclusionary devices daily to ensure their functionality. Repair damaged exclusionary devices as soon as the damage is discovered. Document inspections and maintain documentation on site.

(c) A description of measures to avoid disturbing active migratory bird nests if they are encountered. The typical avoidance measure is to move project activities away from the active nest until the young have left the nest.

[Option 3 - Use this option when the Project is covered under a non-ODOT Migratory Bird Treaty Act permit, typically a Local Government permit. Insert the name of the permit holder and delete the parentheses.]

(1) Bird Management - Bird management activities to comply with the Migratory Bird Treaty Act will be performed by (name of the permit holder) and its permitted agents, as documented in the (name of the permit holder) MBTA permit. Ensure that (name of the permit holder) and its permitted agents have access to the project area as needed to prevent migratory bird nesting. Nesting prevention may include daily bird harassment and the installation and maintenance of devices that exclude birds.

Do not disturb migratory bird nesting habitat (shrubs, trees and structures) or clear vegetation from March 1 to September 1 each calendar year without prior written approval from the Engineer. Notify the Engineer, in writing, a minimum of 10 Calendar Days prior to starting activities that could harm nesting birds.

(Use the following subsection .36(b) when there is potential disturbance to bat colonies. Delete what does not apply. Obtain information from the Environmental Coordinator.)

00290.36(b) Bats - Add the following bullet(s) to the end of the bullet list:

- Schedule Bridge Work that may disturb resident bats, including demolition activities, between (Insert dates outside of maternity roosting/ hibernation (date) to (date)).

(Use one of the following options when bat management is performed.)

[Option 1 – Use the following bullet when bat management is performed by the Agency.]

- Ensure that the Agency and its agents have access to the project area, as needed, to perform bat management activities to prevent bat conflicts.

[Option 2 – Use the following bullets in the event that bat management cannot be performed by the Agency. Modify as needed.]

- Install exclusionary devices to prevent bats from accessing suitable Bridge habitat. An exclusionary device is any item that denies bats physical access to an area (e.g., netting, hole blockers, one-way valves). Furnish exclusionary devices approved by the Engineer prior to installation.

Insert Project Name Here

- Install exclusionary devices a minimum of 15 Days prior to ((Insert the date of the beginning of maternity roosting/hibernation)). Do not remove exclusionary devices until approved by the Engineer.
- Regularly inspect, maintain, and repair or replace exclusionary devices to prevent bridge occupancy by bats during the period listed above.

(Use the following lead-in paragraph and subsection .36(c) when there is high noise production work near listed birds. Obtain information from the Environmental Coordinator.)

Add the following subsection:

00290.36(c) Wildlife Avoidance/Harassment (High Noise) - For purposes of this project, "high noise" is defined as sound pressure levels greater than 10 dBA above the ambient as measured by the L_{AFmax} and L_{AFeq} at sensitive habitat as shown:

(Use the following bullets when suitable habitat for marbled murrelet is located within one mile of the project.)

- Non-blasting high-noise producing construction activities are not allowed between April 1 and August 5. Conduct blasting activities within one mile of sensitive habitat between September 15 and March 31.
- Perform non-blasting high noise producing construction activities conducted from August 6 to September 15 two hours after sunrise to two hours before sunset. If night construction is needed, then perform activities one hour after sunset to one hour before sunrise.

(Use the following bullet when nesting or communal roosting sites for bald and/or golden eagles are within one mile of blasting activities, 0.5 mile line of sight of construction activities, or 0.25 mile of construction activities.)

- Blasting and high-noise producing activities are allowed only between September 1 and October 31.

(Use the following bullets when there is suitable habitat for northern spotted owl near the project site. Delete bullets that do not apply.)

- Blasting and high-noise producing activities are prohibited during the following critical nesting period:
 - March 1 to July 7 for the North Coast Province.
 - March 1 to June 30 for the Rogue/Siskiyou National Forest (NF) and Medford District of U.S. Bureau of Land Management (BLM) in the Southwest Province.
 - March 1 to July 15 for the Umpqua NF in the Southwest Province.
 - March 1 to July 15 for the Willamette Province.
 - March 1 to September 30 for the Deschutes NF, Fremont, and Winema NF and unlisted areas.

Insert Project Name Here

00290.38 Protection of Plants - Replace this subsection, except for the subsection number and title, with the following:

Plant habitats to be protected are shown with the plant habitat boundaries flagged by the Engineer. Avoid destruction of plant habitats by ensuring construction personnel, Equipment, and associated pollutants, including sediment, chemical contaminants, discharge water, non-native grass and weed seed, do not enter the habitat.

(Use the following subsection .41 when required by relevant permits. Obtain information from the Environmental Coordinator. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

00290.41 Protection of Waters of the U.S. or State - Add the following to the end of this subsection:

Permits have been obtained for this project from the (US Army Corps of Engineers (Corps)) (and the) (Department of State Lands (DSL)). Keep a copy of (Corps) (and) (DSL) permit(s) at the project site during construction. Changes to the project that may increase the amount of fill placed or material removed in waters of the U.S. or State, or the acreage of waters impacted are not authorized. The following waters of the U.S. or State are present and have been determined to be unavoidable as indicated in Table 00290-2:

(Use the following table to list the information in the table below for each type of water resource, e.g. Waters 1, waters 2, wetlands A, etc. Temporary impacts are restored in less than 24 months. Obtain information from the Environmental Coordinator. Add or delete rows in the table as necessary to list all applicable resources.

Example:

Deer Creek	20	20	1+00 Lt. to 2+00 Rt.	Temporary	0.1
------------	----	----	----------------------	-----------	-----

)

Table 00290-2

Impact Waters of the US or State	Removal Volume (cu yds.)	Fill Volume (Cu yds)	Station	Duration of Impact (Temporary or Permanent)	Area of impact (Acres)

00290.41(a) Identifying Waters of the U.S. or State, Including Wetlands - Replace the paragraph that begins "Wetlands known to be ..." with the following paragraph:

Wetlands known to be on the Project Site are shown and identified either as "permanently filled or excavated" or as "temporarily impacted". Wetlands to be protected are shown as "no Work Zones".

Insert Project Name Here

00290.41(b) Disturbing Waters of the U.S. or State, Including Wetlands - Replace the paragraph that begins "If Wetlands are shown, ..." with the following paragraph:

If Wetlands are shown, meet with the Agency Wetland Specialist, the Engineer, and Inspector on-site prior to moving Equipment onto the site or beginning any Work, to ensure that all parties understand the locations of Wetlands and the measures that are necessary to protect them.

(Use the following lead-in paragraph and subsection .42 when a work containment plan is required. In the blanks, list each specific Contractor activity requiring containment, do not use generic terms such as "bridge work" or "bridge repair." Obtain information from the Environmental Coordinator and Structural Designer.)

Add the following subsection:

00290.42 Work Containment Plan - A Work Containment Plan (WCP) is required on this Project for _____ activity(ies).

Develop and submit a WCP for approval at least 28 Calendar Days prior to mobilization for _____ activity(ies). Maintain a copy of the WCP on the Project Site at all times during construction, readily available to employees and inspectors. Ensure that all employees comply with the provisions of the WCP. Design the WCP to avoid or minimize disturbance to protected features (sensitive cultural or natural resources, regulated work areas, aquatic life or habitat in regulated work areas) related to Contractor operations.

Before developing the WCP, meet with Agency to review the Contractor's activities that require the WCP to ensure that all parties understand the locations of protected features to be avoided and the measures needed to avoid and protect them.

Notify the Engineer at least 10 Calendar Days before beginning work access or containment construction activities.

The Agency reserves the right to stop Work and require the Contractor to change the WCP methods and Equipment before any additional Contract Work, at no additional cost to the Agency, if and when, in the opinion of the Agency, such methods jeopardize sensitive cultural or natural resources, regulated work areas, or aquatic life or habitat in regulated work areas.

Provide a WCP that identifies how the Contractor's construction operations will protect regulated features during mobilization, construction, maintenance, and demolition. Include a narrative describing compliance with Section 00290.

00290.50 Protection of Cultural Resources - Replace the paragraph that begins "Comply with all Laws..." with the following paragraph:

Comply with all Laws governing preservation of cultural resources. Cultural resources include, but are not limited to:

- Historic buildings (i.e. typically 50 years of age and older)
- Historic structures (i.e. bridges)
- Sites (i.e. sites with artifacts)

Insert Project Name Here

- Objects (i.e. monuments)
- Districts (i.e. historic districts, or linear historic districts like historic roads).

Replace the paragraph that begins “If cultural resources are...” with the following paragraph:

If cultural resources not previously identified in preconstruction are encountered on the Project area or in material sources, and their disposition is not addressed in the Special Provisions, do the following:

(Use the following subsection .51 when there are known sensitive cultural sites on the project or an Inadvertent Discovery Plan is requested.)

00290.51 Protection of Sensitive Cultural Sites - Add the following to the end of this subsection:

(Fill in the blank with the number of sensitive cultural sites. Select either "sites were" or "site was" depending on the number of sites. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

There are sensitive cultural sites or areas of high probability for cultural resources on this Project. At the time of preparation of the Plans, _____ (sites were) (site was) identified.

The Region Environmental Coordinator for this Project is _____.

The Agency Archaeology Representative for this Project is _____.

The Engineer will coordinate all contact with the Agency Archaeology Representative and the Region Environmental Coordinator.

(Use the following paragraph if an Inadvertent Discovery Plan is required for the project.)

An Inadvertent Discovery Plan (IDP) has been developed for this project. The IDP is available from the Engineer.

(Use the following paragraphs and bullet list when sensitive cultural sites require protection during construction.)

Meet with the Engineer at least 10 Calendar Days prior to beginning ground disturbing activities to discuss sensitive cultural sites on the Project. Required attendees include:

- The Contractor’s supervisory personnel.
- Subcontractors, including contract archaeological monitors, and supervisory personnel involved in ground disturbing activities.
- Agency archaeology representative or region environmental coordinator.
- When applicable, tribal representative(s) or monitor(s).

Prior to beginning On-Site Work, install work zone fencing from section 00221.13 of the QPL, or lath and flagging, around no work zones, as shown or as directed.

Insert Project Name Here

(Use the following paragraph when Archaeological and/or Tribal Monitors are required during ground-disturbing activities. Delete the language in purple parentheses that does not apply and delete all parentheses.)

(Archaeological)(and)(Tribal) Monitors are required to be on-site during all ground-disturbing activities for this Project, unless otherwise notified. Notify the Engineer 10 Calendar Days before beginning ground-disturbing activities, or 14 Calendar Days if ground-disturbing activities are anticipated to occur simultaneously in more than two locations.

(Use the following six paragraphs when a monitoring report is required for the project)

Provide archaeological monitoring during construction by a professional archaeologist who meets the Secretary of the Interior's professional standards for archaeology (36 CFR 61, Appendix A) and who has completed the ODOT Cultural Resources Consultant Qualification Training Program.

Submit the following reports according to 00150.37. Within 21 Calendar Days after receipt of the reports, the Engineer will review the submittal and accept or return for correction.

Use monitoring reports to document activities and discoveries from the Project according to the State of Oregon Guidelines for Reporting on Archaeological Investigations for monitoring from the Oregon State Historic Preservation Office website at:

https://www.oregon.gov/oprd/OH/Documents/Reporting_Guidelines.pdf

- **Draft Monitoring Report** - Submit the draft monitoring report completed by a professional archaeologist, not later than 21 Calendar Days following completion of the archaeological monitoring.
- **Final Monitoring Report** - Submit the final monitoring report completed by a professional archaeologist, not later than 60 Calendar Days following completion of the archaeological monitoring.

00290.51(b) Disturbing Unknown Sensitive Cultural Sites - Replace the paragraph that begins "If the Contractor finds a previously undiscovered..." with the following paragraph:

If the Contractor finds a previously undiscovered sensitive cultural site, immediately cease all activities at that site, follow procedures listed in 00290.50, and notify the Engineer. If the Contractor inadvertently disturbs unknown sensitive cultural sites, but immediately ceases all activities and follows the procedures listed in 00290.50, the Agency, to the extent permitted by Article XI, section 7 of the Oregon Constitution and by the Oregon Tort Claims Act, will indemnify, within the limits of the Tort Claims Act, the Contractor for costs associated with monitoring, recovery, site restoration or other required archaeological Work, provided neither the Agency nor the State are required to indemnify the Contractor for such costs resulting from, arising out of or relating to the willful misconduct, negligence or other wrongful acts attributable to the Contractor or other persons on the Project site.

Replace the paragraph that begins "Delays to Work due to new ..." with the following paragraph:

Insert Project Name Here

The Engineer may consider for exclusion from Contract Time according to 00180.50(e) delays to Work due to new cultural resource finds.

(Use the following subsection .90 when a work containment plan and a work containment system are required, when staging areas are required, when there are known sensitive cultural sites on the project, or when turbidity monitoring is required. Remove the parentheses in "paragraph(s)" when more than one paragraph below is used. Remove "(s)" when only the plastic mesh fencing paragraph is used.)

00290.90 Payment - Add the following paragraph(s) to the end of this subsection:

(Use the following paragraphs when a work containment plan and a work containment system are required.)

The work containment plan will be paid for at the Contract lump sum amount for the item "Work Containment Plan".

Payment will be payment in full for providing all Materials, Equipment, labor, and Incidentals necessary to complete the Work as specified. Payment includes providing and updating the Work Containment Plan.

(Use the following paragraphs when turbidity monitoring is required.)

The accepted quantities of turbidity monitoring will be paid for at the Contract lump sum amount for the item "Turbidity Monitoring".

Payment for turbidity monitoring will be payment in full for furnishing and placing all Materials and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph when staging areas are required or when there are known sensitive cultural sites on the project.)

No separate or additional payment will be made for work zone fencing.

(Use the following paragraphs when an archaeological monitoring report is required.)

The accepted quantities of archaeological monitoring report will be paid for at the Contract lump sum amount for the item "Monitoring Report".

Payment for archaeological monitoring will be payment in full for providing a professional archaeologist to monitor the Work and for preparing, submitting correcting, and resubmitting the monitoring reports.

SP00293 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26
This Section requires SP00294.)**

Insert Project Name Here

SECTION 00293 - DECOMMISSION UNDERGROUND STORAGE TANKS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00293 is not a Standard Specification and is included in this Project by Special Provision.

Description

00293.00 Scope - In addition to the requirements of Section 00290, decommission underground storage tanks according to the following Specifications.

Decommission the following underground storage tanks listed in Table 00293-1:

(Fill in the table with the location, number, contents, volume, Regulated-UST or HOT, and required decommission method.)

Table 00293-1

Location/Station	Number of UST	UST contents	Volume (gallons)	Regulated-UST or HOT	Decommission Method (Removal or In-place)

00293.02 Definitions:

Decommission by Filling In-Place - Decommissioning underground storage tanks by filling them in place with inert material.

Decommission by Removal - Decommissioning underground storage tanks by removing them.

Heating Oil Tank (HOT) - Heating Oil Tanks meeting the requirements of OAR 340-177.

Insert Project Name Here

Regulated Underground Storage Tank (Regulated-UST) - Underground storage tanks meeting the requirements of OAR 340-150.

Underground Storage Tank (UST) - Regulated Underground Storage Tanks and underground Heating Oil Tanks.

(Use this subsection .03 when decommissioning regulated underground storage tanks.)

00293.03 Submittals for Regulated Underground Storage Tanks - The following documentation is required:

- Prepare and submit to the Engineer for signing the following DEQ forms:
 - At least 45 Calendar Days before beginning tank decommission work, DEQ's "General Permit Registration Form to Decommission Existing Unregistered Tanks and 30-Day Notice of Intent to Decommission USTs".

(Change the word "Agency" below to the actual owner of the tank when ODOT is not the property owner.)

- List the Agency as the "Permittee" and the "Property Owner". List "Unknown" as the "Tank Owner".
- Pay the Registration Fee and all back fees.

(Use the following bullet when the date of original UST installation is unknown or if the UST was installed before May 1, 1988.)

- Calculate back fees from May 1, 1988 (OAR 340-150-0110).

(Use the following bullet when the date of original UST installation is known insert the date in the blank.)

- Calculate back fees from the installation date of _____

(Change the word "Agency" below to the actual owner of the tank when ODOT is not the property owner.)

- Within 20 Calendar Days after finishing tank decommission work, DEQ's "Underground Storage Tank Decommissioning Checklist and Site Assessment Report". The Agency will sign the form as the "Property Owner" and "Permittee".
- Prepare and submit to DEQ, with copies to the Engineer, the following DEQ forms within the DEQ timelines:
 - The Agency signed "General Permit Registration Form to Decommission Existing Unregistered Tanks and 30-Day Notice of Intent to Decommission USTs" (30 Days - OAR 340-150-0110).
 - The Agency signed "Underground Storage Tank Decommissioning Checklist and Site Assessment Report" (30 Days - OAR 340-150-168 and OAR 340-150-0180).

(Use the following bullet when tanks do not contain petroleum substances.)

- For tanks that do not contain petroleum substances, a site assessment plan (OAR 340-150-0180).
- When contaminated soil is encountered:
 - The "Initial (Twenty Day) Report Form for UST Cleanup Projects" (20 Days - OAR 340-122-0225).
 - The "Initial Site Characterization Report" (45 Days - OAR-340-122-0230 and OAR 340-122-0235).
- Prepare and submit to the Engineer the following, within 48 hours of receipt or completion:
 - Copies of all signed and completed manifests and bill-of-lading forms for transporting the UST contents.
 - Photographs taken of each UST during excavation and removal.
 - All reuse, recycled, and disposal receipts for the UST and UST contents.

(Use this subsection .04 when decommissioning heating oil tanks.)

00293.04 Submittals for Heating Oil Tanks - The following documentation is required:

- Prepare and submit to DEQ, with copies to the Engineer, the following DEQ forms within the DEQ timelines:
 - Within 30 Calendar Days after finishing decommission work, DEQ's "Certified HOT Decommissioning Report, signed by the licensed Contractor" with its associated documentation. Pay all filing and decommissioning fees.(OAR 340-177-0025 and OAR 340-177-0095)
- When contaminated soil is encountered:
 - The "Initial (Twenty Day) Report Form for UST Cleanup Projects" (20 Days - OAR 340-122-0225).
 - The "Initial Site Characterization Report" (45 Days - OAR 340-177-0055, OAR 340-122-0230 and OAR 340-122-0235).
- Prepare and submit to the Engineer the following, within 48 hours of receipt or completion:
 - Copies of all signed and completed manifests and bill-of-lading forms for transporting the UST contents.
 - Photographs taken of each UST during excavation and removal.
 - All reuse, recycled, and disposal receipts for the UST and UST contents.

Labor

00293.30 Personnel Qualifications - For all tank decommissioning work, provide contractors and supervisors meeting the following requirements:

Insert Project Name Here

- For Regulated-UST decommission work a contractor that has a current UST service providers license and a supervisor that has a current DEQ Underground Storage Tank Services Decommissioning License.
- For HOT decommission work a contractor and a supervisor that have current DEQ Underground Storage Tank Services Licenses for Heating Oil Tank services.

Construction

(Use this subsection .40 when decommissioning regulated underground storage tanks by the removal method.)

00293.40 Regulated Underground Storage Tank Decommission by Removal - Decommission Regulated Underground Storage Tanks according to the following:

- Notify the Engineer and DEQ at least 3 Days before beginning decommission work (OAR 340-150-0168).
- Remove the Regulated-UST according to OAR 340-150-0168 and 40 CFR 280.71.
- Clean and recycle the Regulated-UST.
- Recycle or re-use the Regulated-UST contents.
- Complete and sign all manifests, permits, and bill-of-lading forms for recycling or disposing of the tank and tank contents.
- Collect soil and groundwater samples according to OAR 34-150-0180 and have an Oregon Environmental Laboratory Accreditation Program accredited analytical laboratory test and provide the results in time to complete the required DEQ "Underground Storage Tank Decommissioning Checklist and Site Assessment Report".
- Remove free petroleum product entering the excavation, according to OAR 340-122-0235, before backfilling the excavation. Recycle or dispose of the free petroleum product at a facility permitted to accept petroleum contaminated water.
- When clean or contaminated groundwater or contaminated soil is encountered, notify the Engineer within a time frame to meet DEQ's 24-hour initial notification requirement. The Engineer will either require the Contractor to notify DEQ or will have the Agency notify DEQ.

(Use the following bullet when contaminated soil will need to be removed to facilitate construction of the Project. Fill in the blank.)

- Remove up to _____ Tons of contaminated soil to facilitate construction of the Project.
- Backfill the excavation according to 00330.42.
- Perform all contaminated media work according to Section 00294.

(Use this subsection .41 when decommissioning regulated underground storage tanks by the filling in place method.)

00293.41 Regulated Underground Storage Tank Decommission by Filling in Place - Decommission Regulated Underground Storage Tanks according to the following:

Insert Project Name Here

- Notify the Engineer and DEQ at least 3 Days before beginning decommission work (OAR 340-150-0168).
- Clean out the Regulated-UST according to OAR 340-150-0168 and 40 CFR 280.71 and fill it with a compactable inert material that does not react with the tank or its previous contents.
- Complete and sign all manifests, permits, and bill-of-lading forms for recycling or disposing of the tank contents.
- Collect soil and groundwater samples according to OAR 340-150-0180 and have an Oregon Environmental Laboratory Accreditation Program accredited analytical laboratory test and provide the results in time to complete the required DEQ "Underground Storage Tank Decommissioning Checklist and Site Assessment Report".
- When contaminated soil is encountered, notify the Engineer of the contaminated soil within a time frame to meet DEQ's 24-hour initial notification requirement. The Engineer will either require the Contractor to notify DEQ or will have the Agency notify DEQ.

(Use this subsection .42 when decommissioning heating oil tanks by the removal method.)

00293.42 Heating Oil Tank Decommission by Removal - Decommission Heating Oil Tanks according to the following:

- Remove the HOT according to OAR 340-177-0025 and 40 CFR 280.71.
- Clean and recycle the HOT.
- Recycle or re-use the HOT contents.
- Complete and sign all manifests, permits, and bill-of-lading forms for recycling or disposing of the tank and tank contents.
- Collect soil and groundwater samples according to OAR 340-177-0025 and have an Oregon Environmental Laboratory Accreditation Program accredited analytical laboratory test and provide the results in time to complete the required DEQ "Certified HOT Decommissioning Report".
- Remove free petroleum product entering the excavation according to OAR 340-122-0235 before backfilling the excavation. Recycle or dispose of the free petroleum product at a facility permitted to accept petroleum contaminated water.
- When contaminated soil is encountered, notify the Engineer of the contamination within a time frame to meet DEQ's 24-hour initial notification requirement. The Engineer will either require the Contractor to notify DEQ or will have the Agency notify DEQ.

(Use the following bullet when contaminated soil will need to be removed to facilitate construction of the Project. Fill in the blank.)

- Remove up to _____ Tons of contaminated soil to facilitate construction of the Project.
- Backfill the excavation according to 00330.42.
- Perform all contaminated media work according to Section 00294.

Insert Project Name Here

(Use this subsection .43 when decommissioning heating oil tanks by the filling in place method.)

00293.43 Heating Oil Tank Decommission by Filling in Place - Decommission Heating Oil Tanks according to the following:

- Clean out the HOT according to OAR 340-177-0025 and 40 CFR 280.71 and fill them with inert material according to OAR 340-177-0025.
- Complete and sign all manifests, permits, and bill-of-lading forms for recycling or disposing of the tank contents.
- Collect soil and groundwater samples according to OAR 340-177-0025 and have an Oregon Environmental Laboratory Accreditation Program accredited analytical laboratory test and provide the results in time to complete the required DEQ "Certified HOT Decommissioning Report".
- When contaminated soil is encountered, notify the Engineer of the contaminated soil within a time frame to meet DEQ's 24-hour initial notification requirements. The Engineer will either require the Contractor to notify DEQ or will have the Agency notify DEQ.

00293.44 Excavating, Transporting, and Disposing of Contaminated Media - Excavate, transport, and dispose of contaminated media according to Section 00294.

Measurement

00293.80 Measurement - The quantities of Work performed under this Section will be measured on the unit basis.

Excavating, transporting, and disposing of contaminated media will be measured according to 00294.80.

Payment

(Delete the "(s)" or parentheses from the word "item(s)", as appropriate.)

00293.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Decommission Regulated Underground Storage Tanks	Each
(b) Decommission Heating Oil Tanks.....	Each

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Excavating, transporting, and disposing of contaminated media will be paid for according to 00294.90.

SP00294 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-02-26

*This Section requires SP00236
if an Agency provided disposal
site is required.)*

SECTION 00294 - CONTAMINATED MEDIA

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00294 is not a Standard Specification and is included in this Project by Special Provision.

Description

00294.00 Scope - In addition to the requirements of Section 00290 and the Specifications, this Work consists of the following:

(Use the following bullet and table when disturbing contaminated Soils. List in the table all soil identified as contaminated, including a description of lateral and vertical extent, e.g. all roadside soil from the edge of pavement to the R.O.W. line, from the surface to a depth of 18 inches.

Check with the geotechnical designer to evaluate slope stability before specifying that the Contractor can dispose of excess Soil within the boundaries of the Project Site.

Include the Pay Item “Contaminated Soil Disposal” in the Schedule of Items, with a quantity matching the quantity entered in the table as “to be disposed of at landfill.” In the table and in the Schedule of Items, exclude the quantity of contaminated Soil that is expected to be reused on the Project.)

- Excavate, segregate, stockpile, transport, and dispose of Contaminated Soils (, Shoulder Soils,) and contaminated grubbing materials, as defined by 00294.01, from the following locations:

(Fill in the table with the location, depth, quantity, and contents of Soil contaminants.)

Contaminated Soil Location Table 00294-1

Insert Project Name Here

From Location/Station to Location/Station	Depth below grade (feet)	Approximate Quantity (cy)	Known Contaminants
Example: "A" 1+00 to 2+00, Rt or Lt, from edge of pavement to the roadwork limits	0 -1.5'		

Approximate Total Quantity
Quantity to be reused on Project
Quantity to be disposed at landfill

cy
cy
Tons

(Use the following bullet when removing contaminated Soil.)

- In areas where excavation is not required, leave contaminated Material (, Shoulder Soils,) and clearing and grubbing Material in place.

(Use the following bullet and table when removing contaminated groundwater.)

- Pump, test, treat, and dispose of contaminated groundwater from the following locations in Table 00294-2:

(Fill in the table with the location, depth, and contents of groundwater contaminants.)

Table 00294-2

Location/Station	Depth below grade (feet)	Known Contaminants

(Use the following bullet when a HASP is required.)

- Prepare a Health and Safety Plan (HASP) for work within the contaminated areas of the Project.

(Fill in the blanks with the date and name of report that is available from the Engineer.)

The _____ ODOT report, titled _____ documenting the contaminated media identified within the Project, is available from the Engineer.

(Use the following bullet when contaminated Shoulder Soil is the only Material being excavated and lead is present in the Shoulder Soil.)

Insert Project Name Here

- Prepare a written lead compliance plan for work within contaminated areas of the Project.

00294.01 Definitions:

Contaminated Soil - Soil that does not meet the DEQ definition of "Clean Fill", as defined by OAR 340-093-0030(18). This Contaminated Soil is a regulated waste, subject to OAR 340-093-0005 through OAR 340-093-0290. If the grubbing Material has been determined to be contaminated, it is considered and treated as Contaminated Soil for the purposes of this Section.

Shoulder Soil - Soil outside of the existing Highway Pavement and within Highway Right-of-Way generated during Highway maintenance or construction activities. This definition applies to excess Soil generated to a maximum depth of 1.5 feet below ground surface. This definition does not apply to Soil that is covered by existing impervious surfaces, including but not limited to curbs, sidewalks and parking lots constructed of asphalt or concrete.

ODOT Beneficial Use Determination (ODOT BUD) - The statewide ODOT Beneficial Use Determination (ODOT BUD), approved by DEQ (No. BUD-20181204), outlines a series of pre-approved non-residential reuse options for excess Soil Materials that do not meet DEQ's Clean Fill Standards in some circumstances. These options may vary based on project scope and location, and documentation may vary, as directed by the Engineer.

00294.02 Testing of Contaminated Soil (, Shoulder Soil,) and Groundwater - When additional testing of Contaminated Soil or groundwater is required to characterize the Material for reuse, recycle, or disposal, conduct the tests according to 00290.20(c).

Use analytical methods meeting DEQ's Clean Fill Guidance Screening Levels for each analyte. Perform all Contaminated Soil (, Shoulder Soil,) and groundwater sampling by an Oregon Registered Geologist or Professional Engineer who has experience characterizing contaminated media.

(Use the following paragraph and bullet list when contamination is known and additional sampling by the Contractor is required for making a waste management or disposal decision. Add or delete test methods that are required for the Project.)

Collect at least 3 composite Soil samples and submit for the following required testing:

- TPH-Gx and TPH-Dx by Northwest methods.
- The following volatile organic compounds (VOCs) by EPA Method 8260.
 - Benzene, toluene, ethylbenzene, xylenes.
 - Iso-propylbenzene and n-propylbenzene.
 - 1,2,4-trimethylbenzene and 1,3,5-trimethylbenzene.
 - Ethylene dibromide (EDB), ethylene dichloride (EDC), and Methyl tert-butyl ether MTBE.
- Polynuclear aromatic hydrocarbons (PAHs) by EPA Method 8270SIM.
- Total metals (RCRA 8) by EPA 6000 and 7000 series.
- One TCLP lead by using EPA Method 1311.

00294.03 Submittals - Submit the following documents:

(Use the following two bullets when removal of Shoulder Soil contaminated with metals (i.e., lead, cadmium, chromium) is the only action being completed and awareness level training is all that OSHA requires. Remove all other HASP language and requirements.)

- A Project-specific written lead compliance plan, meeting the project applicable requirements of 29 CFR 1926.62(e)(2), at least 10 Calendar Days before the pre-construction conference. When applicable, include compliance procedures for cadmium and chromium VI, according to 29 CFR 1926.1127 and 29 CFR 1926.1126.
- Modifications to the written lead compliance plan that are requested by the Engineer within 7 Calendar Days of the request.

(Use the following HASP language when a HASP is required.)

- A site specific HASP at least 10 Calendar Days before the pre-construction conference.

(Use the following two bullets when a qualified health and safety professionals required. A qualified health and safety professionals required when the contamination is something other than petroleum, is highly toxic, is a risk to workers, or is unusually complex.)

- The site specific HASP, completed and signed by a qualified health and safety professional meeting the requirements of 00294.30.
- The name and qualifications of the qualified health and safety professional.

Submit all modifications to the HASP that are requested by the Engineer or the qualified health and safety professional within 7 Calendar Days of the request.

[End HASP language]

- Current employee training certificates and medical surveillance information before beginning Work within the contaminated areas.

Submit the following documents within 48 hours of removal of contaminated media:

- Permits, permit applications, and documentation of compliance.
- All reuse, recycled, and disposal receipts.
- Final quantities of Soil (and groundwater) reused, recycled, and disposed and their final location.
- All analytical test results.

(Use the following bullet when contaminated Soil will be used under the requirements of ODOT BUD No. BUD-20181204.)

Insert Project Name Here

- Documentation of final disposition of any reused Soil Material that is reused under ODOT's Beneficial Use Determination.

(Use the following subsection .05 when contamination exceeds applicable DEQ cleanup levels or the site is listed by DEQ as a cleanup site or a leaking underground storage tank site.)

00294.05 Health and Safety Plan - Prepare a site specific HASP that meets or exceeds the requirements of 29 CFR 1910.120 and include a personnel and equipment decontamination plan that details how decontamination media is to be contained and disposed.

Maintain a copy of the HASP on site at all times and readily available to employees and Inspectors during construction activities. If additional information becomes available regarding the site specific conditions, revise the HASP and submit the revised version to the Engineer. Review or acknowledgment of the HASP by the Engineer is not an indication or representation that the HASP is fully compliant with State or federal requirements. Compliance is the responsibility of the Contractor. Review by the Engineer will not impose liability upon the Agency or relieve the Contractor of any responsibilities under the Contract.

Do not begin Work in contaminated areas until the Engineer provides written acknowledgement of the HASP.

Ensure all personnel entering contaminated areas follow the requirements of the HASP.

(Use .30 if one of the options apply. If none of the options apply delete this subsection.)

Labor

00294.30 Personnel Qualifications - Provide employees meeting the following requirements:

(Use one of the following options as instructed. Delete the option that does not apply. Delete both if neither apply.)

[Option 1 – Use this option when Shoulder Soil contaminated with metals (i.e. lead, cadmium, chromium) is the only contaminated Soil on the Project.]

- For removal of Contaminated Soil (and Shoulder Soil), provide employees trained in:
 - Lead awareness according to 29 CFR 1926.62(l).
 - Chromium according to 29 CFR 1926.1126(j)(2).
 - Cadmium according to 29 CFR 1926.1127(m)(4).

[End Option 1.]

[Option 2 - Use the following HAZWOPER and Supervisor bullets and sub-bullets when the contamination is known to be greater than the applicable published DEQ RBC or the contaminated area is listed as (or is adjacent to) a cleanup site and encountering contamination is likely.]

Insert Project Name Here

- Hazardous Waste Operations and Emergency Response (HAZWOPER) trained workers (29 CFR 1910.120) that:
 - Have completed a 40-hour HAZWOPER training course.
 - Have completed an 8-hour HAZWOPER refresher training course within the last 12 months.
 - Participates in the HAZWOPER Medical Surveillance Program.
- A Supervisor that:
 - Has at least 2 years of experience cleaning up and managing Contaminated Soil or groundwater in Oregon.
 - Meets the HAZWOPER training requirements plus completed an 8-hour HAZWOPER supervisor training course.

(Use the following bullet and sub-bullets when the contamination is something other than petroleum, is highly toxic, is a risk to workers, or is unusually complex.)

- A qualified health and safety professional that:
 - Has at least 3 years' experience in hazardous waste site work.
 - Meets the HAZWOPER training requirements.

(Use the following bullet when contaminated media requires segregation or field decision making,)

- An Oregon Registered Geologist or Professional Engineer who has experience handling contaminated media.

[End Option 2.]

Construction

00294.40 Contaminated Soil Excavation (and Shoulder Soil) - Excavate and handle Contaminated Soil (or Shoulder Soil) from Project excavations according to the following:

- Notify the Engineer 3 Calendar Days before beginning excavation activities within contaminated areas.
- Allow the Agency to collect Soil (and groundwater) samples during excavation activities.

(Use one of the following options as instructed. Delete the option that does not apply. Delete both if neither apply.)

[Option 1 - Use the following two bullets when the Contractor will field screen the Soil.]

- Field screen Soil using a portable photo ionization detector, portable flame ionization detector, field test kits, or other instrumentation capable of detecting the contaminants identified for this Soil.

Insert Project Name Here

- Segregate non-Contaminated Soil from Contaminated Soil during excavation activities, based on the field screening and the provided Contaminated Soil location information.

[Option 2 - Use the following two bullets when the Agency will field screen the Soil.]

- Allow Agency access to field screen Soils for contaminants during excavation.
- Segregate non-Contaminated Soil from Contaminated Soil during excavation activities, as directed.

[End Option 2.]

- Load Contaminated Soil (or Shoulder Soil) directly into trucks and transport directly to the recycling or disposal facility, or on-site reuse areas or, when approved by the Engineer, temporarily store Contaminated Soil (or Shoulder Soil) on-site.

(Use the following bullet when temporary storage of contaminated soil other than shoulder soil may be allowed on-site. Fill in the blank with the contaminated soil location(s) where contamination is known to be greater than the applicable published DEQ RBC or the contaminated area is listed as (or is adjacent to) a cleanup site.)

- Store Contaminated Soil from (site specific location) in covered water tight containers or place Contaminated Soil on minimum 6 mil thick polyethylene sheeting that has an impermeable berm around the edge. Cover the Contaminated Soil with minimum 6 mil thick polyethylene sheeting. Do not allow precipitation run-off to enter the excavated Contaminated Soil. Label all stored Material with the type of Material, the contaminants, and the dates of accumulation.
- Remove contaminated media from the exterior of all vehicles before they leave the Project Site
- Cover trucks transporting contaminated materials to prevent spillage during transit to the disposal facility according to OAR 340-093-0220.
- Where over excavation is required, backfill the excavation according to 00330.42.

00294.41 Contaminated (and Shoulder Soil) Soil Management - Reuse, recycle, or dispose of Contaminated Soil (and Shoulder Soil) according to any of the following:

(a) Landfill Disposal:

- Obtain the Engineer's approval of the disposal facility before disposing of the Contaminated Soil.
- Transport the Contaminated Soil (or Shoulder Soil) to a DEQ permitted municipal solid waste landfill or a permitted construction and demolition landfill for disposal. Dispose of temporarily stored Contaminated Soils (or Shoulder Soil) within 30 Days of beginning excavation work or before Second Notification, whichever occurs first.
- Complete and sign all manifests and bill-of-lading forms for handling, loading, transporting, and disposing of the Contaminated Soil (and Shoulder Soil).
- Pay all filing and permit fees.

(Use the following "recycling" bullets when recycling Contaminated Soil is allowed.)

(b) Recycling:

- Obtain the Engineer's approval of the recycling facility before disposing of the Contaminated Soil.
- Transport Contaminated Soil to a DEQ permitted recycling facility or asphalt batch plant. Recycle temporarily stored Contaminated Soils within 30 Days of beginning excavation or before Second Notification, whichever occurs first.
- Complete and sign all manifests and bill-of-Lading forms for handling, loading, transporting, and recycling the Contaminated Soil.

(Use the following "Reuse On-Site" bullets when the following 4 conditions are met:

- 1) The Soil contaminant concentrations are less than DEQ Occupational RBCs or EPA's Regional Screening Levels for protection of groundwater.*
- 2) The Material can be used on the Project.*
- 3) Region approves placing Contaminated Soil or Shoulder Soil within the ODOT ROW.*
- 4) DEQ has agreed, in writing, that placement is acceptable without an SWLA permit. This condition may also be met if the Material is placed on-site according to ODOT's Beneficial Used Determination (No. BUD-20181204).*

Fill in the blanks. In the third bullet below, use "(or a permitted recycling facility)" only when the "Recycling" bullets above are included [be sure to remove the parentheses].)

(c) Reuse On-Site:

- Temporarily stockpile the Contaminated Soil (or Shoulder Soil) from _____ *location*.
- Reuse the Contaminated Soil (or Shoulder Soil) on the Project between Station _____ and Station _____ as shown. Place the Contaminated Soil _____ *(site specific restrictions)*.
- Within 30 Calendar Days of completing on-site reuse or before Second Notification, whichever occurs first, transport all Contaminated Soil (or Shoulder Soil) that is not reused on the Project to a DEQ permitted municipal solid waste landfill or a permitted construction and demolition landfill (or a permitted recycling facility).

(Use the following "Reuse On-Site Under a DEQ..." bullets when the following 4 conditions are met:

- 1) The Soil contaminant concentrations are greater than DEQ Occupational Worker RBCs and EPA's Industrial Regional Soil Screening Levels.*
- 2) The Material can be used on the Project.*
- 3) Region approves with placing contaminated Soil within ODOT ROW.*
- 4) DEQ has agreed that they will issue an SWLA permit or have processed the permit without actually issuing the permit.*

Fill in the blanks.)

(d) Reuse On-Site Under a DEQ Solid Waste Letter of Authorization:

- Obtain a DEQ Solid Waste Letter of Authorization (SWLA) to reuse the Contaminated Soil between Station _____ and Station _____ as shown. Complete all submittals, including the land use compatibility statement (LUCS) from the local planning authority, and pay all fees required to obtain a SWLA. Sign the application form and provide the signed application form to the Engineer.
- Temporarily stockpile the Contaminated Soil referred to in the SWLA.
- Complete all on-site reuse covered by the SWLA, before expiration of the SWLA. Transport all Contaminated Soil that is not reused on the Project within 30 Calendar Days of completing the Soil reuse work, or before Second Notification, whichever occurs first, to a DEQ permitted municipal solid waste landfill or a permitted construction and demolition landfill.

(Use the following "Reuse Under ODOT BUD No. BUD-20181204" bullets when the following 4 conditions are met:

- 1) The Soil contamination is at concentrations greater than Oregon DEQ Clean Fill Screening Levels, and cannot be made property of the Contractor at the point of generation as Clean Fill according to 00290.20(c)(2).*
- 2) The contamination is at or below DEQ Occupational Exposure RBCs.*
- 3) The Material cannot be used on the Project.*
- 4) Region agrees that the Material source or disposal sites identified in 00235 or 00236 meet the requirements of the ODOT BUD.*

[NOTE: Off-site reuse of Soil under ODOT BUD No. BUD-20181204 may require additional Project specific documentation (e.g., DEQ authorization for mine reclamation, non-residential or agricultural fill placement locations, etc.)]

Fill in the blanks.)

(e) Reuse Under ODOT BUD No. BUD-20181204:

- Follow the requirements of the DEQ Tier 3 Solid Waste Beneficial Use Determination Permit (BUD-20181204) for reuse of all Contaminated Soil (or Shoulder Soil).
- Stockpile Contaminated Soil (or Shoulder Soil) at (site specific location).
- Complete all off-site reuse of Soil covered by ODOT BUD No. BUD-20181204, before Project completion.
- Transport and dispose all excess Contaminated Soil that is not reused in the Project within 30 Calendar Days of completing the Soil reuse Work, or before Second Notification, whichever occurs first, to a DEQ permitted municipal solid waste landfill or a permitted construction and demolition landfill.

(Insert disposal placement options here when the Region has identified acceptable locations for use by the Contractor. Do not add disposal placement options without Technical Resource and the State Specification Engineer's approval.)

- Reuse the Contaminated Soil (or Shoulder Soil) at the following location(s) (site specific address or location(s) approved by the Engineer).

00294.43 Contaminated Groundwater Pumping - Remove and handle contaminated groundwater as follows:

- Allow the Agency to collect groundwater samples during pumping activities and subsequent storage.
- Remove contaminated groundwater from the Project Site or, when approved temporarily store contaminated groundwater on-site in water tight containers compatible with the contaminants. Label each container with the contents and dates of accumulation.
- Dispose of stored contaminated groundwater within 30 Days from the date of beginning generation of it or before Second Notification, whichever occurs first, according to 00294.44.

00294.44 Contaminated Groundwater Management - Recycle or dispose of contaminated groundwater according to any of the following:

(Include only the options that are feasible for the Project. This is based on the groundwater analytical results, availability and limitations of local facilities, and the applicable permit requirements. Delete those that do not apply.)

- **Discharge to a Permitted Sanitary Sewer Facility:**
 - Submit all groundwater analytical data and proposed treatment information to the local sewer authority, and obtain written permission or a permit to discharge the contaminated groundwater to the sanitary sewer system.
 - Complete and sign the sewer permit application as the applicant and pay all associated fees.
 - Comply with all permit requirements and all other local sewer authority requirements.
- **Discharge to Surface Water or Storm Sewer:**
 - Register for a general National Pollution Discharge Elimination System (NPDES) permit 1500A.
 - Complete and sign the NPDES permit application as the applicant and pay all associated fees.
 - Comply with all permit requirements.
- **Discharge to ground surface for Infiltration:**
 - Register for a Water Pollution Control Facility (WPCF) permit 1500B.
 - Complete and sign the WPCF permit application as the applicant and pay all associated fees.
 - Comply with all permit requirements.
- **Transport to an Off-Site Recycling or Disposal Facility:**

Insert Project Name Here

- Submit all groundwater analytical data to the receiving facility and obtain written acceptance from that Entity.
- Complete and sign bill-of-lading forms and all other documentation required by the receiving facility.
- Pay all permit fees.

Measurement

00294.80 Measurement - Work performed under this Section will be measured according to the following:

(Use the following paragraph when Pay Items (a), (b), (c), or (f) are included in the Pay Item list below.)

No measurement of quantities will be made for the following:

(Use the following bullet when Pay Item (a) is included in the Pay Item list below.)

- HASP.

(Use the following bullet when Pay Item (b) is included in the Pay Item list below.)

- Lead compliance plan.

(Use the following bullet when Pay Item (c) is included in the Pay Item list below.)

- Segregate and stockpile Contaminated Soil.

(Use the following bullet when Pay Item (f) is included in the Pay Item list below.)

- Contaminated groundwater mobilization.

(Use the following paragraph when Pay Item (d) is included in the Pay Item list below.)

Soil sample and analytical testing will be measured on the unit basis for each sample submitted and tested according to 00294.02 when test results are submitted according to 00294.03.

(Use the following paragraph when Pay Item (e) is included in the Pay Item list below.)

The quantities of Contaminated Soil (or Shoulder Soil) disposed will be measured on the weight basis, based on weigh tickets from the recycling or disposal facility.

(Use the following paragraph when Pay Item (g) is included in the Pay Item list below.)

Insert Project Name Here

The quantities of contaminated groundwater removed and disposed will be measured on the volume basis, per gallon, based on the receiving facility approved meter tickets or approved on-site meters.

Clearing and grubbing will be measured according to 00320.80.

Payment

00294.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Item (s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Health and Safety Plan	Lump Sum
(b) Lead Compliance Plan	Lump Sum
(c) Segregate and Stockpile Contaminated Soil.....	Lump Sum
(d) Soil Sample Collection and Analytical Testing	Each
(e) Contaminated Soil Disposal	Ton
(f) Contaminated Groundwater Mobilization	Lump Sum
(g) Contaminated Groundwater Removal.....	Gallon

(Use the following paragraph when item (c) is included in the Pay Item list above.)

Item (c) includes segregating, handling, and stockpiling Contaminated Soil (or Shoulder Soil) within the Project Site for the purpose of analytical testing, on-site reuse, or disposal.

(Use the following paragraph when item (d) is included in the Pay Item list above.)

Item (d) includes mobilization, Soil sampling, testing, analyses, and preparation of reports for tests required in 00294.02. Additional testing beyond that listed in 00294.02 will only be paid if authorized by the Engineer.

(Use the following paragraph when item (e) is included in the Pay Item list above.)

Item (e) includes all costs involved with the disposal of Contaminated Soil (or Shoulder Soil) at a recycling or disposal facility.

(Use the following paragraph when item (f) is included in the Pay Item list above.)

Item (f) includes all mobilization costs for groundwater removal work.

(Use the following paragraph when item (g) is included in the Pay Item list above.)

Item (g) includes obtaining all permits and providing all Equipment and labor necessary to treat and store contaminated groundwater.

No separate or additional payment will be made for the excavation or reuse of Contaminated Soil or contaminated Shoulder Soil. Payment will be included in payment made for the

Insert Project Name Here

appropriate items under which the excavation or reuse of Contaminated Soils or contaminated Shoulder Soil is required.

Clearing and grubbing will be paid for according to 00320.90.

Payment will be payment in full for removing and disposing of all Materials, and for providing all Equipment, labor, Plans, test results, and Incidentals necessary to complete the Work as specified.

SP00295 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-01-26

This Section requires Pollution Liability Insurance in 00170.70. This Section requires asbestos liability insurance in 00170.70 if materials containing more than 1% asbestos will be disturbed.)

SECTION 00295 - ASBESTOS MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00295 is not a Standard Specification and is included in this Project by Special Provision.

Description

00295.00 Scope - This Work consists of removing and disposing of materials containing asbestos. This Work may also consist of testing materials for the presence of asbestos and removing and disposing of materials containing asbestos.

00295.01 Asbestos Survey and Sampling -

(Use one of the following subsection .00 options below:)

[Option 1]

(Use the following option when one or more Structures on the Project were inspected for asbestos and the asbestos inspection report indicates that asbestos was NOT found. Fill in the blanks with the names of the Structures that were inspected, the date, and the name of the report that is available from the Engineer. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Do not include any of the language from subsections .03, .30, .40, .80

Insert Project Name Here

and .90. Obtain information on the asbestos inspection report from the Regional HazMat Coordinator.)

(An asbestos survey was)(Asbestos surveys were) performed on _____ that is to be repaired or demolished for this Project. No asbestos-containing materials (ACMs) were identified on the inspected Structure(s). The _____ ODOT report, titled _____ documenting the asbestos survey(s) within the Project is available from the Engineer. Maintain a copy of this report and all additional asbestos survey results on site at all times and readily available to employees and inspectors during demolition and repair activities.

[Option 2]

(Use the following option when asbestos removal is required. Fill in the tables with the required information and add or delete rows as needed.)

This Work consists of testing materials for the presence of asbestos and removing and disposing of materials containing asbestos.

Remove asbestos from the following locations listed in Table 00295-1 that were sampled and contain asbestos:

Table 00295-1

Location/Address	Material Description	Quantity (ft. or sq.ft.)	Percent Asbestos	Friable or Non-Friable

The suspected asbestos containing materials listed in Table 00295-2 were not sampled.

Table 00295-2

Location/Address	Material Description	Quantity (ft. or sq.ft.)	Friable or Non-Friable

(Fill in the blanks with the date and name of report that is available from the Engineer.)

Insert Project Name Here

The _____ ODOT report, titled _____ documenting the asbestos identified within the Project is available from the Engineer. Maintain a copy of this report and all additional asbestos survey results on site at all times and readily available to employees and inspectors during demolition and repair activities.

00295.02 Definitions:

Asbestos Containing Material (ACM) - Any material containing more than 1% asbestos.

00295.03 Submittals - The following forms and reports are required:

(Use the following bullet on projects with suspect asbestos containing material.)

- Asbestos survey report documenting sample locations and analytical results according to Oregon Administrative Rule (OAR) 340-248-0270 (3)(d).

(Use the following bullet on Projects that will disturb materials that contain more than 1% friable asbestos fibers and cover more than 3 square feet.)

- Completed and signed DEQ Project Notification Form and an abatement plan to Agency and DEQ at least 10 Calendar Days before beginning friable asbestos removal.

(Use the following bullet on Projects that will disturb materials that contain more than 1% non-friable asbestos fibers and cover more than 3 square feet.)

- Completed and signed DEQ Notice for Removal of Non-Friable Asbestos to Agency and DEQ at least 5 Calendar Days before beginning non-friable asbestos removal.

(Use the following bullet on Projects that will disturb materials that contain more than 1% asbestos fibers, regardless of the quantity or condition of the material.)

- Completed and signed DEQ Waste Shipment Report Form according to the following:
 - Send the form along with the asbestos waste to the disposal facility.
 - Provide a copy of the form to the Engineer within 48 hours of transportation of the asbestos waste.
 - Obtain the final signed form from the disposal facility along with the disposal receipts and submit them to the Engineer within 3 Calendar Days after receiving them from the waste disposal facility.

(Use the following bullet on Projects that will disturb materials, in buildings or other enclosed spaces, that contain more than 1% asbestos fibers and cover more than 3 square feet.)

- Completed and signed DEQ Air Clearance Sample Results form to the Agency and DEQ within 30 Calendar Days after completing the asbestos removal.

(Use the following bullet on Projects that will disturb materials that contain 1% or less asbestos.)

Insert Project Name Here

- Disposal receipts within 72 hours of receipt from the waste disposal facility.

(If none of the conditions are met below, delete the "Labor" heading and the entire subsection .30.)

Labor

00295.30 Personnel Qualifications - Provide employees meeting the following requirements:

(Use the following three bullets on Projects that will disturb materials that contain more than 1% friable or damaged asbestos fibers and covers more than 3 square feet.)

- A current Oregon DEQ Asbestos Abatement Contractor license.
- A current Oregon DEQ Certified Supervisor meeting the requirements of OAR 340-248-0130.
- Current Oregon DEQ Certified asbestos workers meeting the requirements of OAR 340-248-0130

(Use the following bullet on Projects that will disturb materials that contain more than 1% non-friable, undamaged asbestos fibers and covers more than 3 square feet, and when there is non-friable asbestos pipe.)

- A current Oregon DEQ Certified Supervisor meeting the requirements of OAR 340-248-0130.

(Use the following bullet on projects that will include follow-up bulk asbestos sampling)

- A current AHERA Inspector Training Certification according to 40 CFR 763, Part 763, Appendix C - TSCA Tile II

(Use the following bullet on Projects that will disturb materials that contain more than 1% friable and non-friable asbestos fibers and covers less than 3 square feet.)

- Workers trained according to 29 CFR 1926.1101.

(Use the following paragraph when a Certified Supervisor is included in the bullet(s) above.)

When a DEQ Certified Supervisor is required, ensure the supervisor is on site and overseeing the work whenever asbestos materials are disturbed or removed.

(Use the following subsection .35 when Table 00295-2 is included.)

Materials Testing

00295.35 Testing of Suspect Asbestos Containing Material - When additional testing is needed for suspected ACM listed in Table 00295-2, complete the following with an Asbestos

Insert Project Name Here

Hazard Emergency Response Act (AHERA) Inspector prior to removal of material listed in the Table 00295-2:

- Collect at least 2 samples of each material listed in Table 00295-2 to determine if asbestos is present.
- Submit samples to a National Voluntary Laboratory Accreditation Program (NVLAP) certified laboratory for analysis by polarized light microscopy (PLM) following EPA Method 600/R-93/116.
- Submit the laboratory test results to Engineer for review.

If asbestos is detected in any material sample then all similar material are considered asbestos containing material and all similar materials are to be removed according to 00295.40.

Construction

00295.40 Asbestos Removal - Comply with Section 00290, 29 CFR 1910, 29 CFR 1926.1101, 40 CFR 61, 40 CFR 763, OAR 340-248, ORS 468A and the following:

(Use the following bullet on Projects that will disturb materials that have more than 3 square feet of friable and non-friable asbestos, regardless of concentration.)

- Before beginning asbestos removal work, sign and submit all notifications and pay all fees to DEQ. Provide copies to the Engineer.

(Use the following three bullets on Projects that will disturb materials that have friable and non-friable asbestos, regardless of amount or concentration.)

- Complete and sign all manifests and bill-of-lading forms for transporting and disposing the ACM.
- Maintain the ACM in an undamaged and non-friable condition by keeping the material wet during demolition or by using methods approved by DEQ.
- Keep material sealed during transport to the disposal facility. Transport and dispose of all ACM according to OAR 340-248-280 and OAR 340-248-290.

(Use the following bullet on Projects that will disturb materials, in buildings or other enclosed spaces, that contain more than 1% friable and non-friable asbestos fibers.)

- Conduct final clearance air monitoring according to OAR 340-248-0270(13), with a contractor that is National Institute of Occupational Safety and Health (NIOSH) 582 certified and is financially independent from the abatement contractor.

(Use the following bullet on Projects that have non-friable asbestos pipe.)

- Do not crush asbestos containing pipe and do not cut or break each pipe section into more than 3 pieces.

Insert Project Name Here

- Handle asbestos containing pipe according to the DEQ Publications *Asbestos Advisory for those who work with AC Water Pipe* and *How to Remove Asbestos (AC) Water Pipe – A Guide for Meeting DEQ Rules*.

(Use the following bullet on Projects that will disturb materials that contain 1% or less friable and non-friable asbestos and, covers more than 3 square feet.)

- Remove and dispose of the materials identified as having less than 1% asbestos according to 29 CFR 1926.1101, where that regulation refers to "asbestos" rather than "asbestos containing material" or "ACM".

Measurement

00295.80 Measurement - The quantities of removing asbestos containing materials will be measured on either the length basis or the area basis.

No measurement of quantities will be made for bulk asbestos sampling, analytical testing, and reporting.

(Use the following paragraph when there are materials containing 1% or less asbestos.)

Materials containing 1% or less asbestos will not be measured.

(Use the following paragraph when there is less than 3 square feet of asbestos.)

Materials containing asbestos that cover less than 3 square feet will not be measured.

Payment

00295.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Remove Asbestos Material, _____	Foot
(b) Remove Asbestos Material, _____	Square Foot

(Use the following paragraph when additional asbestos sampling is needed)

(c) Bulk asbestos sampling, analytical testing, and reporting..... Lump Sum

In item (a) and (b), the type of Material is inserted in the blank.

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

(Use the following paragraph when there are materials containing 1% or less asbestos.)

No separate or additional payment will be made for materials containing 1% or less asbestos.

(Use the following paragraph when there is less than 3 square feet of asbestos.)

No separate or additional payment will be made for asbestos covering less than 3 square feet.

SP00296 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-02-26

This Section requires lead liability insurance in 00170.70.)

SECTION 00296 - PAINT AND PAINTED MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00296 is not a Standard Specification and is included in this Project by Special Provision.

Description

00296.00 Scope - In addition to the requirements of Section 00290, remove lead, chromium, and cadmium based paints, and materials coated with lead, chromium, and cadmium based paints, according to the following Specifications.

(Use the following paragraph and table when there is lead, chromium, or cadmium paints on concrete structures. Fill in the first blank describing the painted concrete portions of the structure. Fill in the second blank with the structure name and number.)

Lead, chromium and cadmium based paints coat the concrete on the _____ on the _____ Bridge. Analysis of paint samples collected from this Bridge detected concentrations of total lead, cadmium and chromium in the concrete paint indicated in Table 00296-1 below:

(Note to spec writer - The metric values listed below are an industry recognized standard geometry for measuring lead. DO NOT convert the value to an English unit.)

Table 00296-1

Sample Location and Material	Total Lead (mg/kg)	Total Chromium (mg/kg)	Total Cadmium (mg/kg)

ND = not detected above the laboratory detection limit.

(Use the following paragraph and table when a TCLP analysis is available.)

Toxicity Characteristic Leaching Procedure (TCLP) analysis of bulk painted concrete samples, representative of the waste that are generated during demolition, detected the concentrations of TCLP lead, chromium, and cadmium indicated in Table 00296-2 below:

(Note to spec writer - The metric values listed below are an industry recognized standard geometry for measuring lead. DO NOT convert the value to an English unit.)

Table 00296-2

Sample Location and Material	TCLP Lead (mg/L)	TCLP Chromium (mg/L)	TCLP Cadmium (mg/L)

ND = not detected above the laboratory detection limit.

(Use the following paragraph and table when there is lead, chromium, or cadmium paints on steel structures. Fill in the first blank describing the painted metal portions of the structure. Fill in the second blank with the structure name and number.)

Lead, chromium and cadmium based paints coat the metal on the _____ on the _____ Bridge. Analysis of paint samples collected from this Bridge detected the concentrations of total lead, cadmium, and chromium in the metal paint indicated in Table 00296-3 below:

(Note to spec writer - The metric values listed below are an industry recognized standard geometry for measuring lead. DO NOT convert the value to an English unit.)

Table 00296-3

Sample Location and Material	Total Lead (mg/kg)	Total Chromium (mg/kg)	Total Cadmium (mg/kg)

Insert Project Name Here

Sample Location and Material	Total Lead (mg/kg)	Total Chromium (mg/kg)	Total Cadmium (mg/kg)

ND = not detected above the laboratory detection limit.

(Use the following paragraph and table when there is lead, chromium, or cadmium paints on wood structures. Fill in the first blank describing the painted wood portions of the structure. Fill in the second blank with the structure name and number.)

Lead, chromium and cadmium based paints coat the wood on the _____ on the _____ Bridge. Analysis of paint samples collected from this Bridge detected the concentrations of total lead, cadmium, and chromium in the wood paint indicated in Table 00296-4 below:

(Note to spec writer - The metric values listed below are an industry recognized standard geometry for measuring lead. DO NOT convert the value to an English unit.)

Table 00296-4

Sample Location and Material	Total Lead (mg/kg)	Total Chromium (mg/kg)	Total Cadmium (mg/kg)

ND = not detected above the laboratory detection limit.

(Fill in the blanks with the date and name of report that is available from the Engineer.)

The _____ ODOT report, titled _____ documenting these analyses, is available from the Engineer.

Unless otherwise tested, assume that all coatings contain lead, chromium, and cadmium and handle paint and painted materials accordingly during demolition.

00296.03 Submittals - Submit the following documents:

- A job specific written compliance program, according to 29 CFR 1926.62(e)(2), at least 10 Calendar Days before the pre-construction conference. When applicable, include compliance procedures for cadmium and chromium VI, according to 29 CFR 1926.1127 and 29 CFR 1926.1126.
- Modifications to the written compliance program within 7 Calendar Days of the modifications.
- Current employee training certificates and medical surveillance information before beginning work that disturbs paint containing lead, cadmium or chromium.

Insert Project Name Here

- Within 48 hours of completing or receiving them:
 - Disposal and recycling facility permits.
 - Transport manifests and bill-of-ladings.
 - All reuse, recycling, and disposal receipts.
 - All analytical test results.

00296.04 Documentation - Include paint and painted materials management and planned reuse, recycling, and disposal information in the pollution control plan. Obtain Engineer approval for the specific reuse, recycling, and disposal methods for all materials before beginning demolition work.

Complete, sign and pay all required fees for all required permits, manifests, and bill-of-lading forms for transport and disposal of the paint and painted materials.

Labor

00296.30 Personnel Qualifications - Provide employees trained in lead awareness, according to 29 CFR 1926.62(l), and also trained according to 29 CFR 1926.1126(j)(2) for chromium and 29 CFR 1926.1127(m)(4) for cadmium, during demolition of painted portions of the Structures.

Construction

00296.40 Handling - Minimize employee exposure to the metals contained in the paint. Provide containment that prevents release of paint chips to the environment. Do not remove or separate paint from painted substrates, unless required to accomplish repair activities.

(Use the following subsection .42 when removing painted concrete.)

00296.42 Painted Concrete Debris Management - Reuse, recycle, or dispose of painted concrete debris according to any of the following:

(Use the following bullets as instructed below. Include only the relevant options, based on the paint testing results and the options that are feasible for the specific project based on the scope of work and location. If different portions of the concrete Structure have different types of paint, clearly specify which portions of the concrete each option applies to.)

(Use this bullet for all painted concrete, unless the bulk concrete waste is a hazardous waste.)

- **Recycle as New Concrete** - Recycle the concrete into new concrete on site or at an off-site fixed facility. Only use concrete containing recycled concrete debris on the Project when testing demonstrates that the mix meets applicable design standards for the intended use and is acceptable to the Engineer. Before beginning on-site crushing, obtain permits required under OAR 340-216-0020 and comply with all the permit conditions.

(Use this bullet and sub-bullets for concrete that has less than 1000mg/kg total lead in the paint and low levels of cadmium and chromium and the project team has determined there are places where crushed concrete can be used on the project site.)

- **Recycle as Aggregate** - Use as aggregate within the road prism or embankment, only when:
 - The concrete debris meets the applicable design standards for the intended use.
 - It is placed on the project between Station ____ and Station ____ as shown.
 - It is placed at least 4 feet above the mean high groundwater table.
 - It is placed more than 50 feet from all surface water body and sensitive environment areas.
 - It is paved over or is covered with least one foot of clean fill material.

(Use this bullet and sub bullets for concrete that has more than 1000 mg/kg total lead in the paint and where the bulk concrete waste will not be a hazardous waste. Only use when Region approves the use of a SWLA and discussions with DEQ have confirmed that they will likely issue a SWLA for that specific use. Note: SWLA permits are only valid for 6 months with one 6 month extension; therefore, the SWLA permit cannot be obtained by ODOT before construction begins.)

- **Recycle as Fill Material** - Obtain a DEQ Solid Waste Letter of Authorization (SWLA) and reuse the material as fill material within the ODOT road prism. Complete all submittals and pay all fees required to obtain a SWLA. Sign the application form and provide the signed application form to the Engineer to sign on behalf of ODOT, at least 60 Calendar Days before beginning placement of the concrete debris. Submit the completed and signed SWLA application to DEQ. Do not begin placement of the concrete debris until DEQ has issued the SWLA permit. The SWLA permit expires 6 months from the date of issuance. Complete the filling work before the permit expires or obtain a 6-month permit extension from DEQ and pay all associated permit extension fees. Only one 6-month extension is allowed.
- Place fill material:

(Modify these sub-bullets to comply with the SWLA permit conditions or conditions agreed to with DEQ in preparation for issuing a SWLA during construction. Follow the Specification and Writing Style manual when making modifications.)

- At least 4 feet above the mean high groundwater table.
- That is paved over or is covered with at least one foot of clean fill material.
- That is more than 50 feet from all surface water body or sensitive environment areas.
- It is placed on the Project between Station ____ and Station ____ as shown.

(Use this bullet for all painted concrete, unless the bulk concrete waste is a hazardous waste.)

- **Recycle or Dispose of at Landfill** - Recycle at a permitted municipal solid waste landfill or a permitted construction and demolition landfill as aggregate material for roads or other infrastructures within the landfill area or dispose of at a permitted municipal solid waste landfill or a permitted construction and demolition landfill for disposal.

(Use this bullet when discussions with DEQ have resulted in an alternate management option acceptable to the Region. Follow the Specification and Writing Style manual when editing.)

- **Recycle, Reuse, or Dispose** - Recycle, reuse, and dispose of painted concrete waste according to the following:

(Use the following subsection .43 when removing painted metal.)

00296.43 Painted Metal Management - Reuse, recycle, or dispose of painted metal according to any of the following:

- **Reuse by Others** - Furnish or sell painted non-structural scrap metal to the following:
 - ODOT for use on other projects.
 - ODOT Maintenance Section.
 - To other government Agencies.
 - To contractors for their reuse.

Obtain the recipients signature on the attached disclaimer form, acknowledging their awareness that the scrap metal contains lead, chromium, and cadmium based paint before giving them possession.

- **Recycle at Recycling Facility** - Transport the painted scrap metal along with the paint analytical results to a recycling facility. Obtain the recipients signature on the attached disclaimer form, acknowledging their awareness that the scrap metal contains lead, chromium and cadmium based paint.

(Use this bullet for painted metal when reuse or recycling is not feasible or disposal may be the only economic option and the bulk waste will not be a hazardous waste. (For example, there is very little painted metal and it's not worth separating and transporting it to a recycler).)

- **Dispose of at Landfill** - Dispose of the painted scrap metal at a permitted municipal solid waste landfill or a permitted construction and demolition landfill.

(Use the following subsection .44 when removing painted wood.)

00296.44 Painted Wood Management - Dispose of painted wood at a permitted municipal solid waste landfill or a permitted construction and demolition landfill, according to the DEQ "Hazardous Waste/Toxics Reduction Policy Clarification: Management of Building Demolition Waste" Policy 1997-PO-002A.

Insert Project Name Here

(Use one or both subsections .45 and .46 only for lead-based paint removal that is incidental to other demolition or repair activities. Do not use them where removal of lead-based paint is a primary construction task (removal of lead-based paint for bridge painting projects). For removal of lead-based paint is primary, coordinate paint removal with the Structure Coatings Engineer. Do not duplicate the Structure Coatings Engineer specifications here.)

(Use this subsection .45 when the paint that is not a hazardous waste may be separated from the substrate during construction. Paint may become separated because it is peeling or because the planned repairs may require paint removal.)

00296.45 Non-Hazardous Waste Paint Management - When non-hazardous paint is separated from its substrate, contain all the paint waste and dispose of it at a permitted municipal solid waste landfill.

(Use this subsection .46 when the paint that is a hazardous waste may be separated from the substrate during construction.)

00296.46 Hazardous Waste Paint Management - When hazardous waste paint is separated from its substrate, store all the separated paint waste in labeled, sealed, watertight containers and handle the hazardous waste according to 00290.20(d).

Measurement

(Use one of the following two options when painted concrete removal is required and as instructed below. Delete the option that does not apply.)

[Option 1 - Use the following subsection .80 when separate bid items are required.]

[Begin Option 1]

00296.80 Measurement -

(Use only one of the following two painted concrete options. Delete the option that does not apply.)

[Painted Concrete Option 1 - Use the following paragraph when a pay item for painted concrete is included in the Schedule of Items. Decide whether or not to include an item depending on the project logistics, likely quantities to be generated, and nature of the work.]

The quantities of painted concrete recycled or disposed will be measured on the weight basis, per Ton, based on the recycling or disposal facility weigh tickets.

[Painted Concrete Option 2 - Use the following paragraph when a pay item for painted concrete is NOT included in the Schedule of items.]

No measurement of quantities will be made for recycling or disposing of painted concrete.

(Use the following paragraph when a Pay Item for painted wood is included in the Schedule of items.)

Insert Project Name Here

The quantities of painted wood disposed will be measured on the weight basis, per Ton, based on the recycling or disposal facility weigh tickets.

(Use the following paragraph when a Pay Item for separated paint is included in the Schedule of items.)

The quantities of paint separated from substrates will be measured on the weight basis, per pound, at least to the nearest 1 pound, based on the recycling or disposal facility weigh tickets.

No measurement of quantities will be made for reusing, recycling, or disposing of painted metal.

[End Option 1]

[Option 2 - Use the following subsection .80 when no separate measurement will be made for work performed under this Section.]

[Begin Option 2]

00296.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

[End Option 2]

Payment

(Use one of the following options as instructed below. Delete the option that does not apply.)

[Option 1 - Use the following subsection .90 when separate bid items are required.]

[Begin Option 1]

(Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

00296.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Painted Concrete	Ton
(b) Painted Wood.....	Ton
(c) Separated Paint	Pound

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

No separate or additional payment will be made for:

(Include the first bullet below only when no payment will be made for painted concrete. Delete it if payment is included in Pay Item (a) above.)

- Recycling and disposing of painted concrete.
- Reusing, recycling, or disposing of painted metal and related demolition and repair activities necessary to complete the work.
- Containment activities.

[End Option 1]

[Option 2 - Use the following subsection .90 when no separate payment will made for work performed under this Section. Use this option for Structural coating projects.]

[Begin Option 2]

00296.90 Payment - No separate or additional payment will be made for Work performed under this Section. Payment will be included in payment made for the appropriate items under which this Work is required.

[End Option 2]

Insert Project Name Here

Attachment A
Lead, Chromium, and Cadmium Based Paint Acknowledgement Form

[Contractor] _____
[Bridge Identification] _____
[Description of Scrap Metal] _____

_____ [Recipient] acknowledges that they are aware that metal and materials received from _____ [Contractor] on _____ [Date(s)] may contain lead, chromium, or cadmium based paint. Recipient further acknowledges that it is aware of the risk to human health and the environment posed by exposure to lead, chromium and cadmium based paint. All storage, use, sale, and disposal of materials containing lead, chromium or cadmium based paint and any removal of lead, chromium, or cadmium based paint from the materials by Recipient will be conducted in compliance with all applicable Federal and State statutes and regulations, including but not limited to 40 CFR 262 through 265 and OAR Chapter 340, Divisions 100 through 106. Recipient acknowledges that they are solely responsible for any liability or damages resulting from the storage, use, sale, and disposal of the materials and removal of lead, chromium or cadmium based paint by Recipient and Recipient will indemnify and hold harmless the Contractor and the Oregon Department of Transportation from any such claims of liability or damages.

_____ [Signature]
_____ [Title]
_____ [Date]

SP00297 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26
This Section requires SP00950.)**

SECTION 00297 - PCB AND MERCURY CONTAINING EQUIPMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00297 is not a Standard Specification and is included in this Project by Special Provision.

Description

00297.00 Scope - In addition to the requirements of Section 00290 and the Specifications, this Work consists of removing and disposing of the following:

Insert Project Name Here

(Edit the bullets below to indicate the number and type of PCB and mercury containing items to be removed. Delete what does not apply.)

- ____ Polychlorinated biphenyls (PCB) lamp ballasts assumed to contain PCB at concentrations greater than 50 ppm.
- ____ non-PCB lamp ballasts manufactured after July 1979 and labeled as containing less than 50 ppm PCB.
- ____ electrical transformers containing approximately ____ gallons of fluid of unknown PCB concentration.
- ____ high intensity discharge (HID) lamps that may contain mercury.
- ____ fluorescent lamp tubes that may contain mercury.
- ____ mercury or PCB containing items that ____.

(Fill in the blanks with the date and name of report that is available from the Engineer.)

The ____ ODOT report, titled ____ documenting the PCB and mercury containing equipment identified for the Project is available from the Engineer.

00297.03 Submittals - Submit the following documents within 48 hours of completing or receiving them:

- Waste characterization and sample analytical data.
- Bill-of-ladings, manifests, disposal and recycling receipts, and destruction certificates.

(Use the following subsection .30 only when removing waste lamps.)

Labor

00297.30 Personnel Qualifications - Provide employees that handle waste lamps meeting the training requirements of 40 CFR 273.16.

Construction

00297.40 PCB Lamp Ballasts - Comply with OAR 340-110, 40 CFR 761, and the following:

- Assume lamp ballasts contain potting materials with a PCB concentration greater than 50 ppm.
- Disconnect and remove the ballasts and store them at a secure location in a sealed, labeled container.
- Remove from site and dispose of within 30 Days of beginning disconnection work or before Second Notification, whichever occurs first.
- Dispose of as a PCB bulk product waste in a Toxics Substances Control Act (TSCA) approved disposal facility or other EPA approved disposal method.
- Complete and sign all manifests and bill-of-lading forms for transporting and disposing of lamp ballasts as the "offeror".

00297.41 Non-PCB Lamp Ballasts - Comply with OAR 340-110, 40 CFR 761, and the following:

- Confirm PCB content labeling indicates less than 50 ppm PCBs. If labeling is not present, remove and dispose of lamp ballasts according to 00297.40.
- Determine if small capacitors are present and if they are broken or leaking.
 - If the capacitor is not broken or not leaking, dispose of it according to this subsection.
 - If the capacitor is broken or leaking and does not have a label or has a label showing a PCB level of 50 ppm or more, dispose of it according to 00297.40.
 - If the capacitor is broken or leaking and has a label showing a PCB level of less than 50 ppm, dispose of it according to this subsection.
- Disconnect and remove the ballasts and store them in a secure location in a sealed, labeled container.
- Remove from site and dispose of within 30 Days of beginning disconnection work or before Second Notification, whichever occurs first.
- Dispose of as solid waste in a DEQ permitted municipal solid waste landfill, in a TSCA approved disposal facility, or other EPA approved disposal method.
- Complete and sign all required manifests and bill-of-lading forms for transporting and disposing of lamp ballasts.

00297.42 Electrical Transformers - Comply with OAR 340-110, 40 CFR 761, and the following:

- Perform a waste characterization for the transformer fluid according to 00290.20(c).
- Disconnect transformers and store them in a secure location in sealed, labeled containers, with secondary containment sufficient to contain the entire contents of the largest transformer in the containment.
- Dispose of transformer and fluids according to the options provided in 40 CFR 761.60, within 30 Days of beginning disconnection work or before Second Notification, whichever occurs first.
- Complete and sign all required manifests and bill-of-lading forms for transporting and disposing of transformers and sign the manifests, as the offeror.

00297.43 Mercury Lamps - Comply with 40 CFR 273, OAR 340-113, and the following:

- Place all waste lamps in closed, labeled, structurally sound and compatible containers that are sufficient to prevent lamp breakage.

(Select one of the following bullets as instructed below. Delete the one that does not apply.)

(Use this bullet when waste lamps is disposed of at a waste facility.)

- Transport waste lamps to a DEQ registered universal waste destination facility within 60 Days of beginning removal from fixtures or before Second Notification, whichever occurs first.

Insert Project Name Here

(Use this bullet when HID mercury lamps will remain the property of ODOT or another entity. Fill in the blank with the address. Be sure to have Letter of Public Interest done and on file before the lamps remain the property of ODOT or other entity)

- HID mercury lamps remain the property of the Agency. Transport them to the ODOT Maintenance facility at _____.

Measurement

00297.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00297.90 Payment - No separate or additional payment will be paid for Work performed under this Section. Payment will be included in payment made under the appropriate method described in 00950.90.

SP00298 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 02-26-26

This Section requires SP00294 when contaminated soil or groundwater is encountered.)

SECTION 00298 - WELL PRESERVATION AND ABANDONMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00298 is not a Standard Specification and is included in this Project by Special Provision.

Description

00298.00 Scope - In addition to the requirements of Section 00290, protect, preserve, and abandon monitoring wells and water wells according to the following:

(Use the following paragraph and table when protecting and preserving wells.)

Protect and preserve the monitoring wells and water wells indicated in Table 00298-1 below:

Insert Project Name Here

(Fill in the table with the location, type ("water well" or "monitoring well"), depth, diameter, and other well information. Be sure that the wells are shown on the plan sheets.)

Table 00298-1

Location/Station	Type	Depth below grade (feet)	Diameter (inches)	Other Well Design Information	Known Contaminants

(Use the following paragraph and table when abandoning wells.)

Abandon existing monitoring wells and water wells indicated in Table 00298-2 below:

(Fill in the table with the location, type ("water well" or "monitoring well"), depth, diameter and other well information. Be sure that the wells are shown on the plan sheets.)

Table 00298-2

Location/Station	Type	Depth below grade (feet)	Diameter (inches)	Other Well Design Information	Known Contaminants

00298.03 Submittals - Provide the Engineer with all Permit applications, permit fees, start cards, well reports, bonds, and letters of credit required by the Oregon Water Resources Department within 48 hours of completing the work.

(If none of the conditions are met below, delete the "Labor" heading and the entire subsection .30.)

Labor

00298.30 Personnel Qualifications - Provide contractors and workers meeting the following qualifications:

(Use this bullet when modifying and abandoning monitoring wells.)

- A contractor with a current Oregon Monitoring Well Constructor's license.

(Use this bullet when modifying and abandoning water wells.)

- A contractor with a current Oregon Water Well Constructor's license

(Use this bullet when modifying and abandoning contaminated monitoring wells when the contamination is known or likely to exceed published DEQ cleanup levels or is listed as a cleanup site.)

- Workers meeting the HAZWOPER training requirements of 00294.30.

Construction

(Use the following subsection .40 when protecting and preserving monitoring wells and water wells.)

00298.40 Protect and Preserve Wells - Protect and preserve the wells during construction. Adjust the wells to finished grade with traffic rated metal covers. Notify the Engineer at least 72 hours before beginning work at or near the wells. Keep the wells capped. Do not allow foreign matter to enter the wells.

(Use the following subsection .41 when abandoning monitoring wells.)

00298.41 Abandon Monitoring Wells - Abandon monitoring wells before beginning ground disturbing construction work in the well locations according to OAR 690-240. Notify the Engineer at least 72 hours before beginning abandonment work.

(Use the following subsection .42 when abandoning water wells.)

00298.42 Abandon Water Wells - Abandon water wells before beginning ground disturbing construction work in the well locations according to OAR 690-220. Notify the Engineer at least 72 hours before beginning abandonment work.

(Use the following subsection .43 when contaminated soil or groundwater is encountered.)

00298.43 Contaminated Media - Excavate, transport, and dispose of contaminated media according to Section 00294.

Measurement

00298.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

(Use the following paragraph when contaminated soil or groundwater will be encountered.)

Excavating, transporting, and disposing of contaminated media will be measured according to 00294.80.

Payment

(Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

Insert Project Name Here

00298.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Protect Monitoring Wells	Lump Sum
(b) Abandon Monitoring Wells	Lump Sum
(c) Protect Water Wells	Lump Sum
(d) Abandon Water Wells	Lump Sum

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph when contaminated soil or groundwater will be encountered.)

Excavating, transporting, and disposing of contaminated media will be paid for according to 00294.90.

SP00299 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-02-26

***This Section requires SP00294 when
contaminated soil or groundwater
is encountered)***

SECTION 00299 - DECOMMISSION UNDERGROUND INJECTION CONTROL SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00299 is not a Standard Specification and is included in this Project by Special Provision.

Description

00299.00 Scope - In addition to the requirements of Section 00290, decommission underground injection control (UIC) systems according to the following Specifications.

Insert Project Name Here

Decommission the UIC systems indicated in Table 00299-1 below:

(Fill in the table with the required location, depth, width, description, and former use information.)

Table 00299-1

Location/Station	Depth (feet)	Width (feet)	Description	Former Use

00299.03 Submittals - Provide the Engineer with the following information and documents for contaminated soil generated on this project, within 48 hours of completing or receiving them:

- DEQ notifications, correspondence, permits and reports.
- Reuse, recycling, and disposal receipts or other related documentation for the UIC systems.
- Sample data and analytical results.

Labor

00299.30 Personnel Qualifications - Provide contractors and workers meeting the following requirements:

- An Oregon Registered Geologist (RG) or Professional Engineer (PE) who has experience decommissioning UIC systems and handling contaminated media.

(Use this bullet when the UIC system contains contamination that is known or likely to exceed DEQ cleanup standards (for example: automotive UIC systems).)

- Workers meeting the HAZWOPER training requirements of 00294.30.

Construction

00299.40 Underground Injection Control System Decommissioning - Decommission UIC systems according to OAR 340-044-0040 and the following:

- Sample UIC contents and bottom materials and characterize for disposal and DEQ UIC closure requirements, based on past use, according to 00290.20(c).
- At least 30 Days before decommissioning, complete, sign and submit to DEQ and the Engineer, DEQ's UIC Registration Pre-Closure Notification Form, along with the UIC content analytical results and, if required by DEQ, a pre-closure plan stamped by a PE or RG.
- Pay all UIC decommissioning fees to DEQ.

Insert Project Name Here

- Obtain written approval from DEQ and proceed with decommissioning the UIC within the time frame specified in DEQ's approval.

(Use the following bullet when the UIC system is removed.)

- Remove the UIC by excavation and backfill according to 00330.42.

(Use the following two bullets when the UIC system is left in place.)

- Obtain approval from DEQ and fill the UIC in place, using DEQ approved fill materials.
- Backfill the excavation according to 00330.42.
- Complete a closure report, signed and stamped by a PE or RG, and submit it to DEQ and the Engineer within 30 Days of finishing decommissioning work or before Second Notification whichever occurs first.

Information for decommissioning underground injection control systems is available on DEQ's Fact Sheet titled *Closure of an Injection System*.

(Use the following subsection .43 when contaminated soil or groundwater is encountered.)

00299.43 Contaminated Media - Excavate, transport, and dispose of contaminated media according to Section 00294.

Measurement

00299.80 Measurement - The quantities of decommissioned UIC systems will be measured on the unit basis.

(Use the following paragraph when contaminated soil or groundwater will be encountered.)

Excavating, transporting, and disposing of contaminated media will be measured according to 00294.80.

Payment

00299.90 Payment - The accepted quantities of decommissioned UIC systems will be paid for at the Contract unit price, per each, for the item "Decommission Underground Injection Control Systems".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph when contaminated soil or groundwater will be encountered.)

Excavating, transporting, and disposing of contaminated media will be paid for according to 00294.90.

SP00299A (Special Provisions for the 2024 Book) (Bidding on or after: 06-01-26
Last updated: 03-02-26)

(Use this Section 00299A when septic systems do not contain hazardous materials.
Use Section 000299 when septic systems contain hazardous materials.)

SECTION 00299A - DECOMMISSION SEPTIC SYSTEMS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00299A is not a Standard Specification and is included in this Project by Special Provision.

Description

00299A.00 Scope - In addition to the requirements of Section 00290, decommission septic systems according to the following Specifications.

Decommission the septic systems indicated in Table 00299A-1 below:

(Fill in the table blanks with the location, description, and decommissioning information. For the System description, describe all elements to be removed (for example: 200 gallon concrete tank and 100 by 200 sq. ft. absorption area). For decommissioning method specify "remove", "fill" or "remove or fill".)

Table 00299A-1

Location/Station	System Description	Decommissioning Method

00299A.03 Submittals - Provide the Engineer with all septage and absorption area material disposal receipts within 48 hours of completing or receiving them.

Labor

Insert Project Name Here

00299A.30 Personnel Qualifications - Provide an Oregon licensed sewage disposal service with a pumper license, or a combined installer/pumper license, to pump all septage.

Construction

00299A.40 Septic System Decommissioning - Decommission septic systems according to OAR 340-071-0185 and the following:

- Pump all septage from tanks, cesspools, and seepage pits and transport and dispose the septage at a DEQ approved disposal facility or treatment site.

(Use the following bullet when filling septic systems.)

- Fill the tanks, cesspools, and seepage pits with Sand, bar run gravel, or other material approved by both DEQ and the Engineer, in writing.

(Use the following two bullets when removing septic systems.)

- Excavate and remove the tanks, cesspools and seepage pits and backfill the excavation according to 00330.42.
- Dispose tanks and associated pipes and hardware at a DEQ permitted solid waste landfill.

(Use the following two bullets when excavation of the absorption area (leach field) is required.)

- Excavate all pipes, Structures, filtration material, and fill within the absorption area.
- Dispose all pipes, Structures, filtration material, and fill material at a DEQ permitted solid waste landfill.

Measurement

00299A.80 Measurement - The quantities of decommissioned septic systems will be measured on the unit basis.

Payment

00299A.90 Payment - The accepted quantities of decommissioned septic systems will be paid for at the Contract unit price, per each, for the item "Decommission Septic Systems".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00305 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26
This Section requires SP00150 to
establish survey responsibilities
in 00150.15.)**

Insert Project Name Here

*(Use this Section when Contractor Surveying is required. Check with Designer. **Do not** modify the Construction Surveying Manual for Contractors in these special provisions.)*

SECTION 00305 - CONSTRUCTION SURVEY WORK

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00305 of the Standard Specifications modified as follows:

(Use the following subsection .00 when requested by the Project Manager. Check with the Project Manager for the distance to establish construction staking. Fill in the blank "___ feet" and delete all purple parentheses.)

00305.00 Scope – Add the following to the end of this subsection:

In addition to the requirements of the ODOT *Construction Surveying Manual for Contractors*, establish Engineering Stationing at (___ foot) intervals for the length of the project along the Shoulder of the Highway. Maintain the stationing so it is visible throughout construction of the project.

00305.05 3D Engineered Models - Replace this subsection, except for the subsection number and title, with the following:

If the Contractor elects to use the 3D Engineered Models to control the work, provide unstamped 3D Construction Models according to 00150.35 that include the following:

- An automated machine guidance (AMG) work plan containing a detailed outline, list of the Pay Items and Work controlled by the 3D Construction Models, and a narrative outlining any differences between the Agency prepared 3D Engineered Models and the 3D Construction Models.
- A copy of the 3D Construction Models used by the Contractor's Equipment for machine guidance or verification that include and represent the Agency prepared 3D Engineered Models with changes identified in the narrative. Provide files in LandXML format or as directed.

SP00310 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-22-26)**

SECTION 00310 - REMOVAL OF STRUCTURES AND OBSTRUCTIONS

Insert Project Name Here

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Note: Only include the “Asphalt Pavement Sawcutting” and “Concrete Sawcutting” Pay Items in the Schedule of Items when the estimated quantity is greater than 100 feet.)

(Note: Include Pay Item for “Removal of Concrete Barrier” when removal of concrete barrier work is included on the Project. Use either Lump Sum or Length unit of measurement. If Section 00820 “Remove and Reinstall Concrete Barrier” is also included in the Project, do not include that quantity of barrier removal in this Section.)

(Use the following lead-in paragraph when none of the following subsections are included in the Project.)

Comply with Section 00310 of the Standard Specifications.

(Use the following lead-in paragraph when any of the following subsections are included in the Project.)

Comply with Section 00310 of the Standard Specifications modified as follows:

(Use the following subsection .45 when historical marker installation is included in 00759.52.)

Add the following subsection:

00310.45 Salvaging Markers - Salvage the historical marker(s) and reinstall as shown or directed according to 00759.52.

(Use the following subsection .80 when the Schedule of Items includes Asphalt Pavement Sawcutting or Concrete Sawcutting or both.)

00310.80 Measurement - Replace the bullet “Length and Area...” with the following bullet:

- **Length and Area** - The length or area of the Structure or item actually removed, will be measured along the line and grade of the Structure or item for each continuous Structure or item removed. Measurement will be on the length or area basis, limited to the Neat Lines shown or directed.

(Asphalt Pavement Sawcutting) (and) (Concrete Sawcutting) will be measured by the linear foot of sawcut, limited to the Neat Lines shown or directed unless otherwise specified. Methods other than sawcutting will not be measured.

Additional concrete sawcutting beyond what is shown or directed by the Engineer will not be measured.

Insert Project Name Here

(Use the following subsection .90 when historical marker installation is included in 00759.52.)

00310.90 Payment - Add the following paragraph to the end of this subsection.

No separate or additional payment will be made for the salvaging historical markers.

(Use the following subsection .92 if any of the Pay Item(s) below apply.)

00310.92 Separate Item Basis -

(Use the following Pay Item and item (g) paragraph if Asphalt Pavement Sawcutting Pay Items in the Schedule of Items when the estimated quantity is greater than 100 feet. If the sawcutting is in a composite pavement section, choose the thicker of the two materials for the Pay Item, either asphalt or concrete, and use the total thickness.)

Replace the Pay Item Asphalt Pavement Sawcutting with the following Pay Item:

Pay Item	Unit of Measurement
----------	---------------------

(g) Asphalt Pavement Sawcutting, _____ Inches Deep	Foot
--	------

Replace the paragraph that begins "Item (g) applies..." with the following paragraph:

In item (g), "less than 6", "6 to 14", or "greater than 14" is inserted in the blank.

(Use the following Pay Item and item (i) paragraph if Concrete Sawcutting Pay Items in the Schedule of Items when the estimated quantity is greater than 100 feet. If the sawcutting is in a composite pavement section, choose the thicker of the two materials for the Pay Item, either asphalt or concrete, and use the total thickness.)

Add the following Pay Item to the Pay Item list:

(i) Concrete Sawcutting, _____ Inches Deep.....	Foot
---	------

Add the following paragraph after the paragraph that begins "Item (g) applies..."

In item (i), "less than 6", "6 to 14", or "greater than 14" is inserted in the blank.

(Use the following two paragraphs if sawcutting Pay Item(s) are included.)

Add the following paragraph to the end of the subsection:

No separate or additional payment will be made when methods other than sawcutting are utilized where sawcutting is shown or directed.

(Use the following Pay Item on Projects that have more than 8 curb ramps that are not included in Section 00330, otherwise (8 curb ramps or less not in Section 00330) curb ramp removal work will be included in the lump sum Removal of

Insert Project Name Here

Structures and Obstructions. Include Pay Item for asphalt pavement sawcutting and concrete sawcutting when removing curb ramps. Do not include Pay Items for items (b), (c), and (d) when using item (j), unless approved by the State Specification Engineer.)

Add the following Pay Item to the Pay Item list:

(j) Removal of Surfacings for Curb Ramp Construction Square Yard

Add the following to the end of this subsection:

Item (j) includes all removal of curb ramp, walk, curb, driveway, Pavement, and other Work associated with curb ramp construction, including but not limited to walk and driveway construction between or beyond curb ramps. Item (j) does not include asphalt pavement sawcutting or concrete sawcutting.

SP00320 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP01030)

SECTION 00320 - CLEARING AND GRUBBING

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(A letter of public interest finding is required when trees, vegetation, or material will be salvaged by the Agency.)

Comply with Section 00320 of the Standard Specifications modified as follows:

00320.40(b)(3) Vegetation and Materials to be Saved - Replace the paragraph that begins “Do not work within the no Work ...” with the following paragraph:

Do not work within the no Work Zones or critical root zone of marked trees unless written approval is obtained from the Engineer. Be responsible for all damage to and removal of trees, landscaping, vegetation or other natural materials designated to be saved. The Engineer will select a specialist who will evaluate the damage.

00320.40(c) Tree and Vegetation Trimming - Replace the bullet that begins “Trim branches obstructing sight...” with the following bullet:

- Trim and remove branches, vegetation, or other materials obstructing sight distance at intersections or impairing visibility of signs, signals, illumination, and other TCD.

Insert Project Name Here

(Use the following subsection .41 when the Oregon Department of Fish and Wildlife (ODFW) or a local Watershed council has identified a stockpile site close to the job site, and the ODFW or Watershed council is willing to pick up the material and haul it away at the Contractor's request and at no charge to ODOT.

A letter of public interest finding is required when materials will be stockpiled and retained by the Agency.)

00320.41 Grubbing Operations - Add the following to the end of this subsection:

Stockpile stumps and root wads at no additional cost to the Agency for use by the Oregon Department of Fish and Wildlife to establish fish habitat in stream beds. Stockpile stumps and root wads meeting the following criteria:

- A trunk diameter of 24 inches or greater.
- A root wad, at least 4 to 5 feet in diameter.
- A long stem or tree trunk attached to the root wad.

Stockpile Stumps and root wads at the following location(s):

(List stockpile location(s) here.)

•

(Use the following subsection .42 when salvaging of vegetation or natural materials is required.)

00320.42 Disposal of Matter - Replace this subsection with the following subsection:

00320.42 Ownership and Disposal of Matter - Vegetation and natural material designated for preservation and salvage are the property of the Agency. All other matter and debris accumulated from clearing and grubbing operations become the Contractor's property at the place of origin. Dispose of all matter and debris according to 00290.20.

00320.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00330 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00236 when using Agency-furnished disposal sites.

Requires SP01040 when topsoil is required.)

SECTION 00330 - EARTHWORK

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00330 of the Standard Specifications modified as follows:

00330.00 Scope - Replace the paragraph that begins "The term "earthwork" will be..." with the following paragraph:

The term "earthwork" is used as a general term to designate the Work included within the scope of this Section.

00330.01 Lines, Grades, and Cross Sections - Replace the paragraph that begins "All earthwork..." with the following paragraph:

Conform all earthwork to the lines, grades and Cross Sections established.

Replace the paragraph that begins "Roadbed Cross Sections ..." with the following paragraph:

Roadbed Cross Sections are subject to variation from the Typical Sections , if directed, to:

00330.02 Definitions - Replace the paragraph that begins "**Construction Slide** - A Slide outside ..." with the following paragraph:

Construction Slide - A Slide outside the designated limits of excavations, or below the foundation within designed limits of embankments or within embankments, that occurs after excavation or embankment construction starts and before Final Acceptance of the Contract.

(Use one of the following subsection .03's as instructed below. Choose the "Embankment Basis" subsection when the embankment quantities are greater than the excavation quantities. Choose the "Excavation Basis" subsection when the excavation quantities are greater than the embankment quantities. Delete the one that does not apply. Check with the Designer for information.)

[Use this subsection .03 only for "Embankment Basis" Projects, modified (by filling in the blank) to exclude Ditch Excavation, Foundation Excavation or Toe Trench Excavation if any of these items are included in the Bid Schedule. Delete "except for _____" if it does not apply.]

00330.03 Basis of Performance - Add the following paragraph to the end of this subsection:

Perform all earthwork under this Section except for _____ on the embankment basis.

Insert Project Name Here

[Use this subsection .03 only for "Excavation Basis" Projects, modified (by filling in the blank) to exclude Stone Embankment and/or Extra For Selected ____ Material if either is included in the Bid Schedule. Delete "except for ____" if it does not apply.]

00330.03 Basis of Performance - Add the following paragraph to the end of this subsection:

Perform all earthwork under this Section except for _____ on the excavation basis.

00330.03(a) General - Replace this subsection, except for the subsection number and title, with the following:

Except as provided in 00330.00, perform all earthwork on either the excavation basis or the embankment basis. The basis of performance for each earthwork Pay Item is specified in the Special Provisions and the Contract Schedule of Items.

00330.04 Sources of Borrow Replace this subsection, except for the subsection number and title, with the following:

(a) Agency-Furnished Borrow - Use Materials obtained from Agency-provided sources lying outside of, separated from and independent of planned Roadbed excavations, or other required excavations within the Project limits, only when called for by the Contract or when specifically directed. (See 00330.41(d).)

(b) Contractor-Furnished Borrow - Unless otherwise specified or directed, furnish all Borrow. Use sources that are wholly outside of and beyond the limits of Agency-Controlled Lands. Acquire at Contractor's own expense. The provisions of 00160.60 and 00160.80 apply.

00330.10 Selected Materials - Replace this subsection, except for the subsection number and title, with the following:

When the Contract contains a Pay Item "Extra for Selected ____ Material", furnish the Material from required excavations. The Specifications for the selected Materials are in the Special Provisions, if different than specified in these Specifications. If other provisions of this Section call for selecting or sorting Material for various parts of the Work, select and sort the Materials to meet the directed requirements.

00330.16(a) Requirements - Replace the paragraph that begins "If the 1" - 0 portion exceeds ..." with the following paragraph:

If the 1" - 0 portion exceeds 10 percent of the total volume by the Engineer's visual examination, the 1" - 0 material will be randomly sampled for testing. The Agency will perform the wet sieve test, according to AASHTO T 11, on the sampled material. The limit on the amount of material passing the No. 200 sieve is not to exceed 5.0 percent by weight.

00330.16(b) Control Sample - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Provide, at a location acceptable to the Engineer, in close proximity to the Project, at least a 5-cubic yard sample of stone embankment meeting the gradation specified. This sample is used as a frequent reference for judging the gradation of the material supplied.

00330.40(a) Quantities - Replace the paragraph that begins "The Agency makes no guarantee ..." with the following paragraph:

The Agency makes no guarantee or representation by implication or otherwise, that any Material available on the Project site is suitable for incorporation into any portion of the Project. No Material is considered unsuitable on the sole basis that special or additional processing or handling is required to make it suitable for incorporation into the Project.

00330.40(c) Avoidance and Correction of Detrimental Operations - Replace the paragraph that begins "Perform all operations involved ..." with the following paragraph:

Perform all operations involved in excavating, hauling and placing of earthwork Materials so no damage or detriment to the completed or partially completed Work results. At all times provide sufficient drainage of completed or partially completed earthwork to prevent damage or loss due to rainfall, surface water or any other cause. In all cases, take proper precautions to ensure that embankment construction and filling do not move, endanger or cause undue strain or stress to any Structure or adjacent ground. Do not construct temporary and final embankment slopes within any Cross Section steeper than the Slope staked for that Cross Section.

00330.41(a)(3) Unsuitable Materials - Replace this subsection, except for the subsection number and title, with the following:

Unsuitable Materials encountered in required excavations are classed as waste material and disposed of according to 00330.41(a)(5).

(Use the following subsection .41(a)(4) when excess materials are to be used on the Project only when there are sufficient R/W limits. Check with Project Leader and the Geotechnical designer.)

00330.41(a)(4) Excess Materials - Replace this subsection, except for the subsection number and title, with the following:

If the quantities of excavated materials are greater than required to construct embankments and to do all filling and backfilling, the Contractor may use the remaining materials to uniformly widen embankments or to flatten slopes in a manner satisfactory to the Engineer.

(Use only one of the following two .41(a)(5) subsection options as instructed below.)

[Option 1 - Use this subsection .41(a)(5) only when subsection .41(a)(4) above is used.]

00330.41(a)(5) Waste Materials - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Unless otherwise specifically allowed and subject to the requirements of Section 00280, dispose of materials, classed as waste materials in 00330.41(a)(3), outside and beyond the limits of the Project and Agency controlled property according to 00290.20. Do not dispose of materials on Wetlands, either public or private, or within 300 feet of rivers or streams.

[Option 2 - Use this subsection .41(a)(5) only for Agency-furnished disposal sites. Include SP00236 when using this subsection.]

00330.41(a)(5) Waste Materials - Replace this subsection, except for the subsection number and title, with the following:

Dispose of waste materials according to Section 00236.

(Use the following subsection .41(a)(9) on excavation Projects which include Section 00331 - Subgrade Stabilization.)

00330.41(a)(9) Excavation Below Grade - Delete subsection 00330.41(a)(9)(c).

00330.41(a)(12) Outside Earthwork Limits - Replace this subsection, except for the subsection number and title, with the following:

Outside earthwork limits but within the Clear Zone, (see 00320.02(c)), remove partially buried natural objects, such as Boulders, that the Engineer determines would be dangerous to an errant vehicle. Place them within embankments as specified or dispose of them as directed.

00330.41(b) Foundation Excavation - Replace this subsection, except for the subsection number and title, with the following:

Excavate Unsuitable Materials in embankment foundations and elsewhere as designated. This Work is classed as "Foundation Excavation". Dispose of these materials according to 00330.41(a)(5) and replace with selected general backfill, selected granular backfill or other suitable Materials as directed.

00330.41(d) Borrow Excavation - Replace this subsection, except for the subsection number and title, with the following:

Whenever the Specifications or Contract Plans call for an Agency-provided Borrow source for earthwork materials, the Material excavated from such source and used in the Work as earthwork materials are classed as "Borrow Excavation". Excavate and use these materials according to the Contract provisions, or as directed.

00330.42(a) Embankment Foundation Preparation - Replace the paragraph that begins "In addition to the excavation ..." with the following paragraph:

In addition to the excavation and replacement of Unsuitable Materials as provided in 00330.41(b), and before constructing embankments, prepare the areas where embankments are to be constructed as follows:

00330.42(a)(1) Unstable Areas - Replace this subsection, except for the subsection number and title, with the following:

Where the embankment foundation will not support hauling or compaction Equipment and only if directed, place an initial layer of selected Materials. Place the initial layer by dumping successive loads in a uniformly distributed layer of a thickness not greater than necessary to support the Equipment and not greater than 3 feet, unless otherwise authorized. Do not place the initial layer higher than 3 feet below Subgrade. Commence consolidation of the initial layer by routing construction Equipment uniformly over the entire layer. Meet the compaction requirements of 00330.43 for the initial layer, except for layer thickness. Meet all requirements of 00330.43 for subsequent layers.

00330.42(a)(3) Drainage - Replace this subsection, except for the subsection number and title, with the following:

Provide drainage and drainage Structures as shown or directed.

00330.42(a)(4) Backfilling Inside Roadbed Limits - Replace this subsection, except for the subsection number and title, with the following:

Break up concrete or asphalt floors, slabs, or walls, as specified in 00310.41(d), before backfilling or placing embankment. Backfill basements, trenches and holes within embankment limits with selected stone backfill Material. Backfill Material placed in basements may include pieces of broken concrete and masonry not exceeding 15 inches in any dimension provided they are placed and compacted according to 00330.42(c). Protruding reinforcement is not allowed in the broken concrete and masonry used as backfill.

00330.42(a)(7) Foundation Benching - Replace the paragraph that begins "Make the bottom bench ..." with the following paragraph:

Make the bottom bench at least 10 feet wide. Penetrate each succeeding bench into the slope at least 3 feet horizontally beyond the vertical side of the previous bench. Ensure the bench is wide enough to operate placing and compaction Equipment. Bring each bench and embankment layer surface to a Slope flatter than 1V:10H. Perform the benching, placing and compaction operation simultaneously from the bottom up.

00330.42(c)(1) General - Replace the paragraph that begins "Except as provided in ..." with the following paragraph:

Except as provided in 00330.42(a)(1), do not construct embankments or fillings when the embankment Material, the foundation or the embankment where it would be placed is frozen, not stable or not compacted, unless otherwise directed.

00330.42(c)(2)(c) Oversize Durable Rock Fragments - Replace the paragraph that begins "Placing isolated individual ..." with the following paragraph:

Placing isolated individual Durable Rock fragments having dimensions greater than the specified layer thickness is allowed if:

00330.42(c)(2)(d) Durable Rock - Replace the paragraph that begins "If the visible quantity of Silt ..." with the following paragraph:

If the visible quantity of Silt and Clay Materials passing the No. 200 screen is less than 20 percent by volume, as determined by the Engineer, the maximum Rock fragment size and

Insert Project Name Here

layer thickness may be increased to 36 inches, but do not exceed the layer thickness of the average maximum size of the Rock fragments.

00330.42(c)(2)(e) Nondurable Rock - Replace the bullet that begins "The moisture content of ..." with the following bullet:

- Compact the Material when the moisture content is within the requirements of 00330.43.

Replace the bullet that begins "Compact the Material to density ..." with the following bullet:

- Compact the Material to density/deflection requirements specified in 00330.43 with a tamping-foot roller that meets the requirements of 00330.20. Perform a minimum of three Coverages on each embankment layer with the tamping-foot roller. Operate the roller at a uniform speed not exceeding 3 mph. No additional compensation will be made for additional roller Coverages to meet the requirements of 00330.43.

00330.42(c)(3) Embankment Slope Protection - Replace the paragraph that begins "Construct outer portions of ..." with the following paragraph:

Construct outer portions of embankments exposed to erosion by stream flow or other erosive action with Rock fragments, or other desirable Materials, if directed, and such are available in the excavations. Also, if directed, place similar Material as a protective layer on the outside of the regular embankment slopes as embankment widening, closely following construction of the embankment. Compaction is not required for protective Materials placed as embankment widening. Place protective Materials with a reasonably smooth surface, resistant to washout or slippage.

(Use the following paragraphs on Projects when directed by the Erosion Control Designer.)

Add the following paragraph to the end of this subsection:

Construct the outer 12 inches of embankments with suitable materials to establish slope stabilization through permanent seeding. If suitable material is not available, furnish suitable materials from a Contractor-provided source that conforms to the requirements of 00330.11 or 00330.13 and provides favorable conditions for germination of seed and growth of grass.

00330.42(c)(5) Embankment Construction Around Minor Structures - Replace this subsection, except for the subsection number and title, with the following:

Backfill prior excavations in the vicinity of curbs, walks, driveways, inlets, manholes and other such minor Structures with selected general backfill, or selected granular backfill as directed with no particles larger than 1 inch and that is compatible with the adjacent material, unless otherwise specified. Place backfill in layers according to 00330.42(c)(1), compact according to 00330.43, and with a moisture content according to 00330.43.

00330.42(c)(7) Embankment Construction at Bridge Ends - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

At the ends of Bridges and for a distance of at least 100 feet from the Bridge, place and compact the embankments before beginning Bridge construction, unless otherwise directed. Unless the embankment is constructed according to 00330.42(c)(8), furnish and place selected stone backfill Material, meeting the requirements of 00330.15 when such is available from excavations, in all embankments within 100 feet of Bridges, or as directed.

00330.42(c)(8) Engineered Fills - Replace the paragraph that begins "Place the granular structure ..." with the following paragraph:

Place the granular structure backfill, meeting the requirements of 00510.13, in maximum 6-inch Lifts and compact to 100 percent maximum density from the top of the selected stone backfill to the footing elevation shown. Place these Materials at the thickness and extent according to the details shown, or as directed.

Replace the paragraph that begins "The foundation compaction ..." with the following paragraph:

The foundation compaction requirements in 00330.43 are subject to the higher requirements of this subsection. Compact according to the percentages required above.

00330.42(d) Stone Embankment - Replace the paragraph that begins "If the Contract Plans or ..." with the following paragraph:

If the Contract Plans or Specifications require embankments, or parts of embankments, to be constructed of stone embankment Material, furnish and place the stone embankment Material according to this provision and as directed. Furnish Materials from Contractor-provided sources according to the requirements of 00330.16, unless otherwise specified.

Replace the bullet that begins "Material placed in the ..." with the following bullet:

- Material placed in the upper 1-foot of embankments or within 1-foot of a culvert or other Structure, are not more than 3 inches in size.

00330.43(b)(2) Replace the paragraph that begins "In place Materials shall ..." with the following paragraph:

Meet the following moisture content, density, and deflection requirements for in-place Materials:

00330.43(b)(2)(a) Moisture Content - Replace this subsection, except for the subsection number and title, with the following:

At the time of compaction, compact the Materials at a moisture content to within minus 4 percent to plus 2 percent of optimum moisture content. Add water to Material that does not contain sufficient moisture to obtain proper compaction and thoroughly mix as directed. Dry Material containing an excess of moisture by manipulation, aeration, drainage or other means before being compacted.

00330.43(b)(2)(b) Density - Replace the paragraph that begins "After compaction of each ..." with the following paragraph:

Insert Project Name Here

After compaction of each layer provide a density of at least:

00330.43(d) Small, Irregular Fill Areas - Replace the paragraph that begins "The density requirements of 00330.43 do not apply..." with the following paragraph:

The density requirements of 00330.43 do not apply to irregular fill areas outside of the travel lanes that have a total volume of no more than 150 cubic yards at each location. Construct these areas according to the following:

00330.44(a) Preparation - Replace this subsection, except for the subsection number and title, with the following:

Do not start excavation for each segment until a stockpile of stone embankment Material is immediately available at or near the site. Locate the stockpile at a site approved by the Engineer. Provide a stockpile size sufficient to fill one excavated segment.

00330.44(b) Sequence of Construction - Replace this subsection, except for the subsection number and title, with the following:

Excavate the area according to 00330.40 and 00330.41 to provide a backslope to the lines, Slopes and details shown, or as directed. Excavate and backfill in segments to minimize aggravating stability conditions. For each segment do not exceed 75 feet in length as measured across the top of each open excavation segment, unless otherwise specified or directed.

00330.47 Specified Selected Courses or Layers of Materials - Replace the paragraph that begins "Place and construct selected ..." with the following paragraph:

Place and construct selected Courses or layers according to the requirements of 00330.42 and 00330.43, unless otherwise specified.

00330.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph that begins "No separate or additional ..." with the following paragraph:

No separate or additional payment will be made for blasting done according to 00330.41(e) unless a blasting item is listed in the Contract Schedule of Items.

00330.91(c) Toe Trench Excavation - Replace the bullet that begins "At the toe of riprap slopes ..." with the following bullet:

- At the toe of riprap slopes as shown and elsewhere as directed to provide a suitable foundation toe trench where to place riprap geotextile or filter blanket, and riprap Material.

Insert Project Name Here

(Use the following subsection .91(d) on excavation Projects that include Section 00331 - Subgrade Stabilization.)

00330.91(d) General Excavation - Delete the bullet that begins "Includes Unsuitable Material...".

(Use the following subsection .92 when either of the bullets under 00330.92 are applicable to the Project. Delete "(s)" or parentheses as applicable.)

00330.92 Kinds of Incidental Earthwork - Add the following bullet(s) to the end of the bullet list:

(Use the following bullet when subsection 00330.41(a)(4) has been included in the Project Special Provisions and excess materials are to be used on the Project.)

- Excess material used to widen embankments or flatten slopes according to 00330.41(a)(4).

(Use the following bullet on Projects with light grading, especially on urban Projects, and when requested by the Project Leader, to eliminate separate measurement and payment for earthwork for driveways and road approaches. Do NOT use on projects involving driveways or road approaches with significant earthwork quantities.)

- Earthwork required for driveways and road approaches. Earthwork for driveways and road approaches is outside the Neat Line limits shown on the typical sections.

(Use the following subsection .94 on embankment Projects that include Section 00331 - Subgrade Stabilization.)

00330.94 Embankment Basis Payment - Replace the paragraph that begins "In item (c), the ..." with the following paragraph:

In item (c), the type of Material is inserted in the blank.

Delete the paragraph that begins "Excavation of unstable...".

SP00331 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00350 & SP02320

Requires SP02630 when base aggregate is required)

SECTION 00331 - SUBGRADE STABILIZATION

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All

Insert Project Name Here

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00331 of the Standard Specifications modified as follows:

00331.10 Materials - Replace the Material that begins "Aggregate Base..." with the following Material:

Aggregate Base.....02630.10

00331.90 Payment - Replace the paragraph that begins "The depth of stabilization ..." with the following paragraph:

The depth of stabilization is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00333 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00333 - AGGREGATE DITCH LINING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00333 is not a Standard Specification and is included in this Project by Special Provision.

Description

00333.00 Scope - This Work consists of furnishing and placing aggregate ditch lining at locations shown or directed.

Materials

00333.10 Aggregate Ditch Lining - Furnish hard durable rock or gravel with a moisture binder of clay material that provides a tight, erosion-resistant surface meeting the following grading requirements:

Insert Project Name Here

Sieve Size Passing	Percentages (by Weight)
--------------------	-------------------------

6"	100
4"	30 - 50
2"	20 - 30
No. 200	15 - 25

Construction

00333.40 General - Place the aggregate material to the lines and grades established and as shown.

Measurement

00333.80 Measurement - The quantities of aggregate ditch lining will be measured on the area basis of the actual surface area of the wetted perimeter of the lined ditch.

Ditch excavation will be measured according to 00330.80 and 00330.81.

Payment

00333.90 Payment - The accepted quantities of aggregate ditch lining will be paid for at the Contract unit price, per square yard, for the item "Aggregate Ditch Lining".

Payment will be payment in full for furnishing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Ditch excavation will be paid for according to 00330.90, 00330.91, and 00330.93.

SP00334 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

(Use this Section on highway widening projects only when a small amount of grading is required.)

SECTION 00334 - PREPARATION OF SHOULDERS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00334 is not a Standard Specification and is included in this Project by Special Provision.

Insert Project Name Here

Description

00334.00 Scope - This Work consists of blading, leveling, and compacting shoulders as required to bring the shoulder subgrade to the required widths, grade, and condition to receive the pavement as shown.

Construction

00334.40 General - Sidecast all material resulting from shoulder preparation without obstructing existing ditches.

(Use one of the following options as instructed below. Delete the option that does not apply.)

[Option 1 - Use the following measurement and payment headings and subsections .80 and .90 when measurement is on the length basis.]

[Begin Option 1]

Measurement

00334.80 Measurement - The quantities of preparation of shoulders will be measured on the length basis. When preparation is performed on both shoulders, measurement will be measured along the center line of the highway excluding the length of bridges. Where preparation of shoulders is performed on only one shoulder, the pay length will be one-half the length as measured above.

Payment

00334.90 Payment - The accepted quantities of shoulder preparation will be paid for at the Contract unit price, per mile, for the item "Preparation of Shoulders".

Payment will be payment in full for furnishing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for watering.

[End Option 1]

[Option 2 - Use the following measurement and payment headings and subsections .80 and .90 when measurement is lump sum. Fill in the blanks. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

[Begin Option 2]

Measurement

00334.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Insert Project Name Here

It is estimated that _____ centerline miles of shoulder preparation will be performed on (one shoulder) (both shoulders).

Payment

00334.90 Payment - The accepted quantities of shoulder preparation will be paid for at the Contract lump sum amount for the item "Preparation of Shoulders".

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for watering.

[End Option 2]

SP00335 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26
Last updated: 06-01-26)

SECTION 00335 - BLASTING METHODS AND PROTECTION OF EXCAVATION BACKSLOPES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00335 of the Standard Specifications modified as follows:

00335.01 Definitions - Replace the paragraph that begins "**Buffer Row** - In multiple-row ..." with the following paragraph:

Buffer Row - In multiple-row blasts where perimeter control blasting techniques are used, the first row of production holes immediately adjacent to and drilled along a plane parallel to the perimeter control blast line. The Buffer Row is located between the production holes and the perimeter controlled blast line.

Replace the paragraph that begins "**Presplitting** - A Perimeter Control ..." with the following paragraph:

Presplitting - A Perimeter Control Blasting method where the perimeter row of blast holes are drilled along the plane of the specified final excavation backslope and that utilizes reduced drill hole spacing and reduced diameter explosives decoupled from the drill hole wall, and whose initiation precedes the initiation of the adjacent production holes by a minimum of 25 milliseconds.

Insert Project Name Here

Replace the paragraph that begins "**Trim (Cushion) Blasting** - A perimeter ..." with the following paragraph:

Trim (Cushion) Blasting - A perimeter control blasting method where the initiation of the perimeter row of blast holes drilled along the plane of the specified final excavation backslope follows the initiation of the adjacent production holes within 25 to 75 milliseconds, if production holes are being employed in the blast.

00335.10 Materials - Replace this subsection, except for the subsection number and title, with the following:

Furnish all explosives and blasting caps that are no more than 1 year old. Furnish blasting caps from one lot number.

00335.40(a) General - Replace the bullet that begins "**Production Blasting** - Design blasting ..." with the following bullet:

- **Production Blasting** - Design blasting in the Rock mass to be excavated to control flyrock, minimize ground vibration and air blast, and result in loosened and fragmented in-place Rock of a size that can be removed, transported, or crushed to produce specified products. Lay out production blast holes in a consistent pattern that does not affect the perimeter control blast holes. Where production blast holes are made adjacent to Highways with specified closure restrictions, do not exceed the Contractor's ability to remove the volume of blasted material from the adjacent Highway within the specified closure time.

00335.40(d) Blasting Plan - Replace the paragraph that begins "Provide a separate blasting plan ..." with the following paragraph:

Provide a separate blasting plan for each cut that requires blasting, prepared by a person qualified and experienced in blasting Work. Include in each plan individual major Rock cut areas or Rock production from a Material source. Similar minor Rock cut areas of less than 50 cubic yards, as well as Utility and culvert trenches, may be covered as a group in one generalized blasting plan.

Replace the paragraph that begins "The blasting plans will be ..." with the following paragraph:

The Engineer will review the blasting plans and discuss any concerns with the Contractor. Submit any proposed changes to the blasting plans in writing to the Engineer for review before implementation. Submittal of blasting plans is for quality control and record-keeping purposes.

Replace the paragraph that begins "Each blasting plans shall ..." with the following paragraph:

Include the full details of the drilling and blasting patterns, vibration, flyrock, and noise reduction methods, blast area security measures and traffic control the Contractor proposes to use, in each blasting plan and provide the following information:

00335.40(f) Blasting Test Sections - Replace the paragraph that begins "If the results of the test ..." with the following paragraph:

If the results of the test shots are unacceptable revise the methods, techniques and procedures, at no additional cost to the Agency, so that the results achieved are acceptable. No further drilling and blasting is allowed until the revised methods are reviewed according to 00335.40(d) and verified by additional test shots.

00335.40(g) Blasting According to Plan - Replace the paragraph that begins "After the Engineer has reviewed ..." with the following paragraph:

After the Engineer has reviewed the blasting plan and determined that test sections have demonstrated acceptable results, perform all perimeter controlled and Production Blasting according to the plan that produced acceptable results. Notify the Engineer when any changes in conditions or results are observed. On the Day of each blasting occurrence and before detonation of the blast, the supervisor or blasting specialist in charge is required to certify, in writing, that the shots being carried out are consistent with the reviewed blasting plan.

00335.40(h) Blasting Report - Replace the bullet that begins "A copy of the color video ..." with the following bullet:

- A copy of the color video recording of the blast area(s), with sound, high definition (at least 1080p resolution, 24 fps), in a format commonly used for viewing with a computer or DVD player. Show an unobstructed view of the blast area, framed to show both above and below the blast area. Begin recording at least 10 seconds before the blast and continue recording until there is no visible dust. Use a free-standing recording device that is not a cell phone or similar device, as approved by the Engineer. Submit the type of recording device to be used at least 7 Calendar Days before the blast.

00335.41(a)(1) Replace this subsection, except for the subsection number, with the following:

Attach mechanical devices to all drilling Equipment used to drill the presplit holes to determine, within an accuracy of 1 degree, the angle that the drill steel enters the Rock.

00335.41(a)(5) Replace this subsection, except for the subsection number, with the following:

Ensure the length of presplit holes for any individual lift does not exceed 30 feet unless the Contractor can demonstrate to the Engineer's satisfaction that hole alignment can be maintained within the above tolerances. Upon satisfactory demonstration, and with written permission of the Engineer, the length of holes may be increased to a maximum of 60 feet. If more than 5 percent of the presplit holes are misaligned in any one lift, reduce the height of the lifts until the 9-inch alignment tolerance is met.

00335.41(a)(7) Replace this subsection, except for the subsection number, with the following:

Insert Project Name Here

When the cut height will require more than one lift, a maximum offset of 18 inches between lifts is allowed to allow for drill Equipment clearance. Adjust the Slope angle of lower lifts to compensate for drill offsets and any drift that may have occurred in upper lifts.

00335.41(a)(8) Replace this subsection, except for the subsection number, with the following:

Use only explosives manufactured specifically made for Presplitting in the presplit holes. Furnish explosives for presplit holes with a maximum diameter not greater than half the diameter of the presplit hole. Bulk ammonium nitrate and fuel oil (ANFO) is not allowed in the presplit holes.

00335.41(c) Buffer Row - Replace this subsection, except for the subsection number and title, with the following:

Locate the buffer hole line a minimum of 3 feet away from the perimeter control blast line, or 1 foot for every inch of buffer hole diameter, whichever is greater. Space Buffer Row holes 3 to 5 feet center-to-center. Ensure the explosive load in buffer holes does not exceed 50 percent of the full explosive load that could be placed in a 3-inch production hole. Initiate the buffer holes in a delayed sequence toward a free face.

(Use the following paragraph and subsection .44 when directed by the Geotechnical Group.)

Add the following subsection:

00335.44 Blasting Consultant - Retain a recognized blasting consultant to assist in the blast design. Provide a consultant who is an expert in the field of drilling and blasting who specializes in providing blasting consulting services. Provide a consultant that is not an employee of the Contractor, explosives manufacturer, or explosives distributor. A list of approved blasting consultants may be obtained from the Engineer.

If the proposed blasting consultant is not on the approved list, submit the credentials of the proposed blasting consultant not later than the preconstruction conference. Use the blasting consultant only after approval is obtained from the Engineer and before beginning any drilling and blasting work. Perform an on-site inspection of the Project Site with the Engineer and the blasting consultant before developing a blasting plan. Make additional on-site inspections of the Project Site with the Engineer and the blasting consultant before revising a blasting plan, before all additional blasts with different conditions than those described in the originally submitted blasting plan, and after any unacceptable test blasts, unless otherwise directed. Provide all blasting plans, including revisions, approved in writing, by the blasting consultant.

Submit the consultant assisted blast design to the Engineer according to 00335.40(d).

(Use the following paragraph and subsection .45 when directed by the Geotechnical Group.)

Add the following subsection:

00335.45 Vibrations Specialist - Provide a qualified vibrations specialist in vibration monitoring and analysis using seismographs to confirm the safe vibration and air

Insert Project Name Here

overpressure limits. Submit documentation of prior experience for all personnel involved in monitoring. Have the vibrations specialist interpret the seismograph records to ensure that the seismograph data is effectively utilized in the control of the blasting operations with respect to the existing Structures.

(Use the following paragraph and subsection .46 when directed by the Geotechnical Group.)

Add the following subsection:

00335.46 Vibration Control and Monitoring - Control ground vibrations by using properly designed blast hole patterns, delay sequences, stemming, and allowable charge weights per delay. Base the allowable charge weights per delay on ground vibration levels that will not cause damage. Establish allowable charge weights per delay by carrying out test blasts and measuring ground vibration levels. Perform test blasts according to 00335.40(f), modified as required to limit ground vibrations to a level that will not cause damage.

Monitor each blast with an approved seismograph located, as approved, between the blast area and the closest Structure, facility, or Utility subject to blast damage. Provide and use a seismograph capable of recording particle velocity for three mutually perpendicular components of vibration in the range generally found with controlled and production blasting.

Operate the seismographs according to the recommended guidelines of the International Society of Explosives Engineering Seismograph Section, titled *ISEE Field Practice Guidelines for Blasting Seismographs*. The applicable guidelines are those contained in the current publication on the date the Project is advertised.

Do not allow peak particle velocity of each component to exceed the safe limits of the nearest Structure subject to vibration damage as follows:

Structure	Maximum Peak Particle Velocity at the Structure (Inches/Second)
Standard Construction Timber Frame, Brick, and Concrete Buildings	2.0
Reinforced Concrete Structures	4.0
Steel Structures	4.0
Buried Utilities	2.0
Wells and Aquifers	2.0
Green Concrete (Less than 7 Days).....	1.0

If the vibration levels exceed the limits, immediately report the measurements to the Engineer.

(Use the following paragraph and subsections .47 when directed by the Geotechnical Group.)

Add the following subsection:

Insert Project Name Here

00335.47 Air Overpressure and Noise Control - Install an air overpressure monitoring system of the type specifically manufactured for that purpose between the main blasting area and the nearest Structure subject to blast damage. Limit air overpressure to 133 dBL (0.013 psi) at nearest Structure, facility, or other designated location. Use appropriate blast hole patterns, detonation systems, and stemming to prevent venting of blasts and to minimize air overpressure and noise levels produced by the blasting operations. Lower the air overpressure limit if it proves too high based on damage or complaints. If the air overpressure levels exceed the limits, immediately report the measurements to the Engineer.

(Use the following paragraph and subsections .48 when directed by the Geotechnical Group.)

Add the following subsection:

00335.48 Vibration and Air Overpressure Monitoring Report - Provide a vibration monitoring report for each shot before the next blast that includes the following:

- Manufacturer, model, and serial number of blasting-type seismograph for each monitoring location.
- Name of qualified seismograph operator and interpreter.
- Distance and direction of recording station from blast area.
- Geophone coupling method.
- Maximum particle velocity and peak frequency of each component.
- Maximum value of air overpressure and the peak air overpressure frequency.
- A dated and signed copy of time-histories of all seismograph and air overpressure monitoring system readings.

00335.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00340 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00340 - WATERING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00340 of the Standard Specifications modified as follows:

Insert Project Name Here

00340.00 Scope - Replace the bullet that begins "Preventing or alleviating dust ..." with the following bullet:

- Preventing or alleviating dust nuisance originating within the Highway Right-of-Way and the Project limits that are not caused by the Contractor's operations at the Contractor's plants or plant setups.

00340.10 Water - Replace this subsection, except for the subsection number and title, with the following:

Furnish water free of silts and other matter harmful to the quality of the Material that it is applied to or that it is mixed with.

Comply with Chapter 537 of the *Oregon Water Laws*, administered by the Water Resources Department, covering the appropriation of water.

Most adjudicated water may be limited to agricultural uses, so it should not be assumed that there are any water sources in the immediate area of the Project available for the Contractor's use.

00340.90 Payment - Replace the paragraph that begins "In item (b), the ..." with the following paragraph:

In item (b), the name of the additive is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00344 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02010)

SECTION 00344 - TREATED SUBGRADE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00344 is not a Standard Specification and is included in this Project by Special Provision.

Insert Project Name Here

Description

00344.00 Scope - This Work consists of treating the upper layer of Subgrade with water and either lime, chloride, or portland cement to form a stabilized Course of Material at the locations and to the lines, grades, thicknesses, and Cross Section shown or directed.

00344.01 Definitions:

Treated Subgrade - Subgrade that is improved by the addition of Soil stabilizing Materials.

Materials

00344.10 Soil Stabilizing Materials - Furnish Soil stabilizing Materials meeting the following requirements:

Material	Type	Requirements
Hydrated Lime	AASHTO M 216, Type 1	Grade A
Granular Quicklime (CaO)	AASHTO T 27 and AASHTO T 219 (grading and hydroxide content)	100% passing 3/8" sieve 15% max. passing No. 100 sieve min. 85% Calcium Hydroxide
Calcium Chloride	AASHTO M 144 (sampling) AASHTO T 143 (testing)	—
Sodium Chloride	AASHTO M 143	—
Portland Cement	AASHTO M 85	Section 02010

Store Materials according to 00165.75.

00344.11 Water - Furnish water meeting the requirements of Section 00340.

Construction

00344.40 Preparation - Before starting Subgrade Work, including backfill, complete all underground Work contemplated in the area of the Subgrade. This requirement includes Work by the Contractor, by the Agency, or by others. Drain all depressions or ruts containing water.

00344.41 Addition of Stabilizing Material - Apply stabilizing Materials at a uniform rate as specified using Equipment and methods that will ensure uniformity of distribution. The use of blade graders to distribute lime will not be allowed. Allow only Equipment that is used for watering, applying and mixing the stabilizing Material to pass over the Material until after it is mixed into the Soil. Add water, if necessary, during mixing operations to provide optimum moisture content.

(Fill in the first blank with the percent of stabilizing Material to be used. Fill in the second blank with the type of stabilizing Material being used.)

Add _____ percent _____ to the Subgrade, calculated as a percentage of the in-place dry Soil unit weight, unless otherwise directed.

00344.42 Mixing - Perform mixing operations until the Treated Subgrade Material is uniform and free of streaks or pockets and all Material, other than stones, will pass a 1-inch sieve. Do not allow the content of stabilizing Material to vary by more than plus or minus 1 percent from the amount specified.

00344.43 Finishing - Immediately after mixing the Treated Subgrade, grade the mixture to specified line, grade and Cross Section and compact the mixture to the specified density. Compact and finish within 12 hours after compaction begins. If the Contractor has not compacted and finished the Material within 12 hours, loosen the mixture and add stabilizing Material and water as directed. Remix the freshened Material, regrade and recompact, at no additional cost to the Agency. During compaction, maintain the mixture at proper grade and Cross Section and at optimum moisture content.

00344.44 Curing - Limit traffic over Treated Subgrade to Equipment that does not cause any damage to the Subgrade and that does not visibly deflect, ravel or wear the surface. Keep the finished surface moist and protect from rutting, spalling, displacement and disfiguration for a period of 7 Days, or until a subsequent Course of Material is placed, to prevent drying of the mixture by evaporation or absorption.

00344.45 Compaction:

(a) Achieve the required density of Treated Subgrade Materials as specified in 00330.43(b).

(b) Compact the Subgrade until it is firm and unyielding. Unyielding means no more than 1/4-inch deflection of the Subgrade when proof-rolled with a fully loaded 10 to 12-cubic yard dump truck. Test and proof-roll within 24 hours prior to placing base Material on the Subgrade.

(c) Over-excavate areas of visible deflection to a depth of 12 inches or more below Subgrade, as directed. Place fabric, backfill the over-excavated Subbase area up to the Subgrade elevation with a single Lift of 1 1/2" - 0 crushed Rock and compact. Apply the compactive effort until the density of the top 6 inches of the Subbase Rock is as specified in 00641.44(a). In addition, proof-roll these areas to verify they are firm and unyielding as specified above.

(d) Notify the Engineer if the specified compaction is not attained. The Contractor may be required to use a modified compaction procedure or apply additional compactive effort. If approved Materials meeting the Specifications cannot be compacted to the required density regardless of compactive effort or method, the Engineer may reduce the required density or direct that alternative Material be used. Do not proceed with finishing or compaction of the Subgrade until the Contractor is able to compact the Material to the satisfaction of the Engineer.

00344.46 Tolerances:

(a) Rework areas found to be deficient in thickness by more than 3/4 inch, and add fresh stabilizing Material in an amount equal to one-half the original amount.

Insert Project Name Here

(b) Finish the surface of the Treated Subgrade so that it does not vary by more than 0.06 foot from the established line, grade, and Cross Section and be free of ruts, depressions, and irregularities. When tested with a 12-foot straightedge, the maximum variation of the finished surface from the testing edge is 3/4 inch.

Measurement

00344.80 Measurement - The quantities of Treated Subgrade will be measured on the area basis, measured along the lines and grades of the area actually treated.

The quantities of Soil stabilizing Materials will be measured on the dry weight basis. Packaged Materials will be accepted at the net weight shown by the manufacturer, subject to periodic verification and approval. Provide a certificate with each shipment together with a certified copy of the weight of each delivery. Measurement of stabilizing Material will not include any that is lost, displaced, used in reworking, used in restoration Work or used contrary to direction.

Payment

00344.90 Payment - The accepted quantities of Treated Subgrade and Soil stabilizing Materials will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Treated Subgrade, ____ Inches Thick.....	Square Yard
(b) Lime	Ton
(c) Portland Cement	Ton
(d) Calcium Chloride.....	Ton
(e) Sodium Chloride	Ton

(Use the following paragraph when Pay Item (a) is included in the Pay Item list above.)

In item (a), the depth of the Treated Subgrade is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Draining water from the Subgrade
- Soil stabilization Work
- Smoothing the Subgrade in preparation for staking
- Blading, shaping and compacting the Subgrade, including Roadbed Materials, to final line, grade and Cross Section

SP00350 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP02320

Requires SP00730 when emulsified asphalt tack coat is required.)

SECTION 00350 - GEOSYNTHETIC INSTALLATION

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00350 of the Standard Specifications modified as follows:

(Use subsection .00 when a geomembrane is required.)

00350.00 Scope - Replace the paragraph that begins "This Work consists of furnishing and placing ..." with the following paragraph:

This Work consists of furnishing and placing Geosynthetics in drains, stormwater control facilities (i.e. swales, ponds, trenches), under embankments, for embankment reinforcement, under riprap, Buttresses, inlays, shear keys, over Roadbed Subgrades, and beneath Pavement overlays as shown or directed.

00350.01 Definitions - Add the following definition:

Geomembrane - An essentially impermeable geosynthetic composed of one or more synthetic sheets.

Replace the definition “**Geogrid**” with the following definition:

Geogrid - A geosynthetic used for reinforcement that is formed by a regular network of tensile elements with apertures of sufficient size to allow strike-through of surrounding Soil, Rock or other geotechnical material.

Replace the definition “**Seam Type**” with the following definition:

Seam Type - A designation of Geotextile positioning and rows of stitching in a specified sewn seam as shown (for example Type SSn-1, “J” Seam SSn-1). The designated method of joining Geomembrane sheets (for example thermal fusion welding, extrusion welding).

(Use subsection .02 when a geomembrane is required.)

Add the following subsection:

00350.02 Submittals - Submit unstamped working drawings according to 00150.35. Include the geomembrane installation layout, details of field seams, treatment around penetrations

Insert Project Name Here

and adjacent structures and anchor trench. Provide an installation layout to include geomembrane widths appropriate for the installation and to minimize field seams.

Submit equipment lists and other submittals according to 00150.37, include geomembrane handling, storage and installation procedures, equipment and personnel experience documents, and report of quality control testing.

(Use subsection .20 when a geomembrane is required.)

00350.20 Field Seam Equipment - Replace this subsection, except for the subsection number and title, with the following:

Use field seaming equipment meeting the following requirements:

(a) Geotextile - Use field seam stitching Equipment that provides an acceptable lock-type stitch as recommended by the Geotextile manufacturer and approved by the Engineer.

(b) Geomembrane - Use thermal fusion welding Equipment for dual track field seaming as recommended by the Geomembrane manufacturer. Use extrusion welding equipment as recommended by the Geomembrane manufacturer at locations where thermal fusion welding is not possible, for example at patches, repairs, and short runs.

(Use subsection .30 when a geomembrane is required.)

Add the following subsection:

00350.30 Personnel Qualifications - Provide installer's and seamer's that have experience from at least five installations similar to Work in the Project. For each project, include the project name, location, year of construction, type and area of geomembrane installed, seam testing performed, owner's contact name, and current phone number.

00350.40 General - Replace this subsection, except for the subsection number and title, with the following:

Furnish geosynthetic from the manufacturer and protect against damage and deterioration. Prevent excessive mud, wet concrete, epoxy and like materials from coming in contact with the geosynthetic. Store all Geosynthetics in a dry place and off the ground at all times according to ASTM D4873. Cover all Geosynthetics with a dark protective covering when received. The geosynthetic will be rejected for use if the Engineer determines it has defects or deterioration or has been damaged.

00350.41(a)(3)(a) General - Replace the paragraph that begins "Sew field seams with polymeric ..." with the following paragraph:

Sew field seams with polymeric thread consisting of polypropylene, polyester or kevlar, and as resistant to deterioration as the Geotextile being sewn. Use a color of thread that contrasts with the Geotextile being sewn so the stitches are exposed for inspection when the Geotextile is placed. Meet the testing requirements of 02320.11(b).

00350.41(a)(3)(b) Stitch Requirements - Replace the paragraph that begins "Use two rows of lock-type ..." with the following paragraph:

Use two rows of lock-type stitching, Type 401, spaced 1/2 inch apart with a tolerance of plus or minus 1/4 inch as shown, to make the seams. Do not cross stitches except for restitching.

00350.41(f)(2) Weather Limitations - Replace this subsection, except for the subsection number and title, with the following:

Do not place sealant and Geotextile unless the weather limitations of 00745.40 are met, as appropriate, except the minimum air temperature is 50 °F for paving grade asphalt sealant placement and 60 °F for asphalt emulsion sealant placement.

00350.41(f)(3) Surface Preparation - Replace the paragraph that begins "Prepare the Pavement surface ..." with the following paragraph:

Prepare the Pavement surface that the sealant is to be placed according to 00730.42 and the following:

00350.41(f)(4) Sealant Application - Replace the paragraph that begins "Uniformly spray the asphalt ..." with the following paragraph:

Uniformly spray the asphalt sealant at normal application temperature by means of a pressure distributor according to 00350.21 on the prepared dry Pavement surface. Apply at the rate of 0.20 - 0.30 gallon per square yard, or as recommended by the Geotextile manufacturer or as directed.

Replace the paragraph that begins "The target width of the sealant ..." with the following paragraph:

The target width of the sealant application is the Geotextile width plus 6 inches. Apply the sealant only as far in advance of the Geotextile installation as appropriate to ensure a tacky surface at the time of Geotextile placement. Place the Geotextile the same Day as the sealant. Do not allow traffic on the sealant. Clean excess asphalt from the road surface.

00350.42(a) Placement - Replace the bullet that begins "Unroll the Geogrid ..." with the following bullet:

- Unroll the Geogrid in the same direction the cover Material is placed. If the Geogrid shifts or becomes misaligned, realign it and anchor it according to the manufacturer's recommendations.

(Use subsection .43 when a geomembrane is required.)

Add the following subsection:

00350.43 Geomembrane Liner Installation Requirements - Install geomembrane liner as shown or specified in the reviewed submittals, or as directed.

(a) Placement:

(1) Surface Preparation - Prepare and compact Subgrade and Soil fills with 3/4 inch maximum Aggregate as directed. Prior to installing the geomembrane, inspect the subgrade, remove all foreign matter and sharp, protruding or loose material that could penetrate or otherwise damage the geomembrane.

(2) Weather and Temperature Restrictions - Place geomembrane when the temperature is between 40 to 104 °F. Do not place geomembrane during the presence of excessive moisture or excessive winds as determined and directed by the Engineer.

(3) Inspection - During installation, visually inspect the geomembrane for imperfections, defects, holes, blisters, undispersed raw materials, and any sign of contamination by foreign matter. Mark and repair faulty or suspect areas.

(b) Seams - Overlap panels at least 2 feet and construct dual track thermal weld seam according to the manufacturer's recommendations. For slope application, align geomembrane panels and seam parallel to the line of maximum slope and minimize cross slope seams. Perform field quality control of seams according to 00350.43(f). Furnish test samples 1.5 feet long by 1 foot wide from the overlap with the seam centered in the sample.

(c) Cuts and Penetrations - Perform all cuts, welds and penetrations according to manufacturer's specifications.

(d) Protection of Geomembrane - Protect the geomembrane at all times from ultraviolet (UV) rays, contamination by surface runoff and damage from construction equipment and activities. Use methods to unroll the panels that minimize wrinkles. Minimize direct contact by personnel, Equipment and tools with the fabric. Do not drive Equipment directly on the geomembrane. Ensure the area to be lined and the cover fill material is smooth and free of sharp material that could penetrate or otherwise damage the geomembrane. Place and spread Aggregate over the geomembrane in a manner that prevents punctures, wrinkles, or other damage to the geomembrane.

(e) Edges - Secure edges of geomembrane using anchor trenches in Soil and attach geomembrane to Structures and around penetrations as shown or directed.

(f) Field Quality Control - Visually inspect all seams and non-seam areas of the geomembrane for defects, holes, blisters, undispersed raw materials, and any sign of contamination by foreign matter. Ensure the membrane is clean at the time of inspection.

Nondestructively test each suspect location in seam and non-seam areas as appropriate. Mark and repair each location that fails the nondestructive testing accordingly.

(1) Prequalification Seams - Each Day, prior to geomembrane seaming, perform a minimum 3-foot-long prequalification seam by each welding technician and welding machine under the same conditions as the installation to determine proper seaming operation. Use geomembrane material from the same lot as the geomembrane to be installed.

a. Nondestructive dual seam testing - Mark the date, ambient temperature, and welding machine identification for each prequalification test seam. Perform

ASTM D5820 air channel test of the geomembrane dual track seam and use a threshold value of 4 psi pressure loss. Use ASTM D5820 Figure 1 report form for test documentation.

b. Destructive seam testing for nonreinforced geomembrane seams produced using thermo-fusion methods - Cut samples, prepare specimens, perform peel and shear tests, and report results according to ASTM D6392 for each prequalification test seam. For each seam sample, cut, prepare, condition, and destructively test 5 specimens for peel strength and 5 for seam shear strength with a field tensometer. Perform peel tests on both the inside and outside weld tracks. The evaluation criteria are shown in Table 00350-1a, Table 00350-1b, and Table 00350-1c by geomembrane polymer type and thickness. Four out of five test specimens are required to satisfy the evaluation criteria for both peel strength and shear strength, and five out of five test specimens are required to satisfy the peel separation evaluation criteria for successful prequalification. If necessary, repeat with a new prequalification seam until successful prequalification is achieved.

(2) Field Seam Non-destructive Testing - Perform non-destructive testing the full length of field seams as seaming progresses and before seams are covered. Mark each seam by number or other approved designation. Record and submit air channel pressure test for each seam; identify each seam by number, location, date, name of QC tester, and test result.

Perform ASTM D5820 air channel test on HDPE and LLDPE geomembrane dual track seams and a threshold value of 4 psi pressure loss. Use ASTM D5820 Figure 1 report form for test documentation.

Perform ASTM D7177 air channel test on PVC geomembrane dual track field seams.

(3) Field Seam Destructive Testing Location and Frequency:

(Choose one of the following options considering the specific Project details, needs and risk.)

[Option 1 – High Risk Application]

Obtain a minimum of one destructive seam test sample per every 500 linear feet of production seam. Install a permanent patch over the test sample location and vacuum test all patches. The destructive seam sample locations will be selected by the Engineer. Cut samples, prepare specimens, perform peel and shear tests, and report results according to ASTM D6392. For each seam sample, cut, prepare, condition, and destructively test five specimens for peel strength and five for seam shear strength with a field tensometer. Perform peel tests on both the inside and outside weld tracks. Acceptance is based on four of five test specimens passing the stated criteria for both peel strength and shear strength, and five out of five test specimens passing the peel separation evaluation criteria in Table 00350-1a, Table 00350-1b, or Table 00350-1c appropriate for the geomembrane polymer type and thickness.

[Option 2 – Low Risk Application]

Obtain a destructive seam test sample from the anchor trench end of each seam. Install a permanent patch over the test sample location and vacuum test all patches. Cut samples, prepare specimens, perform peel and shear tests, and report results according to ASTM D6392. For each seam sample, cut, prepare, condition, and destructively test five specimens for peel strength and five for seam shear strength with a field tensometer. Perform peel tests on both the inside and outside weld tracks. Acceptance is based on four of five test specimens passing the stated criteria for both peel strength and shear strength, and five out of five test specimens passing for peel separation in Table 00350-1a, Table 00350-1b, or Table 00350-1c appropriate for the geomembrane polymer type and thickness.

[End of Option 2]

The following procedures apply whenever a sample fails the field destructive test:

1. Cap strip the seam between the failed location and any passed test location.
2. Retrace the welding path to an intermediate location (a minimum of 10 feet from the location of the field test) and take a sample for an additional peel and shear tests as above. If four of five test specimens pass the stated criteria in Table 00350-1a, Table 00350-1b, or Table 00350-1c appropriate for the geomembrane polymer type and thickness, the sample qualifies, cap strip the seam between that location and the original failed location. If the test fails, the process is repeated.
3. Cut out the old seam over the length of seam failure, reposition the panel, and reseat or add a cap strip, as required.

Table 00350-1a Minimum HDPE Geomembrane Hot Wedge Seam Strength

Geomembrane Thickness	Nominal	30 mils	40 mils	50 mils	60 mils
Minimum Shear Strength, lb/in		57	80	100	120
Minimum Peel Strength, lb/in		45	60	76	91
Maximum Peel separation, %		25	25	25	25

Table 00350-1b Minimum LLDPE Geomembrane Hot Wedge Seam Strength

Geomembrane Thickness	Nominal	30 mils	40 mils	50 mils	60 mils
Minimum Shear Strength, lb/in		45	60	75	90
Minimum Peel Strength, lb/in		38	50	63	75
Maximum Peel separation, %		25	25	25	25

Table 00350-1c Minimum PVC Geomembrane Hot Wedge Seam Strength

Geomembrane Thickness	Nominal	30 mils	40 mils	50 mils	60 mils
Minimum Shear Strength, lb/in		58.4	77.6	92.8	109.6
Minimum Peel Strength, lb/in		18	18	18	18

(g) Repair of Geomembrane - Repair or replace all torn, punctured or contaminated geomembrane during construction at no additional cost to the Agency. Repair according to the following:

- Repair small holes by extrusion cap welding. Patch the hole if larger than 1/4 inch.
- Repair tears by patching. Round any tears located on a slope or an area of stress or with a sharp end prior to patching.
- Repair blisters, large holes, undispersed raw materials and contamination by foreign matter using patches.
- Abrade and clean no more than 15 minutes the surface of geomembrane prior to repair by patching. Remove no more than 10% of the thickness.
- Make all patches rounded or oval in shape, of the same membrane fabric, and extend a minimum of 6 inches beyond the edge of defects. Make all patches of the same compound and thickness as the membrane specified. Make all patches with their top edge beveled using an angle grinder prior to placement on the membrane. Apply all patches using approved methods only.
- Start the welding process by grinding the existing seaming and rewelding a new seam. Begin welding where the grinding started, overlapping the previous seam by at least 2 inches. Do not reseam over an existing seam without regrinding.
- Nondestructively test each repair. Repairs passing the nondestructive test are considered adequate. Repeat and retest each repair that fails these nondestructive tests until the repair passes.

Provide daily documentation of all nondestructive and destructive. This documentation to identify all seams that initially failed the testing and include evidence these seams were repaired and successfully retested.

00350.90 Payment -

(Use the following two paragraphs when a geomembrane is required.)

Add the following Pay Item to the Pay Item list:

(g) Geomembrane LinerSquare Yard

Replace the paragraph that begins "In items (a) and (c), ..." with the following paragraph:

In items (a) and (c), the type of Geotextile is inserted in the blank.

(Use the following two paragraphs when a geomembrane is required.)

Add the following paragraph after the paragraph that begins "Item (e) includes...":

Item (g) includes all prequalification seams and testing, and all production seam testing and patches.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00360 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26)

Last updated: 03-02-26)

SECTION 00360 - DRAINAGE BLANKETS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00360 is not a Standard Specification and is included in this Project by Special Provision.

Description

00360.00 Scope - This Work consists of furnishing and placing drainage blanket material to the lines, grades and dimensions shown, or as directed.

Materials

(Use the following subsection .10 when sand drainage blanket material is required.)

00360.10 Sand Drainage Blanket - Furnish sand drainage blanket Material meeting the following gradation limits determined by AASHTO T 27 and AASHTO T 11:

Sieve Size	Percent Passing
No. 10	95 - 100
No. 40	50 - 100
No. 60	20 - 40
No. 200	0.0 - 5.0

(Use the following subsection .11 when granular drainage blanket material is required.)

00360.11 Granular Drainage Blanket - Furnish granular drainage blanket Material that is clean, free draining, durable crushed or uncrushed Rock, meeting the following gradation limits determined by AASHTO T 27:

Sieve Size	Percent Passing
6"	100
4"	90 - 100

Insert Project Name Here

1/2"	60 - 80
No. 10	0 - 10
No. 100	0 - 5

Granular drainage blanket material is accepted without testing if the Engineer visually determines the material meets the above requirements.

00360.15 Quality Control - Provide quality control according to Section 00165.

Equipment

00360.20 General - Use Equipment capable of hauling, spreading and compacting the material to specified density without segregation.

If drainage blanket material is used to drain areas described in 00360.41, hauling with end dump trucks and spreading with bulldozers and other appropriate Equipment is allowed.

Labor

00360.30 Quality Control Personnel - Provide technicians having CEBT, CAgT, and CDT technical certifications.

Construction

00360.40 Planned Locations - On prepared excavations or embankments constructed as shown on the Plans or as directed, place the drainage blanket as follows:

- Spread and compact to required depth with no layer exceeding 3 feet.
- If a subsurface drain system is installed immediately under or adjacent to the drainage blanket, place the drainage blanket directly against the subsurface drain system.
- Prevent contamination of drainage blanket material.

00360.41 Other Locations - When used to drain an unstable or wet area, excavate or trench the existing low areas as directed for positive drainage before placement of drainage blanket material.

00360.42 Compaction and Density Requirements - Compact the drainage blanket according to 00330.43.

(Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

Measurement

00360.80 Measurement - The (quantity)(quantities) of (sand) (and) (granular) drainage blanket Material will be measured on the volume basis in place and will be limited to the Neat Lines, grades, and dimensions shown or directed, or on the weight basis.

Payment

Insert Project Name Here

(Delete the language in purple parentheses that does not apply and delete all purple parentheses. Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

00360.90 Payment - The accepted (quantity)(quantities) of (sand) (and) (granular) drainage blankets will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete pay item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the pay items.)

Pay Item	Unit of Measurement
(a) Sand Drainage Blanket	Cubic Yard or Ton
(b) Granular Drainage Blanket	Cubic Yard or Ton

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00370 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26)

SECTION 00370 - FINISHING ROADBEDS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00370 of the Standard Specifications modified as follows:

00370.40(c) Slopes - Replace the bullet that begins "Remove all exposed roots ..." with the following bullet:

- Remove all exposed roots, debris, and all stones more than 3 inches in size that are loose or could become loosened.

00370.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00380 (Special Provisions for the 2024 Book) (Bidding on or after: 06-01-26
Last updated: 03-02-26)

SECTION 00380 - ROCK SLOPE SCALING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Do not use Section 00380 in a Project without prior approval from the ODOT State Specifications Engineer.)

Section 00380 is not a Standard Specification and is included in this Project by Special Provision.

Description

00380.00 Scope - This Work consists of providing Materials, Equipment, labor, Incidentals, supervision, and service personnel required to perform Rock Slope scaling on the Project as shown and directed.

Perform this Work under the direction of the Engineer and perform the Rock Slope scaling operations, at all times, according to the Engineer's instructions.

00380.01 Definitions:

Machine Scaling - Scaling performed using a standard or specialized "high-reach" excavator equipped with a hydraulic hammer as well as a bucket or other attachments approved by the Engineer.

Scaling - Removal of vegetation, loose Rock and Soil from the Slope at locations shown or as directed.

Scaler - A person or machine operator qualified under 00380.02(b) actively performing Scaling.

Scaling Supervisor - A Scaler qualified under 00380.02(b) in direct supervision of Scaling and in direct contact with the Engineer.

Spoils - Any Rock, Soil, vegetation, or other debris generated by Scaling.

Hand Scaling - Scaling using hand tools, hydraulic jacks, pneumatic pillows, or other tools or Equipment approved by the Engineer.

Temporary Rockfall Containment System - A suspended or ground-mounted containment system capable of preventing all Spoils from entering the travel lanes of the Roadway.

Insert Project Name Here

00380.02 Submittals - Provide the following submittals to the Agency for review and approval:

(a) Rock Slope Scaling Work Plan - At least 21 Calendar Days before beginning Work on each Slope submit the following:

- The Scaling sequence and schedule.
- The types of tools and Equipment to be used.
- The number of machine Scalers, hand Scalers, and Scaling Supervisor to be employed on the Project.
- Temporary Rockfall Containment System plans and details.
- Debris removal and disposal plans.
- Provisions to protect adjacent facilities.
- Proposed herbicide for stump treatment. Include manufacturer's safety data sheets.

(b) Personnel Qualifications - At least 10 Calendar Days before the preconstruction conference, submit the following:

- Submit the company's experience relevant to the Project.
- Submit a project reference list of at least 3 separate projects, completed in the last 5 years, with scaled slope dimensions equal to or larger than those shown in the Plans. Include a brief description of each project and the owner's contact person's name and current phone number for each project listed.
- Submit a list identifying the Scaling Supervisors and Scaling personnel assigned to the Project. List experience relevant to the anticipated Scaling operations and any special construction techniques required.
- Provide a Scaling Supervisor with at least 3 years of experience in this role and a minimum of 1,500 hours of rope access Scaling experience.
- Provide hand Scalers that have at least 1 year of experience in this role and a minimum of 1,000 hours of rope access Scaling experience.
- Provide a Scaling machine operator having at least 1 year of experience in this role and a minimum of 1,000 hours of Machine Scaling experience with the Equipment submitted in 00380.02(a).

The Engineer will respond within 21 Calendar Days after receipt of the submittal. Do not begin Work on any Scaling until approved by the Engineer.

Materials

00380.10 Herbicide for Stump Treatment - A solution of Triclopyr herbicide (with at least 40% Triclopyr as the active ingredient).

Equipment

00380.20 Temporary Rockfall Containment System - Provide a Temporary Rockfall Containment System capable of preventing all Spoils from entering the travel lanes of the Roadway. The containment system may be ground-mounted or suspended.

Insert Project Name Here

00380.21 Scaling Tools and Equipment - Provide hand tools, portable hydraulic wedges, air pillows or other power tools and associated Equipment necessary to perform Rock Slope Scaling. Other tools or Equipment may include air compressors, hydraulic pumps, and Equipment necessary to access the Slope.

(Fill in the blank for number of machine(s). Delete all purple parentheses.)

Provide a minimum of ____ machine(s) for each shift.

Provide Equipment, machines and tools customarily used for Scaling. Replace Equipment, machines or tools that are unsatisfactory to the Engineer.

00380.22 Machine Scaling Equipment - Provide an excavator with sufficient reach to perform the required Scaling. Provide all necessary attachments such as excavator buckets, hydraulic hammers (breakers), rippers, and grapples.

Labor

00380.30 Personnel Qualifications – Provide on-site Scaling Supervisors, Scalers, and Scaling machine operators who meet the experience requirements of 00380.02(b).

(Fill in the blank for number of scalers, machine scalers and supervisor. Do not change the alpha characters before the subsections.)

00380.31 Personnel:

(a) **Scaling Supervisor** - Provide a minimum of ____ Scaling Supervisor(s) for each shift.

(b) **Scaling Personnel** - Provide a minimum of ____ Scalers for each shift.

The Engineer may suspend the Scaling if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of on-site Scaling Supervisor, qualified Scaling personnel or qualified Machine Scaling personnel to the Engineer for approval, who will have 7 Calendar Days to respond. Additional costs resulting from the suspension of Work due to the changing of personnel is at no additional cost to the Agency.

Construction

00380.41 Vegetation Removal - Except as noted in 00380.42, flush-cut brush and trees on the Slope and within 10 feet of the crest of the Slope and leave the root wad intact for all trees and brush cut from the crest of the slope to 10 feet upslope of the crest. Within 2 minutes of cutting each tree or shrub, wick and saturate stumps with the herbicide listed in the approved work plan. Apply this herbicide to all trees and shrubs cut. Complete initial tree felling prior to performing other Scaling Work.

00380.42 Scaling - Begin Scaling at the top of the Slope and proceed downwards toward the bottom of the Slope, removing loose Rock and Soil as the work progresses. Remove vegetation, including root wads, from the area being scaled.

Insert Project Name Here

The Engineer will inspect the Work as Scaling progresses to determine if additional Machine Scaling is needed. If additional Slope Scaling is required, continue to scale the Slope as directed.

Only scale sections of the Slope protected by the approved containment system. If Scaling Spoil escapes the containment system, cease Scaling operations until the containment system is repaired or modified to contain the Spoil.

00380.44 Spoil Removal - Before beginning Work and as Scaling progresses, remove and dispose of all Spoils and reestablish ditch grade to promote drainage. Periodically remove accumulated Spoil produced during the Scaling operation. Do not allow Spoil to accumulate to the point that subsequent Material falling into the ditch is deflected into the travel lanes.

00380.45 Spoil Disposal - Unless otherwise specified and subject to the requirements of 00280.05, dispose of Spoils described in 00380.44, as follows:

(Use the following paragraph if there is no Agency-provided stockpile/disposal site.)

Dispose of Materials, classed as Spoil Materials in 00380.44, outside and beyond the limits of the Project and Agency-Controlled Lands and according to 00290.20. Do not dispose of Materials on Wetlands, either public or private, or within 300 feet of rivers or streams.

(Use the following two paragraphs if designating an Agency-provided stockpile/disposal site.)

Place Spoils in the embankment area as shown or dispose of Spoil Material according to Section 00236.

Dispose of all other deleterious Materials outside and beyond the limits of the Project and Agency-controlled property according to 00290.20. Do not dispose of Materials on Wetlands, either public or private, or within 300 feet of rivers or streams.

Measurement

00380.80 Measurement

(a) Hand Scaler - The quantity of hand Scalers will be measured on the time basis. The measured number of hours will start from the time the hand Scaler is equipped and begins to ascend the Slope to the time the hand Scaler descends the Slope in any Work shift.

(b) Scaling Supervisor - The quantity of Scaling Supervisor will be measured on the time basis. The measured number of hours will start from the time the hand Scalers are equipped and begin to ascend the Slope to the time the hand Scalers descend the Slope in any Work shift. For Machine Scaling, the measured number of hours will start from the time the machine Scaler positions the Equipment and begins Scaling to the time the Scaler moves the Equipment away from the area being scaled.

(c) Machine Scaling - The quantity of Machine Scaling will be measured on the time basis. The measured number of hours will start from the time the operator positions the Equipment and begins Scaling to the time the operator moves the Equipment away from

Insert Project Name Here

the area being scaled. No measurement of quantities for the support personnel necessary for the Machine Scaling Equipment will be made.

(d) Temporary Rockfall Containment System - No measurement of quantities will be made for the Temporary Rockfall Containment System.

(e) Spoil Removal - Spoil removal will be measured on the volume basis based on the volume of Material in the hauling vehicle.

Payment

00380.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Scaler	Hour
(b) Scaling Supervisor	Hour
(c) Machine Scaling	Hour
(d) Temporary Rockfall Containment System.....	Lump Sum
(e) Spoil Removal	Cubic Yard

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Hand Scaling tools and Equipment
- Operator and support personnel necessary for the Machine Scaling Equipment

SP00390 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP00440, & SP02320

Requires SP00350 when riprap geotextile is required.

Requires SP02080 when portland cement grout is required.)

SECTION 00390 - RIPRAP PROTECTION

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00390 of the Standard Specifications modified as follows:

00390.11(a) General - Replace the bullet that begins "Be angular in shape ..." with the following bullet:

Insert Project Name Here

- Be angular in shape. Thickness of a single Rock is not less than one-third its length. Rounded Rock will not be accepted unless authorized by the Engineer.

00390.11(b) Test Requirements - Replace the paragraph that begins "Furnish the Rock..." with the following paragraph:

Furnish Rock meeting the following test requirements:

00390.11(c)(1) Control Sample - Replace this subsection, except for the subsection number and title, with the following:

If directed, provide, at a satisfactory location near the Project, a Rock sample of at least 5 Tons meeting the gradation for the class specified. The Engineer will use the sample as a frequent visual reference for judging the gradation of the riprap supplied.

00390.11(c)(2) Sampling and Testing Assistance - Replace this subsection, except for the subsection number and title, with the following:

The Engineer may request a gradation verification of two random truckloads of Rock. Provide mechanical Equipment, a sorting site and labor needed to assist in checking gradation at no additional cost to the Agency

00390.42 Filter Blanket Construction - Replace this subsection, except for the subsection number and title, with the following:

Place the Filter Blanket on the prepared area to the full specified thickness in one operation, using methods that do not cause segregation.

00390.44(a) General - Replace this subsection, except for the subsection number and title, with the following:

Unless otherwise directed, place the riprap protection as the embankment is constructed. Lag the riprap placement behind the embankment construction only as necessary to allow proper embankment construction and prevent mixture of embankment and riprap Material.

00390.44(b) Loose Riprap - Replace the bullet that begins "With a clamshell ..." with the following bullet:

- With a clamshell, orange-peel bucket, skip or similar approved device that will contain the riprap Material to its final destination. Do not open the bucket until it has been lowered to the slope where the Material is being placed.

Replace the bullet that begins "To produce a compact ..." with the following bullet:

- To produce a compact riprap protection where all sizes of Material are placed in their proper proportion.

00390.44(c) Keyed Riprap - Replace this subsection, except for the subsection number and title, with the following:

After placing Loose Riprap Material according to 00390.44(a) and 00390.44(b), key the riprap into place by slapping the surface with a piece of armor plating (approximately 4 feet x 5 feet in size weighing approximately 5,000 pounds) or other approved means that will produce a nearly smooth surface.

00390.44(d) Grouted Riprap - Replace the paragraph that begins "Thoroughly moisten the stones ..." with the following paragraph:

Thoroughly moisten the stones and sluice any excess fines to the underside of the riprap before grouting. Deliver the grout to the place of final deposit by any means that ensure uniformity and prevent segregation of the grout. Spade or rod the grout into the spaces to completely fill the voids in the riprap. Control pressure grouting and do not unseat the stones. Penetrate the grout to the depth as shown. If a rough surface is specified, brush the stone until 25 to 50 percent of the depth of surface stone is exposed. For a smooth surface, grout the crevices to within 5/8 inch of the surface.

00390.90 Payment - Replace the paragraph that begins "In items (b), (c), and (d) ..." with the following paragraph:

In items (b), (c), and (d), the class of riprap is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00396 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26)
Last updated: 06-01-26
Requires SP02001, SP02010, SP02020, SP02050, SP02415, & SP02510
Requires SP02080 when rock and ground anchor grout is required.
Requires SP02690 when PCC Aggregates are required.)

SECTION 00396 - SHOTCRETE SLOPE STABILIZATION

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00396 of the Standard Specifications modified as follows:

00396.01 Definitions - Replace the definition "**Dry-Mix Shotcrete**" with the following definition:

Insert Project Name Here

Dry-Mix Shotcrete - Shotcrete process where all dry constituents except accelerator and water are mixed before introduction into the delivery hose. Compressed air is used to deliver the dry mix through the hose. Water is added under pressure in the nozzle body, where it is mixed thoroughly with the dry constituents before the mixture is jetted from the nozzle onto the substrate.

Replace the definition "**Substrate**" with the following definition:

Substrate - The surface where Shotcrete is placed.

Replace the definition "**Wet-Mix Shotcrete**" with the following definition:

Wet-Mix Shotcrete - Shotcrete process where all constituents, except accelerator, are mixed before introduction into the delivery hose. Compressed air and accelerator are added to the mixture at the nozzle, in such a way that the quantity can be properly regulated.

00396.10 Materials - Replace the Material that begins "Non Epoxy Grout..." with the following Material:

Rock and Ground Anchor Grout.....02080.80

00396.12 Aggregates - Replace the paragraph that begins "Combined Fine Aggregates ..." with the following paragraph:

Furnish combined Fine Aggregates and Coarse Aggregates meeting the following grading requirements as determined by AASHTO T 27:

00396.13 Steel Fiber Reinforcement - Replace this subsection, except for the subsection number and title, with the following:

If steel Fiber Reinforced Shotcrete is required, furnish steel fibers that:

- Are between 1/2 and 1 1/2 inches long.
- Meet the requirements of ASTM A820 Type 1, Deformed.
- Have a length-to-diameter ratio of less than 80.
- Have a minimum tensile strength of 160,000 psi.

Only steel fibers manufactured specifically for use in Shotcrete applications are allowed. Use a steel fiber content of not less than 100 pounds per cubic yard of shotcrete.

00396.14 Synthetic Polymer Fiber Reinforcement - Replace this subsection, except for the subsection number and title, with the following:

If synthetic polymer Fiber Reinforced Shotcrete is required, furnish synthetic polymer fibers that:

- Are between 1/2 and 3 inches long.
- Meet the requirements of ASTM C1116 Type III.
- Have a minimum diameter of 0.012 inch.

Insert Project Name Here

- Have a minimum tensile strength of 75,000 psi.

Furnish synthetic polymer fibers manufactured specifically for use in Shotcrete applications. Follow the manufacturer's recommendations for the proportion of synthetic polymer fibers in the mix.

00396.15 Shotcrete Mix Requirements - Replace the paragraph that begins "Determine the exact proportions ..." with the following paragraph:

Determine the exact proportions both by weight and by volume of Cementitious Materials, Fine Aggregate, Coarse Aggregate, fiber reinforcement (if any), admixtures, and water, subject to the Engineer's approval. Furnish shotcrete meeting the following minimum requirements:

00396.16(a)(1) Test Panels - Replace this subsection, except for the subsection number and title, with the following:

Prepare Shotcrete test panels on vertically supported open-face forms. Provide forms that:

- Have internal dimensions of at least 24 by 24 by 5 inches.
- Are rigid, nonabsorbent, and nonreactive with cement.

Place the Shotcrete in the forms using the same Shotcrete mix, air pressure, water pressure, and nozzle tip used in the production shotcrete. Protect the panels for at least 24 hours or until final set has taken place.

00396.16(b)(2) Shotcrete Compressive Strength - Replace this subsection, except for the subsection number and title, with the following:

Furnish shotcrete cores that attain 2,500 psi compressive strength at 7 Calendar Days.

00396.16(c) Shotcrete Quality - Replace this subsection, except for the subsection number and title, with the following:

Submit a visual description of each core. Include details concerning the presence of voids, Sand pockets, laminations, and other deficiencies. The accepted visual quality of the cores is no lower than Grade 2 according to Shotcrete grading requirements of ACI 506.2.

00396.21 Pump System - Replace this subsection, except for the subsection number and title, with the following:

Provide a pump system that conveys premixed Shotcrete constituents delivered in a uniform and continuous flow, without segregation or loss of constituents.

00396.22 Air Compressor - Replace the paragraph that begins "Furnish air compressor(s)..." with the following paragraph:

Provide air compressor(s) capable of providing:

00396.23 Dry-Mix Delivery Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide dry-mix delivery Equipment capable of discharging the cement/Aggregate mixture into the delivery hose and delivering a continuous stream of uniformly mixed Material to the discharge nozzle. Equip the discharge nozzle with a manually operated water injection system (water ring) for directing an even distribution of water through the cement/Aggregate mixture. Provide a water valve, convenient to the Nozzle Operator that is capable of ready adjustment to vary the quantity of water. Provide greater water pressure than the operating air pressure at the discharge nozzle to ensure that the water is thoroughly mixed with the other Materials. Use steady, nonpulsating water pressure. Regularly inspect and replace Equipment parts, especially the nozzle liner and water ring, as necessary or as directed.

When using the dry-mix process, provide and use Predampening Equipment.

00396.24 Wet-Mix Delivery Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide wet-mix delivery Equipment capable of discharging the premixed Materials into the delivery hose and delivering a continuous stream of uniformly mixed Material to the discharge nozzle. Follow the manufacturer's recommendations on the type and size of nozzle to be used, and on cleaning, inspection, and maintenance of the Equipment.

00396.30 Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

At least 7 Calendar Days before beginning Shotcrete Work, provide written evidence that the on-site supervisor, Nozzle Operator, and delivery Equipment operator have performed satisfactory Work in similar capacities elsewhere for a sufficient length of time to be fully qualified to perform their duties.

Provide an on-site supervisor with not less than 2 years of full-time experience as a Shotcrete Nozzle Operator.

Provide Nozzle Operators with current certification by the American Concrete Institute for wet-mix or dry-mix vertical placement of shotcrete, as appropriate to the proposed mixing process.

Provide Nozzle Operators and delivery Equipment operators with at least 1 year of full-time experience each on similar applications with the same type of Equipment as proposed for the Project. Before starting Shotcrete Work, have the Nozzle Operator, in the presence of the Engineer, demonstrate the ability to apply Shotcrete on a test panel according to 00396.16. Visual quality of core samples from test panels are required to meet the requirements of 00396.16(c). Before being allowed to place Shotcrete in permanent construction, have each Nozzle Operator make one satisfactory test panel for each mix used during the course of the Work.

Provide a helper to assist the Nozzle Operator to operate a blowpipe for the purpose of keeping the work area free of Rebound.

Insert Project Name Here

00396.46 Shotcrete Application - Replace the paragraph that begins "Apply Shotcrete from the lower ..." with the following paragraph:

Apply Shotcrete from the lower portion of the area to the top so Rebound does not accumulate on the area still to be covered. Hold the nozzle approximately perpendicular to the working face, and at a distance that minimizes Rebound and maximizes compaction. Apply the shotcrete so that it emerges from the nozzle in a uniform and continuous flow. When, for any reason, the flow becomes intermittent, divert the nozzle from the Work until uniform and continuous flow resumes. Provide a Nozzle Operator's helper, equipped with blowpipe, to attend the Nozzle Operator at all times during Shotcrete placement to keep the work area free of Rebound.

00396.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00398 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP00820, SP02420 & SP02530)

SECTION 00398 - ROCK SLOPE STABILIZATION AND REINFORCEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00398 of the Standard Specifications modified as follows

00398.02 Definitions:

Replace the definition "**Anchored High Tensile Strength Wire Mesh Slope Protection**" with the following definition:

Anchored High Tensile Strength Wire Mesh Slope Protection - A system of woven, diamond-patterned mesh made of a single type of high tensile strength wire, supported by wire ropes secured with Slope Protection Anchors, and held against the slope with a pattern of Anchor Nails, Spike Plates, and Boundary Ropes.

Replace the definition "**High Tensile Strength Wire Mesh Slope Protection**" with the following definition:

High Tensile Strength Wire Mesh Slope Protection - A system of woven, diamond-patterned mesh made of a single type of high tensile strength wire draped over a rockfall

Insert Project Name Here

slope and anchored with Slope Protection Anchors. High Tensile Strength Wire Mesh Slope Protection is used where Rocks are generally less than 4 feet in diameter.

Replace the definition “**Spike Plate**” with the following definition:

Spike Plate - A diamond-shaped steel plate used with an Anchor Nail in an anchored Wire Mesh Slope Protection system to structurally connect the wire mesh to the Anchor Nail.

00398.03(b)(1) Working Drawings - Replace the paragraph that begins “Working Drawings shall...” with the following paragraph:

Submit Working Drawings including at least the following information:

00398.03(b)(2) Working Plan - Replace the bullet that begins “Color(s) for powder coating or otherwise ...” with the following bullet:

- Color(s) for powder coating or otherwise coloring all wire rope and cable to match the mesh color, if mesh color is specified or shown. Furnish colors according to Federal Standard 595C.

00398.03(b)(3) Field Construction Manual - Replace this subsection, except for the subsection number and title, with the following:

Provide a field construction manual, prepared by the manufacturer of the proprietary flexible rockfall barrier system, including step-by-step directions for constructing the system. Include the manufacturers’ anchor testing procedures and acceptance criteria.

00398.03(b)(4) Field Maintenance Manual - Replace this subsection, except for the subsection number and title, with the following:

Provide a field maintenance manual, prepared by the manufacturer of the proprietary flexible rockfall barrier system, including:

- Step by step instructions for maintaining the system.
- A Project specific list of all proprietary components with stock or product reference numbers and illustrations.
- A Project specific list of all non proprietary components.

00398.03(c) Anchored High Tensile Strength Wire Mesh Slope Protection Submittals - Replace the bullet that begins “Documentation demonstrating satisfactory performance...” with the following bullet:

- Documentation demonstrating satisfactory performance of the steel mesh provided by this Supplier in other projects completed for use as part of an anchored high tensile strength steel mesh system where the site conditions were similar to the conditions on this Project.

Replace the bullet that begins “Color(s) for powder coating or otherwise ...” with the following bullet:

Insert Project Name Here

- Color(s) for powder coating or otherwise coloring all wire rope and cable to match the mesh color, if mesh color is specified or shown. Furnish colors according to Federal Standard 595C.

00398.10(a) Steel Anchor Bolts - Replace this subsection, except for the subsection number and title, with the following:

Furnish 1 inch diameter, continuously threaded or deformed, Grade 75 steel anchor bolts, complete with keyhole plate, grout tube, washer, and nut, meeting the requirements of AASHTO M 31 (ASTM A615). Furnish anchor bolts made of one continuous bar. Welding and couplers are not allowed. Galvanize all steel anchor bolts according to AASHTO M 232 (ASTM A153). Furnish grout tubes, grout sealers, and other grouting accessories for grouting anchor bolts of type recommended by the manufacturer and as approved.

00398.10(b) Steel Plates, Washers, and Nuts - Replace this subsection, except for the subsection number and title, with the following:

Furnish steel plates, washers, and nuts for steel anchor bolts meeting the requirements of ASTM F432. Furnish 3/8-inch, flat steel plates that provide not less than 6 by 6-inch area for each bolt. Furnish steel or malleable iron beveled washers and hardened steel machine washers. Furnish heavy hexagonal type nuts. Galvanize all plates, washers, and nuts according to AASHTO M 232 (ASTM A153), Class C. Furnish Class A castings and Class B forgings.

00398.10(c) Wire Rope - Replace this subsection, except for the subsection number and title, with the following:

Furnish wire rope for Slope Protection Anchors meeting the current requirements of Federal Specification RR W 410 and ASTM A1023. Furnish general purpose, 3/4-inch diameter, 6x19 independent wire rope core (IWRC), galvanized wire rope, with the wire rope core made from extra improved plow steel and a minimum breaking force of 58,800 pounds. Attach ferrules to the rope to prevent withdrawal from the encapsulating concrete during testing. Galvanize ferrules and thimbles according to AASHTO M 232 (ASTM A153).

00398.10(e) Cement Grout - Replace this subsection, except for the subsection number and title, with the following:

Furnish non-epoxy cement grout for anchors in Rock, approved by the Engineer, from section 02080.20 of the QPL. Follow the manufacturer's recommendations for water-cement ratio, mixing and set times.

00398.11 Posts, Braces, and Appurtenances for Post Supported Wire Mesh - Replace this subsection, except for the subsection number and title, with the following:

Furnish Schedule 40, hot-dip galvanized steel pipe according to ASTM A53, Grade B, for posts, post sleeves, and braces. Furnish posts and braces that are 4-inch outside diameter. Furnish post sleeves that are 4.5 inch outside diameter (to accommodate post). Furnish post caps, strap clamps, bolts, and nuts that are hot dip galvanized according to AASHTO M 232 (ASTM A153). Repair all cutting, welding, and drilling as well as other damage to the galvanizing according to 02420.10(d).

Insert Project Name Here

00398.12 Top Horizontal Support Rope and Support Post Retaining Rope - Replace the paragraph that begins “Furnish top horizontal Support Rope...” with the following paragraph:

Furnish top horizontal Support Rope and support post retaining rope of the sizes shown and meeting the current requirements of Federal Specification RR-W-410 and ASTM A1023. Furnish Type 1, general purpose, Class 2, 6x19 IWRC, galvanized wire rope, with the wire rope core made from extra improved plow steel.

00398.13 Hardware for Post Supported Wire Mesh - Replace the paragraph that begins “Furnish rings and eyes of drop-forged...” with the following paragraph:

Furnish rings and eyes of drop-forged steel, heat treated after forging. Furnish wire rope thimbles and clips sized for the wire rope shown. Galvanize all rings, eyes, thimbles, wire rope clips, U-bolts and miscellaneous hardware according to AASHTO M 232 (ASTM A153), Class C. Furnish galvanized Class A castings and Class B forgings according to AASHTO M 232 (ASTM A153), Class C.

00398.14(c) Gabion Wire High Tensile Steel Fasteners and Lacing Wire - Replace this subsection, except for the subsection number and title, with the following:

Furnish 11-gauge, high tensile steel fasteners meeting the requirements of ASTM A975 and ASTM A764, with Class 3 zinc coating according to ASTM A641 and minimum panel to panel connection strengths meeting the requirements of ASTM A975.

If stainless steel fasteners are shown, furnish fasteners according to ASTM A313, Type 302.

Furnish lacing wire with the same coating Material as the gabion wire mesh fabric and according to ASTM A641 and ASTM A975. If PVC coating is required, provide the same color as the gabion wire mesh fabric.

00398.14(d) High Tensile Strength Wire Mesh Fabric - Replace this subsection, except for the subsection number and title, with the following:

Furnish wire mesh fabric of woven construction with the ends of each wire formed into a loop and twisted. Fasten the loops of the wire mesh together to prevent unraveling of the mesh. Furnish wire that is alloyed, high-strength carbon steel wire with minimum diameters and tensile strengths complying with ASTM A1007 (Level 3 drawn Zn5 Al wire). Minimum wire diameter is shown. Hot-dip galvanize the wire with a zinc/aluminum coating with a minimum weight of 0.40 ounce per square foot for Level 3 drawn Zn5 Al wire according to ASTM A1007.

00398.15 Cable Net - Replace the paragraph that begins “Furnish cable net consisting of individual...” with the following paragraph:

Furnish cable net consisting of individual square or diagonal panels joined along their edges. Furnish cable net panels composed of woven wire ropes or strand with a maximum opening size of 12 by 12 inches. Bind interior wire rope junctions with either double knots of 1/8-inch diameter corrosion resistant wire, or high-strength, corrosion resistant clips with slotted bottoms made from 0.08-inch plate.

Replace the paragraph that begins “Wire rope or cable...” with the following paragraph:

Furnish wire rope or cable for net panels that have a breaking strength of at least 9,200 pounds.

00398.16 Rock Reinforcing Bolts and Rock Reinforcing Dowels - Replace this subsection, except for the subsection number and title, with the following:

Galvanize or epoxy coat Rock Reinforcing Bolts, Rock Reinforcing Dowels, and all appurtenant hardware prior to installation. Cement grout is not allowed as a substitute for the required protective coatings.

(a) Rock Reinforcing Bolts - Furnish Rock Reinforcing Bolts, including mechanical anchorage system, plates, washers, and nuts from the QPL. If mechanical anchorage is not selected, use a Rock Reinforcing Bolt system from a manufacturer regularly engaged in the manufacturer of Rock Reinforcing Bolts.

Furnish grout tubes, grout sealers, and other grouting accessories for grouting Rock Reinforcing Bolts of types recommended by the manufacturer and as approved.

(b) Rock Reinforcing Dowels - Furnish Rock Reinforcing Dowels, plates, washers, and nuts from a manufacturer regularly engaged in the manufacturer of Rock Reinforcing Dowels. Furnish grout meeting the requirements of 00398.10(e).

00398.18 Anchored High Tensile Strength Steel Wire Mesh Slope Protection - Replace this subsection, except for the subsection number and title, with the following:

Furnish all mesh and components, except Anchor Nails, with powder coating applied by the Supplier. The Engineer will select the color from the color(s) submitted according to 00398.03(c).

(a) Anchor Nails (Predrilled) - Furnish Grade 75 all-thread rods, Grade 75 bolts, or equivalent, of the diameter shown, with a corrosion allowance of 0.079-inch zinc galvanization included in their diameter. Furnish nails with a minimum ultimate strength of 55,000 psi that are groutable using a tremie tube grouting system and capable of being post-tensioned to the minimum design load shown. Required minimum nail length is shown. Provide centralizers every 5 feet along each nail and a tremie tube for grouting.

(b) Anchor Nails (Self-Drilling) - Furnish self-drilling, hollow-core Anchor Nails of the diameter shown, that comply with ASTM A615 and are supplied with a 3-inch diameter sacrificial bit. Furnish self-drilling Anchor Nails made from high-strength steel with a minimum ultimate strength of 55,000 psi, that are groutable and capable of being post-tensioned to the minimum design load shown.

(c) High Tensile Strength Wire Mesh - Furnish a wire mesh of woven construction, with the ends of each wire formed into a loop and twisted. Fasten loops of the wire mesh together to prevent unraveling of the mesh. Furnish alloyed high strength carbon steel wire with minimum diameter and tensile strength conforming to ASTM A1007 (Level 3 drawn Zn5 Al wire). Minimum wire diameter is shown. Hot-dip galvanize the wire with a zinc/aluminum coating, with a minimum weight of 0.40 ounce per square foot for Level 3 drawn Zn5 Al wire.

(d) Connection Clips - Fabricate connection clips from high-strength steel wire with a minimum diameter of 0.15 inch and a minimum ultimate tensile strength of 4,900 pounds according to ASTM A1007 (Level 3 drawn Zn5 Al wire). Furnish clips that measure 2.36 by 0.83 inches and have two reversed end hooks on one side of the clamp and galvanize the wire with a 95 percent zinc and 5 percent aluminum coating, with a minimum weight of 0.49 ounce per square foot.

Hog ring connectors are not allowed.

(e) Spike Plates - Provide Spike Plates with dimensions appropriate for the High Tensile Strength Steel Wire Mesh. Hot-dip galvanize Spike Plates according to ASTM A123 (ASTM A123M) with a minimum layer thickness of 85 microns.

(f) Boundary Rope - Furnish galvanized 1/2-inch diameter wire rope for attaching the mesh at installation boundaries. Furnish Type 1, general purpose, Class 2, 6x19 IWRC rope, with a minimum breaking strength of 23,940 pounds, according to Federal Specification RR-W-410 or equivalent, including galvanizing.

Furnish anchors for Boundary Rope according to 00398.10(c).

(g) High Early Strength Grout - Furnish non-shrink, Type III portland cement grout capable of attaining a minimum unconfined compressive strength of 4,000 psi in not more than 3 Days, as confirmed according to AASHTO T 106. Test non-shrink properties according to AASHTO T 160. Percent length change is not allowed to exceed 0.05 percent at 28 Days for water-cured samples. Add fluidifying agents as needed.

(h) Miscellaneous Materials - Furnish all miscellaneous Materials for system installation, such as wire rope clips, thimbles, and other miscellaneous items from the Supplier of the high tensile strength steel wire to assure and compatibility of system components.

(i) Supplemental Anchor Nails - Furnish Anchor Nails according to 00398.18(a) or (b) with a minimum length of 5 feet.

00398.21 Anchor Testing Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide all torque wrenches, jacks, pressure gauges and other Equipment required to perform proof testing of installed anchors, Rock Reinforcing Bolts, and Rock Reinforcing Dowels. Use pressure gauges and load cells of the types and sizes commonly used in the testing of Rock bolts and anchors.

Calibrate torque wrenches, jacks, and pressure gauges before use. Perform calibration tests, using an independent testing laboratory, within 60 Calendar Days of the date calibration data is submitted. Provide torque wrenches having a capacity at least 20 percent greater than the Rock Reinforcing Bolt manufacturer's recommended torque to achieve the design and test loads. Provide torque wrenches that have an accuracy of at least ± 2 percent of the full-scale reading, and a resolution of at least 1 percent of the full scale reading.

00398.30 Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Provide personnel skilled in the installation of Rock Reinforcing Bolts and Rock Reinforcing Dowels. Provide an on-site supervisor and drill operator with no less than 2 years of demonstrated experience in Rock Reinforcing Bolt and Rock Reinforcing Dowel installation relevant to anticipated Rock conditions and size of Rock Reinforcing Bolts and Rock Reinforcing Dowels being installed. Submit documentation of experience to the Engineer at least 10 Calendar Days prior to the preconstruction conference. Include names and current phone numbers of references, project names and locations, and the year of project completion.

00398.31 Measurement Assistance - Replace this subsection, except for the subsection number and title, with the following:

Provide labor, at no additional cost to the Agency, to assist with the measurement of quantities of Wire Mesh Slope Protection systems and Cable Net Slope Protection system placed on the slopes.

00398.42 Support Posts - Replace the paragraph that begins “Dimensions of footings shall...” with the following paragraph:

Minimum footing dimensions are shown. Moisten the sides of the excavation to a depth of 2 inches and remove all loose Soil and Rock in the hole prior to placing concrete. Place the concrete with contact against firm Soil at the sides and bottom and tamp around anchor bolts, Slope Protection Anchors, or post sleeves while holding the anchor bolts, Slope Protection Anchors, or post sleeves firmly in proper position. If the hole is over-excavated, fill the entire cavity with concrete. Strike off, slope, or crown the surface of the concrete at the ground level and smooth it to shed water.

00398.46 Slope Protection Anchor Proof Testing - Replace the paragraph that begins “Slope Protection Anchors shall...” with the following paragraph:

Furnish Slope Protection Anchors with a minimum pullout capacity of 20,000 pounds per foot. Field verify pullout capacity by testing not less than 25 percent of the total number of anchors installed. The Engineer will determine the anchors to be tested.

Replace the paragraph that begins “Perform lateral testing by...” with the following paragraph:

Perform lateral testing by attaching a steel cable to the anchor and connecting it to a load cell at the base of the slope. Do not allow the cable to come in contact with the slope below the crest of the slope. Position the load cell far enough away from the toe of the slope that the cable under tension is near parallel to the slope. Determine applied test loads with either a calibrated pressure gauge or a load cell according to 00398.21.

00398.48 Support Rope and Post Retaining Rope Attachment - Replace the paragraph that begins “For Post Supported Wire Mesh Slope...” with the following paragraph:

For Post Supported Wire Mesh Slope Protection and Post Supported Rock Protection Screen Behind Barrier or Guardrail, install top horizontal Support Ropes on the posts as shown. Ensure that the top horizontal Support Rope will move freely in the U bolt hangers. Use one continuous length of cable for each complete section of screen. Attach the top horizontal Support Rope to the end anchors as shown. Tension the rope so that the in place wire mesh

Insert Project Name Here

is fully supported. Take up additional tension with turnbuckles. Ensure that a minimum of 4 inches of take up remains in the turnbuckle when full tension has been applied.

00398.50(a) General - Replace the paragraph that begins "Protect Rock Reinforcing Bolts and..." with the following paragraph:

Protect Rock Reinforcing Bolts and Rock Reinforcing Dowels at all times from damage and corrosion. Corrosion, pitting or damage to the Rock Reinforcing Bolt is cause for rejection. Damage includes, but is not limited to, abrasions, cuts, nicks, welds, and weld splatter. Prior to installation, remove all mill scale, flaking rust, and grease.

00398.50(b)(3) Proof Testing Bolts - Replace the paragraph that begins "Tension each installed bolt ..." with the following paragraph:

Tension each installed bolt to 120 percent of the design load, using a calibrated hollow ram hydraulic jack. Hold that tension for a minimum of 10 minutes. Any loss of load during the 10-minute time period will result in failure of the test. If a bolt fails this test, the bolt is rejected. Install, at no additional cost to the Agency, a replacement bolt in a separate hole adjacent to the failed bolt, and repeat the test. The Engineer may require additional proof testing if any bolt fails.

00398.50(c)(2) Proof Testing Dowels - Replace the paragraph that begins "Proof test at least 10 percent..." with the following paragraph:

Proof test at least 10 percent of the installed dowels, but not less than three dowels. The Engineer will interpret the results. Tension the Rock Reinforcing Dowel to 10 kips with a calibrated hollow ram hydraulic jack. Hold the load for 10 minutes with no loss of load. A Rock Reinforcing Dowel is considered to have failed if any movement of the dowel occurs. The Engineer may require additional proof testing if any Rock Reinforcing Dowel fails. Replace failed dowels with a new dowel installed in a separate hole, at no additional cost to the Agency.

00398.51 Flexible Rockfall Barrier Systems - Replace the paragraph that begins "Provide for a representative (the "Field Representative")..." with the following paragraph:

Provide for a representative (the "Field Representative") from the proprietary flexible rockfall barrier system vendor or manufacturer to be present at the start of system construction. Before beginning Work involving the flexible Rockfall barrier system, schedule a meeting with the Engineer and include the Contractor's supervisory personnel, together with any Subcontractors and their supervisory personnel who are to be involved in the flexible Rockfall barrier system installation Work, and the representative from the proprietary flexible rockfall barrier system vendor or manufacturer for a flexible rockfall barrier system preconstruction conference at a time mutually agreed upon. If all invitees are not in attendance, reschedule the flexible rockfall barrier system preconstruction conference for the start of system construction.

00398.52(c) Anchor Nail Installation - Replace the paragraph that begins "For installations through..." with the following paragraph:

Insert Project Name Here

For installations through Soil, excavate a nominal 14-inch diameter by 8-inch-deep hole around each nail head to accommodate the Spike Plate and to ensure optimal load transfer from the nail head to the mesh.

00398.80 Measurement - Add the following paragraph to the end of this subsection:

Concrete barrier will be measured according to 00820.80.

00398.90 Payment - Delete the paragraph that begins "Item (g) includes...".

Add the following paragraph after the paragraph that begins "Item (k) includes ...":

Concrete barrier will be paid for according to 00820.90.

Replace the paragraph that begins "Payment will be payment..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00405 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-16-26
Requires SP02630 when base aggregate is required)

SECTION 00405 - TRENCH EXCAVATION, BEDDING, AND BACKFILL

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00405 of the Standard Specifications modified as follows:

00405.02 Definitions – Replace the definition "**Trench Foundation**" with the following definition:

Trench Foundation - The bottom of the trench where the Pipe Bedding is to lie and that provides support for the pipe.

00405.03 Lines, Grades, and Cross Sections - Replace this subsection, except for the subsection number and title, with the following:

Excavate trenches to the lines, depths, grades and Cross Sections as shown or as established. Variations are allowed only when necessary to ensure firm foundations and when such variations will not be detrimental to the Work.

00405.14 Trench Backfill - Replace the paragraph that begins "Furnish the following ..." with the following paragraph:

Insert Project Name Here

Furnish the following Materials as shown or required:

00405.14(b) Class B Backfill - Replace the paragraph that begins "Use Granular Material..." with the following paragraph:

Use Granular Material consisting of Gravel or crushed Rock meeting the requirements of Section 00641. Use 1" - 0 or 3/4" - 0 Aggregate.

00405.14(d) Class D Backfill - Replace the paragraph that begins "Use pit run or bar ..." with the following paragraph:

Use pit run or bar run Material, well-graded from coarse to fine. The maximum dimension is 3 inches.

(Use the following subsection .41(a) when the open excavation method for installing pipes transversely is not permitted.)

00405.41(a) Within Paved Areas to be Preserved - Add the following to the end of this subsection:

Do not use the open excavation method for installing pipes transversely.

00405.41(b) Open Trench Limit - Replace this subsection, except for the subsection number and title, with the following:

Limit the length of open trench to 100 feet, or as allowed. Complete related resurfacing within 800 feet of the open trench limit.

00405.41(f) Trench Protection - Replace the paragraph that begins "Provide the Materials ..." with the following paragraph:

Provide the Materials, labor and Equipment necessary to protect trenches at all times. Provide safe working conditions in the trench and protect the Work, existing property, utilities, Pavement, and the public. Design the method of protection. The Contractor may elect to use any combination of shoring, overbreak, tunneling, boring, sliding trench shields or other methods of accomplishing the Work, provided the method meets with the approval of the Engineer and complies with all applicable local, state, and federal safety codes.

00405.43 Dewatering - Replace the paragraph that begins "When dewatering near a ..." with the following paragraph:

When dewatering near a river, lake, or stream, meet the requirements of 00290.30(a) and Section 00280. When the presence of water or other conditions in the excavated area would be detrimental to the purpose of the Work, obtain approval of the Engineer for the temporary measures required to correct or care for the condition.

00405.44 Trench Foundation - Replace the paragraph that begins "When, in the judgment of ..." with the following paragraph:

Insert Project Name Here

When, in the judgment of the Engineer, the existing material in the bottom of the trench is unsuitable for supporting the pipe, excavate below grade, as directed. Replace the excavated material with imported Trench Foundation Material meeting the requirements of 00405.11. Place the Trench Foundation Material in 6-inch layers and compact according to 00330.43 except compact selected stone backfill material in 12-inch layers. Bring the Trench Foundation Material to the elevation established.

00405.45 Pipe Bedding - Replace this subsection, except for the subsection number and title, with the following:

Spread the bedding smoothly to the proper grade so that the pipe is uniformly supported along the barrel. Excavate bell holes at each joint to permit proper assembly and inspection of the joint. Furnish bedding under the pipe that provides a firm, unyielding support along the entire pipe length.

00405.46 Backfilling - Replace the paragraph that begins "Backfill with Material ..." with the following paragraph:

Backfill with Material meeting the requirements of 00405.13 and the details shown, or as directed.

00405.46(d) Ponding or Jetting of Backfill Materials - Replace the paragraph that begins "Ponding or jetting is ..." with the following paragraph:

Ponding or jetting is not allowed within Roadbed lateral limits. Ponding or jetting is allowed outside Roadbeds when approved by the Engineer in writing.

Replace the paragraph that begins "Furnish Equipment that provides ..." with the following paragraph:

Provide Equipment that provides a minimum gauge pressure of 35 psi at the discharge nozzle. Use a Rigid Pipe that will reach within 1 foot of the bottom of the backfill. Insert the pipe at intervals not exceeding 4 feet throughout the entire width and length of the Trench Backfill.

00405.46(e) Temporary Trench Plating - Replace this subsection, except for the subsection number and title, with the following:

When temporary steel plates are required over a street cut, install plates capable of carrying at least a minimum of MS-18 loading. Place steel plates with a minimum of 12 inches bearing on all sides of a cut. Anchor steel plates to minimize shifting. Shim the edges of all steel plates with cold mix asphalt.

00405.48(b) Topsoil - Replace the paragraph that begins "Where trenches cross lawns ..." with the following paragraph:

Where trenches cross lawns, garden areas, pastures, cultivated fields or other areas where Topsoil exists, remove the Topsoil to a minimum 12-inch depth and place the Material in a stockpile. Do not mix the Topsoil with other excavated material. After the trench has been backfilled, replace the Topsoil.

Insert Project Name Here

00405.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

In the paragraph that begins "No separate or additional..." delete the following bullet:

- sawcutting

Add the following sentence to the end of the subsection:

Sawcutting will be paid for according to Section 00310.

SP00406 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00406 - TUNNELING, BORING, AND JACKING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00406 of the Standard Specifications modified as follows:

00406.01 Descriptive Terms - Replace this subsection, except for the subsection number and title, with the following:

Tunneling - Tunneling includes all methods where an underground passageway is excavated and lining Materials are brought in and placed.

Boring - Boring includes all methods where a conduit, casing, pipe or sleeve is pushed or pulled into place and that the excavation method precludes the stationing of a worker within the conduit without stopping or removing the excavation Equipment.

Jacking - Jacking includes all methods where a conduit, casing, pipe or sleeve is pushed or pulled into place with one or more workers inside to excavate and assist in keeping the conduit on the required grade and alignment.

00406.12 Casing - Replace this subsection, except for the subsection number and title, with the following:

Furnish casing of the type, size and class as shown. The class of casing specified is based on the post construction loads and not on stresses resulting from jacking and boring operations. The casing may be constructed of other Materials, gauge and section modulus if

Insert Project Name Here

approved, including increasing the casing strength to accommodate the Contractor's jacking or boring operations at no additional cost to the Agency.

When pressure grouting is specified, furnish jacked casings 36-inch diameter and larger with nipples installed at the springline and the crown, at 10-foot centers.

00406.41(b) Boring and Jacking - Replace the bullet that begins "Casing or Conduit" with the following bullet:

- Casing or conduit - verify that the casing is suitable for the installation method

00406.45 Smooth Steel Casing - Replace the paragraph that begins "Join sections of smooth steel ..." with the following paragraph:

Join sections of smooth steel casing to be jacked or bored by welding the joints with a continuous weld for the full circumference, or by other approved means. Furnish joints capable of resisting the jacking or boring forces.

00406.47 Cradles for Cased or Tunneled Pipe - Replace this subsection, except for the subsection number and title, with the following:

Where cradles are shown, provide a strapped cradle under the barrel of the carrier pipe. Ensure the barrel bears continuously on the cradles.

00406.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

The quantities of casing will be measured on the length basis.

No measurement of quantities will be made for tunneling, boring, or jacking Work.

Where tunneling, boring, jacking, or open trench excavation is used at the Contractor's option in lieu of another specified method, measurement will be made as originally bid.

The quantities of pipe installed inside the casing will be measured according to the appropriate items under which this Work is required.

00406.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Tunneling, Boring, and Jacking.....	Lump Sum
(b) Casing, _____	Foot

Insert Project Name Here

Item (a) includes the additional effort required to install the casing by tunneling, boring, or jacking (other than under a Railroad). This includes Equipment, Sand, grout, jacking pits, and bracing.

In item (b) the type of casing, "steel" or "concrete" is inserted in the blank.

If tunneling, boring, jacking, or open trench excavation is used at the Contractor's option in lieu of another specified method, payment will be made as originally bid.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Tunneling, boring, or jacking under a Railroad will be paid for according to 00445.91.

Pipe will be paid for according to the appropriate Section in which the Work is required.

SP00410 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26
This Section requires
SP00412, SP00413, or
SP00414 as required by
Table 00410-1)**

SECTION 00410 - REHABILITATE EXISTING PIPE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00410 is not a Standard Specification and is included in this Project by Special Provision.

Description

00410.00 Scope - This Work consists of rehabilitating existing pipes according to Section 00412, Section 00413, or Section 00414, as indicated in Table 00410-1 as shown and selected.

00410.01 Installation Options - Choose one of the approved rehabilitation methods indicated in Table 00410-1.

00410.02 Submittals - Submit a pipe rehabilitation summary indicating the selected method for each location/station as indicated in Table 00410-1. Submit required documentation

Insert Project Name Here

according to Section 00412, Section 00413, or Section 00414, for the renewal methods indicated in Table 00410-1.

Materials

00410.10 General - Furnish Materials according to Section 00412, Section 00413, or Section 00414, as indicated in Table 00410-1 and selected.

00410.13 Location - Rehabilitate existing pipe(s) according to Table 00410-1:

(Fill in the table for each pipe location with the location of the pipe and the Specification Section that can be used on that pipe. Add or delete rows in the table as necessary to list all pipe locations.)

Example:

<i>Location/Station</i>	<i>Pipe Size (Rise x Span Inches)</i>	<i>Length (feet)</i>	<i>Specification Section(s) Allowed</i>
<i>Station 1+00 to 4+00</i>	<i>18 in x 18 in</i>	<i>125 ft</i>	<i>SP00412, SP00413</i>
<i>Station 11+00 to 14+00</i>	<i>24 in x 24 in</i>	<i>200 ft</i>	<i>SP00412</i>

)

Table 00410-1

Location/Station	Pipe Size (Rise x Span Inches)	Length (feet)	Specification Section(s) Allowed

Construction

00410.40 General - Construct pipe rehabilitation according to Section 00412, Section 00413, or Section 00414 as indicated in Table 00410-1 and selected.

Measurement

00410.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(a) Rehabilitate pipe - The quantities of installed cured-in-place pipe (CIPP) liners or spray applied pipe structural liner (SAPL) liners, will be measured on the length basis. The length will be measured, with no deduction for Structures or fittings, along the pipe flow line from center to center of manholes, inlets, Structures, special sections, or the ends of pipe, whichever is applicable.

Insert Project Name Here

(b) Service Line Reconnections - The quantities of service line reconnections will be measured on the unit basis, regardless of size.

Payment

00410.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete the pay item(s) from the list that are not included in the Schedule of items, but do not change the alpha characters next to the pay item.)

Pay Item	Unit of Measurement
(a) Rehabilitate, _____ Inch x _____ Inch pipe	Foot
(b) Service Line Reconnections	Each

In item (a), the rise x span size of the host pipe will be inserted in the blanks.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00411 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00411 - PIPE BURSTING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00411 of the Standard Specifications modified as follows:

00411.10(a) Markings - Replace the paragraph that begins "Provide pipe Materials ..." with the following paragraph:

Furnish pipe Materials that are legibly marked, by the pipe manufacturer, with the following information:

Replace the bullet that begins "A production code ..." with the following bullet:

- A production code that the date and place of manufacture can be determined.

00411.10(b) Pipe Color - Replace this subsection, except for the subsection number and title, with the following:

Furnish uniformly colored black or gray pipe.

Insert Project Name Here

00411.10(c) Dimension Ratio - Replace this subsection, except for the subsection number and title, with the following:

Furnish nominal 8-to-18-inch sized pipe having a minimum dimension ratio (DR) of 17.

00411.90 Payment - Replace the paragraph that begins "In item (a), ..." with the following paragraph:

In item (a), the nominal size of the new liner pipe is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00412 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

**This Section requires SP00410
when 00412 is listed in Table 00410-1)**

SECTION 00412 - CURED-IN-PLACE PIPE LINING THERMO CURE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00412 of the Standard Specifications modified as follows:

00412.01 Submittals - Replace the bullet that begins "Verify Pipe length, rise and span ..." with the following bullet:

- Verify Pipe length, rise and span, for each installation according to Section 00415 and include the corresponding tube size for each installation according to 00412.10. Do not order Material(s) until approval has been received.

(Use the following subsection .02 to list the CIPP design parameters. Obtain the parameter information from the Designer.)

00412.02 Design Parameters - Add the following to the end of this subsection:

Minimum Height of fill*
Groundwater Elevation above invert

Insert Project Name Here

* Measured vertically from pipe invert to the top of paved surface, directly beneath the pavement section.

(Use the following line when chemical resistance parameters are required)

Chemical Resistance ASTM F1743

00412.12 Liner Properties - Replace the paragraph that begins "Furnish liners that have ..." with the following paragraph:

Furnish liners that have the minimum physical properties stated in ASTM F1216, ASTM F1743 and ASTM D2990, and are also resistant to chemical properties and flow characteristics typically found in municipal sanitary sewer flows. Fabricate the liner to a size that when cured, will tightly fit the pipe being rehabilitated. Furnish a homogeneous finished liner system across the wall thickness containing no intermediate or encapsulated elastomeric layers.

00412.72 Material Sampling and Testing - Replace the paragraph that begins "Flexural properties must ..." with the following paragraph:

Meet or exceed flexural property values according to 00412.12.

(Use the following subsection .80 when SP00410 is used and Section 00412 is listed as an option in Table 00410-1.)

00412.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

CIPP Liner and Service Line Reconnections will be measured according to 00410.80.

(Choose one of the following Options)**00412.90 Payment** -

[Option 1]

Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

In item (a), the nominal size of the host pipe is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Option 2 - Use the following when SP00410 is used and Section 00412 is listed as an option in Table 00410-1.)

Replace this subsection, except for the subsection number and title, with the following:

CIPP Liner and Service Line Reconnections will be paid for according to 00410.90.

SP00413 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

This Section requires SP00410
when 00413 is listed in Table 00410-1)

SECTION 00413 - GRP CURED-IN-PLACE PIPE LINING UV CURE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00413 of the Standard Specifications modified as follows:

00413.01 Submittals - Replace the bullet that begins "Verify Pipe length, rise and span ..." with the following bullet:

- Verify Pipe length, rise and span, for each installation according to Section 00415 and include the corresponding tube size for each installation according to 00413.10. Do not order Material(s) until approval has been received.

(Use the following subsection .02 to list the GRP CIPP design parameters. Obtain the parameter information from the Designer.)

00413.02 Design Parameters - Add the following to the end of this subsection:

Minimum Height of fill*
Groundwater Elevation above Invert.....

* Measured vertically from pipe invert to the top of paved surface, directly beneath the pavement section.

(Use the following line when chemical resistance parameters are required)

Chemical Resistance ASTM D5813

00413.10 Tube - Replace the paragraph that begins "Furnish tubing that consists ..." with the following paragraph:

Furnish tubing that consists of at least two separate tubes made of corrosion resistant (E-CR or equivalent) glass fibers according to ASTM D578 and ASTM F2019. Verify pipe lengths and pipe inside diameters before ordering tubing. Furnish flexible tubing that exhibits the following characteristics:

00413.43(d) UV Curing Method - Replace the paragraph that begins "A camera must ..." with the following paragraph:

Insert Project Name Here

Locate a camera on the ultraviolet light assembly to view that the liner is properly inflated and identify any liner problems before curing begins.

00413.72 Material Sampling and Testing - Replace the paragraph that begins "Flexural properties must ..." with the following paragraph:

Meet or exceed flexural properties values according to 00413.12.

Replace the paragraph that begins "If core sample method ..." with the following paragraph:

If core sample method was used, repair core hole samples using the same tube that was used in the installed liner, and an epoxy or resin mixture compatible with the GRP CIPP liner system used. Fill the cores completely with repair patches. Apply a second oversized 1.5mm thickness patch over the repaired hole to ensure a watertight seal.

(Use the following subsection .80 when SP00410 is used and Section 00413 is listed as an option in Table 00410-1.)

00413.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

CIPP Liner will be measured according to 00410.80.

(Choose one of the following Options)

00413.90 Payment -

[Option 1]

Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

In item (a), the nominal size of the host pipe is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Option 2 - Use the following when SP00410 is used and Section 00413 is listed as an option in Table 00410-1.)

Replace this subsection, except for the subsection number and title, with the following:

CIPP Liner will be paid for according to 00410.90.

SP00414 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

**This Section requires SP00410
when 00414 is listed in Table 00410-1)**

SECTION 00414 – PIPE RENEWAL – SPRAY APPLIED PIPE STRUCTURAL LINER

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00414 of the Standard Specifications modified as follows:

(Use the following subsection .02 to list the spray applied pipe structural liner design parameters. Obtain the parameter information from the Designer.)

00414.02 Design Parameters - Add the following to the end of this subsection:

Height of fill from invert _____ ft
Groundwater Elevation above Invert..... _____ ft

00414.43 Installation - Replace the paragraph that begins "Install the SAPL according ..." with the following paragraph:

Install the SAPL according to the manufacturer's recommendations and control the temperature and humidity. Furnish a SAPL that is smooth, uniform and free of any defects.

(Use the following subsection .80 when SP00410 is used and Section 00414 is listed as an option in Table 00410-1.)

00414.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

SAPL Liner will be measured according to 00410.80.

(Choose one of the following Options)

00414.90 Payment -

[Option 1]

Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

In item (a), the nominal size of the host pipe is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Option 2 - Use the following when SP00410 is used and Section 00414 is listed as an option in Table 00410-1.)

Insert Project Name Here

Replace this subsection, except for the subsection number and title, with the following:

SAPL Liner will be paid for according to 00410.90.

SP00415 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26)

SECTION 00415 - VIDEO PIPE INSPECTION

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00415 of the Standard Specifications modified as follows:

Add the following subsection:

00415.02 Definitions:

Flexible Pipe - Pipes constructed of corrugated metal are considered Flexible Pipes.

Rigid Pipe - Pipes constructed of concrete and ductile iron are considered Rigid Pipes.

Thermoplastic Pipe - Pipes constructed of polyvinyl chloride, polyethylene, and polypropylene are considered Thermoplastic Pipe.

00415.20(b) Transporter - Replace the paragraph that begins “Use an all-wheel...” with the following paragraph:

Use an all-wheel drive or track mounted transporter capable of inspecting pipes ranging in size from 12 to 60 inches in diameter. Provide a transporter with an adjustable operating speed while recording not to exceed 30 feet per minute.

00415.20(c) Recording Device - Replace the paragraph that begins “Provide a device capable ...” with the following paragraph:

Provide a device capable of recording video with the pipe identification, a remote meter counter displaying length along the profile in tenths of feet and indicating the camera’s position from the starting point. Calibrate the meter counter to be accurate within 0.5 percent over the length of pipe being inspected. Provide a device capable of recording a digital video with a minimum resolution of 720 x 480.

00415.23 Manual Inspection - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

For pipes larger than 48 inches and when the entire length of the pipe is accessible, a handheld video camera and a light source may be used. Provide video camera and lighting meeting the requirements of 00415.20(a). A digital camera may be used as a supplement for taking photographs. Use a light source that provides a clear, focused and high-quality photograph of the culvert surface under all conditions.

00415.41 Pre-Installation Video Inspection - Replace the paragraph that begins “Perform a pre-installation video inspection...” with the following paragraph:

Perform a pre-installation video inspection at least 5 Calendar Days before beginning Work. Begin Inspection at one end of the pipe and proceed through the entire pipe length at a speed not greater than 30 feet per minute. Move the camera through the pipe, along the approximate center of the pipe, and provide a continuous 360 degree pan of each pipe joint. Stop and record all cracks, deformities, and defects to document the pipe condition, including the location of all lateral connections to the mainline.

00415.42 Post Installation Video Inspection - Replace the paragraph that begins “Perform post construction video inspection...” with the following paragraph:

Perform post construction video inspection according to 00415.40 and 00415.41. Video inspect the pipe interior no sooner than 30 Days after the trench backfill and compaction have been completed, and before any paving is performed. If the Contract duration does not permit a 30-Day waiting period, the Engineer may allow the inspection when the compacted backfill reaches a minimum of 2 feet above the pipe crown.

00415.42(a) Deflection Testing for Flexible Pipe - Replace this subsection with the following subsection:

00415.42(a) Post Installation Deflection Testing - Perform post construction deflection testing for all Flexible Pipe and Thermoplastic Pipe as described.

- Flexible Pipe for new pipe installations and extensions greater than 15 feet in length.
- Thermoplastic Pipe for new pipe installations and extensions greater than 10 feet in length.

If any portion of the new pipe interior is not accessible for a visual inspection, then perform deflection testing for the entire installation of new pipe or extension regardless of pipe length.

Use one of the approved following methods:

00415.42(a)(1) Remote Video Inspection with Laser Profiler – Replace the paragraph that begins “Calibrate and perform...” with the following paragraph:

For pipe 48 inches or less in diameter, calibrate, and perform deflection inspection according to ASTM F3080. Use video inspection equipment meeting the requirements of 00415.22.

00415.42(a)(2) Manual Deflection Test - Replace the paragraph that begins “Use equipment meeting...” with the following paragraph:

Insert Project Name Here

For pipes larger than 48 inches and when the entire length of the pipe is accessible, use equipment meeting the requirements of 00415.23.

00415.70 Video Inspection Recording and Inspection Report - Replace the paragraph that begins "Furnish two copies..." with the following paragraph:

Provide two copies of all preconstruction and post construction inspection video and reports within 3 Calendar Days after completing the inspections. If inspection video or audio recording quality is poor, the Engineer has the right to reject the recording and request new video inspection at no additional cost to the Agency.

00415.71 Corrections to Deficiencies in Work - Replace the paragraph that begins "Where the pipe deflection..." with the following paragraph:

Where the pipe deflection is greater than 5 percent and less than 7.5 percent of the nominal diameter, submit a remediation plan as a stamped Working Drawing according to 00150.35. Replace pipe where the deflection exceeds 7.5 percent of the nominal diameter at no additional cost to Agency.

00415.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00420 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00420 - SALVAGING PIPE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00420 is not a Standard Specification and is included in this Project by Special Provision.

Description

00420.00 Scope - This Work consists of removing, cleaning, and stockpiling or relaying culvert pipe and other pipe.

Acceptable pipe, parts and special sections are referred to as "salvaged".

Materials

00420.10 Materials - Furnish joint Materials, connecting bands, and other Materials required in relaying pipe meeting the requirements of the Specifications for the type of pipe and materials involved. Salvaged material may be used if approved.

Construction

00420.40 Trench Excavation - Excavate and backfill trenches to remove pipe and to relay salvaged pipe according to Section 00405.

00420.41 Removal of Pipe - Excavate materials over the pipe, and remove, disassemble and clean the exposed pipe without damaging the pipe. Acceptable partial sections of pipe may be cut off for reuse.

00420.42 Stockpiling - Stockpile salvaged materials not used on the Project as directed.

00420.43 Relaying - Install salvaged materials at the locations, in the quantities designated, and conforming to Specifications for new installations. As directed, cut sections of salvaged pipe to obtain the length required for relaying. Make connections to new pipe, inlet and outlet Structures, salvaged or new end sections, or other special sections as provided in the Specifications for new pipe installations.

Measurement

00420.80 Measurement - The quantities of salvaged pipe will be measured on the length basis, regardless of size, kind, or type that is removed, cleaned, and stockpiled or relaid. Stockpiled pipe will be measured from end to end of each pipe. Relaid pipe will be measured according to Section 00445.

The maximum depth to flow line for each run of relaid pipe will be determined along the pipe centerline, by measuring vertically from the flow line to the surface of the original ground, paved surface or Subgrade and slopes of other excavations, whichever is less.

Payment

00420.90 Payment - The accepted quantities of salvaged, stockpiled, and relaid pipe will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the pay items.)

Pay Item

Unit of Measurement

- (a) Salvaging and Stockpiling ____ Inch Pipe Foot
- (b) Salvaging and Relaying ____ Inch Pipe, ____ Depth.... Foot

(Use the following paragraph when pay item (a) is included in the pay item list above.)

Insert Project Name Here

In item (a), the nominal diameter of pipe is inserted in the blank.

(Use the following paragraph when pay item (b) is included in the pay item list above.)

In item (b), the nominal diameter of the pipe will be inserted in the first blank, and the maximum flow line depth "5 feet", "10 feet", "20 feet", or "over 20 feet" will be inserted in the second blank.

Payment will be payment in full for furnishing all Materials, Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for removing, cleaning, transporting, and stockpiling or relaying the pipe or for excavation or backfill.

SP00430 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP02320, SP02410, SP02415, SP02420, & SP02610

Requires SP00350 when drainage geotextile is required

Requires SP00840 when delineators are required

Requires SP02690 when PCC Aggregates are required.)

SECTION 00430 - SUBSURFACE DRAINS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00430 of the Standard Specifications modified as follows:

00430.02 Contractor's Options - Replace the paragraph that begins "If the Contractor has an option ..." with the following paragraph:

If the Contractor has an option of using different kinds of pipe, the option and its limitations are shown.

00430.03 Size Determination - Replace this subsection, except for the subsection number and title, with the following:

The nominal size of pipe is determined according to AASHTO tolerances for pipe dimensions for the appropriate kind or class of pipe.

00430.90 Payment - Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

In item (a), the nominal diameter of pipe is inserted in the blank.

Insert Project Name Here

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00435 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00435 - PREFABRICATED VERTICAL DRAINS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00435 is not a Standard Specification and is included in this Project by Special Provision.

Description

00435.00 Scope - This Work consists of furnishing and installing prefabricated vertical drains at locations and according to details shown or directed.

Materials

00435.10 Drains - Furnish new prefabricated vertical drains from the QPL or that meet the requirements of the Specifications.

00435.11 Core - Furnish a continuous plastic core Material with grooved channels, a pattern of protruding studs, or mesh-type materials fabricated to promote drainage along the axis of the vertical drain. Furnish vertical drain Material meeting the requirements of ASTM D638 and ASTM D4716.

00435.12 Jacket - Furnish the jacket Material meeting the following requirements:

- Be a synthetic, nonwoven geotextile capable of resisting all bending, punching and tensile forces imposed during installation.
- Not crack, peel or otherwise become damaged during installation.
- Be sufficiently rigid when embedded to withstand lateral earth pressures and to ensure vertical flow capacity through the core.
- Allow free passage of pore water to the core without passage of Soil material or piping.

Insert Project Name Here

Test the jacket Material in both saturated and dry conditions. Furnish jacket Material according to the following:

Test	Requirement	
	Specification	Minimum Value
Grab Tensile	ASTM D4632	80 pounds
Trapezoidal Tear	ASTM D4533	25 pounds
Puncture Strength	ASTM D4833	50 pounds
Burst Strength	ASTM D3786	130 psi
Permeability	ASTM D4491	0.05 mm/sec.

00435.13 Assembled Drain - Furnish assembled drains meeting the following requirements:

- Be resistant against wet rot, $\frac{(a+b)}{2}$ mildew, bacterial action, insects, salts, acids, alkalis, solvents and any other significant ingredients in the groundwater.
- Be band-shaped (rectangular Cross Section) with an aspect ratio (width divided by thickness) not exceeding 50.
- Have a minimum equivalent diameter of 2 inches using the following definition of equivalent diameter:

$$d_w =$$

Where:

d_w = diameter of a circular drain equivalent to the band shaped drain

a = width of the band shaped drain

b = thickness of the band shaped drain

00435.14 Acceptance Requirements - Provide a manufacturer's Quality Compliance Certificate according to 00165.35 with each shipment of prefabricated vertical drain materials.

Submit three samples of any proposed splices for approval at least 21 Calendar Days before the installation of any drains.

Identify the drain materials with labels or tags that include the manufacturer's name, lot or control number, individual roll number and date of manufacture.

Equipment

00435.20 General - Install prefabricated vertical drains using a mandrel or sleeve that:

- Has a maximum cross-sectional area of 10 square inches.
- Is sufficiently stiff to prevent wobble or deflection during use.
- Protects the prefabricated vertical drain material from tears, cuts and abrasion during installation.

- Has an anchor plate or similar arrangement at the bottom to prevent Soil from entering the drain during its installation, and to anchor the drain tip at the required depth at the time of withdrawal. Use anchors conforming to the dimensions of the mandrel or sleeve.

Construction

00435.40 Prefabricated Vertical Drain Installation Requirements:

(a) Acquisition and Storage - During shipment and storage, wrap the drain in heavy paper, burlap or similar heavy-duty protective covering and protect it from sunlight, mud, dirt, dust, debris and other detrimental substances.

Material damaged during shipping, unloading, storing or handling is rejected.

(b) Proposed Installation Details - Submit full details on the material, Equipment, sequence and method proposed for prefabricated vertical drain installation to the Engineer for review at least 14 Calendar Days before beginning trial prefabricated vertical drain installation.

(c) Trial Installation - Before production installation of prefabricated vertical drains, demonstrate that material, Equipment and methods produce a satisfactory installation, at permanent installation sites. Install at least 5 trial drains totaling approximately 250 feet at locations designated.

(d) Production Installations - The Engineer's approval of the method or Equipment used to install the trial drains does not necessarily constitute acceptance for the remainder of the Project. If at any time the Engineer determines that the method of installation or Equipment does not produce satisfactory prefabricated vertical drains, alter the method or Equipment as directed to comply with the Plans and Specifications.

(e) Installation Procedure - Prefabricated vertical drains will be located, numbered and staked by the Engineer.

- Preserve stakes and protect field instrumentation Equipment. Stakes and instrumentation damaged by the Contractor will be repaired or replaced by Agency forces. The cost of repair or replacement is deducted from monies due the Contractor. Do not work in the affected area until repair or replacement has been made.
- Locate the prefabricated vertical drains within 6 inches of the staked locations. Prefabricated vertical drains more than 6 inches from the staked locations, damaged or improperly installed, are rejected and abandoned in place without payment. Replace rejected drains at no additional cost to the Agency.
- Install prefabricated vertical drains in the presence of the Engineer's representative.
- Provide the Engineer with a suitable means to determine the depth of the drains at any time during installation and the final length installed at each location.
- Plumb Equipment for installing prefabricated vertical drains before installing each drain. Do not deviate from the vertical more than 0.2 foot in 10 feet during installation of the drains.

- Install prefabricated vertical drains using a mandrel or sleeve inserted into the Soil using a continuous push static weight or vibration at a rate between 0.5 and 2 feet per second while keeping disturbance of the subsoil to a minimum. Installation by driving will not be allowed. Jetting techniques are allowed only after receiving written approval from the Engineer.
- Install the prefabricated vertical drains from the designated working surface to the depth shown or as directed.
- Perform the installation without damaging the drain while advancing or retracting the mandrel or sleeve. Alternately raising or lowering the mandrel while advancing will not be allowed. Retract the mandrel or sleeve after each drain is installed. Raising the mandrel is allowed only after completing a drain installation.
- Cut off completed prefabricated vertical drains neatly 1 foot above the designated working surface.

(f) Obstruction Clearance Procedures - Satisfactory installation may require clearing man-made or natural obstructions that prevent the proper insertion of the mandrel or sleeve and installation of prefabricated vertical drains.

Where obstructions are encountered:

- Immediately notify the Engineer before completing the drain and before installing other drains.
- Upon the Engineer's approval, attempt to install a drain adjacent to the obstructed location.
- Based on the results of this attempt and when directed, attempt to install a second offset drain within 2 feet horizontally of the obstructed drain, or if directed, implement obstruction clearance procedures and install the drain at the specified location.

The Contractor may use augering, spudding or other approved methods to loosen the Soil and remove any obstruction material before installing prefabricated vertical drains. Do not penetrate more than 2 feet into the underlying compressible Soil.

If augering, use augers with a minimum outside diameter equal to the largest horizontal dimension of the mandrel sleeve, shoe or anchor, whichever is greatest. Provide augers with the maximum outside diameter of the auger not more than 3 inches greater than the minimum outside diameter.

00435.41 Splicing - Splice prefabricated vertical drain material by stapling to ensure structural and hydraulic continuity of the drain. Overlap the jacket and core a minimum of 6 inches at each splice.

A maximum of one splice per drain installed is allowed.

Measurement

00435.80 Measurement - The quantities of prefabricated vertical drains and obstruction clearance will be measured on the length basis as follows:

(a) Prefabricated Vertical Drains - The length of drains will be the distance the installation mandrel tip penetrates below the specified surface plus the required cutoff length above the designated working surface.

(b) Obstruction Clearance - The length of obstruction clearance will be the length from the designated working surface at the time of installation to the depth penetrated by the auger or spud, or if directed, to the bottom of the obstruction.

Obstruction clearance will be measured for payment only when authorized by the Engineer.

Payment

00435.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Prefabricated Vertical Drains	Foot
(b) Obstruction Clearance	Foot

Item (a) includes trial installations and splices.

Item (b) includes pre-augering, spudding or performing other acceptable methods to clear obstructions so that prefabricated vertical drains may be satisfactorily installed, including disposing of any surplus preaugered or obstruction clearance materials.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Unacceptable trial drain installations
- Drains that are not installed and anchored to the required depth
- Clearing obstructions caused by the Contractor or obstructions within 2 feet of the specified surface
- Prefabricated vertical drains placed in excess of the designed length unless additional lengths are directed by the Engineer
- Prefabricated vertical drains installed more than 6 inches from the staked location, damaged or improperly installed

SP00440 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-29-26)**

SECTION 00440 - COMMERCIAL GRADE CONCRETE

Insert Project Name Here

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00440 of the Standard Specifications modified as follows:

00440.11 Proportions . Replace the paragraph that begins "Furnish, in writing to the Engineer ..." with the following paragraph:

Provide, in writing to the Engineer, the proportions by weight of the following Materials before using any CGC:

00440.12 Properties of Commercial Grade Concrete - Replace the bullet that begins "Entrained Air..." with the following bullet:

- **Entrained Air** - 4.0 to 7.0 percent
 - Entrained air not required for precast elements utilizing dry cast mix designs.

00440.13 Field-Mixed Concrete . Replace the paragraph that begins "CGC Work items listed in 00440.14(a)..." with the following paragraph:

CGC Work items listed in 00440.14(a) may be field-mixed conventionally, or by volumetric/mobile mixers according to ASTM C685. When approved, concrete sidewalks, concrete curb ramps, concrete driveways, and other flat concrete surfaces may be field-mixed using volumetric/mobile mixers according to ASTM C685, request approval prior to placement. For all other CGC applications, submit written request to the Engineer for approval to use volumetric/mobile mixers according to ASTM C685 at least 21 Days prior to placement.

00440.14(a) General . Replace the paragraph that begins "Acceptance sampling..." with the following paragraph:

Acceptance sampling and testing is based on tests performed by the Contractor's QCT from samples obtained at the site of placement from the discharge of the delivery vehicle.

00440.40(b) Placing . Replace the paragraph that begins "Place CGC..." with the following paragraph:

Place CGC according to the appropriate Sections where CGC is required and the following:

00440.40(c) Forms . Replace the paragraph that begins "Provide forms for CGC ..." with the following paragraph:

Provide forms for CGC according to the appropriate Sections where CGC is required and best common practices. Place to the lines and grades shown or directed.

00440.40(e) Curing - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Cure CGC for a minimum of 7 Calendar Days by one of the following methods:

- Cover with wet burlap, canvas, Sand, or other acceptable Material, and keep moist.
- Apply curing compounds at a rate of not less than 1 gallon per 150 square feet. Do not use on surfaces that come into contact with adjacent pours and avoid overspray on exposed reinforcement. Use curing compounds according to the following:

Table 00440-1

Section	Item	Type 1 or 1-D (Clear)	Type 2 (White-Pigmented)
00480	Drainage Curbs	*	*
00599	Slope Paving Curbs and Berm Paving	Yes	No
00759	Walks, Curb Ramps, Driveways, Surfacing, Curbs, and Islands	*	*

*Use Type 2 except when the Engineer requires Type 1 or 1-D

SP00442 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP02010, SP02020 & SP02030)

SECTION 00442 - CONTROLLED LOW STRENGTH MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00442 of the Standard Specifications modified as follows:

00442.01 Definition - Replace this subsection, except for the subsection number and title, with the following:

Controlled low-strength material is highly flowable lean concrete mix; that may contain cement, supplementary cementitious material, Fine Aggregates, water and chemical admixtures, if necessary.

00442.10 Materials - Replace this subsection, except for the subsection number and title, with the following:

Furnish Materials meeting the following requirements:

Cement.....02010
Chemical Admixtures02040

Insert Project Name Here

Supplementary Cementitious Materials..... 02030
Water..... 02020

00442.12 Proportioning of CLSM Mixture - Replace this subsection, with the following subsection:

00442.12 Submittals - Provide the following, to the Engineer, prior to using any CLSM on the Project:

- Proposed mix design proportions by weight and volume.
- 28-Day compressive strength test reports from trial batch or field data.

00442.13 Compressive Strength - Replace this subsection, except for the subsection number and title, with the following:

Furnish CLSM attaining a 28-Day compressive strength of 100 psi - 200 psi.

00442.14 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is based on the Engineer's review and approval of the documentation required by 00442.12, and visual inspection during placement.

SP00443 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP02010, SP02011, SP02020 & SP02030)

(Use this Section when a faster setting CLSM is appropriate and future excavation is not likely. If this RSCLSM specification is used in place of 00442 or used as an additional option for some other backfill application (does not currently reference 00442), be sure to obtain the appropriate Technical Resource's approval to allow this RSCLSM and to modify their specific specification. Document the Technical Resource's approval on the Project Specific Special Provision form.)

SECTION 00443 - RAPID SETTING CONTROLLED LOW STRENGTH MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00443 is not a Standard Specification and is included in this Project by Special Provision.

Insert Project Name Here

Description

00443.00 Scope - This Work consists of furnishing and placing rapid setting controlled low strength materials (RSCLSM).

00443.01 Definition - RSCLSM is flowable mixture of Sand, cementitious materials, water, and additives.

00443.02 Submittals - Provide the following to the Engineer, before using RSCLSM:

- Mix design showing all proportions and additives.
- Time and unconfined compressive strength data using concrete pocket penetrometer from a trial batch or from a previous installation that used a RSCLSM mixture of similar proportioning.

Materials

00443.10 Materials - Furnish Materials meeting the following:

Chemical Admixtures	02040
Supplementary Cementitious Materials	02030
Portland Cement	02010
Rapid Hardening Hydraulic Cement	02011
Water	02020

00443.11 Fine Aggregates - Furnish Fine Aggregates that are commercial quality concrete Sand.

00443.12 RSCLSM Mixture - Furnish a RSCLSM mixture that achieves at least 500 psi, measured by concrete pocket penetrometer, within 5 hours of placement.

00443.13 Acceptance - Acceptance is based on the Engineer's review of the mix design and checked by visual observation and concrete pocket penetrometer after placement.

Measurement

00443.80 Measurement - No measurement of quantities will be made for RSCLSM.

Payment

00443.90 Payment - No separate or additional payment will be made for RSCLSM. Payment will be included in payment made for the appropriate items under which this Work is required.

SP00444 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02010, SP02020 & SP02030)

SECTION 00444 - LOW DENSITY CELLULAR CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00444 is not a Standard Specification and is included in this Project by Special Provision.

Description

00444.00 Scope - This Work consists of furnishing, placing, and testing Low Density Cellular Concrete at the locations shown.

00444.01 Abbreviations and Definitions:

(a) Abbreviations:

LDCC - Low Density Cellular Concrete
SCM - Supplementary Cementitious Materials
SSD - Saturated Surface Dry
w/cm Ratio - Water-Cementitious Material Ratio

(b) Definitions:

Low Density Cellular Concrete - Concrete made with hydraulic cement, water, and foaming agents, and may include fly ash, chemical admixtures, and other Materials. LDCC is flowable at the time of placement and has a maximum cast density of 50 pounds per cubic foot.

00444.04 Required Submittals - Submit the following information for each LDCC mix design at least 21 Calendar Days before beginning LDCC placement:

(a) LDCC Placement Plan - Include the following:

- LDCC installation sequence, including production rates, hose or pipe lengths and sizes, depths of lifts, temporary bulkhead locations, and other relevant details
- If the depth of any lift exceeds 2 feet, a written letter of certification from the foaming agent manufacturer stating that the depth of lift may be increased to the maximum depth of lift used. According to 00444.40(d), do not exceed 4 feet of depth for a single lift.
- Confinement methods required to contain concrete Materials, debris, and other products from contacting sensitive environmental areas, according to Section 00290 and applicable regulatory permits

Insert Project Name Here

- A list of proposed mixing and pumping Equipment to be used on the Project and setup locations
- Maximum length of piping run used on a completed project using similar Equipment
- Form types and locations for LDCC installation

(b) LDCC Mix Design - Include the following for each LDCC mix design:

(1) Supplier Information - Supplier's unique mix design identification number and batch plant location

(2) Foaming Agent Manufacturer's Certification - Written certification from foaming agent manufacturer indicating approval of mix design constituents

(3) Proportions:

- Weight per cubic yard (pounds per cubic yard) of cement, SCM, mix water, and chemical admixtures
- Absolute volumes of cement, SCM, mix water, air content, and chemical admixtures
- Dosage rates for chemical admixtures (ounces per cubic yard)
- w/cm Ratio including all chemical admixtures

(4) Cement - For each cement used, provide the following:

- Manufacturer
- Brand name
- Type
- QPL Product number
- Source or location plant

(5) SCM - For each SCM used, provide the following:

- Manufacturer
- Brand name
- Source
- QPL Product number
- Class

(6) Chemical Admixtures - For each admixture used, provide the following:

- Manufacturer
- Brand name
- QPL Product number

(7) Water - Identify the source of water to be used and provide a certificate of compliance certifying that the water meets the requirements of 02020.10.

(8) Trial Batch Compressive Strength Test Results - Report the individual test results and the ASTV of cylinders from the trial batch for new mix designs. For current designs, provide the individual tests and the average of the cylinder sets presented for evaluation.

(c) Personnel:

- **Quality Control Personnel** - Provide the name and certification number of the CCT who prepared the mix design, the QCT who cast the test cylinders, the laboratory where the cylinders were tested, and the CSTT who tested the cylinders.
- **LDCC Personnel Qualifications** - Provide a list identifying the on-site supervisors and mixing operators assigned to the Project, and their relevant experience. Provide on-site supervisors that have at least 2 years' experience directly supervising the placement of LDCC, with responsibility for on-site construction operations. Provide mixing operators that have at least 1 years' experience in the use of LDCC.
- **LDCC Contractor Experience** - Submit a project reference list of at least 3 separate LDCC projects similar in scope and scale to the Project, successfully completed in the last 5 years', involving placement of LDCC in quantities roughly equivalent with the quantities for this Project. For each project listed, include a brief description of each project and the owner's contact person's name and current phone number.

The Engineer will respond to the LDCC submittals within 21 Calendar Days after receipt of all information. Provide any additional information and submit a revised plan, if requested, for approval. All procedural approvals given by the Engineer are subject to trial in the field and will not relieve the Contractor of the responsibility to satisfactorily complete the work. Submit request for modification of approved procedures to the Engineer and allow 21 Calendar Days for approval of modifications. Do not begin LDCC placement until all submittals have been approved.

Materials

00444.10 Materials - Furnish Materials meeting the following requirements:

Chemical Admixtures	02040
Portland Cement	02010
Supplementary Cementitious Materials.....	02030
Water.....	02020

00444.11 Chemical Admixtures - When required by mix design, furnish chemical admixtures for accelerating, water reducing, and other specific properties may be used when approved by the foaming agent manufacturer.

00444.12 Portland Cement - When required by mix design, furnish portland cement that has been approved by the foaming agent manufacturer.

00444.13 Supplementary Cementitious Materials - When required by mix design, furnish SCM that have been approved by the foaming agent manufacturer.

Insert Project Name Here

00444.14 Foaming Agent - Furnish, use, and test foaming agent according to ASTM C869 and ASTM C796.

00444.15 Properties of LDCC - Furnish a mixture with uniform composition and consistency, that will produce the properties shown below, at point of placement, according to the LDCC Class shown:

Table 00444-1

	Class				
	I	II	III	IV	V
Maximum Cast Density (pcf)	24	30	36	42	50
Minimum Compressive Strength at 28 Days (psi)	10	40	80	120	160

00444.16 Quality Control - Maintain quality control according to Section 00165 and this Section.

Labor

00444.30 Personnel Qualifications - Provide on-site supervisors and mixing operators who meet the experience requirements of 00444.04(c).

Provide technicians having CSTT and QCT technical certifications.

Construction

00444.40 Installation - Place the Material according to the Specifications and the foaming agent manufacturer's recommendations.

(a) Placement Conditions - Do not place LDCC when the ambient temperature is lower than 35 °F or when the ambient temperature is expected to be less than 35 °F within 24 hours of placement.

Do not place LDCC when the ambient temperature is higher than 95 °F or is expected to be higher than 95 °F within 24 hours of placement.

Do not place LDCC when it is actively raining. If precipitation occurs during the placement, cover the LDCC with plastic sheeting or other approved methods.

(b) Mixing - Mix LDCC according to the foaming agent manufacturer's specification. Do not mix LDCC in excess of the foaming agent manufacturer's recommendations.

(c) Pre-placement Inspection - Inspect the area and remove all deleterious Material and standing water. Remove crushed or broken LDCC from prior lifts as directed. Ensure that bulkheads are strong enough to retain the LDCC during placement. Tie down or otherwise secure Material that is covered with LDCC to ensure that it remains in place within the LDCC and does not float.

Insert Project Name Here

(d) Placing - Avoid excessive handling of the LDCC. Unless otherwise shown, place LDCC in lifts not to exceed 4 feet in depth with the final surface elevation within 0.1 foot of the elevation shown.

Do not drive on or place loads on the LDCC until the LDCC has attained the minimum compressive strength shown in Table 00444-1 or 20 psi, whichever is less.

Remove and replace, at no cost to the Agency, Material that does not conform to the Specifications.

00444.41 Water Removal System - . Provide a water removal system that remains in operation until the final LDCC lift has been placed and accepted and ensure that no flowing or standing water comes into contact with the LDCC.

00444.42 Quality Control Testing - During placement of the LDCC, perform hourly wet-cast density tests and adjust the mix as necessary to maintain the specified cast density.

At 2-hour intervals, take cylinder specimens for compressive strength testing. Test compressive cylinder specimens according to ASTM C495.

LDCC not meeting the requirements of 00444.15 is rejected.

Provide the Engineer with daily reports, including cast density reports, within 24 hours of sampling. Provide the Engineer with a final report detailing compression testing and cast density results. Submit final report within 30 Calendar Days after the last LDCC placement.

(Use only one of the following options as instructed below. Delete the option that does not apply.)

[Option 1 - Use the following subsections .80 and .90 when LDCC will be measured on the lump sum basis.]

Measurement

00444.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

The estimated quantities of Low Density Cellular Concrete are:

(List the estimated quantities of LDCC.)

Type and Class

Quantity (Cu. Yd.)

Payment

00444.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Low Density Cellular Concrete, Class _____".

Insert Project Name Here

[Option 2 - Use the following subsections .80 and .90 when LDCC will be measured on the volume basis.]

Measurement

00444.80 Measurement - LDCC will be measured on the volume basis. Measurement will be limited to the Neat Lines shown or directed.

Payment

00444.90 Payment - The accepted quantities of Low Density Cellular Concrete will be paid for at the Contract unit price, per cubic yard, for the item "Low Density Cellular Concrete, Class _____".

The class of the LDCC is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Required submittals, testing, or test reports
- Curing, joint filler, admixtures and other similar items
- Additional LDCC placed outside the Neat Lines shown

SP00445 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP02410, SP02415, SP02420 & SP02510

Requires SP00405 if sawcutting is required or for pipes under 72 inches

May require SP00510 for pipes over 72 inches.

Requires SP01120 when irrigation pipe is required.

Requires SP02440 when gaskets are required)

(This Section requires SP00415 when constructing new runs or extensions of sanitary sewer, storm sewer, or culvert pipes with any joints, including where the new pipe meets existing pipe or manhole. When SP00415 is used, ensure that a video pipe inspection pay item is included under 00415.90 and in the schedule of items.)

SECTION 00445 - SANITARY, STORM, CULVERT, SIPHON, AND IRRIGATION PIPE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Comply with Section 00445 of the Standard Specifications modified as follows:

00445.02 Contractor's Options - Replace the paragraph that begins "If the Contractor has an option ..." with the following paragraph:

If the Contractor has an option of using different kinds of pipe, the option and its installation and other limits are as shown or on the Pipe Data Sheet.

00445.03 Size Determination - Replace this subsection, except for the subsection number and title, with the following:

The nominal size of pipe is determined according to AASHTO tolerances for pipe dimensions for the appropriate kind or class of pipe.

00445.10 General - Replace this subsection, except for the subsection number and title, with the following:

Furnish appropriate certification from the manufacturer or fabricator, based on the manufacturer's quality control tests, that the Materials used in the production of the pipe meet the Specifications. Materials and strength are as specified for the particular kind of pipe and fittings required.

Use flexible elastomeric gasket Joints on all pipes and fittings. Furnish caps or plugs with each fitting, outlet or stub as required, with the same type of gasket or Joint as the pipe.

For sanitary sewers provide tee or wye fittings in the main of the same Materials as the pipe. Furnish fittings of sufficient strength to withstand all handling and load stresses encountered. Furnish Material joining the fittings to the pipe that is free from cracks and that adheres tightly to each joining surface.

Cap or plug all fittings and provide with gaskets of the same Material as used in the pipe Joint. Fit with an approved mechanical stopper or install an integrally cast knockout plug. Provide a cap or plug capable of withstanding test pressures without leaking and, when later removed, permits continuation of piping with jointing similar to Joints in the installed line.

00445.11(a) Pipe Anchors - Replace this subsection, except for the subsection number and title, with the following:

Use pipe anchors according to the Standard Drawings and as shown. Furnish metal bands according to the material Specifications for the Metal pipe that they are attached to.

00445.11(b) Slip Joints - Replace this subsection, except for the subsection number and title, with the following:

Construct slip Joints according to the details shown. Furnish the outer sleeve and tapered section according to the material Specifications for the Metal pipe that they are installed with.

00445.11(c) Safety End Sections - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Use safety end sections according to 02420.10 and the Standard Drawings. Provide safety bars unless otherwise shown.

00445.11(e) Tracer Wire - Replace this subsection, except for the subsection number and title, with the following:

Use 12-gauge stranded or solid copper insulated high molecular weight polyethylene (HMW-PE) tracer wire or 12-gauge copper clad steel reinforced insulated HMW-PE tracer wire. Use a green, minimum 45 mil thick HMW-PE insulated cover. Use a tracer wire that is UL rated for 140 °F.

00445.11(f) Fittings for Concrete Pipe - Replace this subsection, except for the subsection number and title, with the following:

Where fittings are fabricated by inserting a stub into a hole cut in the pipe, grout with a non-shrinking grout. Coat surfaces to receive grout with an epoxy bonding agent prior to grouting. Do not allow fitting stubs to protrude inside of the sewer pipe.

00445.40(b) Line and Grade - Replace the paragraph that begins "Centerline and grade control ..." with the following paragraph:

Centerline and grade control is established prior to the start of construction and the Special Provisions will indicate if the Agency or the Contractor establishes the control.

Replace the paragraph that begins "Do not vary from established ..." with the following paragraph:

Do not vary from established line and grade by more than 1/32 inch per inch of pipe diameter or 1/2 inch for pipe diameter of 16 inches or longer, subject to the following limitations:

00445.40(d) Laying Pipe on Curves - Replace this subsection, except for the subsection number and title, with the following:

Lay pipe on horizontal or vertical curves as shown or approved. When deflecting the pipe from a straight line, either in the vertical or horizontal plane, or when long radius curves are shown, do not exceed the amount of deflection allowed by the pipe manufacturer.

00445.40(f) Installation of Sanitary Sewer Service Tees and Wyes - Replace the paragraph that begins "The maximum line or ..." with the following paragraph:

Accomplish line or grade changes with fittings and long radius curves or bends. Do not exceed 45 degrees line or grade change with any one fitting.

00445.43(a) General - Replace the paragraph that begins "Lay pipe proceeding upgrade ..." with the following paragraph:

Lay pipe proceeding upgrade with spigot ends in the direction of flow. Assemble Joints according to the recommendations of the manufacturer for the type of Joint used. Furnish a trench bottom that has a continuous and uniform bearing and support for the pipe at every point between Joints.

Insert Project Name Here

Replace the paragraph that begins "Prevent excavated or other ..." with the following paragraph:

Prevent excavated or other foreign material from getting into the pipe. Plug or close off pipes that are stubbed off for future connection. When cutting or machining of the pipe is necessary, use only the tools and methods recommended by the pipe manufacturer. Furnish field Joints that:

00445.43(d) Polyethylene Pipe - Replace this subsection, except for the subsection number and title, with the following:

Install solid-wall HDPE and corrugated polyethylene pipe and fittings according to the manufacturer's recommendations.

Assemble and join solid-wall HDPE pipe at the site using the thermal butt fusion method to provide a leak-proof Joint. Threaded or solvent-cement Joints are not allowed. Use Equipment and procedures in strict compliance with the manufacturer's recommendations. Use personnel certified as fusion technicians by the manufacturer of the pipe or fusing Equipment to accomplish the fusing.

Provide Joints for corrugated polyethylene pipe made with either plain end or bell-and-spigot coupling.

00445.43(f) Polypropylene Pipe - Replace the paragraph that begins "When the ambient air ..." with the following paragraph:

When the ambient air temperature is less than 10 °F, do not install, move, cover, bury, or otherwise handle the polypropylene pipe. All polypropylene pipe handled at temperatures below 10 °F is rejected and not allowed to be used on the Project.

00445.44 Strutting Metal Pipe - Replace this subsection, except for the subsection number and title, with the following:

When the Plans or Special Provisions call for Metal pipe to be installed in a tied or strutted condition, place the ties or struts before backfilling, according to the details shown. Strutting with timber is not allowed in pipe furnished with paved inverts or with centrifugally applied bituminous inner linings. Remove the ties and struts after the embankment over the pipe is completed and compacted.

00445.47 Contact Surfaces, Aluminum to Concrete - Replace the paragraph that begins "Where uncoated aluminum ..." with the following paragraph:

Where uncoated aluminum pipe or aluminum coated steel pipe is touching portland cement concrete, give the contact surfaces of the pipe a coating of asphalt mastic applied at a rate that will give a minimum dry film thickness of 50 mils.

00445.71(a) General - Replace this subsection, except for the subsection number and title, with the following:

Provide storm gravity sewer systems, sanitary gravity systems, siphon systems and irrigation systems and appurtenances that successfully pass a hydrostatic or air test prior to

Insert Project Name Here

acceptance and are free of visible infiltration of water. Test manholes as specified in Section 00470.

On pipe 30 inches in diameter and larger, individual Joints may be tested by an approved Joint testing device. Submit all testing procedures and details for review by the Engineer.

00445.71(c) Testing Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide all necessary testing Equipment and perform the tests in a manner that provides observable and accurate measurements of either air or water leakage under the specified conditions. Calibrate and certify gauges at the direction of the Engineer. Provide the certification with the gauge.

00445.72(a) General - Replace the paragraph that begins "The method, Equipment ..." with the following paragraph:

Submit the method, Equipment and personnel used in testing for approval by the Engineer. The Engineer may, at any time, require a calibration check of the instrumentation used.

00445.72(a)(1) Safety Precautions - Replace this subsection, except for the subsection number and title, with the following:

Only qualified personnel are allowed to conduct the test. Furnish plugs used to close the system for the testing that are capable of resisting the expected internal pressures. Securely brace plugs, if necessary.

00445.72(b) Exfiltration Leakage Testing - Replace this subsection, except for the subsection number and title, with the following:

Prior to the exfiltration leakage test, the pipe test section may be filled with clear water to permit normal absorption into the pipe walls. Keep the test pipe section saturated for a minimum of 4 hours. After the absorption period, refill the pipe to the required test head.

Exfiltration leakage of more than 0.04 gallons per hour per inch diameter per 100 feet of pipe is unacceptable, except 0.3 gallons per hour, per inch per 100 feet may be used in arid climate zones if approved by the Engineer. The minimum hydrostatic head for testing is a minimum 6-foot water column above the crown of the highest section of pipe including service connections or exceed the maximum estimated groundwater level. The Engineer will make the final decisions regarding test height for the water in the pipe section.

Limit the length of pipe tested by exfiltration so that the pressure on the invert of the lower end of the section does not exceed 16 feet of water column. Account for all service connection footage for computing allowable leakage.

00445.72(c) Air Testing - Replace the paragraph that begins "The pressure gauge ..." with the following paragraph:

Provide a pressure gauge for use in air testing having minimum divisions of 0.1 psi and an accuracy of 0.0625 psi. All air testing is by the time pressure drop method. The test procedure is as follows:

00445.72(c)(2) Replace this subsection, except for the subsection number, with the following:

Determine the average height of the groundwater over the line. Increase the required test pressures by 0.433 psi for each foot of average water depth over the exterior crown of the pipe.

00445.72(c)(6) Replace the paragraph that begins "For air permeable Materials ..." with the following paragraph:

For air permeable Materials (concrete & clay) the tested section is acceptable if the time recorded in paragraph (6) above is not less than the time in seconds (T) computed by the formula:

Replace the paragraph that begins "C = the sum of the ..." with the following paragraph:

C = the sum of the computations (0.0003882 dL) for each size of pipe and its length in the section, except that the minimum value for C is 1

Replace the paragraph that begins "For non-air permeable pipe ..." with the following paragraph:

For non-air permeable pipe (Metal, PVC, HDPE, ABS composite), the section tested is acceptable if the time recorded in (6) above is not less than the time determined by the following equation.

00445.72(d)(1) General - Replace this subsection, except for the subsection number and title, with the following:

The Contractor may test each individual Joint for leakage using a pneumatic Joint testing apparatus. The method, Equipment and personnel used in individual Joint testing is as approved. The Engineer may, at any time, require a calibration check of the instrumentation used. Use a pressure gauge having minimum divisions of 0.1 psi and have an accuracy of 0.0625 psi. Pass all air used through a single control panel.

00445.72(d)(2) Method - Replace this subsection, except for the subsection number and title, with the following:

All air testing is by the time pressure drop method. The test procedure is as follows:

- a. Determine the average height of the groundwater over the line. Increase the test pressures required below by 0.433 psi for each foot of average water depth over the exterior crown of the pipe.
- b. Add air slowly to the section being tested until the internal air pressure is raised to 4 psi greater than the average backpressure due to groundwater.

00445.72(d)(3) Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

The Joint is considered acceptable if the pressure drops less than 1 psi within 5 seconds.

00445.75 Repairs - Replace the paragraph that begins "Following a successful ..." with the following paragraph:

Following a successful hydrostatic or air test, visible infiltration of groundwater in any section is considered evidence that the original test was in error or that failure of the section has occurred. Correct such failures and retest the repaired sections, at no additional cost to the Agency.

00445.91 Payment - Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

In item (a), the nominal pipe diameter is inserted in the first blank. The type of pipe is inserted in the second blank. The appropriate flow line depth range is inserted in the third blank.

Replace the paragraph that begins "In item (b), the nominal pipe ..." with the following paragraph:

In item (b), the nominal pipe diameter is inserted in the first blank. For arch type pipe, the nominal diameter of circular Metal pipe from which the pipe arch is formed, or reformed, is inserted in the first blank. The type of pipe is inserted in the second blank.

Replace the paragraph that begins "In items (c) and (d) ..." with the following paragraph:

In items (c) and (d), the nominal pipe size is inserted in the blank.

Replace the paragraph that begins "In item (e), the ..." with the following paragraph:

In item (e), the outer sleeve slip Joint size is inserted in the blank. The inner sleeve will be included in payment made for the smaller pipe.

Replace the paragraph that begins "In item (f) and (g)..." with the following paragraph:

In items (f) and (g), the nominal pipe diameter is inserted in the blank.

Replace the paragraph that begins "In item (h), the ..." with the following paragraph:

In item (h), the type of pipe slope anchor is inserted in the first blank and the nominal pipe diameter is inserted in the second blank.

Replace the paragraph that begins "In item (i), the ..." with the following paragraph:

In item (i), the nominal pipe diameter is inserted in the blank.

Replace the paragraph that begins "In item (m), the ..." with the following paragraph:

In item (m) the nominal pipe diameter is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00446 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-22-26

Requires SP00440)

SECTION 00446 - TRENCH DRAINS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Use the following lead-in paragraph when none of the following subsections are included in the Project.)

Comply with Section 00446 of the Standard Specifications.

(Use the following lead-in paragraph when any of the following subsections are included in the Project.)

Comply with Section 00446 of the Standard Specifications modified as follows:

(Use the following subsection .01 when Type 2 or 3 Trench Drains are required. Type 3 Trench Drains are used when any part of the drain is constructed in a walkway, shared use path, pedestrian circulation zone or pedestrian access route.)

00446.01 Definitions – Replace this subsection, except for the subsection number and title, with the following:

Type 1 Trench Drain - A trench drain installation where any part is constructed in a Traveled Way.

Type 2 Trench Drain - A trench drain installation that is constructed in a paved Shoulder and not within a Pedestrian Accessible Route.

Type 3 Trench Drain - A trench drain installation where any part is constructed in a walkway, shared use path, pedestrian circulation zone or Pedestrian Accessible Route.

(Use the following subsection .11 when Type 3 Trench Drains are required.)

00446.11 Trench Drains - Add the following paragraph to the end of the subsection:

Furnish the following Type 3 Trench Drains:

Insert Project Name Here

- PolyDrain – PD04, manufactured by ABT, Inc.
P.O. Box 837, 259 Murdock Road
Troutman, NC 28166
(704) 528-9806

00446.12 Frames and Grates – Replace the paragraph that begins "Provide Americans with Disabilities Act..." with the following paragraph:

Furnish Type 3 Trench Drains that comply with Americans with Disabilities Act requirements. Where grates are placed within the designated Pedestrian Accessible Route, provide grates without an opening that permits a 1/2-inch diameter sphere to pass through in any direction.

(Use the following paragraphs and bullets when Type 3 Trench Drains are required.)

Replace the sentence that begins "Provide Americans with Disabilities Act..."

Furnish Type 3 Trench Drains that comply with American with Disabilities Act requirements. Where grates are placed within the designated Pedestrian Accessible Route, provide grates without any opening that permits a 1/2-inch diameter sphere to pass through in any direction.

Add the following paragraph to the end of this subsection:

Furnish the following Type 3 Trench Drain grates:

- Ductile Iron ADA Heel Proof Slotted Grate, 2506, manufactured by ABT, Inc.
P.O. Box 837, 259 Murdock Road
Troutman, NC 28166
(704) 528-9806

00446.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of trench drains will be paid for at the Contract unit price, per foot, for the item "Trench Drain, Type _____".

The type of trench drain is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00450 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00440, SP02420, SP02430)

SECTION 00450 - STRUCTURAL PLATE SHAPED STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00450 of the Standard Specifications modified as follows:

00450.42(a) General - Replace the paragraph that begins "Assemble corrugated metal plates ..." with the following paragraph:

Assemble corrugated metal plates at the site of installation to the lines and grades shown or directed. Connect the plates at longitudinal and circumferential seams with bolts. Stagger joints so that no more than three plates come together at any one point. Curve each plate to one or more circular arcs as required, and according to 02430.10, to provide an assembled Structure of specified dimensions and design.

00450.42(b) Plate Thickness - Replace this subsection, except for the subsection number and title, with the following:

The thickness of the respective top, corner and bottom plates in any one Structure is as shown.

00450.44 Arch Substructures and Headwalls - Replace this subsection, except for the subsection number and title, with the following:

Rest each side of each arch in a groove formed in the concrete, or rest on a galvanized angle or channel securely anchored to or embedded in the Substructure. If the span of the arch is greater than 15 feet or the skew angle is more than 20 degrees, furnish a metal bearing surface having a width at least equal to the depth of the corrugation.

Furnish metal bearings at least 3/16 inch thick that are either rolled, structural, or cold-formed galvanized angles or channels. Anchor the horizontal leg securely to the Substructure on 24-inch centers or less. When the metal bearing is not embedded in a groove in the Substructure, punch one vertical leg and bolt to the bottom row of plates.

00450.48 Contact Surfaces, Aluminum to Concrete - Replace this subsection, except for the subsection number and title, with the following:

Where uncoated aluminum pipe is in contact with portland cement concrete, give the contact surfaces of the aluminum pipe a coating of asphalt mastic according to 00445.47.

00450.49 Work Quality - Replace the paragraph that begins "The following defects constitute ..." with the following paragraph:

The following defects constitute poor Work and the presence of any in an individual culvert plate or in a shipment is cause for rejection:

00450.90 Payment - Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

Insert Project Name Here

In item (a), the nominal size diameter of the pipe is inserted in the blank.

Replace the paragraph that begins "In items (b), (c), (d) and (e), the size ..." with the following paragraph:

In items (b), (c), (d) and (e), the size of the span and rise of the Structures is inserted in the applicable blanks.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00460 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP00440, SP02050 and SP02510)

SECTION 00460 - PAVED CULVERT END SLOPES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00460 of the Standard Specifications modified as follows:

00460.40 General - Replace the bullet that begins "Shape the Base where ..." with the following bullet:

- Shape the Base where the concrete is to be placed to the lines and grades established. Water and compact the areas before placing concrete.

00460.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00470 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-08-26
Requires SP00440, SP02410, SP02415,
SP02420, SP02450 & SP02510
Requires SP02440 when grout or joint material is required)

SECTION 00470 - MANHOLES, CATCH BASINS, AND INLETS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00470 of the Standard Specifications modified as follows:

00470.01 Cast-in-Place and Precast Construction - Replace this subsection, except for the subsection number and title, with the following:

Furnish concrete manholes that are cast-in-place or precast, as shown or specified. Concrete inlets and siphon boxes may be either cast-in-place or precast.

00470.11 Precast Concrete Manholes and Bases - Replace the paragraph that begins "Prior to delivery of precast ..." with the following paragraph:

Prior to delivery of precast manhole sections to the Project Site, yard permeability tests may be required at the point of manufacture. The precast sections to be tested are selected at random from the stockpiled Material to be supplied to the Project. Mat test all test specimens to meet the permeability test requirements of ASTM C497.

Replace the paragraph that begins "Precast manhole sections ..." with the following paragraph:

Furnish precast manhole sections that consist of circular sections in one of the following standard nominal inside diameters:

Replace the paragraph that begins "Heights of sections in ..." with the following paragraph:

Furnish heights of sections in multiples of 6 inches, except heights of manhole sections 72 inches through 96 inches in diameters are required to fit site conditions.

00470.12 Cap Screws - Replace this subsection, except for the subsection number and title, with the following:

Furnish cap screws and washers for watertight manhole covers that are stainless steel with 60,000 psi minimum tensile strength according to the requirements of ASTM A453.

00470.14 Pipe and Fittings - Replace this subsection, except for the subsection number and title, with the following:

Furnish pipe and fittings as specified and according to the applicable portions of Section 00445. Use tees, ells and other fittings for drop manholes made from the same material as the pipe connecting to the manhole.

00470.15 Pipe Stubouts for Future Sanitary Sewer Connections - Replace this subsection, except for the subsection number and title, with the following:

Furnish pipe stubouts that are the same type and strength classification as approved for use in the lateral, main or trunk sewer construction. Where there are two different classes of pipe at a manhole, the higher strength pipe will govern strength classification. Furnish watertight plugs with each stubout and adequately brace against hydrostatic or air test pressures.

00470.16 Sanitary Sewer Manhole Carry-Through - Replace this subsection, except for the subsection number and title, with the following:

Furnish ductile iron for all sanitary sewer carry-through pipes and fittings through storm sewer manholes according to Section 02420.

00470.40(b) Pipe Connections - Replace the paragraph that begins "Connect flexible pipe to manholes ..." with the following paragraph:

Connect flexible pipe to manholes using an adapter specifically manufactured for the intended service. Flexible pipe adapters are required to be watertight after installation. Follow the manufacturer's recommendations. Do not use field-fabricated water stops or improvised adapters. Anchor and finish adapters requiring the use of grout for installation using non-shrink grout according to 02440.50.

00470.43(b) Cast-in-Place Catch Basins and Inlets - Replace the paragraph that begins "Construct forms for both ..." with the following paragraph:

Construct forms for both the inside and outside walls of cast-in-place catch basins. Furnish forms that are tight and well braced, with chamfered corners. Remove all water and debris prior to placing concrete.

00470.47 Concrete Inlet Base Drains - Replace the paragraph that begins "Provide concrete inlets ..." with the following paragraph:

Furnish concrete inlets with base drains leading from abutting Aggregate base or selected granular backfill Material.

00470.48 Concrete Manhole Installation Requirements - Replace this subsection with the following subsection:

00470.48 Locator Posts - Construct locator posts as shown.

00470.71(a) Hydrostatic Testing - Replace this subsection, except for the subsection number and title, with the following:

Perform hydrostatic testing according to ASTM C497. Plug all inlets and outlets and fill the manhole with water. Fill each manhole to the rim at the start of the test. Leakage in each manhole exceeding 0.3 gallons per hour per foot of head above the invert is unacceptable. Determine leakage by refilling to the rim using a calibrated container. Manholes may be filled 24 hours prior to the time of testing to permit normal absorption into the manhole walls.

00470.90 Payment - Replace the paragraph that begins "In items (c), (d) and ..." with the following paragraph:

Insert Project Name Here

In items (c), (d) and (k) the type of Structure is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

SP00475 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00475 - DRAIN WELLS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Note: The Technical Resource must approve the use of SP00475 for all projects)

Section 00475 is not a Standard Specification and is included in this Project by Special Provision.

Description

00475.00 Scope - This Work consists of drilling 8-inch diameter drain wells, including furnishing and installing steel well casings, at the locations and to the depths shown, for the purpose of intersecting large voids in underlying Rock.

Materials

00475.10 Well Casing - Furnish NPS 8-inch, Schedule 40 black steel well casing pipe meeting the requirements of ASTM A53.

Construction

00475.40 General - Drill the drain wells at the locations and to the depths directed, before constructing manholes and inlets.

Test each drain well by running water into it to determine if the well has sufficient capacity. Furnish wells that have a capacity of at least 400 gallons per minute for 8 continuous minutes.

Measurement

Insert Project Name Here

00475.80 Measurement - The quantities of drain wells will be measured on the unit basis.

The quantities of drain wells deeper than 100 feet will be measured on the length basis, for the amount greater than 100 feet.

The quantities of steel well casings will be measured on the length basis.

Payment

00475.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) 8 Inch Drain Wells	Each
(b) Extra for 8 Inch Drain Wells Deeper Than 100 Feet	Foot
(c) NPS 8 Inch Steel Well Casing.....	Foot

Item (a) includes all costs involved in drilling 8-inch drain wells up to 100 feet in depth.

Item (b) includes all extra costs involved in drilling in excess 100 feet in depth. The Contractor will not be entitled to extra or additional payment if it is not necessary to drill deeper than 100 feet.

Item (c) includes all costs involved in furnishing and installing steel well casings.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for testing drain wells or for the water or other Materials used in the Work.

SP00480 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
Requires SP00440.
Requires SP00730 if emulsified asphalt tack coat is required
Requires SP00740 when commercial asphalt concrete pavement is required
Requires SP02440 if joint filler is required.)

SECTION 00480 - DRAINAGE CURBS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00480 of the Standard Specifications modified as follows:

Insert Project Name Here

00480.40 Preparation of Base - Replace this subsection, except for the subsection number and title, with the following:

Clean Pavements where drainage curbs are to be constructed so that they are free of dirt, dust, oil, grease or other extraneous matter.

00480.41(a) CGC Curbs - Replace this subsection, except for the subsection number and title, with the following:

Bond CGC curbs to underlying Pavements with an epoxy bonding agent from the QPL or according to 00480.10. Apply according to the manufacturer's recommendations and at a rate that provides a thorough coating to the surface with all voids and depressions filled. Place the new curb on the epoxy bonding agent within 15 minutes after spreading, or before it loses its tackiness, whichever is sooner.

00480.41(b) Asphalt Concrete Curbs - Replace the bullet that begins "An Emulsified Asphalt of ..." with the following bullet:

- An Emulsified Asphalt of the type designated by the Engineer and according to 00480.10. Apply Emulsified Asphalt at a rate of 0.05 to 0.10 gallons per square yard of curb. Place the new curb on the Emulsified Asphalt after the asphalt separates from the water (breaks), but before it loses its tackiness.

00480.42(b) Transverse Expansion Joints - Replace the paragraph that begins "Space expansion joints as ..." with the following paragraph:

Space expansion joints as shown. Construct the width of the joint and thickness of the filler to a minimum of 1/2 inch. Construct each expansion joint at right angles to the curb alignment, normal to the surface of the curb and provide complete separation of new concrete.

00480.44 Line and Grade - Replace this subsection, except for the subsection number and title, with the following:

Place a 12-foot straightedge on the top or face of curb. The curb surface is unacceptable if it varies more than 1/4 inch from the edge of the straightedge, except at grade changes or curves.

00480.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00490 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00440, SP02010, SP02450 & SP02510

Requires SP02440 when joint materials are required.

Requires SP02630 when base aggregate is required)

SECTION 00490 - WORK ON EXISTING SEWERS AND STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00490 of the Standard Specifications modified as follows:

00490.10 Materials - Add the following to the end of this subsection:

Portland Cement Concrete Repair Materials.....02015.20

00490.11 High Early Strength Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish high early strength concrete meeting one of the following requirements:

- Commercial Grade Concrete designed to achieve high early strength utilizing accelerating admixture from 02040.10, Type III cement from Section 02010, or rapid setting cement from Section 02011.
- A Portland cement concrete repair material from 02015.20, rapid setting or very rapid setting.

00490.40 General - Replace the paragraph that begins "Provide high early strength concrete ..." with the following paragraph:

Furnish high early strength concrete when shown, or when traffic is required to traverse the Structure due to staging requirements. The Engineer will determine the length of curing time.

Replace the paragraph that begins "New construction ..." with the following paragraph:

Provide new construction according to Section 00470.

Replace the paragraph that begins "Bypass pump sanitary ..." with the following paragraph:

Bypass pump sanitary sewer and stormwater flows around the pipe section or manhole being repaired or replaced by plugging an existing upstream manhole and pumping the flow around the Work to a downstream manhole. Submit a bypass pumping plan to the Engineer at least 48 hours before beginning bypass pumping. Use a pump with adequate capacity to handle existing flows and additional flow due to rain. Use a pump that does not exceed a noise level of 86 dB at a distance of 50 feet. Do not operate bypass pumps at night except in an emergency. Do not discharge raw sewage onto private property or city streets, or into storm drain systems.

00490.41(b) Manholes over Existing Rigid Pipe Sewers - Replace the paragraph that begins "Construct manholes over existing ..." with the following paragraph:

Insert Project Name Here

Construct manholes over existing rigid sewers after first cleaning and applying an approved commercial concrete bonding agent to all surfaces of the pipe that are in contact with the manhole.

00490.41(c) Manholes over Existing Flexible Pipe Sewers - Replace the bullet that begins "Apply a coating of PVC ..." with the following bullet:

- Apply a coating of PVC solvent to the pipe that is in contact with the manhole.

00490.41(d) Manhole Connections - Replace this subsection, except for the subsection number and title, with the following:

Core or sawcut openings in the existing manhole base or barrel as required. Construct connections that are watertight and that will provide a smooth flow into and through the manhole. Provide all sanitary sewer pipe connections, including those at invert level as well as penetrations for drop connectors, conduits and carry-throughs, according to Section 00470.

00490.43 Abandoning Pipe in Place - Replace the paragraph that begins "Drain abandoned pipes and ..." with the following paragraph:

Drain abandoned pipes and plug watertight. Plug abandoned pipes with gasketed mechanical plugs or grout seals, as directed. Where abandoned pipes connect to sewer manholes, install the plugs or seals from the inside of the manhole and reshape the channel according to the Standard Drawings.

(Use the following subsection .44 when filling abandoned pipes, manholes and catch basins.)

00490.44 Filling Abandoned Pipes, Manholes and Catch Basins - Replace this subsection, except for the subsection number and title, with the following:

Cap or plug all connecting pipes to manholes and catch basins that are scheduled to be abandoned. Remove the manhole cone or flat top and manhole sections, or the catch basin frame, to a minimum depth of 3 feet below finish grade and fill the remaining manhole barrel or catch basin with Granular Material meeting the requirements of 02630.10. Compact the Granular Material to 90 percent of maximum density according to AASHTO T 99. When in landscaped or unimproved Roadway sections, backfill with approved Materials meeting the requirements of 00330.13. Place Topsoil meeting the requirements of 00330.11 for the last 1 foot of backfill.

00490.45 Salvaging Manhole Frames, Covers and Grates - Replace the paragraph that begins "Remove manhole frames ..." with the following paragraph:

Remove manhole frames, covers and grates scheduled for salvage and store in an approved location. Frames, grates and covers meeting Specifications may be salvaged from Structures to be adjusted and may be reused in the Work if of suitable size and condition. Replace, at no additional cost to the Agency, all items damaged or lost by the Contractor with similar items that are comparable in all respects with those they are to replace, and that are adequate for the intended purpose.

Insert Project Name Here

00490.46(c) Raising Tops of Manholes - Replace the paragraph that begins "Do not exceed 24 inches ..." with the following paragraph:

Do not exceed 24 inches total distance from the top of the metal frame at its new adjusted grade to the top of the cone. Provide riser rings and repairs according to Section 00470. Extend manhole barrels of brick, block or concrete in kind.

00490.46(c)(1) Concrete Manholes - Replace the bullet that begins "Chip away the exposed ..." with the following bullet:

- Chip away the exposed top surface where new mortar or concrete is to be placed, to a depth of 1 1/2 inches or until firm concrete is exposed.

00490.49 Finish Grade - Replace this subsection, except for the subsection number and title, with the following:

Center a 12-foot straightedge, as nearly as practicable, over the center of the cover of manholes and boxes. The final grade of the Pavement surface and adjusted manholes and boxes is unacceptable if it varies more than 1/4 inch from the finish grade and Cross Section at any point along the straightedge.

00490.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00495 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26

Last updated: 06-08-26

Requires SP00641 when rock surfacing or aggregate base is required.

Requires SP00705 when emulsified asphalt prime coat is required.

Requires SP00710 when emulsified asphalt surfacing is required.

Requires SP00730 when emulsified asphalt tack coat is required.

Requires SP00735 when EAC is required.

Requires SP00744 or SP00745 when ACP is required.

Requires SP00756 when concrete paving is required.

Requires SP00759 when sidewalk, curbs or driveways are required.

Requires SP01030 when seeding is required.

Requires SP01040 when topsoil or planting/landscaping is required.

)

SECTION 00495 - TRENCH RESURFACING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All

Insert Project Name Here

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00495 of the Standard Specifications modified as follows:

00495.40(b) Emulsified Asphalt Concrete Paving - Replace this subsection, except for the subsection number and title, with the following:

When temporary Surfacing is required prior to placing permanent Surfacing, place EAC paving a minimum of 1 inch thick. Place temporary paving that is smooth with surface variations not greater than 1/2 inch from the Existing Surfacing. Ensure the joint between the temporary patch and existing surfaces is not greater than 1/4 inch high. Maintain the temporary Surfacing until the permanent Surfacing is placed. ACP mix may be used if approved.

00495.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00501 (Special Provisions for the 2024 Book)

**(Bidding on or after: 12-01-26
Last updated: 08-25-26)**

SECTION 00501 - BRIDGE REMOVAL

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00501 of the Standard Specifications modified as follows:

(Use the following subsection .00 to describe the location of the Bridge to be removed or portions of the Bridge to be removed. Delete (s) or parentheses as appropriate. Obtain information from the Bridge Designer.)

00501.00 Scope - Add the following paragraph(s) to the end of this subsection:

(Fill in the blank with the Structure information as described on the Plans and include the Structure number (e.g. BR####). When applicable, provide a description of what the Bridge is going over (roadway, waterway, etc). Copy and paste for multiple Structures.)

Remove (portions of) the existing bridge _____ as shown.

Insert Project Name Here

(Use the following lead-in paragraph and subsection .02 when plans are available for viewing. Obtain the Bridge Designer's approval to use.)

Add the following subsection:

00501.02 Plans - Plans of the existing Structure are available from the Engineer. Prints of these plans are available upon request.

(Use the following lead-in paragraph and subsection .03 when removing existing bridge items. Obtain information from the Bridge Designer.)

Add the following subsection:

00501.03 Submittals - Submit unstamped bridge removal plans according to 00150.35, _____ Calendar Days before beginning removal work.

Include the following information in the submittal:

- Removal sequence, including contractor staging and traffic staging.
- Detailed schedule of bridge removal work.
- Type of Equipment, including size and capacity.
- Equipment location during removal operations.

Do not begin bridge removal work until the bridge removal plans have been approved.

(Use the following lead-in paragraph and subsections .45 when salvaging existing bridge items. Obtain information from the Bridge Designer.)

Add the following subsection:

00501.45 Salvage - Salvage the following items and deliver them to _____ :

-
-

00501.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following lead-in paragraph and subsection .90 when salvaging existing bridge items. Obtain information from the Bridge Designer.)

Add the following to the end of this subsection:

The accepted quantities of salvaging and stockpiling portions of the existing bridge will be made at the Contract lump sum amount for the item "Extra for Salvaging and Stockpiling Bridge".

Insert Project Name Here

Payment includes removing, salvaging, and stockpiling portions of the existing bridge as shown and specified.

SP00503 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26)

Last updated: 06-01-26)

SECTION 00503 - BRIDGE DECK COLD PLANE PAVEMENT REMOVAL

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00503 of the Standard Specifications modified as follows:

00503.41 Surface Tolerance - Replace this subsection, except for the subsection number and title, with the following:

Test with a 12-foot straightedge furnished and operated by the Contractor, as directed. Ensure the variation of the top of the ridges from the testing edge of the straightedge, between any two ridge contact points, does not exceed 1/4 inch.

00503.43 Maintenance Under Traffic - Replace this subsection, except for the subsection number and title, with the following:

If the cold planed Pavement surface is exposed to traffic, sweep and clean prior to allowing traffic to use the Roadway.

00503.90 Payment - Replace the paragraph that begins "In items (a) and (b) ..." with the following paragraph:

In items (a) and (b), the depth is inserted in the blank. If the depth is variable, the depth range is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00504 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26)

Last updated: 07-22-26)

SECTION 00504 - CONCRETE DECK SURFACE PREPARATION

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00504 of the Standard Specifications modified as follows:

00504.01 Definitions: Replace this subsection with the following subsection:

00504.01 Definitions and Acronym:

(a) Definitions:

Bonded Membrane - A polymer or spray-on waterproofing membrane system that is fully or partially bonded to the concrete deck.

Class 1 Preparation - Deck surface preparation for a membrane or overlay system on an existing bridge deck, where the existing concrete is sound, and minimal concrete removal is required to reach sound concrete.

Class 2 Preparation - Deck surface preparation in areas that are determined by the Engineer to have Unsound Concrete that requires concrete removal beyond the limits of Class 1 Preparation.

Class 3 Preparation - Deck surface preparation in areas where concrete removal extends through the full thickness of the deck.

Fabric Membrane - A rolled or sheet waterproofing membrane system that is installed below or between layers of asphalt Pavement.

Unsound Concrete - Delaminated or otherwise deteriorated concrete identified by a deck delamination survey or during surface preparation operations.

(b) Acronym:

ICRI - International Concrete Repair Institute

00504.02 Submittals - Replace this subsection, except for the subsection number and title, with the following:

Submit the type of Equipment that is used for deck preparation to the Engineer for approval at least 21 Calendar Days before the pre-placement conference.

00504.21(a) Sawing Equipment - Replace the paragraph that begins “Furnish power-operated diamond grinding...” with the following paragraph:

Provide power-driven concrete saws adequate for sawing joints and for surface texture.

Insert Project Name Here

00504.21(b) Scarifying Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide power-operated diamond grinding, micro-milling, or shot blasting scarifying Equipment capable of uniformly removing the existing surface to depths required.

(1) Diamond Grinding - Provide power-driven self-propelled machines with the cutting head made up of diamond cutting blades.

(2) Micro-milling - Provide cold plane or rotomill grinding machines using carbide cutting tools on a rotary drum. Provide Equipment with tooth spacing of not more than 1/4 inch, capable of leaving a smooth, uniform pattern of striations. Limit machines to a gross operational weight of no more than 35 Tons and a forward speed to 2.5 feet per minute. Operate at a drum speed of at least 120 RPM.

(3) Shot-blasting - Provide mono-directional or bi-directional shot blast machines with single or multiple blast wheels that conform to EPA air pollution requirements by containing dust and steel abrasive media and that can prepare concrete surfaces according to *ICRI Technical Guideline No. 310.2R*, to the project specific Concrete Surface Profiles (CSP) profile. Furnish type S-330 or larger diameter shot. If the Equipment is not equipped for simultaneous bi-directional blasting, make separate passes in opposite directions to ensure equal cleaning on all sides of the exposed aggregate.

00504.21(c) Power-Driven Hand Tools - Replace the paragraph that begins "Furnish power-driven hand tools ..." with the following paragraph:

Provide power-driven hand tools for removal of Unsound Concrete meeting the following requirements:

00504.21(d) Hand Tools - Replace this subsection, except for the subsection number and title, with the following:

Provide hammers and chisels to remove final particles of Unsound Concrete or to achieve the required depth.

00504.21(e) Air Compressor - Replace this subsection, except for the subsection number and title, with the following:

Provide air compressors equipped with functioning oil traps. Ensure air used for blow-down of prepared surfaces is free of oil.

00504.40 General Surface Preparation - Replace the paragraph that begins "Furnish surface preparation Equipment ..." with the following paragraph:

Provide surface preparation Equipment according to 00504.21. Remove surface concrete by approved hand methods that cannot be reached by power-driven Equipment.

00504.40(c) Bonded Membrane Removal - Replace the paragraph that begins "If rutting is present in ..." with the following paragraph:

If rutting is present in the existing concrete deck resulting in additional thickness of Bonded Membrane material, remove all existing Bonded Membrane material with Equipment that can sufficiently remove the material without exceeding 1/4 inch of PCC deck surface removal.

00504.40(d) Multi-Layer Polymer Concrete Overlay (MPCO) Removal - Replace the paragraph that begins “If rutting is present in ...” with the following paragraph:

If rutting is present in the existing concrete deck resulting in additional thickness of MPCO material, remove all existing MPCO material with Equipment that can sufficiently remove the material without exceeding 1/4 inch of PCC deck surface removal.

00504.40(e) Premixed Polymer Concrete (PPC) Removal - Replace the paragraph that begins “If rutting is present in ...” with the following paragraph:

If rutting is present in the existing concrete deck resulting in additional thickness of PPC material, remove all existing PPC material with Equipment that can sufficiently remove the material without exceeding 1/4 inch of PCC deck surface removal.

00504.40(f) Structural Overlay Removal - Replace the paragraph that begins “Remove the existing Structural Overlay to the parent ...” with the following paragraph:

Remove the existing Structural Overlay to the parent deck surface. Use Equipment that can sufficiently remove the overlay without exceeding 1/2 inch of parent deck removal.

00504.40(g) Sealant Removal - Replace this subsection with the following subsection:

00504.40(g) Sealant and Pavement Marking Removal - Remove all existing crack sealant pavement markers and pavement markings from deck surface by grinding, bush hammering, or other approved method. Do not exceed 1/4 inch of deck surface removal.

00504.41(b) Class 1 Preparation – Replace this subsection, except for the subsection number and title, with the following:

- Roughen the existing concrete surface to an exposed aggregate surface texture meeting the following volumetric profiles and ICRI CSP:
 - Polymer overlays (MPCO’s and PPC’s) and membranes require minimum profile depth of 1/16 inch and CSP 5.
 - Structural cementitious overlays (SCO’s and HESC’s) require a minimum profile depth of 1/8 inch and CSP 7.
- Determine profile depth according to ASTM E965 (standard volumetric test). Perform four tests per 500 square yards of concrete surface prepared, with a minimum of four tests per Day. Visually verify CSP profile with ICRI CSP chips.
- Protect visible reinforcing steel and reinforcing steel where the Plans show it to be within 1/2 inch of the surface.
- When not in conflict with this Specification, follow surface preparation requirements in ICRI Technical Guideline No. 310.2R.

00504.42(a) PPC, MPCO, and Membrane Installations – Replace this subsection with the following:

Insert Project Name Here

00504.42(a) PPC, MPCO, Deck Seal, and Membrane Installations - Prepare all surfaces that are to be in contact with the membrane, deck seal or overlay, including vertical contact areas, as follows:

- Clean the entire surface by shot-blasting within 24 hours of placing the membrane or overlay.
- Sweep the area magnetically to remove metal residue.
- Blow clean the surfaces with compressed air.
- Immediately after surface preparation is complete cover the prepared deck with clear plastic, overlapping it to prevent contaminants from construction vehicles or other sources from contacting the deck. Maintain the covering until PPC, MPCO, deck seal or membrane installation.
- If the prepared surface becomes contaminated by spills, rain, or other contaminant before placing the membrane or overlay, prepare the surface again according to this Subsection.

00504.42(b) SCO Overlays – Replace the bullet that begins “Clean the entire surface by shot-blasting...” with the following bullet:

- Clean the entire surface by shot-blasting. Shot-blasting is not required on final surfaces that were prepared by chipping or jack hammering.

00504.90 Payment - Replace the paragraph “No separate or additional payment will be made for sealant removal” with the following:

No separate or additional payment will be made for sealant or pavement marking removal.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00505 (Special Provisions for the 2024 Book)

**(Bidding on or after: 11-01-26
Last updated: 07-22-26
Requires SP02020)**

SECTION 00505 – CONCRETE DECK HYDRODEMOLITION

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not renumber or re-letter subsections when item(s) are deleted. Delete all purple text)

before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00505 is not a Standard Specification and is included in this Project by Special Provision.

Description

00505.00 Scope - This Work consists of partial depth removal and preparing of concrete decks for structural concrete overlays and inlays with hydrodemolition Equipment and associated operations.

00505.01 Definitions and References:

(a) Definitions:

Blow-through - An unanticipated full-depth removal of deck concrete during hydrodemolition operations.

Selective Hydrodemolition - Preparation of deck concrete with hydrodemolition Equipment that creates a scarified surface profile and removes approximately 1/2 inch of concrete in areas of sound concrete and Unsound Concrete is removed in the same operation.

Deep Cut Hydrodemolition - Removal of deck concrete to the depth shown or specified.

Unsound Concrete - Delaminated or otherwise deteriorated concrete identified by a deck delamination survey or during surface preparation operations.

(b) References - In these Specifications, the reference ICRI 310.3R refers to Guideline No. 310.3R, *Guide for the Preparation of Concrete Surfaces for Repair Using Hydrodemolition Methods*.

00505.02 Submittals - Submit the following to the Engineer for approval at least 21 Calendar Days before the pre-placement meeting:

- Wastewater control and debris management plan. Include details of water supply system, pumping system, and vacuum Equipment.
- Plan and Materials to be used to shield traffic from hydrodemolition debris.
- Blow-through contingency plan. Provide a written plan for potential Blow-through scenarios. Include Materials used to contain water and debris both above and below the deck.
- Type of Equipment used for deck preparation.

Equipment

00505.20 General - Provide Equipment to perform hydrodemolition of the concrete deck surface. Remove all Equipment that leaks oil or other contaminants from the work area until they are repaired.

Insert Project Name Here

00505.21 Hydrodemolition Equipment - Hydrodemolition Equipment consists of a water supply system, a high-pressure pumping system, vacuum Equipment, and a robotic hydrodemolition unit.

(a) Water Supply System and Pumping System - Provide a water supply system and pumping system compatible with the hydrodemolition units and that supplies water that meets the requirements of Section 02020.

(b) Hydrodemolition Unit - Provide a hydrodemolition unit that is robotic, computerized, and self-propelled, that is capable of removing concrete at a rate and volume as specified and as accepted by the Engineer without leaving a striated surface. Provide either rotating or oscillating nozzles. For Selective Hydrodemolition, provide Equipment capable of operating in the pressure range of 14,000-20,000psi.

(c) Vacuum Equipment - Provide vacuum Equipment suitable for removal of wastewater and construction debris.

00505.22 Wastewater Recycling Equipment - The Contractor may provide a wastewater recycling unit that removes solid waste from the wastewater such that the water may be reused for hydrodemolition operations.

00505.23 Hand Lances - Provide hand-operated high-pressure lances that operate at pressures of 10,000 to 40,000psi.

00505.24 Micro-Milling Equipment - Provide cold plane or rotomill grinding machines using carbide cutting tools on a rotary drum. Provide Equipment with tooth spacing of not more than 1/4 inch, capable of leaving a smooth, uniform pattern of striations. Limit machines to a gross operational weight of no more than 35 Tons and a forward speed to 2.5 feet per minute. Operate at a drum speed of at least 120 RPM.

Construction

00505.40 General - When not in conflict with this Specification, perform hydrodemolition according to ICRI 310.3R.

00505.41 Partial Depth Concrete Deck Removal - Perform partial depth concrete deck removal on Bridge No. (Insert Bridge No.) to the depths shown as follows:

(a) Existing Deck Elevation - Measure and identify existing deck elevations and cross slopes at least every 10 feet, to verify removal depths and to establish final grade. Provide a vertical reference for approval by the Engineer before beginning removal work.

(b) Reinforcement Survey - Using a rebar locator or other approved means, measure and mark the depth of reinforcement at least every 10 feet, in each lane of traffic prior to beginning micro-milling operations.

(c) Existing Repairs - Prior to micro-milling or hydrodemolition operations, remove existing repair patches from the deck using power-driven hand tools. The Contractor may elect to proceed with micro-milling and hydrodemolition operations prior to removing existing repairs if it is demonstrated during hydrodemolition calibration that existing repairs

can be removed without increasing the depth of removal at the perimeter of the repairs or causing Blow-throughs.

(d) Micro-milling - Limit micro-milling to the depth shown or within 1/2 inch of reinforcement, whichever is least, measured from the nominal roadway surface. If reinforcement is encountered during milling operations, stop Work immediately and notify the Engineer. Repair any damage to the reinforcement caused by micro-milling operations at no additional cost to the Agency.

(e) Hydrodemolition - Perform Selective Hydrodemolition or Deep Cut Hydrodemolition as shown. In the presence of the Engineer, calibrate hydrodemolition Equipment on the deck in a location with sound concrete. Measure the removal depth to the mean paste elevation. Mean paste elevation is defined as the average elevation of parent deck concrete paste, excluding exposed aggregate. Record the calibrated settings, including: water pressure gauge, machine staging control, nozzle size and type, nozzle travel speed, and water usage rate. Provide calibrated settings to the Engineer. Do not adjust calibrated settings without notifying the Engineer. Monitor the removal depths to verify the desired depth of sound concrete and all Unsound Concrete is removed. Perform additional calibration in an area with Unsound Concrete if directed by the Engineer.

Hydrodemolition Equipment is operated in the pressure range of 14,000-20,000 psi during Selective Hydrodemolition operations. During Deep Cut Hydrodemolition operations the prescribed depth of removal is achieved with one or more passes of the hydrodemolition unit.

(1) Depth of Removal - Removal depth is measured from the original parent deck surface, or the top of the milled surface, to the mean paste elevation. When performing Selective Hydrodemolition, remove approximately 1/2" of parent deck concrete. When performing Deep Cut Hydrodemolition, remove parent deck concrete to the depth shown or specified, +/- 1/2". The depth of removal is measured from the original parent deck surface accounting for the depth of milling performed. If shown or specified, remove to a depth below the bottom of the top mat of reinforcement.

(2) Deck Blow-Through - If hydrodemolition operations cause a full depth deck Blow-through, immediately stop Work and notify the Engineer. Contain water and debris above and below deck, as necessary. Use equal to or less than 30-pound class chipping hammers to excavate all remaining Unsound Concrete. Square off the repair area and slope the sides to avoid vertical edges. Perform Blow-through repair Work according to 00140.30.

(3) Wastewater and Debris Management - Contain wastewater and debris as outlined in the wastewater control and debris management plan. Provide sufficient shielding during hydrodemolition process to contain dislodged concrete and prevent damage to surrounding property.

(4) Cleaning - Do not allow debris and slurry to dry. Use pressurized water and vacuum Equipment to remove dislodged debris and slurry from the bridge deck. Repeat cleaning until the wastewater is clear. If slurry dries prior to cleaning, use a minimum of 7500 psi water to remove dried slurry. Remove standing water from deck surface prior to surveying the deck for additional removal.

(f) Post Hydrodemolition Survey - In the presence of the Engineer, perform a visual inspection and sounding of the concrete surface. Identify locations of Unsound Concrete for removal. Remove additional Unsound Concrete using 15-pound class power-driven hand tools or hand lances. Identify locations of exposed reinforcement that require removal of concrete surrounding the reinforcing bars. Using a straightedge, stringline, or other approved methods, ensure minimum overlay thickness is achieved. Remove high areas of concrete with power driven hand tools, hand lances, or additional passes of hydrodemolition Equipment to ensure minimum required overlay thickness. Provide reinforcement chairs or blocks to place reinforcement at required elevation and to prevent deformation of the bars from construction vehicle loading.

(g) Removal of Concrete Surrounding Reinforcing Bars - Remove a minimum of 3/4 inch of concrete around and below reinforcing steel in the following scenarios:

- When there is exposed reinforcement that exceeds 24 inches in length, is within the mean paste elevation, and is not bonded to the concrete as identified by hammer sounding.
- When power-driven hand tools are used to remove Unsound Concrete that exposes greater than 50 percent of the reinforcing bar.

(h) Reinforcing Bar Repair - Abrasive blast reinforcing steel that is pitted or has flaking corrosion, that would inhibit adequate bonding to the concrete, to a bright finish. Light rust staining may remain in place.

When exposed reinforcement has greater than 50 percent section loss, required repairs will be designated by the Engineer and performed according to 00140.30.

(i) Surface Preparation Accommodations - Clean the entire surface by using abrasive blast or 7500 psi high pressure water blast. Saturate the surface with water for a minimum of 1 hour before resurfacing. Remove standing water with compressed air or wet-dry vacuum ahead of concrete placement. Repeat cleaning and water saturation on areas that are allowed to dry or become contaminated before resurfacing. Immediately after surface preparation is complete cover the prepared deck with clear plastic, overlapping it to prevent contaminants from construction vehicles or other sources from contacting the deck. Maintain the covering until overlay installation.

(Use the following subsection .43 ONLY when there are special repair zones identified in the Plans. Special repair zones are Project specific. Obtain information from the Bridge Designer and the BDM.)

00505.43 Special Repair Zones - A special repair zone is a specific zone or location on the bridge deck as indicated in the plans. Perform Work in special repair zones as shown according to the following:

(Use the following paragraph when negative moment regions are required. This is sample language and needs to be bridge specific. Obtain information from the Bridge Designer and the BDM.)

(a) Negative Moment Regions - In areas designated as negative moment regions with negative moment reinforcement, do not excavate below the top of the reinforcement. If

Insert Project Name Here

negative moment reinforcement is exposed, stop Work and re-calibrate the hydrodemolition Equipment in the presence of the Engineer.

(Use the following paragraph when full depth removal is required. This is sample language and needs to be Bridge specific Obtain information from the Bridge Designer and the BDM.)

(b) Full Depth Removal - Perform full-depth removal as shown. Full depth removal requires project specific language based on size, location, containment, and shoring requirements.

(Use the following subsection .44 when milling is incorporated on the Project.)

00505.44 Use of Micro-Milled Surface - Traffic is allowed on the micro-milled surface for up to 14 Calendar Days. Remove dust, residue, and loose milled material from the micro-milled surface immediately before opening to traffic. Do not open to traffic until approved by the Engineer.

00505.45 Use of Hydro-Demolitioned Surface – Traffic is not allowed on the hydro-demolitioned surface, except construction equipment required for the work.

When reinforcement is exposed, protect all exposed reinforcement from direct loading by construction equipment using wood blocks, plywood sheets, or other protection methods approved by the Engineer.

Measurement

00505.80 Measurement - The quantities of Work performed under this Section will be measured on the area basis.

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Payment

00505.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Concrete Deck Micro-milling, _____ inch depth	Square Yard
(b) Selective Hydrodemolition	Square Yard
(c) Deep Cut Hydrodemolition, _____ inch depth	Square Yard
(d) Full Depth Removal	Square Yard

In items (a) and (c), the depth is inserted in the blank.

(Use the following paragraph when Pay Item (b) is included in the Pay Item list above.)

Item (b) includes hand tool removal of concrete surrounding reinforcing bars.

Insert Project Name Here

(Use the following paragraph when Pay Item (c) is included in the Pay Item list above.)

Item (c) includes hand tool removal of concrete surrounding reinforcing bars.

(Use the following paragraph when Pay Item (d) is included in the Pay Item list above.)

Item (d) includes the full depth removal work required by 00505.43(b), including all formwork and staged work as shown.

Removal of Unsound Concrete is included in the hydrodemolition operations and the associated Pay Item including additional removal of Unsound Concrete following the post hydrodemolition survey.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00510 (Special Provisions for the 2024 Book) (Bidding on or after: 12-01-26
Last updated: 08-25-26
Requires SP02630 when base aggregate is required)

SECTION 00510 - STRUCTURE EXCAVATION AND BACKFILL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00510 of the Standard Specifications modified as follows:

00510.00 Scope - Replace the paragraph that begins “This Work does not include any ...” with the following paragraph:

This Work does not include any earthwork covered under any sections of Parts 00300 or 00400, or any earthwork that may be specifically included and provided for as Incidental Work for particular items or parts of the Work. The construction, measurement, and payment of embankment at bridge ends and engineered fills is according to Section 00330.

00510.04(a) Defined Shoring Systems - Replace the sentence that begins “Select Shoring systems...” with the following sentence:

Select Shoring systems for construction from the list of defined Shoring systems provided in Section 16.3.26 of the ODOT GDM.

(Use the following paragraphs and table when shoring is required.)

Insert Project Name Here

Add the following to the end of this subsection:

Construct shoring at the location(s) listed below:

(Use the following table to indicate the shoring location and the defined system(s) allowed. Include the beginning and ending stations, use either "Lt." or "Rt.", or a separate shoring alignment as required, to locate and provide minimum shoring length, and include the defined type of shoring system type(s) allowed from the list: All, 5A, 5B, 5C, 5D, 5E, 5F, 6A, 6B, 7A. Add or delete rows in the table as necessary to list additional locations and list all applicable defined shoring systems.

Example:

<i>Beginning Station</i>	<i>Ending Station</i>	<i>Shoring System Type(s) Allowed</i>
<i>Station 1+55 Rt.</i>	<i>Station 2+45 Rt.</i>	<i>All</i>
<i>Station 4+00 Lt</i>	<i>Station 4+40 Lt.</i>	<i>5A</i>

)

Beginning Station	Ending Station	Shoring System Type(s) Allowed
Station (Lt.)(Rt.)	Station (Lt.)(Rt.)	

00510.04(b) Atypical Shoring Systems - Replace the paragraph that begins "Shoring systems that are not on the list..." with the following paragraph:

Shoring systems that are not on the list of Shoring types published in Section 16.2.4.2 of the ODOT GDM are considered atypical Shoring systems. If proposing an atypical Shoring system, submit stamped Working Drawings according to 00150.35. The review and response time allowed for the Agency to return the Working Drawings will be 120 Calendar Days. Submit calculations and other data satisfying the requirements of the Specifications and include sufficient detail and explanation of the design for the Agency to process and comment on the Working Drawings. If the Engineer requests additional information or explanation related to the review of the atypical Shoring system the Engineer may restart the 120-Calendar Day review period.

Replace the bullet that begins "A list of supervisory personnel ..." with the following bullet:

- A list of supervisory personnel who are on-site during construction of the atypical Shoring system and documentation of their experience and qualifications to perform the Work.

Replace the paragraph that begins "Geotechnical and structural analysis ..." with the following paragraph:

Insert Project Name Here

Geotechnical and structural analysis and design for the Shoring include, but are not limited to the items listed in the Shoring Design Checklist. Submit a completed Shoring Design Checklist and a written Shoring Design Summary, prepared by the shoring design engineer, to accompany the Working Drawings and calculations. Include the following in the Design Summary:

Replace the bullet that begins "Performance requirements (actual threshold ...)" with the following bullet:

- Performance requirements (actual threshold limits of tolerable differential foundation settlement and lateral movement). Indicate how the performance requirements are monitored during construction.

00510.13(1) Material Passing No. 200 Sieve - Replace the paragraph that begins "The amount of Materials passing ..." with the following paragraph:

Ensure the amount of Materials passing the No. 200 sieve does not exceed 15 percent by weight. Test according to AASHTO T 11.

00510.13(2) Plasticity Index - Replace the paragraph that begins "The plasticity index of the ..." with the following paragraph:

Ensure the plasticity index of the Material passing the No. 40 sieve does not exceed 6. Test according to AASHTO T 90.

00510.40 Clearing, Grubbing, and Removal Work - Replace this subsection, except for the subsection number and title, with the following:

Perform clearing, grubbing and removal work according to Section 00310 and Section 00320.

Perform clearing, grubbing, and removal at least 10 feet outside of the entire Structure, including the ends of the Structure but within the Right-of-Way.

00510.41 Structure Excavation - Replace the paragraph that begins "Concrete placed against steel ..." with the following paragraph:

Concrete placed against steel sheet piles in cofferdams or cribs are considered placed against undisturbed material, whether or not the steel sheets are later removed.

00510.44(a) Cofferdams and Cribs - Replace the paragraph that begins "Do not begin cofferdam or crib ..." with the following paragraph:

Do not begin cofferdam or crib construction Work until all submittals have been approved. Upon completion of the cofferdam construction, and immediately after dewatering, field inspect the cofferdam with the cofferdam design engineer of record and accompanied by the Engineer. Do not continue construction until the cofferdam design engineer provides the Engineer a written statement that the cofferdam conforms to the design and will serve the intended purpose.

00510.44(b) Shoring - Replace the paragraph that begins "Upon completion of the Shoring construction ..." with the following paragraph:

Insert Project Name Here

Upon completion of the Shoring construction, field inspect the Shoring with the shoring design engineer of record, accompanied by the Engineer. Do not continue construction until the shoring design engineer provides the Engineer a written statement that the Shoring conforms to the design and will serve the intended purpose.

00510.45 Pumping - Replace the paragraph that begins “No pumping of water from the ...” with the following paragraph:

No pumping of water from the interior of any foundation enclosure is allowed during the placing of concrete or for a period of at least 24 hours thereafter unless an effective means of eliminating moving water through fresh concrete is employed. Water may then be pumped, if approved.

00510.48(b)(3)(a) Test Pad Method - Replace the paragraph that begins “Before placing the wall backfill ...” with the following paragraph:

Before placing the wall backfill, determine the number of Passes necessary to achieve the specified density by constructing a test pad that is at least 5 feet wide, 15 feet long, and 3 feet in final depth. Construct test pad fill in layers no more than 8 inches thick using the same Equipment and methods that are used to compact the wall backfill. Perform at least one density test according to AASHTO T 310 on each test pad layer. Construct and test a new test pad when changes in Material occur or different Equipment is used during the construction of the wall backfill.

00510.48(d) Reinforced Concrete Box Culverts, Structural Plate Structures and Pipe Culverts Over 72 Inches in Diameter - Replace the paragraph that begins “Provide bedding, if required ...” with the following paragraph:

Provide bedding, if required, according to 00405.12. Use backfill Materials meeting the requirements of 00510.12 or 00510.13 unless otherwise specified. Place and compact as shown and according to 00405.46. Place backfill up to the surrounding ground surface, to the top of trench, or the upper backfill pay limits shown or as directed.

(Use the following subsection .80(b)(1) when Structure excavation is paid for on the lump sum basis.)

00510.80(b)(1) Lump Sum - Add the following to the end of this subsection:

The estimated quantity of Structure excavation is:

Location

**Structure Excavation
(Cubic Yard)**

(Use the following subsections .80(d) when granular wall backfill and/or granular Structure backfill will be measured and paid for on the lump sum basis.)

00510.80(d)(1) Lump Sum - Add the following to the end of this subsection:

Insert Project Name Here

The estimated (quantity)(quantities) of (granular wall backfill) (and) (granular structure backfill) (is)(are):

(Delete headings that do not apply. Obtain quantities from the designer.)

	Granular Wall Backfill (Cubic Yard)	Granular Structure Backfill (Cubic Yard)
Location		

00510.90(d) Granular Wall/Structure Backfill - Replace the paragraph that begins “Payment will be payment ...” with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

(Include the following cofferdam design checklist when required by the Bridge Designer.)

COFFERDAM DESIGN CHECKLIST

Instructions - This cofferdam design checklist was developed to facilitate the design, review, and erection of cofferdams to be used for ODOT bridge construction projects. This checklist is intended to act as a reminder to design or check for specific important aspects of this construction. It is not a substitute for plan and/or design criteria or specification requirements.

The Checklist is to be completed and signed by the cofferdam design engineer. Answer every question. Attach to the Checklist an explanation of any negative responses.

Submit the Checklist according to 00510.03.

A. Contract Plans, Specifications, Permits, etc.	YES	NO	N/A
1. Are the cofferdam Working Drawings prepared, stamped and signed by an engineer registered to practice in Oregon?	_____	_____	_____
2. Have three copies (five copies if railroad approval is required) of the complete design calculations accompanied the cofferdam drawings submittal?	_____	_____	_____
3. Are cofferdam Working Drawings in compliance with the requirements of the construction plans general notes?	_____	_____	_____
4. Are cofferdam Working Drawings in compliance with contract plan structural details?	_____	_____	_____
5. Are cofferdam Working Drawings in compliance with the requirements of the Oregon Standard Specifications for Construction, subsection 00150.35?	_____	_____	_____
6. Are all existing, adjusted or new utilities in proximity with the proposed cofferdam shown on the cofferdam Working Drawings and is projection of these utilities addressed?	_____	_____	_____
7. Are clearance requirements satisfied and shown on the cofferdam Working Drawings?	_____	_____	_____
B. Loads	YES	NO	N/A
1. Are the magnitude and location of all loads, equipment and personnel that will be supported by the cofferdam shown noted on the cofferdam Working Drawings?	_____	_____	_____

Insert Project Name Here

2. Are design loads and material properties used to determine design stresses shown for each different cofferdam member shown on the cofferdam Working Drawings?	_____	_____	_____
3. Is the assumed water elevation for seal design shown on the Working Drawings?	_____	_____	_____
4. Does the cofferdam design assume water pressure acts on the full height of the cofferdam (from the vent to the bottom of the excavation?)	_____	_____	_____
5. Has percolation into the excavation been addressed?	_____	_____	_____
C. Allowable Stresses	YES	NO	N/A
1. Have the design loads used for cofferdam design of all members been noted in the design calculations?	_____	_____	_____
2. Are the allowable stress and the calculated stress listed in the summary for each different cofferdam member?	_____	_____	_____
D. Timber Construction	YES	NO	N/A
1. Are timber grades consistent with material to be delivered to the construction site, noted on the cofferdam drawings, and in accompanying calculations for all timber cofferdam material?	_____	_____	_____
2. If "rough" lumber is specified for the cofferdam, are the actual lumber dimensions used in the calculations shown?	_____	_____	_____
E. Steel Construction	YES	NO	N/A
1. Are steel structural shapes and plates identified by ASTM number on the cofferdam Working Drawings and in the calculations?	_____	_____	_____
2. Have steel beams been checked for bending, shear, web crippling and buckling of the compression flange?	_____	_____	_____
F. Compression Members, Bracing Members and Connections	YES	NO	N/A
1. Has general buckling been evaluated for all compression members?	_____	_____	_____
2. Has bracing been provided at all points of assumed support for compression members?	_____	_____	_____

Insert Project Name Here

3. Is bracing strength and stiffness sufficient for the intended purpose?

4. Have all connections been designed and detailed?

Designer Engineer of Record Signature

Date

Insert Project Name Here

(Include the following shoring design checklist when required by the Bridge Designer.)

SHORING DESIGN CHECKLIST

Instructions - This shoring design checklist was developed to facilitate the design, review, and erection of shoring to be used for ODOT construction projects. This checklist is intended to act as a reminder to design or check for specific important aspects of this construction. It is not a substitute for plan and/or design criteria or specification requirements.

The Checklist is to be completed by the shoring design engineer. Answer every question. Attach to the Checklist an explanation of any negative responses.

Submit this Shoring Design Checklist for each stage and phase of the project, along with the shoring design summary, Working Drawings and calculations according to 00510.04.

A. General	YES	NO	N/A
1. Are the shoring Working Drawings and supporting calculations prepared, stamped, and signed by an engineer registered to practice in the state of Oregon?	_____	_____	_____
2. Are the temporary shoring installation plans, construction sequence, and removal plan compatible with the project construction staging/phasing?	_____	_____	_____
B. Design Standards	YES	NO	N/A
1. Does the shoring design comply with standards identified in ODOT GDM 16.3.26.3 and related sections?	_____	_____	_____
2. Is the design standard and edition identified in the shoring design calculations?	_____	_____	_____
C. Loading	YES	NO	N/A
1. Have the design loads, including special loading conditions (e.g. cranes, stockpiles, etc.), used for shoring design of all members been noted in the design calculations?	_____	_____	_____
2. Have the appropriate load and resistance factors or factors of safety on the shoring system been identified, for all applicable load combinations or load cases?	_____	_____	_____
3. If public traffic is near or directly above the shoring system, has a minimum traffic live load surcharge of 250 psf been applied?	_____	_____	_____

4. Have the loads from actual construction equipment and not less than 250 psf been included in the shoring system design?	_____	_____	_____
5. Have the construction loads for different stages of construction been considered and included in the calculations?	_____	_____	_____
6. Have the effects of any construction activities adjacent to the shoring system on the stability/performance of the shoring system been addressed in the shoring design (e.g., excavation or soil disturbance in front of the wall or slope, excavation dewatering, vibrations and soil loosening due to soil modification/construction activities)?	_____	_____	_____
7. Have earth pressure diagrams been included?	_____	_____	_____
8. Does the shoring design consider the effect of water saturated soil pressure acting on the full height of the shoring?	_____	_____	_____
D. Geotechnical and Structural Analysis	YES	NO	N/A
1. Has internal stability been evaluated?	_____	_____	_____
2. Has eccentricity/overturning stability been evaluated?	_____	_____	_____
3. Has sliding been evaluated?	_____	_____	_____
4. Has overall/global stability been evaluated?	_____	_____	_____
5. Has bearing capacity been evaluated?	_____	_____	_____
6. Have displacement constraints or other performance objectives of the shoring system been identified and evaluated?	_____	_____	_____
7. Has each stage of the shoring system construction been evaluated to carry traffic and construction loads and ensure internal and external stability through the construction and loading sequence?	_____	_____	_____
8. Are the allowable stress and the calculated stress listed in the summary for each different shoring member?	_____	_____	_____
9. Have steel beams been checked for bending, shear, web crippling and buckling of the compression flange?	_____	_____	_____

Insert Project Name Here

10. Have connections for all phases of construction and removal been designed for all interim loading? _____

11. Has buckling, bracing strength, and stiffness been evaluated for all compression members? _____

E. Materials **YES** **NO** **N/A**

1. Are all soil, rock, and other material properties used for the design of the shoring system provided and consistent with GDM and the subsurface field and lab data? _____

2. Are timber grades noted on shoring drawings and in accompanying calculations? _____

3. Are the minimum lumber dimensions shown in the calculations and noted on the Working Drawings? _____

4. Are steel structural shapes, bolts, connections, and plates identified by ASTM number on the shoring Working Drawings and in the calculations? _____

F. Shoring Working Drawings **YES** **NO** **N/A**

1. Is the field verified ground topography above and below the shoring wall shown? _____

2. Are all existing, adjusted or new utilities, structures, and "no work zones" in proximity to the proposed shoring shown on the shoring Working Drawings and is protection of these items addressed? _____

3. Are horizontal and vertical clearance requirements identified and shown on the shoring Working Drawings? _____

4. Are plan view, elevation and cross sections drawn to scale, with dimensions defining location and size of the temporary shoring, components, and excavation limits? _____

5. Are the magnitude and location of all loads, equipment and personnel that will be supported by the shoring shown or noted on the shoring Working Drawings? _____

6. Has a dewatering plan been shown? _____

7. Have all connections been detailed? _____

8. Has bracing been detailed? _____

Insert Project Name Here

G. Testing and Monitoring

YES

NO

N/A

1. If a "yes" response to No. D-6, is a monitoring plan provided to verify adequate performance of the shoring system throughout the design life of the system?

2. Has a load testing program been provided for soil nails, tiebacks, or other applicable elements of the shoring system?

Design Engineer of Record Signature

Date

SECTION 00512 - DRILLED SHAFTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00512 of the Standard Specifications modified as follows:

00512.14(a) Mineral Slurry - Replace the paragraph that begins "Use mineral slurry ..." with the following paragraph:

Use mineral slurry meeting the following requirements:

00512.14(b) Synthetic Slurries - Replace the paragraph that begins "Select synthetic slurries from ..." with the following paragraph:

Select synthetic slurries from the QPL. Use synthetic slurries according to the manufacturer's recommendations and the Contractor's quality control plan. The allowed Sand content of synthetic slurry is less than 1.0 percent prior to final cleaning and immediately prior to concrete placement.

00512.14(c) Water Slurry - Replace the paragraph that begins "Water may be used as ..." with the following paragraph:

Water may be used as slurry when casing is used for the entire length of the drilled shaft. Use of water slurry without full-length casing will only be allowed with the Engineer's approval. Use water slurry meeting the following requirements:

00512.15 Crosshole Sonic Log Access Tubes - Replace the bullet that begins "Steel access tubes shall ..." with the following bullet:

- Use steel access tubes at least 1 1/2 inch inside diameter Schedule 40 pipe meeting ASTM A53, Grade A or B, Type E, F, or S.

Replace the bullet that begins "Access tube acceptance ..." with the following bullet:

- Access tube acceptance is based on manufacturer's certification that the furnished Material meets the requirements of this Specification.

00512.18 Crosshole Sonic Log Cement Grout - Replace this subsection, except for the subsection number and title, with the following:

Furnish non-epoxy grout or tendon grout from the QPL or furnish a pumpable CSL cement grout consisting of neat cement and water that has a water-cement ratio between 0.38 and 0.45. Furnish portland cement for the pumpable CSL cement grout meeting the requirements of Section 02010.

00512.30 Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

Perform the drilled shaft construction Work using a company and personnel experienced in drilled shaft construction Work. Submit a list to the Engineer for approval identifying the on-site supervisors and drill rig operators assigned to the Project and the company's experience relevant to the Project. Submit experience relevant to the anticipated subsurface materials, groundwater conditions, shaft size, depth and any special construction techniques required. Also provide the experience qualifications of the company performing the quality assurance testing. Before the preconstruction conference, provide the following information to verify the firm's experience and the qualifications of personnel scheduled to perform the drilled shaft construction and quality assurance testing:

- Submit a project reference list of at least three separate foundation projects, successfully completed in the last 5 years, with Drilled Shafts of diameters and depths equal to or larger than those shown in the Plans and in ground conditions similar to those indicated. Include a brief description of each project and the owner's contact person's name and current phone number for each project listed.
- Submit a resume for on-site supervisors with at least 2 years' experience in supervising construction of drilled shaft foundations of similar size (diameter and depth) and scope to those shown in the Plans and in similar geotechnical conditions to those described in the geotechnical report. Submit experience that includes the direct supervisory responsibility for the on-site construction operations.
- Submit a resume for drill operators with at least 1 year of experience in the construction of drilled shaft foundations.
- Perform quality assurance testing using an independent testing organization retained by the Contractor and approved by the Agency. Provide personnel experienced in operating the specific quality assurance testing Equipment. Submit the CSL testing firm qualifications according to 00512.40(a). Provide a quality assurance testing firm that has successfully performed quality assurance testing on a minimum of five projects during the last 3 years. Provide quality assurance testing personnel that have been trained in the operation of the quality assurance Equipment and have at least 1 year of experience in operating quality assurance testing Equipment on a minimum of 10 shafts.

The Engineer will respond within 21 Calendar Days after receipt of the submittal. Do not begin Work on any drilled shafts until the qualifications have been approved. The Engineer may suspend the drilled shaft construction if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of either on-site supervisors, drill operators, or CSL testing personnel to the Engineer, who will have 7 Calendar Days to respond to each request. Additional costs resulting from the suspension of Work due to the changing of personnel is the Contractor's responsibility, and no adjustment in Contract Time resulting from the suspension of Work is allowed.

Insert Project Name Here

00512.40(a) Drilled Shaft Installation Plan - Replace the paragraph that begins "The Engineer will approve or reject ..." with the following paragraph:

The Engineer will approve or reject the drilled shaft installation plan within 21 Calendar Days after receipt of all submissions. Provide any additional information and submit a revised plan, if requested, for review and approval. All procedural approvals given by the Engineer are subject to trial in the field and will not relieve the Contractor of the responsibility to satisfactorily complete the Work. Submit requests for modification of adopted procedures to the Engineer. Allow 21 Calendar Days for approval of modifications. Do not begin drilled shaft construction Work until all drilled shaft submittals have been approved.

00512.41 Drilled Shaft Coordination Meeting - Replace the paragraph that begins "Hold a drilled shaft coordination ..." with the following paragraph:

Hold a drilled shaft coordination meeting at least 7 Calendar Days before beginning any shaft construction Work at the site to discuss construction procedures, schedules, staging, personnel, Equipment to be used, and other elements of the approved shaft installation plan as specified in 00512.40. If synthetic slurry is used to construct the shafts, discuss the frequency of scheduled site visits to the Project Site by the synthetic slurry manufacturer's representative. Those attending the meeting include:

Replace the bullet that begins "**Representing the Contractor** ..." with the following bullet:

- **Representing the Contractor** - The superintendent, on-site supervisors, and all supervisors in charge of excavating the shaft, placing the casing, mixing and installing slurry (as applicable), placing the steel reinforcing bars, and placing the concrete. If synthetic slurry is used to construct the shafts, the slurry manufacturer's representative and a Contractor's employee trained in the use of the synthetic slurry are required to also attend.

00512.43(a) Drilled Shaft Excavation, General - Replace the paragraph that begins "Excavate Drilled Shafts to the ..." with the following paragraph:

Excavate Drilled Shafts to the dimensions and elevations shown or as directed. Provide and maintain stabilized drilled shaft sidewalls and bottoms for the full depth of the excavation, using approved Materials, Equipment and methods. If caving or other unstable conditions occur during any construction procedure, stop further construction, notify the Engineer, and stabilize the shaft excavation by approved methods and submit a revised installation plan that addresses the problem and prevents further instability. Do not continue with shaft construction until any damage that occurred has been repaired according to the Specifications and until receiving the Engineer's approval of the revised shaft installation plan.

(Use the following when the contract requires a minimum shaft penetration into a bearing layer (as opposed to a specified tip elevation) and the bearing layer elevation at each shaft cannot be accurately determined. Obtain the information from the Geotechnical Engineer. Include subsections .45, .80(d), and .80(e).)

Add the following paragraph to the end of this subsection:

Variations in the bearing layer elevation from that shown are anticipated. Provide Equipment on-site capable of excavating an additional _____ feet of depth below that shown.

00512.43(c) Temporary Casing - Replace the bullet that begins "The minimum diameter ..." with the following bullet:

- The minimum diameter of the shaft is as shown.

Replace the bullet that begins "Use temporary telescoping ..." with the following bullet:

- Use temporary telescoping casing material according to 00512.13.

00512.43(d) Unexpected Drilled Shaft Obstructions - Replace this subsection, except for the subsection number and title, with the following:

Remove any natural or manmade object encountered that was not revealed by the Agency's site investigation, and that would cause a significant decrease in the rate of advancement if removed using the techniques and Equipment used successfully to excavate the shaft. The Engineer is the sole judge of the significance of any reduced rate of shaft advancement and the classification of any unexpected obstructions. Removal of unexpected obstructions from the shaft excavation will be paid according to 00195.20.

00512.43(e) Lost Tools - Replace this subsection, except for the subsection number and title, with the following:

Promptly remove drilling tools lost in the excavation. Lost tools will not be considered unexpected obstructions. Remove lost tools without additional compensation. Drilling tools lost during the course of removing unexpected drilled shaft obstructions will be paid according to 00195.20.

00512.43(f) Drilling Slurry Installation - Replace the paragraph that begins "If synthetic drilling slurry is ..." with the following paragraph:

If synthetic drilling slurry is selected, provide a manufacturer's representative to provide technical assistance at the site prior to use of the slurry, and have them remain at the site during construction and completion of a minimum of one drilled shaft to adjust the slurry mix for the specific site subsurface conditions. After the manufacturer's representative is no longer at the site, provide the approved personnel trained in the use of the synthetic slurry for the remainder of the shaft slurry operations to supervise the proper slurry mix design and quality control procedures.

Replace the paragraph that begins "All in hole drilling ..." with the following paragraph:

Meet the required slurry specifications during excavation and prior to concrete placement. Clean, recirculate, de-sand or replace the slurry to maintain the required slurry properties.

00512.43(g) Drilling Slurry Inspection and Testing - Replace the paragraph that begins "Mix and thoroughly ..." with the following paragraph:

Mix and thoroughly hydrate all drilling slurries in an appropriate storage facility. Collect sample sets from the storage facility and perform tests to ensure the slurry conforms to the

Insert Project Name Here

specified Material properties before introduction into the drilled shaft excavation. A sample set consists of samples taken at mid-depth and within 24 inches of the bottom of the storage facility.

Replace the paragraph that begins "Sample and test all slurry ..." with the following paragraph:

Sample and test all slurry in the presence of the Engineer, unless otherwise directed. Provide the sample sets of slurry within the excavation consisting of samples taken at mid-depth of the excavation and within 24 inches of the bottom of the excavation. Collect and test sample sets during the drilling operation as necessary to ensure the specified properties of the slurry are maintained. Clean, recirculate, de-sand, or replace the slurry as necessary to maintain the specified slurry properties. Final cleaning of the excavation and placement of concrete is not allowed until the test results indicate the slurry properties are as specified.

00512.43(h) Clean Out - Replace the paragraph that begins "Use appropriate means, such ..." with the following paragraph:

Use appropriate means, such as a cleanout bucket, pump or air lift, to clean the bottom of the drilled shaft excavations. No more than 2 inches of loose or disturbed material is allowed at the bottom of the excavation for end-bearing Drilled Shafts. No more than 6 inches of loose or disturbed material is allowed at the bottom of the excavation for side friction Drilled Shafts. Assume end-bearing shafts unless otherwise shown or specified. Shaft cleanliness is determined by the Engineer.

(Use the following lead-in paragraph and subsection .44 when permanent casing is required. Include the outside diameter and the wall thickness under the "Casing Size" column.)

Add the following subsection:

00512.44 Permanent Casing - Furnish and install permanent casing as follows:

Bridge Number	Bent Number	Casing Size	Elevation for Top of Casing (Feet)	Elevation for Bottom of Casing (Feet)

Perform welding of all permanent casing according to AWS D1.1. Test all full penetration welds using nondestructive methods by either radiograph or ultrasonic methods. Base nondestructive testing acceptance criteria on cyclic tension loading.

After concrete placement, fill all void space between the casing and the shaft excavation with a material that approximates the geotechnical properties of the in-situ materials.

(Use the following subsection .45(e) when the contract requires a minimum shaft penetration into a bearing layer (as opposed to a specified tip elevation) and the bearing layer elevation at each shaft cannot be accurately determined. Obtain the

information from the Geotechnical Engineer. Include subsections .43(a), .80(d), and .80(e).)

Add the following subsection:

00512.45(e) Rock Socket - At locations requiring minimum shaft penetrations into specific bearing layers, furnish steel reinforcing bar cages, including CSL access tubes if specified, _____ feet longer than the lengths shown. Add the increased length to the bottom of the cage. Trim the shaft steel reinforcing bar cage to the proper length prior to placing it in the excavation. Shift or trim CSL access tubes (if present) to the revised cage length. If CSL tubes are cut, adapt the ends of the tubes to receive the watertight caps as specified.

00512.46 Crosshole Sonic Log Test Access Tubes - Replace the paragraph that begins "Furnish and install access tubes ..." with the following paragraph:

Furnish and install access tubes for CSL testing as shown. Attach CSL access tubes securely to the interior of the reinforcement cage as near to parallel as possible in each drilled shaft and in the pattern shown. Extend the access tubes from the bottom of the reinforcement cage to at least 24 inches above the top of the shaft. When joints are required to achieve full-length access tubes, furnish watertight joints. Do not damage the access tubes during reinforcement cage installation and concrete placement. Fill the tubes with potable water, according to 02020.10(b), as soon as possible, but no more than 1 hour after concrete placement and reinstall the top watertight caps. Check water level and top off as needed.

00512.47(a) Concrete Placement - Replace the paragraph that begins "Allow a maximum of 60 minutes ..." with the following paragraph:

Allow a maximum of 60 minutes between concrete placements and use no concrete older than 90 minutes from batch time. Use procedures for concrete placement ensuring that the concrete within the shaft becomes a monolithic, homogeneous unit.

00512.47(b) Casing Removal - Replace the paragraph that begins "Under free-fall placement ..." with the following paragraph:

Under free-fall placement, deposit concrete through the center of the reinforcement cage by a method that prevents segregation of Aggregates and splashing of concrete on the reinforcement cage. Place concrete so that the free-fall is vertical down the center of the shaft without hitting the sides, the steel reinforcing bars or steel cage bracing.

00512.47(e) Dry Shaft Concrete Placement - Replace the paragraph that begins "Remove all Temporary Casing during ..." with the following paragraph:

Remove all Temporary Casing during or after completion of concrete placement. Do not start Temporary Casing removal until the level of fresh concrete within the casing has reached a depth of at least 10 feet or the level necessary to adequately counteract the external hydrostatic pressure head. As the Temporary Casing is withdrawn, maintain a minimum 5 feet head of concrete above the bottom of the casing. A slight downward movement of the casing while exerting downward pressure, or hammering or vibrating the casing is allowed to facilitate extraction. Extract the casing so that concrete is cast directly against the surrounding in-situ material. Check the elevation of the top of the reinforcing cage before and after Temporary Casing extraction for conformance with the construction tolerance criteria of

Insert Project Name Here

00512.42. Casing that cannot be extracted during, or immediately after, the concrete placement operation may be cause for rejection of the shaft.

00512.48 Drilled Shaft Testing and Acceptance - Replace the paragraph that begins "Acceptance of Drilled Shafts ..." with the following paragraph:

Acceptance of Drilled Shafts is based on the Engineer's review of the results of CSL, or other, integrity testing (if conducted), field inspection reports and visual observations during drilled shaft construction. The Engineer has final authority on the approval of Drilled Shafts. For shafts that are integrity tested, the Engineer will determine final acceptance of each tested shaft, based on the integrity test results and inspection reports and will provide a response to the Contractor within 5 Calendar Days after receiving the CSL test report.

00512.48(a) Crosshole Sonic Log Testing - Replace the paragraph that begins "Provide crosshole sonic log ..." with the following paragraph:

Provide crosshole sonic log testing Equipment and perform crosshole sonic log testing and analysis on the first drilled shaft completed at each Structure and subsequent shafts as specified or designated for testing by the Engineer. Provide CSL testing Equipment according to the requirements of ASTM D6760 and approved by the Engineer. Provide all necessary access and other support to the CSL testing firm necessary to do the CSL testing Work.

00512.48(b) Contractor's Crosshole Sonic Log Test Reports - Replace the paragraph that begins "Submit a stamped final CSL ..." with the following paragraph:

Submit a stamped final CSL Test Report for each shaft tested according to 00150.35 and ASTM D6760. Provide electronic file copies of the raw CSL data measurements, if requested. Include a summary of the CSL testing performed, data analysis, and interpretation of CSL data with special attention made to the identification and location of any anomalies or possible defects. Provide interpretation of the CSL test data in terms of overall shaft integrity and acceptance. Submit all reports to the Engineer within 5 Calendar Days of the performance of the tests.

00512.48(c) Additional Testing and Investigation - Replace the paragraph that begins "If requested by the Engineer ..." with the following paragraph:

If requested by the Engineer, drill a core hole in any questionable quality shaft to explore the shaft condition. The Engineer will determine the number, location and depths of the core holes. Submit the method and Equipment used to drill and remove cores from the shaft to the Engineer for review and approval prior to drilling. Use a coring method that provides complete core recovery and minimizes abrasion and erosion of the core. If a defect is confirmed, as determined by the Engineer, all investigation costs associated with identifying the defect will be at no additional cost to the Agency and no extension of the Project completion date will be granted, regardless of whether the identified defect is repaired or not.

00512.80(a) Furnish Drilling Equipment - Replace the title of this subsection with "Provide Drilling Equipment"

(Use the following subsection .80(d) to list the estimated amount of required concrete.)

Insert Project Name Here

00512.80(d) Drilled Shaft Concrete - Add the following at the end of this subsection:

The estimated quantity of drilled shaft concrete is:

Structure	Quantity (Cubic Yard)
-----------	--------------------------

(Use the following paragraph when additional concrete is required to extend the minimum shaft penetrations. Include subsections .43(a), .45, and .80(e).)

The estimated quantity of drilled shaft concrete includes the concrete required to extend the shafts according to 00512.43(a).

(Use the following subsection .80(e) to list the estimated amount of required reinforcement. Remove the coated reinforcement table if coated steel is not required.)

00512.80(e) Drilled Shaft Reinforcement - Add the following at the end of the paragraph:

The estimated quantity of drilled shaft reinforcement is:

Structure Number	Uncoated Reinforcement Quantity (Pound)		
	Grade 60	Grade 80	Grade 100

Structure Number	Coated Reinforcement Quantity (Pound)		
	Grade 60	Grade 80	Grade 100

(Use the following paragraph when additional reinforcement is required to extend the minimum shaft penetrations. Include subsections .43(a), .45, and .80(d).)

The estimated quantity of drilled shaft reinforcement includes the reinforcement required to extend the shafts according to 00512.45.

00512.90 Payment - Replace the Pay Item Furnish Drilling Equipment with the following Pay Item:

Pay Item	Unit of Measurement
(a) Provide Drilling Equipment	Lump Sum

Insert Project Name Here

Replace the paragraph that begins "Item (a) includes ..." with the following paragraph:

Item (a) includes providing and moving the drilling Equipment to the Project, setting up the Equipment at the various locations on the Project and removing the Equipment from the Project.

Replace the paragraph that begins "In item (b) ..." with the following paragraph:

In item (b), the diameter of the shaft casing is inserted in the blank.

Replace the paragraph that begins "In item (c) ..." with the following paragraph:

In item (c), the diameter of the shaft is inserted in the blank. Item (c) includes excavating the shafts and disposing of the excavated material and for providing, placing, splicing, and removing temporary shaft casing and forms.

Replace the paragraph that begins "In item (e) ..." with the following paragraph:

In item (e), the grade of reinforcement is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00515 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

**Requires SP02010, SP02020, SP02510,
SP02515 & SP02530)**

SECTION 00515 - MICROPILES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00515 is not a Standard Specification and is included in this Project by Special Provision.

Description

00515.00 Scope - This Work consists of designing, furnishing, constructing and testing Micropiles at the locations shown and specified.

00515.01 Definitions:

Alignment Load (AL) - A minimum initial load applied to the Micropile during testing to keep the testing Equipment correctly positioned.

Bond Length - The length of the Micropile that is bonded to the ground and used to transfer the applied axial loads to the surrounding Soil or Rock.

Casing - Steel pipe Casing, generally installed during the drilling process to stabilize the borehole when drilling through Overburden Soils. The Casing may be either temporary and withdrawn during the grouting process, or permanently left in place to provide added Micropile reinforcement.

Centralizer - A device to support and position the steel reinforcement in the center of the drillhole or Casing.

Coupler - A mechanical Coupler or other approved device that transfers load from one partial length of steel reinforcement to another.

Creep - The movement that occurs during the Creep test of a Micropile under a constant load.

Double Corrosion Protection - A system composed of two levels of corrosion protection, usually consisting of either grout filled Encapsulation or epoxy coating and grout.

Encapsulation - A corrugated or deformed tube protecting the steel reinforcement against corrosion.

Factored Design Load (FDL) - The maximum load expected to be applied to the Micropile during its design life.

Micropile - A small-diameter, bored, cast-in-place composite pile, with the applied load resisted by steel reinforcement, cement grout and frictional grout-ground bond.

Overburden - Natural or placed Material that may require cased drilling methods to provide an open borehole to underlying strata.

Post-Grouting - The injection of additional grout into the load transfer length of a Micropile after the primary grout has set.

Proof Load Test - Incremental loading of a production Micropile, recording the total movement at each loading increment.

Spacer - A device to separate individual elements of multiple-element reinforcement.

Verification Load Test - Pile load test of a sacrificial Micropile performed to verify the design of the Micropile system and the construction methods proposed, prior to installation of production Micropiles.

Insert Project Name Here

00515.02 General - Furnish Materials and provide all design, Equipment, tools, services, labor and supervision required for installing and testing Micropiles and Micropile top attachments for this Project.

Select the Micropile type, dimensions, Bond Length, pile-top attachment(s), and installation method to meet the requirements of the Specifications. Conduct verification and Proof Load Testing that demonstrates the test piles meet or exceed the specified test acceptance criteria.

(Consult with the Geotechnical Designer and modify the following section as needed to describe what subsurface information is available and how to access it. Also add descriptions of special or unusual subsurface conditions that should be noted.)

00515.03 Subsurface Investigation - The Soils and Geological Exploration Logs are available for review through the Engineer's office. The data shown for each test boring or test pit applies only to that particular boring or test pit. Subsurface conditions may vary between borings or test pits. Core samples and laboratory test results, if obtained and performed for the Project, are available for review by contacting the Engineer.

The Foundation Data shown in the Plans is a compilation of pertinent information including, but not limited to, the Soils and Geological Exploration Logs.

00515.04 Micropile Design Requirements - Design Micropiles to meet the loading conditions provided in Table 00515-1. Design Micropiles and pile top-to-footing connections using the procedures described in the most current version of the AASHTO *LRFD Bridge Design Specifications* at the time of Advertisement.

(Obtain information from designer and fill in Table 00515-1. Add rows or modify as necessary for all micropile locations included in the Project.)

TABLE 00515-1

Micropile Factored Design Load (FDL),* (kips)		
Location	Right Footing	Left Footing
Bridge XXX – Bent 1		
Bridge XXX – Bent 2		

* Loads are axial compression loads per Micropile unless otherwise noted.

Verification test piles may require additional structural capacity above that required for production piles. Size the structural steel and grouted sections of the Micropiles to ensure that the maximum verification and proof test loads applied to the Micropile do not exceed 80 percent of the structural capacity of the Micropile structural elements, to include steel yield in tension, steel yield or buckling in compression, or grout crushing in compression.

(Use the following paragraph when moment design applies to the Project. Fill in the required nominal (ultimate) moment capacity below. Identify the location of the nominal moment by selecting either the pile top location or the depth below the pile top; delete the unused portion and parentheses. Obtain the moment and depth from designer.)

Insert Project Name Here

Design and provide a composite Cross Section of the Micropile capable of developing a nominal moment capacity of _____ kip-ft. The location of the nominal moment is at (top of the pile)(a depth of _____ feet below the top of the pile).

(Obtain the thickness of the sacrificial steel for permanent steel casings from the designer and fill in the blank.)

Provide corrosion protection of the internal steel reinforcement according to 00515.10. Where permanent Casing is used for a portion of the Micropile, extend the double corrosion system at least 5 feet into the Casing. If the Micropile design relies on the Casing for axial or moment capacity, incorporate an additional _____ inch thickness of sacrificial steel for corrosion protection of all permanent steel Casing used in Micropile construction.

(Use the following sentence if double-corrosion protection is required on the Project.)

Provide Double Corrosion Protection of all steel reinforcement that is not contained within permanent Casing.

00515.05 Submittals - Before beginning construction of Micropiles, submit the following to the Engineer:

(a) Qualifications - Submit contractor and personnel qualifications according to 00515.30.

(b) Stamped Working Drawings - Submit stamped Working Drawings according to 00150.35 that include all stamped design calculations, details, dimensions, quantities, ground profiles, and Cross Sections necessary to construct the Micropile Structure. Verify the limits of the Micropile Structure and ground survey data before preparing the detailed Working Drawings. Provide stamped Working Drawings that include, but are not limited to, the following information:

(1) Stamped Design Calculations and Documentation - Provide design calculations and documentation that includes:

- A written summary report that describes the overall Micropile design, including the type and diameter of Micropiles selected, and if applicable, a discussion of the use of any temporary Casing.
- Applicable code requirements and design references.
- Dimensions of all Micropile structural components, structural design properties, and critical design Cross Sections.
- Geotechnical design parameters and criteria, including Soil and Rock shear strengths (friction angle and cohesion), material unit weights, ground-grout bond values, and group effects if applicable.
- Factored Design Loads, including maximum verification test loads, and nominal and factored resistances used in the design of the ground grout bond values, surcharges, steel, grout, and concrete Materials.
- Minimum grout unconfined compressive strength at 28 Days and at the time of verification and Proof Load Testing.

- Pile to pile cap/footing connection design calculations and construction details.
- Design calculations for design of the Micropiles, including but not limited to analysis performed to determine drillhole diameters, estimated Bond Lengths, total Micropile lengths, design of corrosion protection, type and size of steel reinforcement, and if applicable, permanent Casing.
- Structure (Bridge) number, Micropile Structure location (Bent No. and footing), date of preparation, initials of designer and checker, and page number at the top of each page. Provide an index page with the design calculations.
- Design notes including an explanation of any symbols and computer programs used in the design.

(2) Plan View Drawing - Provide a plan view drawing that shows:

- Reference baseline and elevation datum.
- Overall plan layout of Micropiles showing numbering sequence, pile diameters, position, and horizontal spacing.
- Station and offset from the construction centerline or baseline to the center of all Micropiles or face of Micropile Structure.
- Right-of-Way and permanent or temporary construction easement limits, location of all known active and abandoned existing utilities, adjacent Structures or other potential interferences.
- The centerline and dimensions of any Utility, drainage Structure, or drainage pipe behind, passing through, or passing under the Micropile Structure.
- Locations of all subsurface explorations with appropriate reference base lines to fix the locations of the explorations relative to the Micropile Structure.

(3) Elevation View Drawing - Provide an elevation view drawing that shows:

- Micropile locations and elevations
- Micropile lengths
- Minimum hole diameters, batter and alignment
- Casing dimensions and lengths
- Reinforcement type, sizes and details
- Splice types and locations
- Centralizers and Spacers
- Minimum grout bond zone
- Casing plunge lengths, if used
- Corrosion protection details
- Micropile Structure connection details to Substructure footing
- Micropile Design Loads
- Summary of estimated quantities for each Substructure unit
- If applicable, location of drainage elements

(4) Steel Shop Drawings - Provide steel shop drawings for all structural steel including the details, dimensions, and schedules for all Micropile Casing and steel reinforcement, including steel reinforcement bending details and steel for Substructure and footing connection.

(5) Micropile Load Testing and Reporting - Provide detailed plans for the proposed Micropile load testing method and procedures. Include all drawings, details, and structural design calculations necessary to clearly describe the proposed test method, reaction load system capacity, Equipment setup, and types and accuracy of apparatus to be used for applying and measuring the test loads and pile top movements according to 00515.47. Submit Micropile Load Test Data Reports according to 00515.48.

Revise the drawings when Plan dimensions are changed due to field conditions or for other reasons. Within 30 Calendar Days after completion of the work, submit corrected stamped Working Drawings and calculations to the Engineer according to 00150.35. Provide corrected Working Drawings that represent all design changes made during the construction of the Micropile Structure.

(c) Micropile Installation Plan - At least 21 Calendar Days before beginning Micropile Work, submit a Micropile Installation Plan to the Engineer for review and approval. Provide a Micropile Installation Plan that includes, but is not limited to, the following information:

(1) Detailed step by step description of the proposed Micropile construction procedure, construction sequencing (including but not limited to drilling, grouting and testing procedures), anticipated ground conditions, and any special construction requirements to assure quality control. Include sufficient detail to allow the Engineer to monitor the construction and quality of the Micropiles.

(2) A list of the Equipment to be used for installing Micropiles, including the model, size and type of Equipment, with appropriate manufacturer's literature for review. Provide information on the drilling methods and tools to be used and the proposed method for flushing and removal of spoils. Include information on headroom and space requirements, if appropriate, for installation Equipment that show the proposed Equipment is appropriate for the site conditions and constraints.

(3) Proposed start date(s) and Micropile installation schedule.

(4) Plan describing how surface water, drill flush, and excess waste grout are contained, controlled and disposed of in accordance with all applicable permits and regulations.

(5) Details for constructing Micropile Structures around drainage or other facilities, if applicable.

(6) Permanent Casing threading connection details. If welding of Casing is proposed, submit a proposed Welding Procedure Specification (WPS) for approval.

(7) Certified mill test reports for the steel reinforcement and permanent Casing, if used. Check sample results for permanent Casing without mill certification may be submitted in lieu of mill certification. Supply two check sample tests per truckload delivered to the

fabricator, but not less than two check sample tests per project. Include the ultimate strength, yield strength, elongation, material properties and chemical composition.

(8) Grouting Plan, including complete descriptions, details, and supporting calculations for the following:

- Grout mix design and type of Materials to be used in the grout including certified test data and trial batch reports. Include in the mix designs, certified test results verifying that the mix designs provide the required grout strength, as specified in the submitted design calculations, for the 28-Day strength and the strength required at the time of verification and Proof Load Testing. Provide grout consistency and density requirements.
- Equipment and procedures used to mix and place the grout, including the grout pressures to be used and descriptions of any post grouting methods, if applicable.
- Estimated grout quantities.
- Methods and Equipment for accurately monitoring and recording the grout depth, grout volume, and grout pressure as the grout is being placed.
- Grouting rate calculations, when requested by the Engineer. Base calculations on the initial pump pressures or static head on the grout and losses throughout the placing system, including anticipated head of drilling fluid to be displaced, if applicable.
- Estimated curing time for grout to achieve specified strength. Previous test results for the proposed grout mix completed within one year of the start of grouting may be submitted for initial verification and acceptance and start of production work. During production, test grout according to 00515.44(e).
- Procedure and Equipment for Contractor monitoring of grout quality.

(9) Calibration reports and data for each test jack, pressure gauge and master pressure gauge and load cell to be used. Provide calibration tests performed by an independent testing laboratory within 60 Calendar Days of the date submitted. Do not begin testing until the Engineer has reviewed and accepted the jack, pressure gauge, master pressure gauge and electronic load cell calibration data.

The Engineer will approve or reject the Micropile Installation Plan within 21 Calendar Days after receipt of the plan. Do not begin Work until all submittals have been received, reviewed, and accepted in writing by the Engineer.

Make revisions or corrections to the Working Drawing submittals as requested by the Engineer and resubmit revised drawings or submittals. Resubmit changes or deviations on the Working Drawings for review and approval.

Materials

00515.10 Materials - Furnish Materials meeting the following requirements:

(a) Admixtures - Furnish admixtures according to Section 02040. Admixtures that control bleed, improve flowability, reduce water content, and retard set may be used in the grout, if approved by the Engineer. Only add expansive admixtures to grout used for filling

sealed Encapsulations and anchorage covers. Accelerators will not be permitted. Use admixtures compatible with the grout and mixed in accordance with the manufacturer's recommendations.

(b) Cement - Furnish Portland cement (Type I, II or III) according to Section 02010.

(c) Grout - Furnish neat cement or Sand/cement grout mixture with a minimum compressive strength at 28 Days as specified in the contractor's design submittal and according to 02690.30.

(d) Water - Use water in the grout mix according to Section 02020.

(e) Reinforcement:

(1) Furnish deformed bar reinforcement according to Sections 00530 and 02510, or furnish all thread, high tensile strength bars according to 02515.30. When a bearing plate and nut are required to be threaded onto the top end of reinforcing bars for the pile top to footing anchorage, furnish threading that is either continuous spiral deformed ribbing provided by the bar deformations or threading cut into the bar. If threads are cut into a reinforcing bar, furnish a bar that is one bar size number larger than the bar size designation shown, at no additional cost to the Agency.

(2) Furnish continuous thread, hollow core steel bars (hollow injection rods) according to the quality, ductility and deformation requirements of AASHTO M 31 (ASTM A615).

(3) If required, furnish mechanical splices according to 2510.20.

(f) Permanent Casing - Furnish permanent steel Casing with:

- A diameter and minimum wall thickness as shown on the approved Working Drawings.
- Tensile strength meeting the tensile requirements of API 5L Grade X52, API 5 CT Grade N80 or better, using the minimum yield strength in the design submittal.

(g) Plates and Shapes - Furnish structural steel plates and shapes for Micropile top attachments meeting the requirements of ASTM A36 or ASTM A572 Grade 50 and Section 02530 and as required to meet the design loads specified in 00515.04 and 00515.05(b).

(h) Centralizers - Fabricate Centralizers from plastic, steel, or Material that is not detrimental to the steel reinforcement. Wood Centralizers are not allowed.

(i) Corrosion Protection - Provide corrosion protection of the steel bar reinforcement by using one or more of the following methods:

(Select one or more of the following three paragraphs as appropriate. Delete any that do not apply.)

- **Encapsulation:** Shop fabricate the Encapsulation from high-density, corrugated polyethylene tubing meeting the requirements of AASHTO M 252 (ASTM D3350) or

corrugated polyvinyl chloride pipe meeting the requirements of ASTM D1784 (Class 13464-B) with a minimum wall thickness of 0.03 inches. Provide an annulus opening between the reinforcing bars and the encapsulating tube of at least 0.25 inches and use a grout according to 00515.10(c).

- **Epoxy Coating:** Apply epoxy coating according to 02510.11. Bend test requirements are waived. Epoxy coating of bearing plates and nuts encased in pile concrete footings is not required. Furnish mechanical Couplers for splicing epoxy coated reinforcing bars that are either epoxy coated with the same thickness as the reinforcing bars or, for bare-steel Couplers, coated with heat-shrink wrap from section 02510.11 of the QPL. Apply heat-shrink wrap extending at least 6 inches past the ends of the Couplers and 6 inches past any damaged areas.
- **Grout Protection:** For bare steel reinforcing bars, provide a minimum 3 inches of grout cover surrounding the reinforcing bar. For epoxy or galvanized reinforcing bars, provide a minimum of 2 inches of grout cover.

Labor

00515.30 Personnel Qualifications - Use personnel experienced in Micropile construction to perform the work. Relevant experience includes that with similar anticipated subsurface Materials, groundwater conditions, Micropile type, size, loads and any special construction techniques required.

Provide the following information to verify the contractor's experience and the qualifications of personnel scheduled to perform the Micropile construction:

(a) Micropile Contractor Qualifications - Evidence of the firm's experience in the construction and load testing of Micropiles and the successful construction of at least 5 projects in the last 5 years involving construction totaling at least 100 Micropiles of similar size and capacity to those required in these plans and specifications. Evidence of contractor experience in Micropile drilling and grouting in Soil or Rock Materials and conditions similar to project conditions. Provide a project reference list for each of the 5 projects that includes:

- Brief project description with the owner's name and current phone number.
- Date of project.
- Number, size, and capacity of Micropiles successfully installed and tested.
- Types of Soil/Rock Materials and groundwater conditions encountered in the project.

(b) Micropile On-Site Supervisor - Names and detailed experience of on-site supervisors for the Project. Provide on-site supervisors that have experience on at least 3 projects over the past 5 years installing Micropiles of similar type, size and scope to those shown in the Working Drawings and in similar geotechnical conditions to those described in the project geotechnical report for this project. List experience that includes the direct supervisory responsibility for the on-site Micropile construction operations and load testing.

(c) Micropile Drill Rig Operator - Names and detailed experience of drill operators for the Project. Provide drill rig operators that have experience on at least 3 projects over the

Insert Project Name Here

past 5 years installing the type(s) of Micropiles required for this project and to capacities equal to, or greater than, those required in the Specifications.

(d) Micropile Registered Professional Engineer of Record - Name(s) and detailed experience of the Micropile engineer. Provide Micropile engineers that are a Professional Engineer registered in the State of Oregon, with experience in the design of at least 3 Micropile projects of similar scope to this project, successfully completed over the past 5 years, and experience designing Micropiles of similar or greater capacity to those required in the Plans and Specifications.

(e) Welder Qualifications - Submit qualification documents for each welder. Use welders qualified according to AWS D1.1 for the position, process and Casing diameter used on the Project.

Include in the personnel list a summary of each individual's experience with sufficient detail for the Engineer to determine whether each individual satisfies the required qualifications.

Submit qualifications of the contractor's Micropile engineer at least 21 Calendar Days before submittal of the stamped Working Drawings. The Engineer will approve or reject the contractor's qualifications within 7 Calendar Days after receipt of a complete submittal.

Do not begin Work or order Materials before the Engineer provides written approval of the Contractor's experience qualifications.

The Engineer may suspend the Micropile construction Work if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of field personnel to the Engineer, who will have an additional 7 Calendar Days to respond to each request.

Construction

00515.40 General - Contain and dispose of all construction related waste according to 00290.20.

00515.43 Allowable Tolerances - Install Micropile to within the following tolerances:

- Centerline of piling not more than 3 inches from indicated plan location.
- Plumb within 2 percent of total-length plan alignment (vertical piles).
- Top elevation of Micropile no more than 1.0 inch above or 2.0 inches below the vertical plan elevation.
- Centerline of core reinforcement not more than 0.75 inches from centerline of final pile location.

00515.44 Micropile Installation - Select the drilling method, grouting procedure, and grouting pressure used for the installation of the Micropiles. Schedule all Micropile installations such that there is no interconnection with or damage to previously installed piles.

(a) Drilling - Provide drilling Equipment and methods suitable for drilling through the conditions to be encountered without causing damage to any overlying or adjacent Structures or services. Open the drillhole to the required nominal diameter along its full length prior to placing grout and reinforcement.

(Use only one of the following two options when micropile construction occurs near settlement-sensitive Structures. Delete both options if neither is applicable. Consult with geotechnical designer.)

[Option 1 - Use the following paragraph when vibratory pile-driving hammers will NOT be allowed.]

Do not use vibratory pile-driving hammers to advance Micropile Casings.

[Option 2 - Use the following paragraph when vibratory pile-driving hammers are allowed.]

If vibratory pile-driving hammers are used to advance Micropile Casings, submit a Vibration Monitoring Plan to the Engineer for approval prior to beginning any construction activity. Allow 14 Calendar Days for plan review. Include in the Vibration Monitoring Plan a preconstruction survey of affected Structures and facilities and describe methods and plans to monitor vibrations caused by pile installation Equipment and other construction activities. Demonstrate the use of monitoring Equipment and devices to detect and prevent damage to affected Structures and facilities. Do not begin any construction activity until the Engineer approves the Vibration Monitoring Plan.

Use temporary Casing or other approved method of Micropile drillhole support, in caving or unstable ground to permit the Micropile shaft to be formed to the minimum design drillhole diameter. Do not use drilling fluid containing bentonite. Stabilize and repair detrimental ground movements caused by caving or other unstable drillhole conditions, as determined by the Engineer.

(b) Ground Heave or Settlement - Observe the conditions in the vicinity of the Micropile construction site on a daily basis for signs of ground heave, settlement or other signs of ground displacement during construction. Immediately notify the Engineer if signs of movements are observed. Immediately suspend or modify drilling or grouting operations if ground heave or settlement is observed, if the Micropile Structure is adversely affected, or if adjacent Structures are damaged from the drilling or grouting. If the Engineer determines that the movements require corrective action, take corrective actions necessary to stop the movement or perform repairs.

(c) Reinforcement Placement - Place reinforcement according to the approved Micropile installation plan. Ensure that reinforcement surfaces are free of deleterious substances such as Soil, mud, grease or oil that might contaminate the grout or coat the reinforcement and impair the bond. If applicable, provide pile cages and reinforcement groups with sufficient strength to withstand the installation and grouting process and the withdrawal of the drill Casings without damage or disturbance.

Provide Centralizers and Spacers equally spaced along the length of the Micropile with a maximum center-to-center spacing of 10 feet. Locate the top and bottom Centralizers a maximum of 5.0 feet from the top and bottom of the Micropile. Provide at least two Centralizers per Micropile. For Micropiles less than or equal to 20 feet in length, place Centralizers at the top and bottom quarter points of the Micropile. Ensure that Centralizers and Spacers permit the free flow of grout without misalignment of the reinforcing bars and permanent Casing. Lower the central reinforcing bars with Centralizers into the stabilized

drillhole and set to the design elevation and alignment tolerances. Do not force or drive partially inserted reinforcing bars into the hole. Redrill and reinsert steel reinforcement when necessary to facilitate insertion.

(d) Grouting - Measure the grout quantity and pumping pressure during the grouting operations. Provide the Engineer with records showing the quantities, test data, and grout pressures.

After drilling, flush the hole with water or air to remove drill cuttings and other loose debris. Use a stable neat cement grout or a sand cement grout with a minimum 28-Day unconfined compressive strength as required in the Contractor's submitted design. Mix admixtures, if used, in accordance with manufacturer's recommendations. Use grouting Equipment that produces a grout free of lumps and undispersed cement. Equip the pump with a pressure gauge to monitor grout pressures. Place a second pressure gauge at the point of injection. Ensure that the pressure gauges are capable of measuring pressures of at least 150 psi or twice the actual grout pressures used by the contractor, whichever is greater. Size the grouting Equipment to enable the grout to be pumped in one continuous operation. Constantly agitate the grout prior to pumping. Place grout within one hour after mixing the grout or, if admixtures are used, within the time recommended by the manufacturer. Discard grout not placed within the allowed time limit.

Inject the grout from the lowest point of the drillhole by tremie methods until clean, pure grout flows from the top of the Micropile. The grout may be pumped through grout tubes, Casing, hollow-stem augers, or drill rods. Control the grout pressures and grout takes to prevent excess grout take, excessive ground heave, and fracturing of Rock formations. Fill the entire Micropile length with grout containing no voids or inclusions. Subsequent to tremie grouting, ensure complete continuity of the grout column in all grouting operations. The use of compressed air to directly pressurize the fluid grout is not permissible. If required, apply Post-Grouting of Micropiles according to the approved Working Drawings and record grout pressures, quantities, mix design, and other relevant Post-Grouting information. Upon completion of grouting, the grout tube may remain in the hole. Fill grout tube with grout if left in place.

(e) Grout Testing - Ensure that grout within the verification and proof test Micropiles attains the minimum required compressive strength, as identified in the Contractor's design submittal, prior to load testing. Previous test results for the proposed grout mix, completed within one year of the start of work, may be submitted for initial verification of the required compressive strengths for installation of pre-production verification test piles and initial production proof test piles.

During production, test the Micropile grout for compressive strength according to AASHTO T 106 (ASTM C109) for grout cubes or AASHTO T 22 (ASTM C39) for cylinders at a frequency of no less than three samples from each grout plant each Day of operation or three samples from each grout plant per every 10 Micropiles, whichever occurs more frequently. Calculate the average of the three samples tested to determine the compressive strength.

Determine grout consistency, as measured by grout density according to AASHTO T 121 (ASTM C138) or API RP-13B-1, at a frequency of at least one test per verification or proof test Micropile, conducted just prior to start of grouting. For production Micropiles, perform grout density testing at a frequency of at least once per each period of continuous grouting

operation or once per Day, whichever is more frequent. Ensure that the measured grout density is consistent with the approved Micropile Installation Plan.

Take grout samples directly from the grout plant. Provide grout cube compressive strength and grout density test results to the Engineer within 24 hours of testing.

00515.45 Micropile Splices - Furnish steel rebar and permanent Casing splices that develop at least the required compressive, tensile, and bending strengths used in the design of the Micropile. Provide mechanical bar splices meeting the requirements of 00515.10(e). Secure lengths of Casing and reinforcing bars to be spliced in proper alignment and in a manner to avoid eccentricity or angle between the axes of the two lengths to be spliced. Locate Casing joints at least two Casing outside diameters away from any bar splice, as measured along the vertical axis of the Micropile. When multiple reinforcing bars are used, stagger bar splices at least 3.0 feet.

Furnish threaded Casing joints that develop at least the required compressive, tensile, and bending strength used in the design of the Micropile. If welding of permanent high strength steel Casing is required, submit a Welding Procedure Specification (WPS) meeting the requirements of AWS D1.1 for review and written approval by the Engineer, prior to any welding operation. Weld all permanent Casing seams and splices using complete penetration welds.

00515.46 Pile Cap Connection - Furnish and install all Materials required to connect Micropiles to pile caps in accordance with the accepted stamped Working Drawings.

00515.47 Pile Load Tests - Perform verification and proof testing of piles at the locations shown, specified, or as directed. Confirm the grout has achieved the minimum required grout compressive strength prior to verification and Proof Load Testing.

(Use the following paragraph when compression load testing is required.)

Perform compression load testing meeting the requirements of ASTM D1143, except as modified by this subsection.

(Use the following paragraph when tension load testing is required.)

Perform tension load testing meeting the requirements of ASTM D3689, except as modified by this subsection.

(Use the following paragraph when lateral load testing is required.)

Perform lateral load testing meeting the requirements of ASTM D3966, except as modified by this subsection.

(Use the following paragraph when compression and tension load testing is required.)

When both compression and tension load testing is to be performed on the same pile, test the pile under compression loads prior to testing under tension loads.

(Fill in the blank in the following paragraph with the number of required sacrificial verification test piles. Obtain information from the designer.)

(a) Verification Load Tests - Perform pre-production verification pile load testing on sacrificial Micropiles to verify the design of the pile system and the construction methods proposed prior to beginning Work on any aspect of production piles. Construct _____ sacrificial verification test piles according to the approved Working Drawings. Install verification test pile(s) at the following locations:

(Provide the location(s) of verification test piles in by filling in the blank. Copy and paste the location line to as required to list all of the locations. Renumber "VT - 1" as necessary. Obtain information from the designer.)

Verification Test Pile

Station

Offset

VT - 1

Verification test pile locations may be adjusted by the Engineer depending on actual site conditions and other factors. If additional verification test piles are needed, the location will be determined by the Engineer.

Perform Verification Load Tests to verify that the Contractor-installed Micropiles will meet the loading requirements in compression and tension and the load test acceptance criteria, and to verify that the length of the Micropile bond zone is adequate. Demonstrate to the Engineer that the Micropile Verification Load Test results verify the Contractor's design and installation methods. The Engineer reviews and accepts the Contractor's design and installation methods prior to beginning production installation. For each verification test provide the Micropile Load Test Data Report to the Engineer within 5 Calendar Days of completing the testing.

For verification test piles, use the drilling and grouting methods, Casing and reinforcement details, depth of embedment (bond zone), and all other installation Materials and methods specified for the production piles, unless otherwise approved by the Engineer. At the completion of verification testing, remove test piles down to 2 feet below Roadway Subgrade or as directed.

(1) Testing Equipment and Data Recording - Provide dial gauges, dial gauge support, jack and pressure gauges, load cells and a reaction frame for use in testing the Micropiles. The load cell is required only for the Creep test portion of the verification test.

Provide a description of test setup and jack, pressure gauge, and load cell calibration curves according to 00515.05. Design the testing reaction frame to be sufficiently rigid and of adequate dimensions to prevent excessive deformation of the testing Equipment. Align the jack, bearing plates, and stressing anchorage such that unloading and repositioning of the Equipment will not be required during the test.

Apply and measure the test load with a hydraulic jack and pressure gauge. Provide a pressure gauge graduated in 100 psi increments or less. Provide a jack and pressure gauge with a pressure range not exceeding twice the anticipated maximum test pressure. Provide a jack ram travel sufficient to allow the test to be completed without

resetting the Equipment. Position the jack at the beginning of the test such that unloading and repositioning during the test will not be required. Monitor the Creep test load hold during verification tests with both the pressure gauge and the load cell. Use the load cell to accurately maintain a constant load hold during the Creep test load hold increment of the verification test.

Measure the pile top movement with a dial gauge capable of measuring to 0.001 inch. Provide a dial gauge having a sufficient travel to allow the test to be completed without having to reset the gauge. Visually align the gauge to be parallel with the axis of the Micropile and support the gauge independently from the jack, pile, or reaction frame. Use a minimum of two dial gauges when the test setup requires reaction against the ground or single reaction piles on each side of the test pile. Record the required load test data and supply the results to the Engineer.

(2) Verification Test Loading Schedule - Test verification piles designated for compression or tension load testing to a maximum test load of 1.5 times the Factored Design Loads provided in 00515.04 or as shown. Measure the pile top movement at each load increment. Start the load-hold period as soon as each test load increment is applied. Reset dial gauges to zero after the initial AL is applied.

(Obtain information from designer and fill in the table below).

Incrementally load the Micropile in accordance with the following cyclic load schedule for both compression and tension loading as indicated in Table 00515-2:

AL = Alignment Load ($\leq 0.04\text{FDL}$)

FDL = Factored Design Load

TABLE 00515-2

Loading Cycle	Increment	Load	Hold Time (min.)
AL	1	AL	2.5
Cycle 1	2	0.075 FDL	4
	3	0.15 FDL	4
	4	0.225 FDL	4
	5	0.30 FDL	4
	6	0.375 FDL	4
Cycle 2	7	AL	1
	8	0.15 FDL	1
	9	0.30 FDL	1
	10	0.375 FDL	1
	11	0.45 FDL	4
	12	0.525 FDL	4
	13	0.60 FDL	4
	14	0.675 FDL	4
	15	0.75 FDL	4
	16	AL	1
	17	0.30 FDL	1
	18	0.60 FDL	1

Insert Project Name Here

Loading Cycle	Increment	Load	Hold Time (min.)
Cycle 3	19	0.675 FDL	1
	20	0.75 FDL	1
	21	0.825 FDL	4
	22	0.90 FDL	4
	23	0.975 FDL	60* (Creep Test)
Cycle 4	24	AL	1
	25	0.30 FDL	1
	26	0.60 FDL	1
	27	0.90 FDL	1
	28	0.975 FDL	1
	29	1.05 FDL	4
	30	1.125 FDL	4
	31	1.20 FDL	4
	32	1.275 FDL	4
	33	1.35 FDL	4
	34	1.425 FDL	4
	35	1.50 FDL	4
	36	1.20 FDL	4
	37	0.90 FDL	4
	38	0.60 FDL	4
	39	0.30 FDL	4
	40	AL	15

* Measure and record pile movement during the Creep test at intervals of 1, 2, 3, 4, 5, 6, 10, 20, 30, 50, and 60 minutes as soon as the test load is applied.

(3) Verification Test Pile Acceptance Criteria - The acceptance criteria for Micropile Verification Load Tests are:

(Obtain information from designer and fill in the blanks. Delete the first bullet if the structural components of the verification test pile have to be increased to accommodate the maximum required verification test load.)

- The pile sustains the first compression or tension ____ FDL test load with no more than ____ inch total vertical movement at the top of the pile, relative to the top of the pile prior to the start of testing.
- At the end of the ____ FDL Creep test load increment, test pile Creep rate does not exceed 0.04 inch/log cycle time (1 to 10 minutes) or 0.08 inch/log cycle time (6 to 60 minutes or the last log cycle if held longer) and the Creep rate is linear or decreasing throughout the Creep load hold period.
- Failure does not occur at the ____ FDL maximum test load. Failure is defined as the load where the slope of the load versus head deflection curve (at the end of increment) first exceeds 0.025 inch/kip.

Submit a Micropile Load Test Data Report, according to 00515.48. The Engineer will respond within 5 Calendar Days after receipt of the report with either acceptance or rejection of the tested Micropile.

(4) Verification Test Pile Rejection - If a verification-tested Micropile fails to meet the acceptance criteria, modify the design, the construction procedure, or both. These modifications may include modifying the installation methods, increasing the Bond Length, or changing the Micropile type. Submit to the Engineer any modifications that necessitate changes to the Structure. Do not proceed with further Micropile testing or construction without approval from the Engineer.

(b) Proof Load Tests - Perform Proof Load Tests on one production pile at each designated Substructure unit (footing) unless otherwise directed. The Engineer will determine the pile to be tested in each Substructure unit. Proof test Micropiles are required at the following Substructure unit locations:

(Identify the micropile locations selected for testing below. Add rows for each micropile location to be proof tested. Obtain information from the designer.)

Proof Test Pile	Location	Footing
Bridge No. ____,	Bent ____	Right, Center or Left

Proof Load Test locations may be adjusted by the Engineer. The Engineer will designate the location of additional proof test piles.

Perform Proof Load Tests to verify the production Micropiles will meet the loading requirements in compression and tension and the load test acceptance criteria. For each proof test, provide the Micropile Load Test Data Report to the Engineer within 5 Calendar Days of completing the testing.

(1) Proof Test Loading Schedule - Test piles designated for compression or tension Proof Load Testing to a maximum test load of 1.0 times the Micropile Factored Design Load(s) provided in 00515.04 or as shown. Provide testing Equipment and data recording devices in accordance with 00515.47(a)(1). Incrementally load the proof test Micropiles according to Table 00515-3, to be used for both compression and tension loading:

AL = Alignment Load ($\leq 0.04\text{FDL}$)

FDL = Factored Design Load

TABLE 00515-3

Loading Cycle	Increment	Applied Load	Hold Time (min.)
Apply AL	1	AL	2.5
Load Cycle	2	0.10 FDL	4
	3	0.20 FDL	4
	4	0.30 FDL	4
	5	0.40 FDL	4
	6	0.50 FDL	4
	7	0.60 FDL	4
	8	0.70 FDL	4
	9	0.80 FDL	4
	10	0.90 FDL	4

Insert Project Name Here

	11	1.00 FDL	10 or 60 minutes*
Unload Cycle	12	0.90 FDL	4
	13	0.75 FDL	4
	14	0.60 FDL	4
	15	0.45 FDL	4

* Where the pile top movement between 1 and 10 minutes exceeds 0.04 inch, maintain the 1.0 FDL increment an additional 50 minutes and measure and record pile movements at 1, 2, 3, 5, 6, 10, 20, 30, 50 and 60 minutes.

Reset dial gauges to zero after the initial AL is applied.

(2) Proof Test Pile Acceptance Criteria - The acceptance criteria for Micropile Proof Load Tests are:

(Obtain information from the designer and fill in the blanks.)

- The pile sustains the compression or tension ____ FDL with no more than ____ inch total vertical movement at the top of the pile, relative to the top of the pile prior to the start of testing.
- At the end of the ____ FDL Creep test load increment, test piles have a Creep rate not exceeding 0.04 inch/log cycle time (1 to 10 minutes) or 0.08 inch/log cycle time (6 to 60 minutes) and the Creep rate is linear or decreasing throughout the Creep load hold period.
- Failure does not occur at the ____ FDL maximum test load. Failure is defined as the load where the slope of the load versus head deflection curve first exceeds 0.025 inch/kip.

Submit a Micropile Load Test Data Report, according to 00515.48. The Engineer will respond within 5 Calendar Days after receipt of the report with either acceptance or rejection of the tested Micropile.

(3) Proof Test Pile Rejection - If a proof-tested Micropile fails to meet the acceptance criteria, proof test additional Micropiles within that footing or Substructure unit as directed by the Engineer. For failed piles and construction of replacement piles, modify the design, the construction procedure, or both. Modifications may include installing replacement Micropiles, incorporating remaining untested piles at reduced load capacities, post grouting, modifying installation methods, increasing the Bond Length, or changing the Micropile type. Submit to the Engineer any modifications that necessitate changes to the Structure design. Do not proceed with further Micropile testing or construction without the Engineer's approval.

00515.48 Micropile Load Test Data Reports - Report the Micropile verification and Proof Load Test data to the Engineer in the form of a summary report that includes, at a minimum, the following information:

- Project description.
- Description of site and subsurface conditions including information on the subsurface conditions encountered at the load test location.

Insert Project Name Here

- A listing of key personnel involved with the testing and production of the Micropile including the grout plant operator, drill rig operator, on-site supervisor and Micropile engineer.
- Results of the load test, including completed testing field data records for load increments and time periods in 00515.47(a)(2) and 00515.47(b)(1), and appropriate presentation figures, charts and graphs. Record the required load test data and submit to the Engineer for verification.
- Statement of load testing requirements and acceptance criteria according to 00515.47(a)(3), 00515.47(a)(4), 00515.47(b)(2), and 00515.47(b)(3).
- Comparison of load testing results and acceptance criteria.
- Summary statement of load test results, including whether the load test met or failed to meet the criteria.
- Hydraulic jack pressure gauge and load cell calibration report.
- Material certifications or check sample results for permanent Casing (if used), reinforcement, and grout compressive strength testing.

Submit the Micropile Load Test Data Report as a Stamped Working Drawing according to 00515.05(b)(5).

00515.49 Micropile Installation Log - Prepare and submit a Micropile Installation Log to the Engineer for each Micropile installed, within 24 hours of Micropile installation. A copy of the Micropile Installation Log is available from the ODOT Construction Forms website at:

<https://www.oregon.gov/ODOT/Construction/Pages/Forms.aspx>

At a minimum, include the following information:

- Micropile drilling duration
- Description of Soil and Rock encountered
- Final tip elevation
- Cutoff elevations for the top and bottom of the Casing
- Nominal Resistance
- Description of unusual installation behavior or conditions
- Grout pressures attained during grouting
- Grout quantities pumped into Micropiles
- Micropile Materials and dimensions

Measurement

(Use subsections (a) through (d) as instructed. Re-alphabetize subsections to be sequential, beginning with (a).)

00515.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

Insert Project Name Here

(Use the following subsection (a) when Pay Item (a) is included in the Pay Item list below.)

(a) Provide Micropile Equipment - No measurement of quantities will be made for providing Micropile Equipment.

(Use the following subsection (b) when Pay Item (b) is included in the Pay Item list below.)

(b) Micropiles - Micropiles will be measured on the unit basis for each production Micropile installed and accepted.

(Use the following subsection (c) when Pay Item (c) is included in the Pay Item list below.)

(c) Micropile Verification Load Test - Micropile Verification Load Tests will be measured on the unit basis for each for Verification Load Test pile constructed, tested, and accepted. Micropile Verification Load Tests performed at the option of the Contractor will not be measured.

(Use the following subsection (d) when Pay Item (d) is included in the Pay Item list below.)

(d) Micropile Proof Load Test - Micropile Proof Load Tests will be measured on the unit basis for each Proof Load Test completed, reported, and accepted. Micropile Proof Load Tests performed at the option of the Contractor will not be measured.

Payment

(Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

00515.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Provide Micropile Equipment	Lump Sum
(b) Micropiles	Each
(c) Micropile Verification Load Test	Each
(d) Micropile Proof Load Test	Each

(Use the following paragraph and bullets when item (a) is included in the Pay Item list above.)

Partial payments for Item (a) will be made as follows:

- When drilling Equipment is on the job, assembled and Verification Load Test drilling is underway 75%

Insert Project Name Here

- When the installation of the Micropiles is complete, accepted and the drilling Equipment has been removed from the site 25%

(Use the following paragraph when item (b) is included in the Pay Item list above.)

Item (b) includes designing, drilling, furnishing, and placing all steel reinforcement and Casing, grouting, and all Micropile top attachments. No payment will be made for Micropiles that fail Micropile Proof Load Tests.

(Use the following paragraph when item (c) is included in the Pay Item list above.)

Item (c) includes payment for furnishing all Materials, providing all Equipment, and labor required to construct sacrificial Verification Load Test piles, conduct the load test, and report the results as specified. No payment will be made for failed Micropile Verification Load Tests.

(Use the following paragraph when item (d) is included in the Pay Item list above.)

Item (d) includes payment for furnishing all Materials, providing all Equipment, and labor required to conduct Proof Load Tests, and report the results as specified. No payment will be made for failed Micropile Proof Load Tests.

Payment will be payment in full for furnishing and placing all Materials, providing, erecting, maintaining, and replacing all Equipment, and for all labor and Incidentals necessary to complete the Work as specified.

SP00520 (Special Provisions for the 2024 Book)

**(Bidding on or after: 10-01-26
Last updated: 06-30-26
Requires SP02520)**

SECTION 00520 - DRIVEN PILES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Use the following lead-in paragraph when none of the following subsections are included in the project.)

Comply with Section 00520 of the Standard Specifications.

(Use the following lead-in paragraph when any of the following subsections are included in the project.)

Comply with Section 00520 of the Standard Specifications modified as follows:

Insert Project Name Here

(Use the following subsection .11 on projects that require steel piles. Insert bridge structure number and bent number under "Location". Insert the number of piles in each bent under "Number". Insert the estimated length of the individual piles in each bent under "Length". Insert the type and dimensions of the pile under "Type and Size". If the piles will be coated, insert the top and bottom elevations of the coating in the "Coating Top Elevation" and "Coating Bottom Elevation" columns, otherwise insert "n/a" Add rows to the table as necessary. Obtain information from the Geotechnical Designer.)

00520.11 Engineer's Estimated Length List - Add the following to the end of this subsection:

The Engineer's estimated lengths of steel piling are:

Location	Number	Length (feet)	Type and Size	Coating Top Elevation ¹	Coating Bottom Elevation ¹

¹ Protective coating system and color requirements according to 00594.10.

(Use the following subsection .13 on projects that require test piles. Insert bridge structure number and bent number under "Location". Insert the number of piles in each bent under "No.". Insert the estimated length of the individual piles in each bent under "Length". Insert the type and dimensions of the pile under "Type and Size". Obtain information from the Geotechnical Designer.)

00520.13 Test Piles - Replace this subsection, except for the subsection number and title, with the following:

Furnish test piles according to the test pile length list below. When test piles are required, the production pile lengths shown or specified below are estimated lengths only. The actual lengths furnished for production piles are determined by the Engineer after the test piles have been driven. This applies for all pile types.

The required test piles are:

Location	No.	Length (Feet)	Type and Size
----------	-----	---------------	---------------

00520.14 Unused Piles - Replace the paragraph that begins " Acceptable full-length piles ..." with the following paragraph:

Acceptable full-length piles furnished according to the estimated length list, order list, or revised pile order list, but not incorporated in the Work, is handled according to one of the following:

00520.20(a)(2) Open-End Diesel Hammers - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Provide open-end (single-acting) diesel hammers equipped with a device that allows the Engineer to visually determine hammer stroke at all times during pile driving operations. Provide the Engineer with the hammer manufacturer's chart equating stroke and blows per minute.

00520.20(a)(4) Gravity Hammers - Replace this subsection, except for the subsection number and title, with the following:

Provide gravity hammers that have a ram weighing between 2,000 pounds and 5,000 pounds, weigh not less than the combined weight of helmet and pile and a drop height of not more than 10 feet.

00520.20(b) Vibratory Hammers - Replace this subsection, except for the subsection number and title, with the following:

Control installation of production piles with vibratory hammers according to the power consumption, rate of penetration, specified tip elevation, or other acceptable means that assure the pile resistance equals or exceeds the required nominal pile bearing resistance. After driving piles with a vibratory hammer, verify pile resistance (see 00520.42) by driving them with an impact hammer of suitable energy. Do not use vibratory hammers to drive test piles or when preboring or jetting.

00520.20(c)(1) Helmet - Replace the paragraph that begins "Equip piles driven with ..." with the following paragraph:

Equip piles driven with impact hammers with an adequate metal helmet. Provide helmets that:

(Use the following subsection .20(c)(4) when required by the Geotechnical Designer.)

00520.20(c)(4) Followers - Replace this subsection, except for the subsection number and title, with the following:

Support piles in line and position while driving. Construct pile hammer leads to give the hammer freedom of movement while maintaining alignment of the hammer and the pile to ensure concentric impact for each blow. Use fixed leads unless the Engineer approves the use of swinging leads. Fit swinging leads, when used, with a pile gate at the bottom of the leads. To maintain alignment of batter piles, use horizontally braced swinging leads, adequately embedded in the ground, or rigidly attached to prevent movement during pile driving.

Followers are permitted.

00520.20(d)(1) General - Replace the paragraph that begins "During pile-driving operations, no ..." with the following paragraph:

During pile-driving operations, no changes to the approved Equipment are allowed without the Engineer's written permission. Submit a request for change on a "Pile and Driving Equipment Data" form. The Engineer will give notification of approval or rejection within

7 Calendar Days of receiving the form. Time required for resubmission and review of a Contractor's Equipment change request is not a basis for a Contract Time extension request unless the Engineer does not respond in 7 Calendar Days.

00520.20(d)(2) Standard Evaluation Method - Replace the paragraph that begins "1 Requirements are based ..." with the following paragraph:

- 1 Requirements are based on the FHWA Gates equation (see 00520.42(b)), except all driving criteria for double acting and differential hammers both air/steam and diesel are by the wave equation analysis.

Replace the paragraph that begins "The required number of ..." with the following paragraph:

The required number of hammer blows indicated by the FHWA Gates equation at the nominal pile bearing resistance is at a rate between 2 and 10 blows per inch.

(Use the following subsection .20(d)(3) when WEAP input values are required. Include further explanations if necessary. More than one table may be required to assess pile driving stresses through upper hard or dense soils layers or other conditions. Consult with the Geotechnical Designer regarding the appropriate input(s) to use. Typically supply the highest R_n value and the worst-case driving conditions that the contractor should use in the WEAP analysis to determine hammer requirements. Supply WEAP input data for a complete "drivability analysis" if appropriate. Obtain information from the Geotechnical Designer.)

00520.20(d)(3) Wave Equation Method - Replace the bullet that begins "The energy of the submitted ..." with the following bullet:

- The energy of the submitted hammer produces a wave equation predicted blow count between 2 and 10 blows per inch for the nominal resistances, pile lengths and other conditions specified.

Replace the bullet that begins "The pile stresses indicated by ..." with the following bullet:

- The pile stresses indicated by the wave equation at the nominal resistance are not greater than the stress at the point of impending damage to the pile as follows:

Replace the paragraph that begins "Hammers not meeting these ..." with the following paragraph:

Hammers not meeting these requirements are rejected. Replace rejected hammers with suitable hammers.

Replace the bullet that begins "Electronic and paper copies ..." with the following bullet:

- Electronic and paper copies of the wave equation input and output files. Provide output files in the standard WEAP output format.

Insert Project Name Here

Replace the paragraph that begins "For Agency reviewing and approving ..." with the following paragraph:

The Agency will consider the following when reviewing and approving the wave equation analysis submittals:

Replace the paragraph that begins "Failure of a previously approved ..." with the following paragraph:

Failure of a previously approved hammer to operate properly during construction is cause for rejection.

Add the following paragraph and table(s) to the end of this subsection:

The input values for the wave equation analyses are:

Bent	Pile Type	Pile Length * (Feet)	Quake (Inches) Skin	Quake (Inches) Toe	Damping (sec./ft.) Skin	Damping (sec./ft.) Toe	% skin (ITYS)	R _n (kips)

- * These pile lengths are based on the top of the pile being at the finished cutoff elevation. Add all additional pile length above the cutoff elevation, that may be required to accommodate the Contractor's pile installation method or site conditions to the lengths listed above and appropriate changes made to the skin friction distribution input listed below.

(Use one of the following two options. Delete the one that does not apply.)

[Option 1 - Use this option when either triangular or rectangular distribution is required. Delete the one (triangular or rectangular) that does not apply.]

Use (triangular)(rectangular) skin friction distribution.

[Option 2 - Use this option when providing relative skin friction values in table form. Insert Relative Skin Friction Distribution values in the table. Fill in the bent number. Add or delete rows and columns as appropriate.]

Use the relative skin friction distribution values listed below in the WEAP analysis:

(Repeat the table as needed for each bent)

	Bent _____
Depth (Feet)	Relative Distribution

Depth (Feet)	Bent _____ Relative Distribution
-----------------	--

(Use the following subsection .41(d) when augering or wet-rotary drilling is allowed by the Geotechnical Designer.)

00520.41(d) Preboring - Replace the paragraph that begins "Use augering, wet-rotary ..." with the following paragraph:

Use augering, wet-rotary drilling or other methods of preboring only when specified or with written approval. When allowed, prebore holes at pile locations and to the depths shown or directed. Make prebored holes smaller than the diameter or diagonal of the pile Cross Section, but sufficient to allow penetration of the pile to the specified depth. If subsurface obstructions, such as Cobbles, Boulders or Rock layers are encountered, the hole diameter may be increased to the least dimension that is adequate for pile installation. The use of a reinforced section (spud) to loosen the subsurface material at pile locations is not allowed unless otherwise approved.

Replace the paragraph that begins "Perform preboring in a manner ..." with the following paragraph:

Perform preboring in a manner that will not impair the bearing or lateral capacity of the piles already in place or the safety of existing adjacent Structures. When it is determined that preboring has disturbed the load bearing resistances of previously installed piles, restore those piles that have been disturbed to conditions meeting the requirements of this Specification by redriving or by other acceptable methods. The Contractor is responsible for the costs of any necessary remedial measures unless the preboring method was specifically included in the Contract Documents and properly executed by the Contractor.

Add the following sentence to the end of this subsection:

Use augering, wet-rotary drilling or other approved methods of preboring as directed.

(Use the following subsection .41(e) when jetting is allowed by the Geotechnical Designer.)

00520.41(e) Jetting - Replace the paragraph that begins "Jetting may only be used ..." with the following paragraph:

Jetting may only be used when allowed in the Contract Documents or if approved in writing. When jetting is not required in the Contract Documents, but approved at the Contractor's request, determine and submit for review the number of jets and the volume and pressure of water at the jet nozzles necessary to freely erode the material adjacent to the pile without affecting the lateral stability of the final in-place pile. The Contractor is responsible for all damage caused by unapproved or improper jetting operations, unless the jetting method was specifically included in the Contract Documents and properly executed by the Contractor. Control, treat if necessary, and dispose of all jet water in a satisfactory manner. Drive all jetted pile with an approved impact hammer.

Insert Project Name Here

Add the following sentence to the end of this subsection:

Jetting is permitted.

00520.41(f) Location and Alignment Tolerance - Replace the paragraph that begins "Place the tops of piles at ..." with the following paragraph:

Place the tops of piles at plan cutoff elevation and horizontally within 6 inches of plan locations and no closer than 4 inches from any edge of the cap. Any increase in cap size to meet this edge distance requirement is at no additional cost to the Agency.

00520.41(h) Test Piles - Replace the paragraph that begins "When specified, furnish and ..." with the following paragraph:

When specified, furnish and drive test piles at the locations and to the lengths directed. Furnish all test piles of the kind and size specified for the permanent foundation piles unless otherwise directed. Drive all test piles with approved pile driving Equipment. The specified length of test piles is greater than the estimated length of production piles to provide for variation in Soil conditions. Drive test piles using driving Equipment identical to what the Contractor proposes to use on the production piling. Excavate to the elevation of the bottom of the footing before driving test piles. (See Section 00510.)

Replace the paragraph that begins "Drive test piles to or below ..." with the following paragraph:

Drive test piles to or below the required minimum tip elevation and to a hammer blow count established by the Engineer. Allow test piles that do not attain the hammer blow count specified at the minimum tip elevation shown to "set up" for 24 hours, or less if directed, before being redriven. (See 00520.42(d).) If the tops of test piles reach plan grade without attaining the required pile bearing resistance, splice them and drive until the required bearing resistance is attained.

00520.42(a) General - Replace the paragraph that begins "Drive piles with approved pile ..." with the following paragraph:

Drive piles with approved pile driving Equipment to the lengths necessary to attain the required penetration and nominal pile bearing resistance. Adequate pile penetration is considered reached when the piles are driven to or below the minimum penetration depth and the specified bearing resistance is achieved. If piles do not achieve the specified resistance when driven to order length or estimated length, splice and drive them to penetrations established by the Engineer. Provide a pile blow count at a rate of between 2 and 10 blows per inch at the required nominal pile bearing resistance. Maintain the required number of hammer blows per inch at final penetration for 3 consecutive inches unless "refusal" driving is first obtained. "Refusal" driving is defined as 20 blows per 1 inch or as determined by the Engineer.

Replace the paragraph that begins "If water jets are used ..." with the following paragraph:

If water jets are used with the driving, determine the bearing value by the specified equation from the results of driving after the jetting has been completed according to 00520.42(e).

(Use the following subsection .42(d) when a minimum "set period" of longer than 24 hours is required or if piles are required to set before redriving. Check with the Geotechnical Designer.)

00520.42(d) Set Period and Redriving - Replace the paragraph that begins "If piles do not attain the ..." with the following paragraph:

If piles do not attain the required nominal bearing resistance when driven to the specified length, and if allowed or required, allow the piles to stand for a "set period" without driving. The "set period" is a minimum of 24 hours. After the set period, perform check driving on either two piles in each bent or on one pile in every 10 piles, whichever is more. The Engineer will designate the piles that check driving is to be performed. Do not use a cold hammer for redriving. Warm up the hammer before redriving begins by applying at least 20 blows to another pile. Redriving consists of driving the pile to the required bearing resistance with a maximum of 15 blows. If the specified hammer blow count is not attained on redriving, the Engineer may direct the Contractor to drive all of the remaining pile length and repeat the set period and redriving procedure. Splice those piles driven to plan grade that do not attain the hammer blow count required, and drive until the required bearing resistance is attained. If the required bearing resistance is attained for each pile that is redriven, then the remaining piles in that bent are considered satisfactory when driven to at least the same penetration and resistance as the redriven piles.

(Use the following two paragraphs when a minimum "set period" of longer than 24 hours is required. Fill in the blank. Use days or hours as appropriate and delete whichever doesn't apply.)

Replace the sentence that begins "The "set period" shall be..." with the following sentence:

The "set period" is a minimum of _____ (Days)(hours) unless otherwise approved by the Engineer.

(Use the following two paragraphs when piles are required to set before redriving.)

Add the following sentence to the end of this subsection:

Piles are required to set before redriving.

00520.42(e) Jetted Piles - Replace this subsection, except for the subsection number and title, with the following:

The nominal pile bearing resistance of jetted piles is based on impact driving blow count after jetting has been completed. Jet pipes may be removed when the pile tip is at the required minimum pile tip elevation and before the pile is driven to the required bearing resistance. For piles that are jetted at the Contractor's request and do not attain the required nominal bearing resistance at the ordered length, splice, as required, and drive with a specified impact pile hammer until the required nominal bearing resistance is achieved according to appropriate criteria in 00520.42. If jetting is requested by the Contractor, perform all splicing and driving piles beyond the order length at no additional cost to the Agency.

Insert Project Name Here

00520.42(g) Vibratory Hammers - Replace this subsection, except for the subsection number and title, with the following:

The nominal bearing resistance of piles driven with vibratory hammers is based on impact driving blow count after the vibratory Equipment has been removed. When vibratory installation of the piles is approved by the Engineer and the vibrated piles do not attain the required nominal bearing resistance at the specified length, splice them as required, at no additional cost to the Agency, and drive with a specified impact pile hammer until the required nominal bearing resistance is achieved, according to 00520.42.

00520.43(b) Storage and Handling - Replace this subsection, except for the subsection number and title, with the following:

Store and handle steel piles in ways that protect them from damage. Bent or kinked piles are rejected.

(Use the following subsection .43(c) on projects with steel pipe piles that do not require reinforced tips. Delete the end treatment that does not apply and remove the parentheses. Obtain information from the Geotechnical Designer. If reinforced tips are required, do not use this subsection; instead use subsection .43(d) below.)

00520.43(c) End Treatment - Add the following sentence to the end of this subsection:

Drive steel pipe piles (open)(closed)-ended with tip treatment as shown.

(Use the following subsection .43(d) on projects with steel pipe piles that require reinforced pile tips. Delete "inside" or "outside" as appropriate and remove the parentheses. Obtain information from the Geotechnical Designer.)

00520.43(d) Reinforced Pile Tips - Add the following sentence to the end of this subsection:

For steel pipe piling, provide (inside)(outside) fit, open end cutting shoes meeting the requirements of 02520.10(e).

00520.43(g)(1) Splices - Replace this subsection, except for the subsection number and title, with the following:

Construct splice joints for pipe piles according to Joint B-U4a or B-U4a-GF (Single-Bevel Groove Weld) in D1.1. Weld back-up rings with a full penetration groove weld. Construct pipe pile splices that include a steel plate for Soil plug formation according to Joint TC-U4a or TC-U4a-GF.

Construct splice joints for H-piles according to Joint B-U3b or B-U3-GF (Double V-Groove Weld) in D1.1 for both the web and flange sections. Joint B-U4a or B-U4a-GF may be substituted on the flange weld. Provide access holes at the ends of the web according to D1.1.

00520.43(g)(2) Submittals - Replace the bullet that begins "A Welding Procedure Specification ..." with the following bullet:

Insert Project Name Here

- A Welding Procedure Specification (WPS) for all pile welds, according to the limitations of D1.1. Both ASTM A36 and ASTM A252 Grade 1 and 2 may be treated as prequalified base metals under Group 1. ASTM A252 Grade 3 will not be considered a prequalified base metal unless the steel has a Carbon Equivalent (CE) of 0.30 percent or less. Develop a Procedure Qualification Record (PQR) for all welding using Grade 3 steel or present proof that the chemistry of the steel meets the CE requirements.

Replace the bullet that begins "An inspection report stating ..." with the following bullet:

- An inspection report stating that the welding under the Contract was performed according to D1.1. Include a review of the WPS, a review of welder qualifications and a report on visual inspection of the welds on the Project Site in the report. Submit inspection reports signed by a Certified Welding Inspector (CWI) holding QC1 certification as defined in D1.1.

00520.43(g)(3) Additional Testing - Replace this subsection, except for the subsection number and title, with the following:

The Engineer may request additional nondestructive testing (NDT), such as radiography or ultrasonic testing of any or all welds. If the additional testing identifies defects warranting rejection, perform repair and additional inspection at no additional cost to the Agency. If the additional NDT does not identify defects warranting rejection, the Agency will pay the cost of the additional testing. Radiographic and ultrasonic defect indications are evaluated according to the statically loaded criteria of D1.1.

00520.43(h) Cutoff Lengths - Replace this subsection, except for the subsection number and title, with the following:

Cut off the tops of all permanent piles square and smooth at the elevation shown or as directed. All cut-off pile becomes the property of the Contractor. Dispose of according to 00290.20. With approval, undamaged cutoffs may be used as pile extensions or welded together to form full length piles. Do not vary steel pile cutoffs welded together from a straight line more than 1/4 inch in 20 feet measured along any edge of the pile, whether pile extensions or full length piles.

Mark all acceptable cutoffs and unused pile lengths remaining at completion of pile driving for identification by the Engineer as acceptable for use on other or future Agency projects if requested by the Contractor.

00520.46 Damaged or Defective Piles - Replace this subsection, except for the subsection number and title, with the following:

In addition to other specified requirements:

- Approval of a pile hammer does not relieve the Contractor of responsibility for piles damaged from misalignment of the leads, failure of cap block or cushion materials, failure of splices, malfunctioning of the pile hammer or other improper construction methods.

Insert Project Name Here

- Piles damaged during installation are considered unsatisfactory unless the nominal bearing resistance is proved by load tests performed by the Contractor. If such tests indicate inadequate resistance, take corrective measures, such as the use of damaged piles at reduced resistance, installation of additional piles, strengthening of damaged piles, or replacement of damaged piles.
- A concrete pile is considered defective if a visible crack appears around the entire periphery of the pile, or any other crack or defect is observed that is determined to affect the strength or performance of the pile.
- Do not place footing concrete until all piles within a footing are inspected by the Engineer.

00520.80(a) Furnish Pile Driving Equipment - Replace this subsection with the following subsection:

00520.80(a) Provide Pile Driving Equipment - No measurement of quantities will be made for providing Equipment for driving piles.

(Add the following lead-in paragraph and subsection .80(g) when protective coatings are required on steel piles.)

Add the following subsection:

00520.80(g) Steel Pile Protective Coatings - The estimated quantities of steel pile protective coatings are:

Coating System	Length of Coated Pile (feet)
----------------	---------------------------------

00520.90 Payment - Replace the Pay Item Furnish Pile Driving Equipment with the following Pay Item:

Pay Item	Unit of Measurement
----------	---------------------

(a) Provide Pile Driving Equipment.....	Lump Sum
---	----------

Replace the bullet that begins "When Equipment for driving ..." with the following bullet:

- When Equipment for driving piles is provided and is satisfactorily driving piles 75%

Replace the paragraph that begins "The cost of all Materials ..." with the following paragraph:

The cost of all Materials and labor, including the manipulation of the pile driving Equipment in connection with driving piles will be included in the unit price each for driven piles. Providing Equipment for driving sheet piling is not included in this Work.

Replace the paragraph that begins "In items (b), (c), (d) ..." with the following paragraph:

Insert Project Name Here

In items (b), (c), (d) and (k) the type and size of pile is inserted in the blank.

Replace the paragraph that begins "Items (d) and (e) ..." with the following paragraph:

Items (d) and (e) include all expenses involved in driving piles that have not attained the required bearing resistance and are required to stand for a "set period".

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00530 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

**Requires SP02510. Requires
SP02513 when using Stainless Steel.)**

SECTION 00530 - STEEL REINFORCEMENT FOR CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00530 of the Standard Specifications modified as follows:

00530.10 Materials - Replace this subsection, except for the subsection number and title, with the following:

Concrete Inserts	02513.35
Deformed Bar Reinforcement	02510.10
Deformed Bar Reinforcement (Stainless Steel)	02513.10
Dowels	02510.50
Dowels (Stainless Steel)	02513.50
Epoxy Coated Reinforcement	02510.11
Galvanized Coating	02510.30
Headed Bar Reinforcement	02510.25
Mechanical Splices	02510.20
Mechanical Splices (Stainless Steel)	02513.20
Ties and Supports	02510.60
Ties and Supports (Stainless Steel)	02513.60
Welded Wire Reinforcement	02510.40

00530.13 Miscellaneous Metal - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Minor metal parts such as drains, bolts, concrete anchors, spacer blocks, expansion and bearing devices, access hole covers and frames, anchor bolts, inserts and similar miscellaneous metal, unless otherwise provided, are classified as reinforcement.

Pipe attached to or used in conjunction with bridge deck drains or catch basins are classified as reinforcement.

00530.14 Concrete Inserts - Replace the paragraph that begins "Furnish hot-dip galvanized ..." with the following paragraph:

Furnish hot-dip galvanized expanded coil concrete inserts with closed back ferrule threaded to receive UNC threaded bolts or rods of the size shown. Furnish concrete inserts with the following minimum lengths and capacities:

00530.30 Mechanical Splice Installers - Replace the bullet that begins "Make splice samples ..." with the following bullet:

- Make splice samples in the presence of the Engineer using the same Materials, Equipment, and procedures that are used on the Project.

00530.35 Headed Bar Reinforcement Installers - Replace the bullet that begins "Make samples in the ..." with the following bullet:

- Make samples in the presence of the Engineer using the same Materials, Equipment, and procedures that are used on the Project.

00530.40 Protection of Material - Replace the paragraph that begins "In addition to the requirements ..." with the following paragraph:

In addition to the requirements above, store epoxy coated bars with supports close enough to prevent sagging in the bundles. Provide protective padding when bundles are stacked or when supported on metal. Store bars as close as practicable to where they are placed in the Structure. Cover bars with an opaque material during storage to protect them from exposure to sunlight and saline mist. Move bars to or from storage according to 02510.11(b) to minimize damage to the coating. Do not allow the total exposure time from bar delivery to concrete placement, while in storage or in place, to exceed 2 months.

00530.41(a) Fabric - Replace this subsection with the following subsection:

00530.41(a) Welded Wire Reinforcement - If welded wire reinforcement is shipped in rolls, straighten it into flat sheets before placing.

00530.41(b) Ties and Supports - Replace the bullet that begins "When precast concrete bar ..." with the following bullet:

- When precast concrete bar supports are used, furnish Wired Blocks. Furnish tie wires meeting the requirements of 02510.60. Combination Blocks may be used in horizontal applications. Furnish tie wires meeting the requirements of 02513.60 for blocks supporting stainless steel reinforcement.

Replace the bullet that begins "Where at least one of the ..." with the following bullet:

Insert Project Name Here

- Where at least one of the bars to be tied or supported is epoxy coated, furnish tie wires that are either plastic or epoxy coated.

Replace the bullet that begins "When stainless steel rebar is specified..." with the following bullet:

- When stainless steel reinforcing is specified, use stainless steel ties and supports meeting the requirements of 02513.60.

Replace the bullet that begins "Use plastic tipped feet or ..." with the following bullet:

- Use plastic tipped feet or Class 2, Type A stainless steel tips if the feet of the support are on an exposed surface.

Delete the bullet that begins "Tie stainless steel reinforcement ...".

Delete the bullet that begins "Support stainless steel reinforcement...".

Replace the bullet that begins "Do not allow direct contact between stainless ..." with the following bullet:

- Do not allow stainless steel reinforcement to directly contact ASTM A1035 CS reinforcement. Do not allow stainless steel reinforcement or ASTM A1035 CS reinforcement in direct contact with other reinforcement with a different type of metal. When stainless steel or ASTM A1035 CS reinforcing or dowels are located near other reinforcing with a different type of metal, use nylon or polyethylene spacers to maintain a minimum 1 inch clearance between the two metals and bind them with nylon cable ties. Where insufficient space exists to maintain this minimum, either bar may be sleeved with a continuous polyethylene or nylon tube extending at least 1 inch in each direction past the point of closest contact between the two dissimilar bars.

Add the following bullets to the end of the bullet list:

- When ASTM A1035 CS reinforcing is specified, use epoxy coated ties and supports meeting the requirements of 02510.60(a).

00530.42(c)(2)(a) General - Replace this subsection, except for the subsection number and title, with the following:

Provide labor, Material and Equipment for fabricating sample mechanical splices at no additional cost to the Agency. All sample splices are tested by the Agency at the Agency's expense.

00530.42(c)(2)(d) Project Site Quality Control - Replace the bullet that begins "Submit one quality control ..." with the following bullet:

- Submit one quality control sample for each 100 splices performed up to 500 splices and then submit one sample for each 500 splices. Successful installer qualification

Insert Project Name Here

according to 00530.30 satisfies quality control for the first 100 splices being installed. This sequence of testing is required for each heat treatment lot used.

Replace the bullet that begins "Quality control samples ..." with the following bullet:

- Quality control samples are tested according to this Section. If any sample fails to meet the test criteria, the lot that it represents is rejected until the cause of failure has been determined. Materials from a rejected lot may be accepted if they are shown to be free of the condition that caused the failure.

00530.42(c)(3) Installation - Replace the paragraph that begins "Install splices in the ..." with the following paragraph:

Install splices in the presence of the Engineer. Splices made without the Engineer present are rejected.

00530.43 Splicing Welded Wire Fabric - Replace this subsection with the following subsection:

00530.43 Splicing Welded Wire Reinforcement - Overlap sheets of welded wire reinforcement as shown or provide edge and end laps not less than one mesh in width. Securely fasten sheets at the ends and edges according to 00530.41.

00530.47(b)(1) General - Replace this subsection, except for the subsection number and title, with the following:

Provide labor, Material and Equipment for fabricating sample headed bar reinforcement at no additional cost to the Agency. All sample headed bar reinforcement are tested by the Agency at the Agency's expense.

00530.47(b)(4) Project Site Quality Control - Replace this subsection, except for the subsection number and title, with the following:

During the installation of headed bar reinforcement:

- Submit one quality control sample for each 100 headed bars installed up to 500 headed bars and then submit one sample for each 500 headed bars. Successful installer qualification according to 00530.35 satisfies quality control for the first 100 headed bars being installed. This sequence of testing is required for each heat treatment lot used.
- Complete the headed bar reinforcement according to the manufacturer's recommendations.
- Quality control samples are tested according to this Section. If any sample fails to meet the test criteria, the lot that it represents is rejected until the cause of failure has been determined.

00530.47(c) Installation - Replace the paragraph that begins "Install headed bar reinforcement ..." with the following paragraph:

Install headed bar reinforcement in the presence of the Engineer. Headed bar reinforcement installed without the Engineer present is rejected.

Insert Project Name Here

(Use the following subsection .80(a) when reinforcement is paid for on the lump sum basis. Remove tables that are not applicable to the Project. Add additional rows as necessary. Obtain information from the Bridge Designer. For ASTM A1035, include the chromium content letters (CS, CM, or CL).)

00530.80(a) Lump Sum - Add the following to the end of this subsection:

The estimated quantity for uncoated reinforcement in pounds is:

Structure Number	Grade 60	Grade 80	Grade 100 ASTM A615	Grade 100 ASTM A706	Grade 100 ASTM A1035 ()
1234	0	0	100	0	1000

The estimated quantity for coated reinforcement in pounds is:

Structure Number	Grade 60	Grade 80	Grade 100 ASTM A615	Grade 100 ASTM A706	Grade 100 ASTM A1035 ()
1234	0	0	100	0	1000

The estimated quantity for stainless steel in pounds is:

Structure Number	Grade 60	Grade 75

The estimated quantity for welded wire reinforcement in pounds is:

Structure Number	Grade ____

00530.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of reinforcement will be paid for at the Contract unit price, per unit of measurement, for the following items:

Insert Project Name Here

Pay Item	Unit of Measurement
(a) Reinforcement, Grade _____	Lump Sum or Pound
(b) Reinforcement, ASTM A1035 _____	Lump Sum or Pound
(c) Coated Reinforcement, Grade _____	Lump Sum or Pound
(d) Coated Reinforcement, ASTM A1035 _____	Lump Sum or Pound
(e) Stainless Steel Reinforcement, Grade _____	Lump Sum or Pound
(f) Welded Wire Reinforcement, Grade _____	Lump Sum or Pound

In items (a), (c), (e), and (f) the grade of reinforcement is inserted in the blank.

In items (b) and (d) the ASTM chromium content, "CS", "CM", or "CL" is inserted in the blank.

Item (a) and (b) include fabricating and placing uncoated reinforcement as specified.

Item (c) and (d) include placing epoxy coated reinforcement as specified.

Item (e) includes fabricating and placing stainless steel reinforcement as specified.

Item (f) includes fabricating and placing welded wire reinforcement as specified.

Payment for reinforcement will be made when the reinforcement is incorporated into the concrete.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for clips, wire, separators, wire chairs, or other Material used in fastening the reinforcement in place.

SP00531 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26
Requires SP02513)**

SECTION 00531 – GLASS FIBER REINFORCED POLYMER BAR REINFORCEMENT FOR CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00531 is not a Standard Specification and is included in this Project by Special Provision.

Description

00531.00 Scope - This Work consists of furnishing and placing glass fiber reinforced polymer (GFRP) bar reinforcement of the size shown or specified.

00531.02 Submittals - Submit a product certificate to the Engineer at least 21 Calendar Days before delivering GFRP reinforcement to the Project Site for each size of GFRP reinforcement. Provide test data for each of the mechanical, physical and durability properties for product certification for each bar diameter of the Material furnished. Provide the following information:

- The testing agency and the representative responsible for the test results.
- The resin matrix, filler and additives.
- The fiber type.
- The test results and the test method for each of the following properties:
 - Mechanical Properties:
 - Tensile Modulus of Elasticity
 - Ultimate Tensile Strength
 - Ultimate Strain
 - Bond Strength
 - Transverse Shear Strength
 - Physical Properties:
 - Fiber Mass Content
 - Glass Transition Temperature
 - Bar Diameter
 - Bar Area
 - Durability Properties:
 - Moisture Absorption
 - Alkaline Resistance

Submit order lists and bending diagrams according to 00531.11.

Materials

00531.10 General - Furnish GFRP reinforcement from the QPL.

00531.11 Order Lists and Bending Diagrams - Before ordering Material, submit all order lists according to 00150.37 and unstamped Working Drawings and bending diagrams according to 00150.35 for approval. Do not order Material until such lists, Working Drawings and bending diagrams have been approved. The review of order lists, Working Drawings and bending diagrams by the Engineer in no way relieves the Contractor of responsibility for the correctness of such lists and diagrams. Revise lists, Working Drawings and diagrams as required to comply with the design drawings at no additional cost to the Agency.

Insert Project Name Here

00531.12 Fabrication - Create bends as shown during GFRP bar manufacturing. Use a minimum inside bend diameter of 3 times the bar diameter for #4 - #8 bars and a minimum inside bend diameter of 4 times the bar diameter for #9 and #10 bars.

Provide identification marks on each GFRP reinforcement or affix a durable tag to each bundle for Production Lot traceability and nominal bar size designation.

Construction

00531.40 Protection of Material - Store GFRP reinforcement above the surface of the ground on dunnage. If stored outdoors for more than 2 months, cover the GFRP reinforcement with opaque plastic or other types of cover that protects the bars from ultraviolet rays. Prevent exposure of GFRP reinforcement to temperatures above 120 °F during storage.

Protect GFRP reinforcement from damage at all times. Ensure GFRP reinforcement is free of dirt, paint, oil and other foreign substances. When handling GFRP reinforcement, use Equipment that avoids damaging or abrading the GFRP reinforcement. Lift bundles of GFRP reinforcement at multiple pickup points. Do not drop or drag GFRP reinforcement.

If visual inspection reveals discoloration due to UV exposure or loss of grit on GFRP reinforcement, the GFRP reinforcement is rejected.

00531.41 Placing and Fastening - Place all reinforcement within the tolerances recommended in the *CRSI Manual of Standard Practice* unless otherwise specified. Hold reinforcement firmly during the placing and setting of concrete. If GFRP reinforcement is not adequately supported or tied to resist settlement, floating upward, or movement in any direction during concrete placement, halt concrete placement until corrective measures are taken.

(a) Ties and Supports - Keep reinforcement properly positioned during placement of concrete according to the following:

- Use precast mortar or plastic blocks to support GFRP reinforcement. When precast mortar blocks are used, furnish mortar blocks that have the same or greater compressive strength as the concrete to be placed and have cast-in wire ties meeting the requirements of 02513.60 mortar blocks.
- Furnish plastic/nylon zip tie or stainless steel tie wire meeting the requirements of 02513.60.
- For bridge decks, use precast mortar or plastic blocks to support the bottom mat of GFRP deck reinforcement from deck formwork. Use stainless steel reinforcement supports to support the top mat of deck reinforcement as shown. Place all reinforcement in designated position and securely hold in position while placing and consolidating concrete.
- Wire bars together with ties at all intersections for both top and bottom mats.

(b) Clearances:

Insert Project Name Here

- Unless otherwise specified, furnish concrete cover for GFRP reinforcement as shown.
- Provide the same surface clearance for ties and splices as shown or specified for the reinforcement.
- Maintain clearance distance from the forms and between layers of reinforcement as shown or specified with stays, precast concrete blocks, ties, hangers, or other approved supports.
- Ensure bridge deck clearances meet the requirements of 00540.48(g).

(c) Approval - After placing GFRP reinforcement for each section of work or in any member, have it inspected and approved by the Engineer before placing concrete. Concrete placed in violation of this provision may be rejected and removal required.

00531.42 Splicing - Do not use mechanical splices for GFRP reinforcement.

(a) General - Furnish full length bars for the specific length shown or the calculated length for those designated "full length".

If specific locations are designated for splices, make splices only at those locations, or use full-length bars.

In the absence of other directions, including bars designated "continuous", furnish GFRP reinforcement to provide the minimum practical number of bars.

(b) Lapped Splices - In lapped splices, place the bars in contact and fasten together according to 00531.41 with at least three ties per splice.

00531.43 Field Cutting and Bending - Field cut GFRP reinforcement only when specifically permitted using high speed grinding cutter, fine blade saw, diamond blade, or masonry blade. Do not use shear or flame cutting. Seal cut ends according to GFRP bar manufacturer's recommendations. Allow the Engineer to inspect all surface damage due to cutting. Repair the damage according to the manufacturer's recommended method. Do not field bend or straighten GFRP reinforcement.

00531.44 Damage and Repair of GFRP Reinforcement - GFRP reinforcement with the following damage is rejected:

- Visible fibers (other than at cut ends).
- Cut deeper than 0.04 inches.
- Damage area is larger than 2% of the surface area in that linear foot of bar.

For damage not exceeding the list above, lap splice a new GFRP reinforcing bar adjacent to the damaged portion with the appropriate lap length on either side of the damage area.

Measurement

00531.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Insert Project Name Here

When laps are made for splices for the convenience of the Contractor, the extra reinforcement will not be included in the pay quantities.

The estimated quantity of GFRP reinforcement is:

Structure	Bar Size	Quantity (Foot)
Bridge No. _____		
Bridge No. _____		

Payment

00531.90 Payment - The accepted quantities of GFRP Reinforcement will be paid for at the Contract lump sum amount for the item “___ GFRP Reinforcement”.

The bar diameter of GFRP reinforcement is inserted in the blank.

Payment for reinforcement will be made when the reinforcement is incorporated into the concrete.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for clips, wire, separators, chairs, and other Material used in fastening the reinforcement in place.

SP00532 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00532 - REBAR CONTINUITY

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00532 is not a Standard Specification and is included in this Project by Special Provision.

Description

00532.00 Scope - This Work consists of electrically connecting metal reinforcement and making all bars, strands, and rods electrically continuous. It does not include bars in bridge rails that do not extend into the deck.

Labor

00532.30 Welders - Provide a certified welder to perform all continuity welds.

Construction

00532.40 Electrical Connection - Make electrical continuity connections by welding reinforcing bars at contacting points or by welding a minimum 1/4-inch diameter or 1/4-inch square bare steel bar between reinforcing bars or prestressed strands.

Remove epoxy coating from the reinforcing steel or prestressed strand at the weld point by grinding or other means approved by the Engineer.

Perform all welds according to AWS D1.4. When using shielded metal arc welding (SMAW) use low-hydrogen electrodes.

(Fill in the blanks as appropriate.)

Do not connect reinforcing bars to the prestressed strands. Keep connections to these separate from one another. Bring out separately into the junction boxes on Bents ___ through ___ as shown.

Make electrical continuity connections at locations of low stress as follows or at locations of low stress as proposed by the Contractor and approved by the Engineer.

(List locations of low stress. Contact the bridge designer.)

-
-

00532.41 Deck Reinforcement - Make all longitudinal reinforcement bars continuous by connecting each to a common transverse deck reinforcement bar near a transverse beam. Make all transverse reinforcement bars continuous by connecting each to a common longitudinal deck reinforcement bar near the center of a longitudinal beam.

Make all bridge rail bars that extend into the deck continuous by connecting each to any longitudinal deck reinforcement bar.

00532.42 Prestressed Beam - Make stirrups, full length longitudinal reinforcement bars, structural continuity bars and prestressed strands electrically continuous during manufacturing of the beams or at the Project site.

(a) Connections During Beam Manufacturing - If electrical continuity of the reinforcement bars is made during beam manufacturing, do the following before placing concrete:

- Electrically connect every U-3 bar to a stirrup near the bottom of the beam.
- Electrically connect all U-1 bars near their ends and connect at least one U-1 bar at each beam end to at least one stirrup near the bottom of the beam.
- Electrically connect all full length longitudinal bars to each other by connecting each to the same U-1 bar.
- Electrically connect each U-1 bar to any continuous longitudinal bar.
- Electrically connect each stirrup (both sides of every pair) near the top of the beam to any continuous longitudinal reinforcement bar.
- Electrically connect all structural continuity reinforcement bars in each beam end. Connect near the end of the bar.

Before or after placing concrete, electrically connect all strands. Electrically connect at least one stirrup in each prestressed beam to a deck reinforcement bar at the Project site.

(b) Connections at the Project Site - If electrical continuity is made at the Project site, do the following:

- Extend all prestress strands and full length longitudinal bars 3 inches beyond one fixed end.
- Make all bars and pieces of miscellaneous metal that do not protrude 3 inches outside the beam electrically continuous with each other and with at least one bar that does protrude. Clearly mark protruding bars that are electrically continuous with covered bars for easy identification at the bridge site. Modify electrical continuity connections given for the condition where all continuity is made during manufacturing of the beams as is necessary.
- Electrically connect all stirrup bars, strands, all longitudinal bars and structural continuity bars at the bridge site.
- Connect at least one stirrup, one longitudinal bar and one structural continuity bar to a cross beam or deck bar.

00532.43 Column - Electrically connect all column reinforcement bars by connecting all vertical column bars to each other near their ends in the cross beam and also connecting one vertical column bar to the column spiral in the cross beam.

00532.44 Drilled Shafts - Electrically connect all drilled shaft reinforcement bars by connecting all drilled shaft bars to each other near their ends in the column or cross beam and also connecting one vertical drilled shaft bar to the drilled shaft spiral or drilled shaft spiral in the cross beam.

00532.45 Transverse Members:

(a) Cross Beams:

- Electrically connect all full length longitudinal reinforcement bars to each other at one end of the cross beam.
- Electrically connect all post tensioned strands to each other by welding a 1/4-inch steel bar to the end of at least one strand from each bundle.

- Electrically connect all partial length longitudinal reinforcement bars in each group to each other.
- Electrically connect at least one full length longitudinal reinforcement bar and at least one partial length longitudinal reinforcement bar in each group to a column bar or drilled shaft bar near its end.
- Electrically connect all stirrups to each other near the bottom of the cross beams.
- Electrically connect at least one stirrup to one longitudinal reinforcement bar near one end of the cross beam.
- Electrically connect all inner reinforcement bars, all U-bars, and all stirrups to each other and connect one of each of these reinforcement bars to any column reinforcement bar or drilled shaft bar near its top.
- Electrically connect the two stirrups and ties at each beam to each other near their ends and connect at least one at each beam to a bottom longitudinal cross beam reinforcement bar.

(b) Diaphragms:

- Electrically connect all longitudinal diaphragm reinforcement bars to each other near their ends.
- Electrically connect all stirrups to each other near their top or bottom.
- Electrically connect at least one stirrup to a longitudinal reinforcement bar near their ends.

00532.46 Other Bars - Electrically connect all other metal reinforcement not mentioned so that all bars are electrically connected together and all strands are electrically connected together.

00532.47 Wire Leads for Future Cathodic Protection - Before concrete is placed for the closure pour at each bent, connect a No. 8 AWG stranded RHW copper wire to the bare steel used to establish continuity of the prestressed strands of the center longitudinal beams, as shown. Connect a separate No. 8 AWG stranded RHW copper wire to the bare steel bar used to establish continuity with the reinforcement in the cross beam, as shown. Make the connections using one of the following ground rod clamps:

- Blackburn J Ground Clamp
- Eritech CWP1JU
- Ilsco BGC-1DB

Tighten ground rod clamps according to the manufacturer's recommendations or as directed.

Completely encapsulate each connection in a non-conductive resin from section 00535.10 of the QPL designated as "high strength".

(Fill in the blanks with the appropriate span number.)

Route the insulated No. 8 AWG copper wire for both the prestressed strands and the reinforcement bars such that it will not be damaged by placing concrete. Extend out of the finished closure pour for at least 12 inches at the junction box location shown. Identify each

Insert Project Name Here

wire as either "PRESTRESS STRANDS SPAN _____" or "REINFORCEMENT BARS SPAN _____" with an appropriate non-removable label permanently attached to the wire. Protect the exposed end of the wire from making an electrical connection by wrapping with electrical tape.

Provide 4-inch x 4-inch x 4-inch UL listed, PVC or thermoplastic junction boxes that have mounting feet, gaskets, and a weather tight cover. Attach the cover with brass or stainless steel screws. Attach boxes with brass or stainless steel screws in plastic anchor inserts installed in drilled holes in the surface of the concrete.

Thread the No. 8 AWG copper wires into the junction box through a hole drilled in the bottom of the box. Make a weather proof seal by using a silicone sealer between the box and the concrete.

Make an engraved plastic label and permanently attach it to the cover of each junction box. Furnish labels that have letters 1/4-inch height and read "REINFORCEMENT CONNECTION FOR FUTURE CATHODIC PROTECTION FOR SPAN _____".

Make two bronze plaques and attach one to the bridge rail at each end of the bridge. Furnish plaques that read "METAL REINFORCEMENT IN THIS BRIDGE IS ELECTRICALLY CONNECTED FOR FUTURE CATHODIC PROTECTION IF NEEDED, SEE PLANS".

00532.48 Procedure Approval - Submit a detailed continuity connection procedure to the Engineer for approval.

00532.49 Acceptance Criteria - Choose one full length reinforcement bar as a king bar. Use an ohmmeter to check electrical continuity between the king bar and all other reinforcement bars. Acceptable electrical resistance between the king bar and all other reinforcement bars is 2.0 ohms or less. If long test leads or wire reels are used, measure the resistance of the wire and subtract that value from value measured between the king bar and other reinforcement bars. Repair all defective welds, complete additional welds and retest until continuity is established.

Measurement

00532.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

(Fill in the blanks with the appropriate quantities.)

There are approximately _____ prestressed strand connections and approximately _____ reinforcement bar connections (including reinforcement in the prestressed beams).

Payment

00532.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Rebar Continuity".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SECTION 00535 - POST-INSTALLED ANCHOR SYSTEMS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00535 of the Standard Specifications modified as follows:

00535.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of drilling and preparing holes in hardened concrete and providing and installing anchor bolts, rods, or reinforcing bars using a resin bonded anchor system or a mechanical anchor system as shown.

00535.01 Required Submittals - Replace the title of this subsection with “**Submittals**”

Add the following to the end of the subsection:

Submit the anchor system manufacturer's installation instructions at least 21 Calendar Days before installation.

00535.10(a) Resin Bonded Anchor System - Replace the paragraph that begins “Furnish anchor bolts meeting ...” with the following paragraph:

Furnish anchor bolts and rods meeting the requirements of 02560.30 and reinforcing steel meeting the requirements of Section 02510 as shown. High-strength anchor bolts meeting the requirements of ASTM A193, Grade B7 may be substituted in place of these specified in 02560.30(b).

Replace the paragraph that begins “Furnish a polyester ...” with the following paragraph:

Furnish a polyester, vinyl ester, or epoxy resin bonding system from the QPL that sustains the minimum pullout force shown. Furnish resin used for installation of the anchor system as shown from the same lot used for testing according to 00535.45(a)(1).

Replace the paragraph that begins “Unless shown otherwise, galvanize all ...” with the following paragraph:

Unless shown otherwise, galvanize all anchors that have any portion of the anchor exposed. Galvanize according to AASHTO M 232 (ASTM A153) or AASHTO M 298 (ASTM B695), Class 50. When within 25 aerial miles of the Pacific Ocean, galvanize according to

Insert Project Name Here

AASHTO M 232 (ASTM A153) only. Anchors that become completely encased in concrete will not require galvanizing.

00535.10(b) Mechanical Anchor System - Replace this subsection, except for the subsection number and title, with the following:

Furnish a mechanical anchor system from the QPL that sustains the minimum pullout force and is not longer than the embedment depth shown. Furnish anchors used for installation from the same lot used for testing according to 00535.45(a)(2). Unless shown otherwise, furnish galvanized mechanical anchors according to AASHTO M 232 (ASTM A153).

00535.40 Construction - Replace the paragraph that begins "Install the anchor system according ..." with the following paragraph:

Install the anchor system according to the manufacturer's installation instructions and to the embedment depths shown.

00535.40(a) General - Replace the paragraph that begins "Clean holes with a nonmetallic..." with the following paragraph:

Drill and clean holes according to the manufacturer's installation instructions. Protect drilled and cleaned holes from contamination. If a drilled hole becomes contaminated, as determined by the Engineer, re-clean the hole.

Replace the paragraph that begins "Provide components connected ..." with the following paragraph:

Furnish components connected to the installed anchors with the same metal type or provide electrical isolation when metal type of the components is dissimilar or unknown.

00535.40(b) Resin Bonded Anchor System - Replace the paragraph that begins "For resin bonded anchor system ..." with the following paragraph:

For resin bonded anchor system with anchor and nuts, after the resin is fully cured, mark the position of the nut with a felt tip pen or similar marker. Rotate the nut of each anchor past snug-tight by no more than 1/6 turn, unless shown otherwise, to avoid unintended damage.

00535.45(a)(1) Resin Bonded Anchor System - Replace Table 00535-1 with the following table.

TABLE 00535-1

Minimum Pullout Force							
	Anchor Bolts or Rods				Rebar		
	Grade 36	Grade 55	Grade 105		Grade 60		
Dia. (inch)	Force (Pounds)			Embed Depth (inch)*	Size	Force (Pounds)	Embed. Depth (inch)*

Insert Project Name Here

1/2	7,400	9,700	15,300	4.50	3	7,900	3.25
5/8	11,700	16,900	24,300	6.00	4	14,400	5.25
3/4	17,300	22,500	36,000	7.50	5	22,300	6.50
7/8	24,000	31,200	49,900	9.25	6	31,700	7.50
1	31,700	40,900	65,400	11.00	7	43,800	8.75
					8	56,700	10.25

*± 1/8 inch

Add the following subsection:

00535.45(c) Anchor Test Summary - Test the installed anchors according to Table 00535-2 and Section 00165.

(Fill in anchor information and test requirements. At minimum, consider specifying a demonstration test to confirm epoxy resin lot quality and for Contractor to practice anchor installation. Add or delete rows in the table as necessary to list all applicable anchor systems.)

Table 00535-2

Str. #	Sheet #	Anchor System (Mech/ Resin)	Anchor Type (bolt/rod rebar)	Anchor Size	Anchor Grade	Anchor Sustained Tension (yes/no)	Demo. Test (yes/no)	Prod. Test (yes/no)

Replace anchors that fail at no additional cost to the Agency.

00535.45 Testing - Replace the paragraph that begins “Do not incorporate demonstration ...” with the following paragraph:

Do not incorporate demonstration test anchors into the Work. Do not begin installing the anchor system until the installation process is approved. Test results with the average load meeting or exceeding the minimum pullout force are acceptable. If any test anchor has a capacity less than 95 percent of the minimum pullout force, the anchor lot is rejected.

00535.45(a) Demonstration Tests - Replace the paragraph that begins “Install three test anchors ...” with the following paragraph:

Install three test anchors using the same Materials and methods that is used for installing the anchor system. One demonstration test includes 3 test anchors.

00535.45(b) Production Tests - Replace the paragraph that begins “Use anchors from the same ...” with the following paragraph:

Use anchors from the same lot used for the demonstration tests. Perform production tests during installation of the anchor system, after the installation is finished, and for the resin bonded anchor system the resin has cured according to the manufacturer’s

recommendations. One production test includes 1 test anchor. Maintain the test load at the required load level for a minimum of 10 seconds. Measurable displacement is a failure. If the Engineer suspects improper installations, more testing may be required.

SP00536 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26)

SECTION 00536 - INTERNAL SHEAR ANCHORS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00536 of the Standard Specifications modified as follows:

00536.03 Submittals - Replace the bullet that begins "Describe the Materials ..." with the following bullet:

- Describe the Materials to be used including the properties of each Material and the Specifications that the Materials comply. Published manufacturer data is acceptable.

00536.01(a) Demonstration - Replace the paragraph that begins "Demonstrate the installation ..." with the following paragraph:

Demonstrate the installation of the internal shear anchors that are installed from the bottom in the presence of the Engineer using the same Materials, Equipment, and installation methods that are used for the final installation. Perform the demonstration according to the following:

Replace the bullet that begins "Insert the anchor rod ..." with the following bullet:

- Insert the anchor rod into the PVC pipe then inject the epoxy resin. Simulate the anchor rod placement conditions including temperature, humidity, geometry, injection pressure, and the method that are used to prevent the epoxy resin from escaping. Measure the quantity of resin injected.

00536.42 Internal Shear Anchors - Top - Replace the bullet that begins "Tie a sponge or rag to ..." with the following bullet:

- Tie a sponge or rag to a section of scrap rebar. Test the drilled hole for standing water and debris by touching the bottom of hole with the sponge or rag. Repeat vacuuming until no evidence of water or debris is observed on the sponge or rag.

Replace the bullet that begins "Repair the deck with a PCC ..." with the following bullet:

- Repair the deck with a PCC repair material. Remove all loose material according to the manufacturer's recommendations for patch preparation. Apply a patched surface finish that matches the appearance of adjacent deck sections.

00536.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00537 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26)**

SECTION 00537 - PENETRATING CONCRETE SURFACE TREATMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00537 is not a Standard Specification and is included in this Project by Special Provision.

Description

00537.00 Scope - This Work consists of furnishing and placing penetrating sealers on concrete Bridge decks, concrete overlays, and other concrete surfaces as shown.

00537.04 Submittals - Submit the following at least 7 Calendar Days before the pre-placement meeting for each sealer proposed for use:

- Penetrating sealer, including: Brand name, manufacture's name, and a copy of the manufacturer's unabridged application procedures.
- A detailed work plan for the deck sealer preparation, application, and cleanup. Include estimated dates and detailed timelines (sealer installation and opening the Bridge to traffic).
- Plan to shield storm drains, traffic and pedestrians from penetrating sealer application, including overspray.
- Number and size of sample lots for cores. Include a map or drawing of core locations.

Do not proceed with the Work until the proposed work plan has been approved by the Engineer.

Insert Project Name Here

00537.05 Pre-Placement Meeting - Hold a pre-placement meeting with the Engineer at least 10 Calendar Days before applying the sealer. Do not proceed with the Work until the proposed work plan has been approved by the Engineer.

Materials

00537.10 Materials:

(a) Silane Sealer - Furnish a water based silane sealer meeting the requirements of 02060.30.

(b) Dye - Furnish a fugitive dye to make the solution visible on the treated concrete surface for at least 5 hours. Ensure the dye is not conspicuous longer than 7 Days after application when exposed to direct sunlight.

Equipment

00537.20 General - Remove all Equipment that leaks oil or other contaminants from the Project Site until they are repaired.

00537.21 Application Equipment - Provide truck mounted or trailer mounted low pressure airless application Equipment with an application pressure from 15 psi to 40 psi and multiple adjustable nozzles. Prevent overspray or misting. Provide heavy nap rollers or other manufacturer recommended Equipment, as approved by the Engineer. Hand pump sprayers are not permitted.

Labor

00537.30 Personnel Qualifications – Provide a technical representative from the sealer manufacturer on-site during the first application of each approved sealer on the Project. The need for manufacturer's representative may be waived if the Contractor provides evidence and reference contacts for work involving at least 5 Bridges treated with the same products within the last two years.

Construction

00537.40 General - Do not begin sealing Work until all Materials and Equipment necessary to perform the Work are at the job site.

(a) Application Conditions - Apply the sealer when the following conditions exist:

- The ambient and deck surface temperature are between 45 °F and 100 °F.
- The deck surface:
 - Has been dry for at least 72 hours.
 - Has a surface temperature at least 5 °F above the dew point.
- There is no forecasted precipitation during application and less than 12 hours after completion of application. If precipitation occurs during application or 12-hour window, stop work and re-apply sealer at no additional cost to the Agency.
- Wind speeds are 15 mph or less.

(b) Handling Materials - Store sealer at temperatures recommended by the manufacturer. Use penetrating sealer treatment solution from original unopened manufacturers containers with seal(s) intact and the manufacturer's label visible. Do not use Materials that have exceeded their expiration date.

00537.41 Surface Preparation - Prepare all deck surfaces according to Section 00504 modified as follows:

- Perform Class 1 Preparation according to 00504.41(b) with a surface texture depth profile of at least 1/16 inch.
- Perform final surface preparation according to 00504.42(a).
- Block out interior Bridge joints and drains with rigid polyethylene foam or other approved Material to prevent leaking of sealer. Clean the surfaces of dirt, dust, curing compounds, laitance, debris, oil, grease, and foreign matter that would prevent sealer penetration, adhesion, or drying.
- Ensure all foreign Materials are removed from the concrete surfaces.
- Approved solvents and hand tools can be used to remove bonded Materials detrimental to concrete surface treatment.

00537.42 Application:

(a) General - Apply sealer according to the following:

- Use the same sealer for the entire Structure.
- No thinning or alteration of the sealer, with exception of the fugitive dye, is permitted.
- Apply sealer within the same shift as final surface preparation.
- Apply the sealer by brushing, rolling or spraying a flood coat onto concrete surfaces with approved Equipment.
- Avoid sealer running or pooling. Spread treatment from ponded areas to dry areas.
- On sloping and vertical concrete surfaces, apply sealer from bottom to top.
- When possible, apply subsequent coats perpendicular to the previous application.
- Sweep the entire deck surface after the sealer has cured and remove all loose material.

(b) Pre-production Trial Application - Perform a test application on each Structure in the presence of the Engineer. Perform the test with a minimum of 1/2 gallon of sealer. Use the approved Equipment and apply the sealer within the project limits on the surface to be treated. Verify coating application methods and yield rates.

(c) Application of Sealer:

(1) Number of Coats and Yield Rate - Apply a minimum of two coats. Apply at the yield rate verified by the pre-production trial application, or at a minimum rate of 140 square feet per gallon.

Insert Project Name Here

(2) Coating Thickness and Coverage Requirements - Coating thickness measurements will not be made. A visual inspection for complete coverage will be made by the Engineer after each coat. If coating coverage of any single coat is incomplete, apply an additional coat at no additional cost to the Agency.

(3) Protection - Protect Public Traffic, pedestrians, exposed metal, and non-concrete appurtenances from overspray using physical barriers or other approved methods.

00537.43 Inspection - The Engineer will inspect Materials and each phase of preparation and coating. Do not proceed with succeeding phases until approved. Provide the Engineer with timely, safe access to areas where Work is being performed. Allow adequate time for inspection at each hold point. Provide hold points at the following times:

- Before cleaning operations begin.
- After cleaning operations are completed and before application of any coating Materials.
- After Pre-production trial application.
- After each full coat.

00537.44 Sampling and Testing of Bridge Decks - For each Structure, determine the number of core locations by dividing the surface area of the Bridge deck by 10,000 square feet. Round to the nearest whole number. A minimum of 2 cores are required per Structure.

Take cores a minimum of 7 Days after silane application. Prior to coring, locate rebar in the Bridge deck to avoid rebar. Make cores 3 inch in diameter by 4 inch in depth. Core the concrete in the Engineer's presence and submit the cores to the Engineer for verification testing.

Repair core locations using Material from 02015.20 of the QPL. Perform core hole repairs the same Day the cores are taken.

Sampling and testing is for informational purposes only. Acceptance is visual and based off application rates.

Measurement

00537.80 Measurement - The quantities of penetrating concrete sealing will be measured on the area basis, and will be the sealed surface area, excluding curb and rail faces, and will be limited to the Neat Lines and dimensions shown or directed. Field measurement of the area will not be made. The area will be determined by calculating the area from the dimensions shown.

Payment

00537.90 Payment - The accepted quantities of penetrating concrete sealing will be paid for at the Contract unit price, per square foot, for the item "Penetrating Concrete Sealing".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SECTION 00538 - CRACK INJECTING EXISTING BRIDGES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00538 of the Standard Specifications modified as follows:

00538.01 Submittals - Replace the bullet that begins "Describe the Materials ..." with the following bullet:

- Describe the Materials to be used including the properties of each Material and the Specifications that the Materials comply with. Published manufacturer data is acceptable.

00538.30 Personnel Qualifications - Replace the paragraph that begins "Provide personnel skilled in ..." with the following paragraph:

Provide personnel skilled in the application of epoxy crack injection. Show experience relevant to anticipated conditions, Materials, and construction techniques for epoxy crack injection. Provide an on-site epoxy crack injection supervisor that has successfully completed at least three projects within the past 5 years.

00538.42 Acceptance - Replace the paragraph that begins "Crack injection Work ..." with the following paragraph:

Crack injection Work is accepted visually by determining that the epoxy resin has set and cured and that all cracks are sealed. If visual inspection reveals suspected failures, the Engineer will require cores samples. When required, provide 2-inch minimum diameter by 6-inch minimum depth core samples. The Engineer will determine the number of core samples and the locations to take the core samples. Take core samples at least 24 hours after the crack injection Work. When the crack injection Work is performed on only one side of the girder, take the core sample from the opposite side of the girder. When obtaining core samples, do not cut or damage existing steel reinforcement. Fill core holes with a PCC repair material.

Replace the paragraph that begins "If core samples show fully ..." with the following paragraph:

If core samples show fully hardened epoxy resin and at least 90 percent of the crack is filled, the crack injection Work for that crack is accepted. If core samples show inadequately

Insert Project Name Here

hardened or inadequately filled cracks, stop all crack injection Work. Submit a revised crack injection procedure to the Engineer. Do not resume crack injection Work until the revised crack injection procedure has been approved by the Engineer.

00538.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00539 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26
Last updated: 03-02-26
This Section requires SP00504)

SECTION 00539 - CONCRETE AND CRACK SEALING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00539 is not a Standard Specification and is included in this Project by Special Provision.

Description

00539.00 Scope - This Work consists of furnishing and placing concrete and crack sealer on concrete Bridge decks, concrete overlays, and other concrete sections as shown.

Materials

(Fill in the blank with the words "Low Modulus", "High Modulus" or "High or Low Modulus". If none of these apply, remove the blank. Obtain information from the Bridge Designer.)

00539.10 Materials - Furnish a _____ concrete and crack sealer meeting the requirements of Section 02060.

Furnish a PCC repair material meeting the requirements of Section 02015 that is compatible with the sealer.

Construction

00539.40 General - Begin sealing work when all materials and equipment necessary to perform the work are at the job site and all required repairs are made.

(a) Placement Conditions - Apply the sealer when:

- The ambient temperature, surface temperature, and relative humidity (RH) meet the requirements on the manufacturer's written data sheet.
- The concrete substrate is dry, and has been dry for at least 24 hrs.
- During the hours of darkness, work areas are illuminated. Submit an illumination plan for approval at the pre-placement conference.

(b) Handling Materials - Store sealer at temperatures recommended by the manufacturer.

(c) Pre-Placement Meeting - Hold a pre-placement meeting with the Engineer at least 10 Calendar Days before applying the sealer. Submit for the Engineer's approval a manufacturer approved procedure for preparing the concrete surface, applying the sealer, and broadcasting the Sand. Include in the procedure the number of persons required, Equipment, installation sequence, sealer application rate, sealer dwell time, sealer gel time, broadcast Sand application rate, traffic control, and the estimated time schedule for installing the sealer and opening the Bridge to traffic. Do not proceed with the Work until the proposed procedure has been approved by the Engineer.

- Area of Application - Apply the sealer full width of the deck and roadway or as directed.
- Protect adjacent surfaces not to be covered with the sealer from spatter or coating.
- Applicator Qualifications - Provide a manufacturer authorized applicator. Re-certify the manufacturer authorized applicators yearly.

00539.42 Preparing Bridge Decks:

(a) Surface Removal - Remove the existing asphalt concrete wearing surface from the bridge decks, according to Section 00503.

(b) Surface Preparation - Prepare all surfaces that are to receive a deck seal according to Section 00504.

00539.45 Installation - Install sealer according to the following:

- Roll, squeegee, or broom the sealer at application rates and procedures recommended by the manufacturer.
- Allow sealer to dwell on the surface for the time recommended by the manufacturer.
- Remove all excess sealer from the surface with a squeegee, broom, or by other methods and within the time limitations recommended by the manufacturer before broadcasting the Sand.
- Before the sealer gels, broadcast the Sand at the rate recommended by the manufacturer or as required to reach refusal.
- Sweep the entire deck surface after the sealer has cured and remove all loose Material.

Insert Project Name Here

(Use one of the following Measurement and Payment options as instructed below. Obtain information from the Bridge Designer. Delete the option that does not apply.)

(Option 1: Use this option when sealing existing surfaces.)

[Begin Option 1]

Measurement

00539.80 Measurement - The quantities of concrete and crack sealer will be measured on the area basis, and will be the sealed surface area, excluding curb and rail faces, and will be limited to the Neat Lines and dimensions shown or directed.

(Use the following paragraph when removal of existing asphalt wearing surfaces is required.)

Removal of existing asphalt wearing surfaces will be measured according to 00503.80.

Payment

00539.90 Payment - The accepted quantities of concrete and crack sealer will be paid for at the Contract unit price, per square foot, for the item "Concrete and Crack Sealer".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph when removal of existing asphalt wearing surfaces is required.)

Removal of existing asphalt wearing surfaces will be paid for according to 00503.90.

[End Option 1]

(Option 2: Use this option when constructing new bridge deck surfaces (00540) or constructing new SFC and LMC overlays(00559).)

[Begin Option 2]

Measurement

00539.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00539.90 Payment - No separate or additional payment will be made for Work performed under this Section. Payment will be included in payment made for the appropriate items under which this Work is required.

[End Option 2]

SP00540 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
Requires SP00585, SP02001, SP02050, SP02080 & SP02560
Requires SP00759 when surface finishing is required.
Requires SP02690 when PCC Aggregate is required.
Requires SP02210 when concrete coating is required.
Requires SP02440 when preformed expansion joint filler is required)

SECTION 00540 - STRUCTURAL CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00540 of the Standard Specifications modified as follows:

00540.03 Required Submittals for Deck Sidewalk and Curb Ramps - Replace the title of this subsection with **"Submittals for Deck Sidewalk and Curb Ramps"**

Replace the paragraph that begins "Material ordered or Work ..." with the following paragraph:

Material ordered or Work done before the Engineer reviews and returns the documents are at the Contractor's risk.

Add the following subsection:

00540.10(a) Pigmented Sealer - Furnish a semi-opaque, or opaque, 100% acrylic or acrylic co-polymer resin concrete sealer meeting the following requirements:

Property	Test Method	Requirement
UV Resistance	ASTM D5894	5000 hour exposure
Wind Driven Rain Resistance	ASTM D6904 reference FED TT-P-555B	No visible leaks
Permeance	ASTM E96/E96M or ASTM D1653	Minimum 10 perms
Fungal Growth	FED STD 141	No fungal growth after 21 Days

Provide colors and color samples as shown or directed. Furnish a sealer designated for vertical application when applied to walls. When applied to structures with soffits or overhangs, furnish a sealer that is designated for vertical and overhead application.

Furnish pigmented sealer color that conforms to the following colors:

Insert Project Name Here

(In the following list, replace the color and color number if necessary. Delete all purple parentheses.)

Light Gray, according to SAE AMS-STD-595C color #~~(36375)~~.

Dark Gray, according to SAE AMS-STD-595C color #~~(36176)~~.

00540.15 Form Materials - Replace this subsection, except for the subsection number and title, with the following:

Furnish wood, minimum nominal 5/8-inch-thick APA exterior grade plywood, minimum nominal 5/8-inch-thick APA plyform, metal, or other suitable form material. For round concrete columns, furnish either metal or other approved form material that produces a smooth and true surface free from fins, joints and other irregularities. Use APA plyform for all decks and slabs.

00540.17 Acceptance of Concrete - Replace the paragraph that begins "Acceptance of concrete ..." with the following paragraph:

Acceptance of concrete is according to Section 00165 and the following:

00540.17(a) Aggregate - Replace the paragraph that begins "Acceptance of Aggregate ..." with the following paragraph:

Acceptance of Aggregate is according to 02690.12.

00540.17(b) Plastic Concrete - Replace the paragraph that begins "Acceptance of plastic concrete ..." with the following paragraph:

Acceptance of plastic concrete is based on tests performed by the Contractor's QCT, according to the Tolerances and limits of 02001.20.

00540.17(c) Hardened Concrete - Replace the paragraph that begins "Cast and cure..." with the following paragraph:

Cast and cure test specimens according to AASHTO R 100 in 6-inch x 12-inch or 4-inch x 8-inch, single-use plastic molds and test at 28 Days according to AASHTO T 22.

00540.17(c)(1) General - Replace the paragraph that begins "For all classes of concrete ..." with the following paragraph:

For all classes of concrete, acceptance of hardened concrete is based on an analysis of compressive strength tests of cylinders cast by the QCT. Test cylinders at an ODOT certified laboratory.

00540.17(c)(2) Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Hardened concrete with an ASTV meeting or exceeding the specified design strength, f'_c is accepted for strength. If the ASTV is less than f'_c but at least 85 percent of f'_c , the Engineer may review the results to determine if the concrete represented by the cylinders is suitable

Insert Project Name Here

for the intended purpose. Remove concrete that has an ASTV less than 85 percent of f'_c unless otherwise authorized, in writing, by the Engineer. If the concrete is removed, the cost of removal, replacement and all related Work is the Contractor's responsibility. If the Engineer determines that the concrete is suitable for the intended purpose, the concrete may be allowed to remain in place, subject to a price adjustment according to 00150.25.

If an ASTV falls below f'_c , the Contractor may submit a written plan outlining a proposed alternate method of evaluating compressive strength. Submit the plan for review by the Engineer within 3 Days of the test. Provide evidence that a reasonable f'_{cr} (over-design) was maintained and that there is credible evidence (besides low strength) that warrants consideration of this option. The Engineer may allow an alternate method of acceptance if the compressive strength test results are determined to be suspect from definable external factors.

00540.24(a) Deck Finishing Machine Support System - Replace this subsection, except for the subsection number and title, with the following:

Provide calculations and detailed drawings of the proposed deck finishing machine support system according to 00540.41.

00540.25 Straightedge - Replace this subsection, except for the subsection number and title, with the following:

Provide a 12-foot metal straightedge for checking bridge deck roadway and sidewalk surface Tolerances.

00540.40(b)(3)(c) - Replace this subsection, except for the subsection number and title, with the following:

On ramps, sidewalks and intersections the gap below a 12-foot unlevelled straightedge resting on high spots does not exceed 1/4 inch in any direction.

00540.40(b)(3)(d) - Replace this subsection, except for the subsection number and title, with the following:

On bridge decks, the gap below a 12-foot unlevelled straightedge does not vary from the testing edge by more than 1/8 inch in any direction.

00540.41(b) General Design Loads - Replace the paragraph that begins "Ensure design loads ..." with the following paragraph:

Ensure design loads used are the maximum loadings. Ensure deflections used on manufactured devices and assemblies do not exceed the manufacturer's recommendations. Provide catalog data that lists the manufacturer's recommendations.

00540.41(c)(2) On Piles - Replace the paragraph that begins "For Falsework supported ..." with the following paragraph:

For Falsework supported on piles, show on the Working Drawings the pile type, size and spacing. Accompany these drawings with calculations that show the assumptions and

Insert Project Name Here

methods used to design the piles and the bearing values that the piles need to be driven to support the calculated loads.

00540.41(d) Requirements at Highway and Railroad Traffic Openings - Replace the bullet that begins "Increase the vertical post ..." with the following bullet:

- Increase the vertical post load 150 percent. If the load on the Falsework is increased by load transfer due to prestressing, increase the vertical post load by the additional load due to prestressing or by 150 percent, whichever is greater.

(Use the following subsection .41(f) if bolt holes are allowed in the exterior girder web to support form brackets.)

00540.41(f) Concrete Forms on Steel Structures - Replace the paragraph that begins "Provide sufficient temporary bracing ..." with the following paragraph:

Provide sufficient temporary bracing or temporary struts and ties to minimize lateral deflection and rotation of the exterior steel girder. Calculate exterior girder rotation according to the *ODOT Bridge Design Manual* section 1.16.3. Limit deck deflection at the edge of deck due to girder rotation to no more than 1/4 inch.

Add the following to the end of the subsection:

Shop drill bolt holes in the exterior girder web to support form brackets. Fill the holes with fully torqued ASTM F3125 Grade A325 or button-head twist-off bolts ASTM F1852 or F2280 bolts according to Section 02560. Place each bolt head on the exterior side of the web. No holes are to be made in the flanges.

00540.42 Falsework Construction - Replace the paragraph that begins "Construct Falsework according ..." with the following paragraph:

Construct Falsework according to the current edition of *AASHTO Construction Handbook for Bridge Temporary Works*, except where in conflict with the Specifications. Assure that Falsework is constructed according to the Falsework design and on Soils equal to or exceeding design assumptions. Within 2 Days of notice of the falsework design engineer's pending inspection, the Engineer will provide a list of construction concerns. Do not place concrete until the falsework design engineer of record, accompanied by the Engineer, field inspects that portion of the Falsework proposed for use. Do not place concrete until all construction concerns have been addressed, the falsework design engineer provides the Engineer a written statement that the Falsework conforms to the design and will serve the intended use, and the Engineer agrees in writing that the Falsework will serve the intended use.

00540.43(a) Construction Joints - Replace the paragraph that begins "Apply a concrete surface ..." with the following paragraph:

Apply a concrete surface retarder according to the manufacturer's recommendations. Remove surface mortar within the time period recommended by the manufacturer and clean the joint surface and reinforcing steel by removing loosened particles of Aggregate, damaged concrete, unconsolidated concrete and surface laitance with a high pressure washer according to 00540.28 to the extent that clean Aggregate (free of surface mortar) is exposed

on 50 percent of the surface. Clean the joint surface again immediately prior to the concrete placement to remove any subsequent deposits of dirt, debris or other foreign materials. Saturate the joint surface with potable water immediately before resuming concrete placement. Remove standing water in depressions or hollows of the joint surface.

00540.43(e) Construction Joints Between Existing and New Concrete - Replace the paragraph that begins "Sand-blast or water-blast existing ..." with the following paragraph:

Sand-blast or water-blast existing concrete surfaces where shown or directed. Roughen surface to a uniformly distributed 1/4-inch minimum amplitude surface profile. If approved, bush hammers or scabbler may be used for roughening existing concrete surfaces. Use pneumatic hammers, chipping guns, manual picks and chisels for area with limited access. Do not use pneumatic hammers heavier than a nominal 15-pound class. Remove loosened particles of Aggregate and damaged concrete with a high-pressure washer according to 00540.28.

00540.45 Construction of Forms - Replace the bullet that begins "Are retightened before ..." with the following bullet:

- Are retightened before depositing new concrete on or against concrete that has hardened.

00540.48(a) General - Replace the bullet that begins "Through pumps, chutes ..." with the following bullet:

- Through pumps, chutes or trunks according to 00540.22, when placement requires dropping concrete more than 5 feet. Place the bottom of pump hose, chutes, pipes or trunks as close to final placement position as practicable.

Replace the bullet that begins "In layers not more ..." with the following bullet:

- In layers not more than 18 inches thick, except for seal concrete placement, unless shown otherwise. Place and consolidate each layer before the preceding layer has taken initial set to avoid surfaces of separation between the layers.

00540.48(b) Pumping Concrete - Replace this subsection, except for the subsection number and title, with the following:

Pump concrete with pumping Equipment according to 00540.22. Pump a cement-water slurry through the lines before starting the mix through the pump. Operate the pump in a manner that produces a continuous stream of concrete without air pockets or segregation. When a placement nears completion, if concrete remaining in the pipeline is to be used, remove it in a manner that will not cause contamination of the concrete already in place.

There is no extra payment for additional cement or additives required to ensure a mix is pumpable.

00540.48(c) Vibrating Concrete - Replace the paragraph that begins "Apply vibration at the point ..." with the following paragraph:

Insert Project Name Here

Apply vibration at the point of freshly deposited concrete. Apply vertically at points uniformly spaced not farther apart than 1 1/2 the radius over where the vibration is visibly effective. Penetrate into previously placed plastic layers.

Replace the paragraph that begins "Do not use vibrators to ..." with the following paragraph:

Do not use vibrators to make concrete flow or to move concrete from one point to another in the Forms. Do not apply directly on or through the reinforcement to sections or layers of concrete that have hardened to the degree that the concrete ceases to be plastic under vibration.

00540.48(g) Bridge Decks - Replace the paragraph that begins "Use deck finishing machines ..." with the following paragraph:

Use deck finishing machines according to 00540.24 and set to run parallel to the skew of the bent lines. Place screed rails outside the finishing area. Extend screed rails beyond both ends of the scheduled placement length for a distance that allows the finishing machine to reach all of the concrete.

Replace the paragraph that begins "Before placing concrete, operate ..." with the following paragraph:

Before placing concrete, operate the finishing machine the length of the proposed placement, and check the deck thickness and clearance from the screed to the reinforcing steel in the presence of the Engineer, by an approved method. The permissible variation from the clearance indicated is plus or minus 1/4 inch. Make necessary corrections before beginning the placement.

Replace the bullet that begins "Provides wind breaks, fog ..." with the following bullet:

- Provides wind breaks, fog spray, or other approved methods when the concrete surface is exposed to conditions that may cause premature drying during placement operations.

00540.49(a)(2)(a) General - Replace the paragraph that begins "To place concrete when the ..." with the following paragraph:

To place concrete when the temperature is below 40 °F, submit a Cold Weather Plan that identifies the methods that are used to prevent the concrete temperature from falling below 50 °F. Methods include heated enclosures and insulated Forms. Also include in the plan measures that are taken if the concrete temperature falls below 50 °F. Provide a 24-hour continuous recording thermometer to verify the concrete temperature.

00540.49(a)(2)(b) Enclosures - Replace the bullet that begins "Furnish and use, within ..." with the following bullet:

- Provide and use, within the enclosure, a 24-hour continuous temperature/humidity recorder to record the air temperature and relative humidity every hour during the cure period.

00540.50(b) Deck Roadway Finish - Replace the paragraph that begins "After the deck roadway concrete ..." with the following paragraph:

After the deck roadway concrete has been screeded with a finishing machine according to 00540.24, float, if necessary, to produce a uniform surface, according to 00540.55. If the Work does not conform to the prescribed limits, stop the operation until revised methods, changes in Equipment, or correction of procedures are approved for trial. Also stop the revised operation if it does not produce a specified surface.

00540.50(d) Deck Sidewalk and Curb Ramp Finish - Replace this subsection, except for the subsection number and title, with the following:

Finish concrete surfaces on pedestrian facilities including but not limited to sidewalks, curb ramps and pedestrian structures that contain a Pedestrian Accessible Route according to 00759.50.

00540.51(a) General Requirements - Replace the paragraph that begins "If the ambient temperature falls ..." with the following paragraph:

If the ambient temperature falls below 50 °F, or is forecasted to be below 50 °F, provide a 24-hour continuous recording thermometer and place it directly on the surface of the concrete. Once placed, leave the thermometer in place for the duration of the cure period. Use methods approved by the Engineer to maintain a concrete temperature of at least 50 °F during the cure period.

00540.51(b) Curing Concrete Bridge Decks - Replace the bullet that begins "Provide wind breaks or ..." with the following bullet:

- Provide wind breaks or other approved methods when exposed to conditions that may cause premature drying during placement operations. Premature drying is defined as an evaporation rate equal to or greater than 0.10 pounds per square foot per hour, as determined from Figure 00540-1, or as the loss of surface sheen when the evaporation rate at the surface exceeds the bleed rate.

Replace the bullet that begins "Maintain a continuous water..." with the following bullet:

- Except for HPC(IC), maintain a continuous water cure of the concrete surface for 14 Days. For HPC(IC), maintain a continuous water cure of the concrete surface for 7 Days.

00540.52 Removal of Forms and Falsework, and Subsequent Loading – Replace the paragraph that begins "In determining when to remove ..." with the following paragraph:

In determining when to remove Forms and Falsework, and when to place subsequent loads, the Engineer will consider the Contractor's proposed schedule, the location and character of the Structure, the weather, and other conditions influencing the setting of the concrete. If appropriate, these operations are controlled by compressive strength tests of cylinders cast by the Contractor and witnessed by the Engineer. Test the cylinders at a recognized testing laboratory at no additional cost to the Agency. Cast and cure cylinders according to

Insert Project Name Here

AASHTO R 100 (field cured) that is equivalent to the most unfavorable field conditions for the portions of the concrete that the cylinders represent.

Replace the paragraph that begins “² Where continuous spans ...” with the following paragraph:

² Where continuous spans are involved, the time for all spans is determined by the last concrete placed affecting any span.

00540.53(b) Class 1 Surface Finish (Ground, Sacked, and Coated) - Replace the paragraph that begins “After completion of the general ...” with the following paragraph:

After completion of the general surface finish, grind the surface with a power grinder or an equivalent method to remove laitance and surface film. Sack the surface to fill all holes using a paste of fine mortar sand, cement, water, and bonding agent. The ratio of bonding agent to water is one part bonding agent to two parts water, or as recommended by the manufacturer. Apply coating according to 00540.53(d).

00540.53(d) Concrete Coating - Replace the paragraph that begins “Apply either a concrete paint...” with the following paragraph:

Apply either a concrete paint or a pigmented sealer as shown or specified. Where a Class 1 or Class 2 surface finish is shown, apply a concrete paint unless specified or shown otherwise.

00540.53(d)(1) Concrete Paint - Replace the paragraph that begins “Thoroughly saturate the surface ...” with the following paragraph:

Thoroughly saturate the surface with water and coat it, while damp, with a coating Material according to 02210.30. Apply a minimum of two coats of coating Material. Apply coating according to the manufacturer's instructions. The second coat may be applied any time after the previous coat, when touched lightly, does not adhere to the finger. Additional coats may be required to provide uniformity in coverage and color. Mortar sand may be added to the coating Material to help achieve a uniform surface.

00540.53(d)(2) Penetrating Concrete Stain or Sealer - Replace this subsection with the following subsection:

00540.53(d)(2) Pigmented Sealer - Prepare concrete surfaces and apply 2 coats of the pigmented sealer according to the manufacturer's recommendations. Follow all recommended curing schedules for newly placed concrete prior to application and for recoat or repair. Monitor and follow all environmental limitations as published by the manufacturer during application, and curing.

00540.54 Crack Inspection and Deck Sealing - Replace the paragraph that begins “Perform crack sealing Work ...” with the following paragraph:

Perform crack sealing Work at no additional cost to the Agency. Complete all crack sealing Work before opening to traffic. If the Bridge is opened to traffic at the Contractor's request before completing crack sealing, all additional traffic control to complete crack sealing is at no additional cost to the Agency.

Insert Project Name Here

00540.55 Final Acceptance of Bridge Deck Surface - Replace the paragraph that begins "Ensure the finished ..." with the following paragraph:

Ensure the finished bridge deck roadway surface meets the Tolerance specified in 00540.40(b)(3)(d) at every point. Provide a 12-foot straightedge and use it under the Engineer's direction.

(Use the following subsection .80(a)(1) when concrete is paid for on the lump sum basis. List by bridge number then by bid item name. Add items as appropriate. Delete what does not apply. Obtain information from the Bridge Designer.)

00540.80(a)(1) Lump Sum - Add the following to the end of this subsection:

The estimated quantity of concrete is:

Bridge No. _____

Type and Class	Quantity (Cu. Yd.)
Foundation Concrete, Class _____	_____
Deck Concrete, Class _____	_____
General Structural Concrete, Class _____	_____

Bridge No. _____

Type and Class	Quantity (Cu. Yd.)
Foundation Concrete, Class _____	_____
Deck Concrete, Class _____	_____
General Structural Concrete, Class _____	_____

(Use the following subsection .80(b) if surface texturing is required.)

00540.80(b) Sawcut Texturing - Replace this subsection with the following subsection:

00540.80(b) Surface Texturing - The quantities of surface texturing will be measured on the area basis and is the area of each bridge deck or approach slab as shown, less 16 inches along each curb and 6 inches from joint blockouts and bridge ends. Field measurement of surface texturing will not be made.

(Use the following subsection .90 if surface texturing is required.)

00540.90 Payment – Replace the Pay Item Sawcut Texturing with the following Pay Item:

Pay Item	Unit of Measurement
(d) Surface Texturing	Square Yard

Replace the paragraph that begins "In items (a), (b) ..." with the following paragraph:

Insert Project Name Here

In items (a), (b), and (c), the class of concrete is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

(Include the following falsework design checklist when required by the Bridge Designer.)

FALSEWORK DESIGN CHECKLIST

Instructions - This checklist was developed to facilitate the design, review, and erection of falsework to be used for Oregon Department of Transportation bridge construction projects. This checklist is intended to act as a reminder to design or check for specific important aspects of this construction. It is not a substitute for plan and/or design criteria or specification requirements.

The Checklist is to be completed and signed by the Falsework Design Engineer. Answer every question. Attach to the Checklist an explanation of any negative responses.

Submit the Checklist according to 00540.41(a).

A. Contract Plans, Specifications, Permits, Etc.	YES	NO	N/A
1. Are the falsework plans prepared, stamped and signed by an engineer registered to practice in Oregon?	_____	_____	_____
2. Have three complete sets (five if railroad approval is required) of the design calculations been included with the falsework drawings submittal?	_____	_____	_____
3. Are falsework plans in compliance with the requirements of the construction plans general notes?	_____	_____	_____
4. Are falsework plans in compliance with contract plan structural details?	_____	_____	_____
5. Are falsework plans in compliance with the requirements of the Oregon Standard Specifications for Construction, subsection 00150.35?	_____	_____	_____
6. Are all existing, adjusted or new utilities in proximity with the proposed falsework shown on the falsework plans and is protection of these utilities addressed?	_____	_____	_____
7. Are clearance requirements satisfied and shown on the falsework plans?	_____	_____	_____
8. For construction in or over navigable waters have all requirements for construction of falsework that are called for in the Coast Guard Permit been incorporated in the falsework design?	_____	_____	_____
9. Has possible damage from traffic been considered in the falsework design?	_____	_____	_____

Insert Project Name Here

10. Has damage from stream drift been considered in the falsework design? _____

11. Is the concrete placing sequence shown and is it consistent with the contract plans? _____

B. Foundation Requirements **YES** **NO** **N/A**

1. Are driven falsework piling provided as called for on the contract plans? _____

a. Is a minimum pile tip elevation or penetration indicated on the drawings? _____

b. If timber falsework piles are specified, are the recommended order lengths sufficient to virtually eliminate the possibility of pile splices? _____

c. Is a detailed static pile capacity analysis included in the calculations? _____

d. If lateral loads are applied to the piling by equipment, dead loads, flowing water, or drift, is a detailed lateral load analysis included in the calculations? _____

e. When piling are in an active waterway, have the potential effects of scour on axial and lateral pile support been addressed in the calculations? _____

f. Does the proposed falsework pile hammer meet the minimum field energy requirements as listed in 00520.20(d)(2)? _____

g. Will a driving criteria graph [FHWA Gates Equation, in 00520.42(b)] plotting blow count versus stroke for an acceptable pile hammer be provided for the project inspector? _____

2. Is falsework supported on spread footings or mud sills? _____

a. Are the spread footing elevations shown on the drawings? _____

b. Has a rational method for determining the ultimate bearing capacity of the foundation materials been presented and described in the calculations? _____

c. Have the soil parameters used in calculating the ultimate bearing capacity been listed and confirmed by the designer? _____

d. Has an appropriate Factor of Safety been used for calculating the allowable bearing capacity of the foundation materials?	_____	_____	_____
e. Are spread footing settlement estimates included in the calculations?	_____	_____	_____
f. Have effective stresses been used in the calculations, when applicable?	_____	_____	_____
g. When spread footings are founded near the top of a slope or in a slope, have the ultimate bearing capacity calculations been modified accordingly?	_____	_____	_____
h. When spread footings may be subjected to flowing water, have the potential effects of scour on ultimate bearing capacity been addressed in the calculations?	_____	_____	_____
C. Loads	YES	NO	N/A
1. Are the magnitude and location of all loads, equipment and personnel that will be supported by the falsework shown and noted on the falsework plans?	_____	_____	_____
2. Has the mass of specific equipment units to be supported by the falsework been included in the calculations or on the falsework plans?	_____	_____	_____
3. Is the deck finishing machine supported in a manner that will not impose load on concrete forms except deck overhang brackets?	_____	_____	_____
4. Are design loads and material properties used to determine design stresses for each different falsework member shown on the falsework plans?	_____	_____	_____
5. Is the worst loading and member property condition, rather than the average condition, used to obtain design loads?	_____	_____	_____
6. Are deck forms for concrete box girders supported from the girder stem and not from the bottom slab?	_____	_____	_____
7. Are diaphragm loads or other concentrated loads included in the analysis of supporting beams?	_____	_____	_____
8. If sloping structural members exert horizontal forces on the falsework, is bracing or ties used to resist these loads?	_____	_____	_____
D. Allowable Stresses	YES	NO	N/A

Insert Project Name Here

- | | | | |
|---|-------|-------|-------|
| 1. Has the method used for falsework design of all members except for manufactured assemblies been noted in the design calculations? | _____ | _____ | _____ |
| 2. Are manufactured assemblies identified as to manufacturer, model, rated working capacity and ultimate capacity? | _____ | _____ | _____ |
| 3. Is the allowable stress and the calculated stress listed in the summary for each different falsework member, except for manufactured assemblies? | _____ | _____ | _____ |

E. Timber Falsework Construction	YES	NO	N/A
---	------------	-----------	------------

- | | | | |
|--|-------|-------|-------|
| 1. Are timber grades consistent with material to be delivered to the construction site, and noted on falsework drawings, and in accompanying calculations for all timber falsework material? | _____ | _____ | _____ |
| 2. If "rough" lumber is specified for falsework by the falsework designer are the actual lumber dimensions used in calculations shown? | _____ | _____ | _____ |
| 3. If plywood spans are governed by the strength of the plywood, are the allowable stress and the calculated stress shown on the submitted calculations? | _____ | _____ | _____ |
| 4. If plywood spans are governed by the allowable spacing of supporting joists, are the allowable and the proposed spacing shown on the falsework plans? | _____ | _____ | _____ |
| 5. Have timber stringers been checked for bending, shear, bearing stresses, and 1/240 of the span length deflection? | _____ | _____ | _____ |
| 6. Are joists identified as being continuous over 3 or more spans when they are not analyzed as simple spans? | _____ | _____ | _____ |
| 7. Have stringers and cap beams been checked for bearing stresses perpendicular to the grain as well as for bending and shear stresses? | _____ | _____ | _____ |
| 8. Have posts been checked as columns as well as for compression parallel to the grain? | _____ | _____ | _____ |

F. Steel Falsework Construction	YES	NO	N/A
--	------------	-----------	------------

- | | | | |
|---|-------|-------|-------|
| 1. Are steel structural shapes and plates identified by ASTM number on the falsework plans and in the calculations? | _____ | _____ | _____ |
|---|-------|-------|-------|

- | | | | |
|--|-------|-------|-------|
| 2. Have steel beams been checked for bending, shear, web crippling and buckling of the compression flange? | _____ | _____ | _____ |
| 3. Has horizontal plane bracing been shown where required to limit compression flange buckling? | _____ | _____ | _____ |

G. Deflections and Settlement

YES NO N/A

- | | | | |
|--|-------|-------|-------|
| 1. Is falsework deflection for concrete dead load shown on the plans for all falsework spans? | _____ | _____ | _____ |
| 2. Is falsework deflection from concrete dead load limited to 1/240 of the span length for all falsework spans? | _____ | _____ | _____ |
| 3. Do stringers supporting cast-in-place concrete compensate for estimated camber? | _____ | _____ | _____ |
| 4. For beam spans with cantilevers, has the upward deflection of the cantilevers due to load placed on the main spans been investigated? | _____ | _____ | _____ |
| 5. Are provisions shown for taking up falsework settlement? | _____ | _____ | _____ |

H. Compression Members, Connections and Bracing

YES NO N/A

- | | | | |
|---|-------|-------|-------|
| 1. Has general buckling been evaluated for all compression members? | _____ | _____ | _____ |
| 2. Has bracing been provided at all points of assumed support for compression members? | _____ | _____ | _____ |
| 3. Was bracing in each direction considered in establishing the effective length used to check post capacity? | _____ | _____ | _____ |
| 4. Is bracing strength and stiffness sufficient for the intended purpose? | _____ | _____ | _____ |
| 5. If temporary bracing is required during intermediate stages of falsework erection, is it shown on the falsework plans? | _____ | _____ | _____ |
| 6. Have all connections been designed and detailed? | _____ | _____ | _____ |
| 7. Are web stiffeners required on steel cap beams to resist eccentric loads? | _____ | _____ | _____ |
| 8. Are wedges required between longitudinal beams and cap beams to accommodate longitudinal slope or to reduce eccentric loading? | _____ | _____ | _____ |
| 9. Has the width to height ratio of wedge packs been verified to fall within the limits given in the special provisions? | _____ | _____ | _____ |

Insert Project Name Here

10. If overhang brackets are attached to girder webs, has the need for temporary bracing to prevent longitudinal girder distortion been investigated?	_____	_____	_____
11. Have beams and stringers with height/width ratios greater than 2.5:1 been checked for stability?	_____	_____	_____
12. Have sloping falsework members that exert horizontal forces on the falsework been braced or tied to resist these loads?	_____	_____	_____
13. If beams supporting cast-in-place concrete have cantilever spans, have the falsework plans been noted to require the main spans be loaded before loading the cantilever spans?	_____	_____	_____
14. Have timber headers set on shoring towers been checked for eccentric loads, and for shear and bending stresses produced by the eccentricity?	_____	_____	_____
I. Highway and Railroad Traffic Openings (For falsework over or adjacent to highway or railroad traffic openings.)	YES	NO	N/A
1. Do falsework plans satisfy construction clearances shown on the contract plans?	_____	_____	_____
2. Are posts designed for 150% of the calculated vertical loading and increased or readjusted for loads caused by prestressing forces?	_____	_____	_____
3. Are mechanical connections 2,000 pounds minimum capacity shown at the bottom of posts to footing connections?	_____	_____	_____
4. Are mechanical connections 1,000 pounds minimum capacity shown at the top of the post to cap connections?	_____	_____	_____
5. Are beam tie downs 500 pounds minimum capacity shown for all beams?	_____	_____	_____
6. Are 5/8 inch or larger diameter bolts used at connections for timber bracing?	_____	_____	_____
7. Are temporary erection and removal bracing shown?	_____	_____	_____
J. Additional Requirements for Railroad Traffic Openings	YES	NO	N/A
1. Do falsework plans show collision posts as shown on the contract plans?	_____	_____	_____

Insert Project Name Here

2. Do posts adjacent to the openings have a minimum section modulus of?

a. steel - 9.5 cubic inches

b. timber - 250 cubic inches

3. Are soffit and deck overhang forming details shown?

4. Are falsework bents within 20 feet of centerline of the track sheathed solid between 3 feet and 17 feet above top of rail with 5/8 inch thick minimum plywood and properly blocked at the edges?

5. Is bracing on the bents within 20 feet of the centerline of the track adequate to resist the required assumed horizontal load or minimum 5,000 pounds, whichever is greater?

Designer's Signature

Date

SECTION 00541 - ULTRA HIGH PERFORMANCE CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00541 is not a Standard Specification and is included in this Project by Special Provision.

Description

00541.00 Scope - This Work consists of furnishing, placing, and finishing Ultra High Performance Concrete (UHPC) for Bridges and other Structures according to these specifications and in close conformity to the lines, grades and dimensions shown or established. This Work also includes field cast of UHPC in joints between precast concrete members and existing concrete surfaces.

00541.01 Definitions:

Ultra High Performance Concrete (UHPC) - A cementitious composite material composed of an optimized gradation of granular constituents, a water-to-cementitious material ratio less than 0.25, and a high percentage of discontinuous internal steel fiber reinforcement. The mechanical properties of UHPC include:

- A compressive strength greater than 17.5 ksi
- An effective cracking tensile strength greater than 0.75 ksi
- A minimum crack localization strength is greater than or equal to the effective cracking tensile strength

00541.02 Submittals - At least 14 Calendar Days before the UHPC pre-placement conference submit the following:

- Material certifications from the manufacturer
- Manufacturer's requirements for storing, mixing sequence and time, batching sequence, forming, placing, and curing
- Manufacturer's quality control procedures for sampling and testing including test methods and name and location of testing laboratory. Submit quality control test results according to manufacturer's quality control procedures for all UHPC placed.

Insert Project Name Here

- Formwork details and construction plan that includes attachment details, top forming, surface coating, joint sealing, and overpressure source according to the UHPC manufacturer's recommendation.
- Formwork repair plan for formwork blowout that can occur during UHPC placement.
- Certification of an ODOT certified laboratory or an AASHTO accredited laboratory approved by the Engineer to perform compressive strength tests according to ASTM C39 or ASTM C1856. For laboratory certified for ASTM C39 tests, ensure that the laboratory has testing machine that can apply a minimum load of 200,000 pounds. Include specifications of testing equipment to be used for testing.

00541.03 UHPC Pre-Placement Conference - Meet on-site with the UHPC manufacturer representative, the Engineer, and the Contractor's staff at least 1 Calendar Day before initial placement of UHPC. Discuss the proposed procedures for mixing, transporting, finishing, and curing of the UHPC material. Provide notification of the meeting to the Engineer at least 7 Calendar Days in advance.

Materials

00541.10 Materials - Furnish UHPC from one of the following list of pre-approved manufacturers.

Manufacturer

Material

Holcim US
8700 West Bryn Mawr Avenue, Suite 300
Chicago, IL 60631
Phone: (734) 489-9555
Email: ductal-na@lafargeholcim.com

Ductal Infrastructure

Steelike, Inc.
7631 Fullerton Road 7G
Springfield, VA 22153
Phone: 703-520-2763
US Toll Free: 1-888-364-2541
E-mail: info@steelike.com

Steelike® UHPC

ceEntek, Inc.
1 Gold Mine Rd, Suite A
Roxbury Township, NJ 07836
Phone: 518-428-6599
Email: USA@ceentek.com

ce200SF-G

00541.11 Material Sampling and Acceptance of UHPC - Cast 15 - 3-inch diameter x 6 inches cylinder samples according to ASTM C1856 for each Day of placement. Field cure cylinders for 3 Days. After 3 Days, keep cylinders sheltered in open air. A set of samples includes 3 cylinders.

Allow the Engineer to randomly select two sets of the samples for testing by the Agency. The Agency will test one set for compressive strength at 28 Days. The other set will be tested for splitting tensile strength at 28 Days for information only.

Insert Project Name Here

Transport three sets of the samples to an ODOT certified laboratory or an AASHTO accredited laboratory approved by the Engineer. A set of the cylinders will be randomly selected and tested for compressive strength at 4 Days, 14 Days, and 28 Days. Acceptance is based on the results obtained at 28 Days. Results from additional sets of cylinders is informational only.

Prepare cylinders according to ASTM C1856. Perform compressive strength tests according to ASTM C39 or ASTM C1856.

Meet the following minimum required strength:

- 17,500 psi compressive strength at 28 Days

Perform a flow test before UHPC placement according to ASTM C1437 for each batch of UHPC. The acceptable flow range is between 7 and 10 inches.

Labor

00541.30 Manufacturer's Representative - Provide a representative of the UHPC manufacturer on-site during placement of UHPC to monitor the quality of UHPC mixing, delivery, placement, and curing of the UHPC material and to conduct a flow test on every batch.

Construction

00541.40 Surface Preparation for Joints - Furnish exposed aggregate finish at precast concrete interfaces that are in contact with UHPC by using surface retarders from the QPL to expose Coarse Aggregates up to a 1/4-inch amplitude. For joints between existing concrete surfaces, prepare surfaces according to 00542.46 or other methods approved by the Engineer.

Wet precast concrete interface for a minimum of 8 hours and to a saturated surface dry condition immediately before placing UHPC. Blow out with compressed air any standing water in depressions, holes or low area.

00541.41 Forming - Design and fabricate forms that provide tight seals to prevent leakage of UHPC constituents and are sufficiently rigid to conform to the specified dimensions without appreciable distortion, warping or opening of joints. Use methods and Equipment as required by the manufacturer to ensure all joints are completely filled. Coat forms as recommended by the UHPC manufacturer to prevent water absorption.

00541.42 Batching and Placing - Follow the batching sequence as specified by the UHPC manufacturer and approved by the Engineer. Place UHPC according to 00540.49 and as recommended by the UHPC manufacturer. Overfill joint 1/8 inch maximum using top formwork for surface with a cross slope in any direction exceeding 2 percent. Place UHPC in one continuous pour, unless cold joint location is shown.

Insert Project Name Here

00541.43 Curing - Cure UHPC according to the manufacturer's recommendations for a minimum of four Days or until UHPC has a compressive strength of at least 14,000 psi before removing forms or applying loading.

00541.44 Grinding Overfilled UHPC - Grind UHPC joint to elevation shown. Grinding of UHPC surface can be performed when compressive strength of 10,000 psi has been achieved. If significant fiber pullout is observed during grinding operations, stop grinding. Resume the grinding with approval of the Engineer.

00541.45 Deck Sealing - Unless deck overlay that includes sealing work is specified for this Project, seal the surface over deck-level joints plus 3 feet around the joints and full width of the Roadway width according to Section 00539 after texturing the deck surface.

Measurement

00541.80 Measurement - No measurement of quantities will be made for UHPC.

The estimated quantity of UHPC is:

Type	Quantity (Cu. Yd.)
Ultra High Performance Concrete	_____

Payment

00541.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Ultra High Performance Concrete".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Reinforcing steel or other metal incorporated in the Work will be paid for according to the appropriate Section where the Work is required.

No separate or additional payment will be made for surface preparation for precast members. Payment will be paid for the appropriate items under which the Work is required.

No separate or additional payment will be made for:

- Formwork
- Leak-tight seal
- Corrective work
- Manufacturer's representative
- Deck sealing
- Surface preparation for existing concrete surfaces

SP00542 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 00542 - CONCRETE REPAIR

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00542 is not in the Standard Specifications and is included in this Project by Special Provision.

Description

00542.00 Scope - This Work consists of locating and repairing damaged concrete and reinforcement in Structures, and providing mortar or resin buildup over shallow reinforcement.

00542.01 Definitions:

(Delete the "Anode" paragraph if no anodes are used on the Project).

Anode - A galvanic unit consisting of a sacrificial zinc core and a cementitious mortar outer cover for corrosion prevention and on-going corrosion control of surrounding reinforcing steel.

Damaged Concrete - Concrete that is spalled or delaminated due to corroded reinforcement or metal appurtenances such as bearing devices, drains, and conduits; concrete that is debonded from corroded reinforcing bars; concrete with near-surface rock pockets; unsound or delaminated existing patches; and concrete that has been drilled, excavated, or removed during prior maintenance work or during the Work of this Contract.

Hand Patch - Installing hand-troweled repair mortar in concrete cavities up to 0.50 square foot surface area.

Metal Detector - A device to measure any type of metal, whether on the surface or buried in concrete.

Pumped Repair - Installing Pumped Repair mortar in concrete cavities greater than 0.50 square foot surface area.

Reinforcing Bar Locator - A device specifically designed to find reinforcing in concrete.

Saturated Surface Dry Condition - Surface condition where hardened concrete is thoroughly saturated with water, but any free water has been removed from the surface.

Shallow Reinforcing Bar - Steel reinforcement with 1/2 inch or less of concrete cover.

00542.02 Submittals - Submit the following at least 21 Calendar Days before beginning concrete repair Work according to 00150.37. Within 21 Calendar Days after receipt of submittals, the Engineer will review the submittals and designate them in writing as "approved", "approved as noted", or "returned for correction".

(a) Concrete Repair Mortar - Submit the following:

- A description of all relevant constituents and properties of the Material. Data published by manufacturer is acceptable unless certifications of the Material characteristics are required by the Specifications.
- For prepackaged products, the manufacturer's certification that the contents include cement and Aggregate and do not include silica fume, fly ash, or any other porosity-reducing admixture. Furnish the proportion (by weight) of portland cement to Sand according to the provisions of 00165.35.
- The Specifications subsection that each repair mortar complies.
- If proposing alternative repair mortar to those specified in 00542.10, test data demonstrating compliance with 00542.10.

For alternate repair mortar submit three 4 by 8-inch cylinders of repair mortar cast in the presence of the Engineer using the proposed mix proportions, admixtures, and mixing and application Equipment, at least 10 Calendar Days before starting concrete repair Work. Cast and cure the cylinders according to AASHTO R 100 or R 39.

Submit records of mix proportions and indicate the mix design that was used in each repair location. Maintain and provide records that are complete enough to be able to match repaired areas with the mix records.

(b) Concrete Repair Procedure - Submit a concrete repair procedure that includes the following:

- Manufacturer's specifications and operating instructions for all Equipment.
- Details of each step to accomplish the Work.
- Steps to regularly maintain quality control of all newly applied mortar.
- Plan to maintain records of verification of proportion (by weight) of Sand to portland cement and quantity of any additives for all mortar mixed on-site.
- Plan to maintain records identifying the mix design for each repaired area.

(c) Repair Damaged Reinforcing Bars - Submit a plan for accomplishing reinforcing bar repair that includes the following:

- Welder certifications according to AWS D1.4
- Pre-approved welding procedure specification (WPS) or procedure qualification record / welding procedure specification (PQR/WPS)
- Detailed procedure for electrode control measures
- Detailed procedure for achieving, maintaining, and monitoring pre-heat and inter-pass temperatures.

Insert Project Name Here

00542.03 Pre-welding Conference - Before beginning concrete repair Work, meet with the Contractor's supervisory personnel, concrete repair Subcontractor's supervisory personnel, the Contractor's certified welding inspector (CWI), and the Engineer at a mutually agreed upon time. The pre-welding conference includes discussion of the Contractor's quality control responsibilities, documentation requirements, welding procedures and Equipment, and demonstration of welder skills.

Materials

00542.10 Patch Material:

(a) Pumped Repair Mortar - Furnish one of the following micro-concrete (MC) or mortars with the required admixture as specified in 00542.15 for pump application.

- Pumped SikaEmaco 440MC (formerly BASF MasterEmaco S 440MC).

Alternative repair mortar meeting the following requirements:

- Non-polymer flowable micro-concrete
- Suitable for pumping
- At least 4,000 psi 28-Day compressive strength
- "Low" potential for cracking and no cracking in 28 Calendar Days when tested according to ASTM C1581, including Appendix
- Electrical resistivity in the range of 2,000 to 20,000 ohm-cm

Submit proposed alternative Materials for approval according to 00542.02.

(b) Hand Patch Material - Furnish Hand Patching Materials according to 02015.20 or 02015.30. Observe QPL remarks and follow the manufacturer's recommendation for application.

00542.11 Non-conductive Resin - Non-conductive resin is acceptable for filling cavities of 0.05 square feet or less and for resin buildup over Shallow Reinforcing Bar in sound concrete. Furnish a non-conductive resin from the category "Resin Bonded Anchor System" of the QPL, mixed at a 1:1 ratio with clean abrasive blasting Material.

00542.12 Abrasive Material - Furnish clean, dry, non-metallic grit abrasive Material with no mineral constituents that break down and remain on the surface in visible quantity. Furnish hard angular shaped abrasives from 16 - 30 mesh.

00542.13 Water - Furnish water according to Section 02020.

00542.14 Reinforcement and Added Steel - Furnish ASTM A706 Grade 60 uncoated reinforcing bars meeting the requirements of 02510.10. Furnish uncoated, ungalvanized welded wire reinforcement meeting the requirements of 02510.40. Furnish uncoated and ungalvanized metal embedded in the repair material to facilitate concrete replacement.

00542.15 Admixtures - Use only admixtures approved by the Engineer.

Insert Project Name Here

If using admixtures to reduce the water-cement ratio, or to retard or accelerate the development of strength, use only admixtures compatible with the mortar and at the rate specified by the manufacturer.

(Use the following subsection .16 for corrosive environments and when hollow wall anchors are used on the project. Delete this subsection if using subsection .17.)

00542.16 Hollow Wall Anchors - Furnish the following plastic hollow wall anchors:

- ITW Red Head EZP100 Nylon E-Z Drywall Anchor

(Use the following subsection .17 for non-corrosive environments and when mechanical anchors are used on the project. Delete this subsection if using subsection .16.)

00542.17 Mechanical Anchors - Furnish the following mechanical screw anchors:

- Dewalt Ultracon + (Hex washer head)
- Hilti Kwik Con II + (Hex washer head)
- ITW Red Head Tapcon (Hex washer head)

(Use the following subsection .18 when zinc Anodes are required.)

00542.18 Galvanic Zinc Anode - Furnish one of the following galvanic zinc Anodes:

Galvashield XP2 (100 grams zinc)
Vector Corrosion Technologies
5436 N. Desert Saguaro Ct.
Tucson, AZ 85745
(520) 230-0060
Fax (813) 830-7565
www.vector-corrosion.com

Sentinel Silver (100 grams zinc)
The Euclid Chemical Company
19218 Redwood Rd.
Cleveland, OH 44110
(216) 531-9222
Fax (216) 531-9596
www.euclidchemical.com

MasterProtect 8105 Anode, 105 grams zinc (24 anodes/case)
Master Builders Solutions/MBCC Group
889 Valley Park Drive.
Shakopee, MN 55379
(800) 433-9517 (Customer service)
www.master-builders-solutions.com

Labor

Insert Project Name Here

00542.30 Welders - Provide certified welders and welding inspectors according to AWS D1.4.

Construction

00542.40 Work Access, Containment, and Disposal - Provide Work access and debris containment according to Section 00253.

Dispose of waste according to 00290.20.

00542.41 Locating and Marking - Locate and mark the following:

- Concrete having visible spalling or delamination due to corrosion of reinforcement or metal appurtenances such as bearing devices, drains, and conduits. Include within the repair boundaries all Damaged Concrete at the edges of spalls.
- Visible unsound patches of Material.
- Concrete that is visibly loose, or that becomes dislodged or loosened when struck with a 16-ounce masonry hammer or by other approved technique.

Verify the presence of steel with a metal detector.

The Contractor is advised that concrete containing Aggregate larger than 2 inches can cause false readings. If no steel is present, readings in such areas should be disregarded.

Investigate all spots of rust visually and with a metal detector to determine if a metallic object is present. If a metal object is present mark the location.

In areas where spalling or delamination is not visually detectable, but is indicated by sounding, use a Reinforcing Bar Locator and mark reinforcing bars and their minimum concrete cover. If rust scale or pitting is found on the exposed reinforcing bar, or if the remaining concrete is separated from the bar, mark the Damaged Concrete area for removal.

Do not use internal angles less than 45 degrees in defining the repair boundaries. Make all repairs at least 2 inches wide in each direction. Within these restrictions, mark boundaries such that repair areas can be efficiently sawed and excavated.

Determine and mark the location and extent of each repair excavation. Do not begin concrete removal until location and extent have been verified by the Engineer.

The Engineer will perform verification surveys of selected sections of the Work and determine the final quantity of repairs. Do not begin excavation until the Engineer has completed the verification surveys.

00542.42 Concrete Removal - Sawcut the boundaries of concrete to be removed, to a depth just missing the reinforcing bars with less than 1/2-inch concrete cover or to a minimum of 1/2 inch, whichever is less. Do not overrun sawcuts at the corners of the marked boundaries. Sawcutting is not required if the Contractor can consistently provide, by another technique, a minimum 1/2-inch-deep excavation surface that is uniformly perpendicular to the original concrete surface along the marked boundary.

Remove concrete within the marked boundaries with high-pressure waterjet blasting Equipment, pneumatic hammers, chipping guns, manual picks and chisels, or other Equipment approved by the Engineer. Do not use pneumatic hammers heavier than a nominal 15-pound class. Remove concrete in such a way that removal of sound concrete beyond established boundaries is kept to a minimum. When working around reinforcing bars, avoid loosening the reinforcement or fracturing the concrete around it within or beyond the repair area.

Remove all Damaged Concrete within the marked boundaries to the depth of sound concrete. In areas where the reinforcing bar lacks bond with the existing concrete, continue to excavate to 1/2 inch beyond the depth of the reinforcing bar. Do not excavate beyond the depth of the reinforcing bar if area shows the reinforcing bar to be free of rust scale or pitting and the reinforcing bar is not separated from the remaining concrete.

The depth of concrete damage, due to corrosion, in any member is not expected to be substantially greater than 1/2 inch beyond the depth of the reinforcing bar.

Do not remove sound concrete over Shallow Reinforcing Bar.

00542.43 Damaged Reinforcing Bar Repair - Repair reinforcing bar showing 50 percent or greater section loss according to the following:

- Remove all Damaged Concrete
- Remove sound concrete as necessary so that there is a minimum of 3/4 inch clearance between the concrete and splice bars over entire length of repair
- Blast-clean all exposed reinforcing steel and concrete
- If feasible, place splice bars so as to allow 1/2 inch of concrete cover without raising the concrete surface
- Perform all weld splicing according to ANSI/AWS D1.4, "Structural Welding Code - Reinforcing Steel". Since the carbon content of existing reinforcement is unknown, assume that preheating is required under ANSI/AWS D1.4. Limit the temperature of reinforcing bar at concrete interface to 500 °F or less, verified using an infrared thermometer.
- Remove any additional concrete that cracks or spalls during welding
- Keep the existing spliced bars in place and avoid gouging and loosening reinforcing bar or damaging sound concrete outside of splice areas
- Keep the splice bar in the proper position during placement of concrete cover

Repair round bars with new splice bars the same size as the original bars. Repair square bars with new round splice bars with a diameter equal to the thickness of the square bars.

00542.44 Shallow Reinforcing Bar in Sound Concrete - If Shallow Reinforcing Bar exists in sound concrete and passes the sounding test, no concrete repair is necessary.

00542.45 Shallow Reinforcing Bar in Damaged Concrete - Where directed, treat prefabricated mesh and other closely spaced shallow metals in the same manner as Shallow Reinforcing Bar in Damaged Concrete. Place additional cover Material over Shallow Reinforcing Bar in Damaged Concrete according to the following:

(a) Mortar Buildup over Shallow Rebar - Place additional mortar as needed to achieve at least 1/2 inch of cover over Shallow Reinforcing Bar repairs.

(b) Resin Buildup over Shallow Reinforcing Bar - In areas where additional buildup is not feasible, or where buildup would detract from the aesthetic appearance of the Structure, furnish additional cover using non-conductive resin according to 00542.11. Apply the resin in 2-inch-wide strips over the Shallow Reinforcing Bar.

00542.46 Surface Preparation - Abrasive-blast or water-blast all concrete surfaces that are to receive additional mortar cover or patches, to remove all debris, loose concrete, concrete pulverized during removal, scale, and loose rust. Blast exposed reinforcing bars according to SSPC Standard SP6 "Commercial Blast Cleaning" or equivalent procedure. Do not allow prepared surfaces to remain exposed more than 36 hours before placing repair mortar.

Prepare surfaces that are to receive additional mortar or resin cover with a surface profile according to International Concrete Repair Institute (ICRI) Guideline 310.2R-2013 surface profile CSP 6 (1/8-inch surface profile).

(Delete the following paragraph if mechanical anchors are used on the project.)

Furnish hollow wall anchors for concrete surfaces that are to receive more than 1 inch of repair mortar and have reinforcing bar spacing greater than 9 inches. Install anchors by drilling 1/4-inch diameter holes 1/2 to 3/4 inch deep on a 9-inch (maximum) grid in the concrete substrate. Apply non-conductive resin and insert anchors. Remove excess resin from the concrete substrate.

(Delete the following paragraph if hollow wall anchors are used on the project.)

Furnish mechanical anchors for concrete surfaces that are to receive more than 1 inch of repair mortar and have reinforcing bar spacing greater than 9 inches. Install anchors by drilling hole diameter per manufacturer's specification with 1-inch-deep embedment on a 9-inch maximum grid in the concrete substrate.

(Delete the following subsection .47 if no Anodes are used on the Project. Do not re-number subsequent subsections.)

00542.47 Anode Installation - Install galvanic zinc Anodes in Damaged Concrete repair locations that have scaled or pitted reinforcement bar with a high probability of recurring corrosion. Place an Anode in the edge of the patch area within the vicinity of the corroded reinforcement. Securely fasten the Anode to clean reinforcing steel using a suitable wire twisting tool to eliminate free movement, and to ensure electrical continuity. Confirm continuity using an ohmmeter. Limit electrical resistance between the Anode wire and adjacent reinforcement is 2.0 ohms or less. Install Anodes in a 24-inch grid, on center. Adjust spacing where intersecting reinforcement does not allow for 24 inches and maintain 14 inches minimum and 24 inches maximum spacing. Install a single Anode in directions where less than 30 inches of reinforcement is exposed. Install Anodes according to the Anode manufacturer's recommendations and cover with patch Material within 24 hours after removing the Anode from its original packaging. Provide a minimum of 3/4 inch coverage over Anodes.

00542.48 Patch Installation:

(a) Forms - Furnish smooth-surfaced form Materials. Provide adequate support and bracing of forms to prevent deflection under the weight and pressure of new mortar, and to prevent vibration damage to mortar during setting and curing. Leave forms in place for a minimum of 3 Days after mortar placement.

Furnish watertight form Materials and a watertight form system to prevent loss of water during presoaking and repair mortar placement. Incorporate enough pumping ports to ensure consistent placement and enough vent holes or vent tubes to allow air to escape extreme surface irregularities and remote cavities. Limit port spacing to prevent mortar segregation.

Furnish forms that can readily be removed and reinstalled for presoaking, flushing, blowdown, and for verification of Surface Saturated Dry Condition.

(b) Pre-soak - Saturate the substrate concrete for at least 24 hours before application of repair mortar. Use either a watertight form kept full of water; saturated burlap or foam Material packed inside the forms, in contact with the entire existing concrete surface, and soaked frequently; or any other method demonstrated to produce Saturated Surface Dry Condition.

After the substrate has been saturated, temporarily remove the form and, immediately before placing mortar, remove all dust, dirt, and other debris by flushing the surface with water pressurized to at least 60 psi, followed by blasting with clean compressed air to remove excess water. Provide a damp surface free of standing water and free of contaminants when applying repair mortar. Light surface rust that appears during the pre-soak stage does not need to be removed. When the concrete surface is in Saturated Surface Dry Condition and free of contaminants, and reinforcement is clean or has only light surface rust, immediately reinstall the forms and place mortar.

(c) Mixing - When a package of prepackaged repair mortar is opened, mix the entire contents of the package.

Mix repair mortar according to the manufacturer's instructions including.

(d) Placing Repair Mortar - Pump repair mortar and achieve thorough and uniform hydration without the use of excess water.

Do not place mortar before acceptance of Saturated Surface Dry Condition by the Engineer.

Do not place mortar during freezing weather or if temperatures are likely to drop below freezing during the cure period for the mortar. Do not apply mortar to frosted surfaces. Follow the manufacturer's recommendations regarding temperature and weather conditions during mortar placement.

Provide adequate pumping pressure into each port to ensure mortar completely fills the cavity and mortar is observed at all vents. Vibrate only if approved by the Engineer in advance.

(e) Adjacent Surface Protection - Protect surfaces outside the repair area from mortar overshoot and drip. Remove the excess Material from these areas after the application has been completed.

(f) Mix Records - Record proportion (by weight) of Sand to portland cement and the quantity of any additives for all mortar mixed on-site at the start of each mortar placement operation and every time proportions or additives are changed. Keep a record of the mix used for each repair area.

00542.49 Curing - Take care to avoid cracks in the new mortar due to excessive surface evaporation. Continuously cure all newly applied mortar according to the manufacturer's recommended curing schedule.

00542.50 Finish - Finish all exposed surfaces and surface defects to straight and true lines as shown. Provide a Class 2 surface finish according to 00540.53 on all exposed surfaces and a general surface finish according to 00540.53 on all other surfaces, with no coating on any surface unless otherwise directed.

00542.51 Delamination Survey - After mortar repair Work has cured, conduct a delamination survey of all repaired areas with the Engineer according to the following:

- Sound all repaired areas with a 1-pound masonry hammer or by other approved technique.
- Mark boundaries of all delaminations in the repaired areas.
- Identify the marked delamination that needs Patching.

Make repairs when delamination repair areas do not meet the acceptance criteria of 00542.52.

Upon completion of the survey, prepare and sign a survey report that identifies all areas to be patched. Submit the survey report for review and acceptance by the Engineer. Repair the identified areas in a manner satisfactory to the Engineer.

After Patching the identified areas, repeat the delamination survey. Repeat the delamination survey and repair procedure until all areas of unsound concrete have been repaired and accepted.

Following the bond strength test of cores according to 00542.52(b), the Engineer will visually inspect the cores for sand pockets and voids. If sand pockets or voids are found, the area from where the core was taken will be marked by the Engineer to aid in the Contractor's delamination survey.

00542.52 Production Quality Control Testing - Acceptance of Work performed under this Section is according to the following tests:

(Fill in the blank in the first sentence below. For small estimated repair work area Projects use an area value that will provide desired number of test samples. For single-span Bridges, use the default value of 100 SF. For medium to large Structures, proportion the estimated repair work area to result in a minimum of

three samples taken on each primary Bridge segment, such as approach span or main span.)

(a) Compressive Test - For each _____ square feet of mortar placed on the Bridge, but not less than once per production Work shift, cast at the same time and under the same conditions three 4 by 8 inch cylinders for testing. Cast the cylinders in single-use plastic molds. Cast and cure strength specimens according to AASHTO R 100 or AASHTO R 39. Test the cylinders for compressive strength according to AASHTO T 22 following a 28-Day cure.

(Fill in blank in the sentence below. At a minimum, use the design compressive strength of concrete in the existing Structure (if available) or the value determined for load rating. If field testing on an existing Structure determines a higher concrete strength, use that value.)

The minimum acceptable 28-Day compressive strength of cylinders is _____ psi.

(Fill in the blank in the sentence below. For small estimated area Projects use an area that will provide desired number of test samples. For single-span Bridges, use the default value of 100 SF. For medium to large Structures, proportion the estimated repair work area to result in three samples being taken on each primary Bridge segment, such as approach span or main span.)

(b) Pull-off Test - Following a 7-Day cure of the mortar patch, core one test specimen from each _____ square feet of newly applied mortar placed on the Bridge surface, at locations designated by the Engineer. Locate cores to avoid damaging reinforcing bar. Core approximately 1/2 inch into the original concrete. Do not break cores free before testing. Perform pull-off tests of the cores in the presence of the Engineer.

Measure the core bond strength according to ASTM C1583. Use pull-test dollies with the same diameter as the cores. Conduct the test until failure.

The minimum acceptable bond strength between the new and original concrete is 175 psi.

If the test shows failure at less than 100 psi, retest after checking Equipment and verifying core angle is perpendicular to the surface. If the patch area is too small for another test, use alternate patch location. If the retest shows failure at less than 100 psi, then a pull-off test may be performed on in situ concrete substrate in the vicinity of the patch area to determine the existing concrete substrate tensile strength. If in situ concrete substrate fails at 100 psi or less, the Engineer will re-evaluate the original concrete substrate.

Individually seal the cores taken from the Bridge in plastic bags and tag them for identification.

If any quality control test fails to meet the minimum requirements, any or all repair mortar represented by that test may be rejected by the Engineer.

00542.53 Deficient Repair Mortar - Repair, at no additional cost to the Agency, all mortar patches that show an alligator cracking in the surface or uncontrolled cracks visible without magnification. Perform additional testing as directed to determine the extent of deficient mortar in the production test area represented. If additional patches are found to be deficient,

Insert Project Name Here

repair the production test area represented according to the Specifications at no additional cost to the Agency. Repairs include removal and replacement of patches found to be substandard.

Repair small crevices a maximum of 0.4 inch deep and 0.1 inch wide at the edge of a patch with non-conductive resin mixed with abrasive blasting Material or other approved patch Material, at no additional cost to the Agency. Cut out pockets or other defects and replace with new repair mortar according to this Section.

Measurement

00542.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(Delete the items not used on Project. Re-alphabetize the remaining items as needed after deletion. In paragraph (a), insert the estimated quantity provided by the Designer.)

(a) Locate Concrete Repair - No measurement of quantities will be made for locating concrete repairs. The estimated quantity of locating concrete repairs is _____ square feet.

(b) Reinforcing Bar Repair - Repair of damaged reinforcing bar will be measured on the unit basis, per each.

(c) Concrete Repair - Concrete repair will be measured on the area basis. Measurement will be the outside measurement of the area of Work marked for concrete repair, not including areas marked for mortar buildup over Shallow Rebar, after locating concrete repair and before concrete removal Work. The area of Work marked for concrete repair does not include initially sound concrete that is damaged or micro-fractured by the Contractor's operations.

(d) Mortar Buildup over Shallow Rebar - Mortar buildup over Shallow Rebar will be measured on the area basis. Measurement will be the outside measurement of the area of Work marked for mortar buildup after locating concrete repair and before concrete removal Work. The area of Work marked for mortar buildup does not include initially sound concrete that is damaged or micro-fractured by the Contractor's operations.

(e) Resin Buildup over Shallow Rebar - Resin buildup over Shallow Rebar will be measured on the area basis. Measurement will be the outside measurement of the area of resin in place.

(f) Zinc Anodes Installation - Installation of zinc Anodes will be measured on the unit basis, per each.

Payment

00542.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price per unit of measurement for the following item(s):

(Delete Pay Items not used on the Project. Re-alphabetize as needed after deletion.)

Insert Project Name Here

Pay Item	Unit of Measurement
(a) Locate Concrete Repair	Lump Sum
(b) Reinforcing Bar Repair	Each
(c) Concrete Repair	Square Foot
(d) Mortar Buildup over Shallow Rebar	Square Foot
(e) Resin Buildup over Shallow Rebar	Square Foot
(f) Zinc Anodes Installation	Each

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for providing mix proportion or mix design records.

No payment will be made for repair of initially sound concrete that is micro-fractured or otherwise damaged by the Contractor's operations.

SP00543 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-02-26
Requires SP00540 when
pigmented sealer is required.)**

SECTION 00543 - ARCHITECTURAL TREATMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00543 is not a Standard Specification and is included in this Project by Special Provision.

Description

00543.00 Scope - This Work consists of applying concrete surface texture and color to the indicated concrete faces, as shown in the Plans.

00543.02 Required Submittals - Submit the following at least 10 Calendar Days before the preconstruction conference:

- Five copies of the form liner manufacturer's pattern details;
- Five copies of manufacturer's instructions for handling, cutting, assembling, and finishing form liners;

Insert Project Name Here

- Five copies of the stain manufacturer's written application instructions;
- One color sample for each proposed stain to be used;
- A description of proposed containment methods and plan for disposal of chemical or other residues; and
- Documentation showing that the firm performing the Work of this Section has successfully completed a minimum of 5 projects involving comparable textured and colored concrete construction within the previous 5 years. Include the name, location, and approximate completion date for each previous project, and the name and phone number of an owner's representative who can attest to the success of the project.

Materials

00543.10 Form Liners - Furnish form lining Materials and patterns according to the Specifications and as approved by the Engineer. Furnish a high-quality form liner product that attaches easily to the forms. Furnish form liners that are:

- Capable of withstanding anticipated concrete pour pressures without compressing more than 1/4 inch or leaking concrete so as to cause physical or visual defects in the finished Work; and
- Removable without causing damage to the concrete surface or the substrate.

(a) General - Furnish all form liners used for a particular pattern from the same manufacturer.

(Use the following subsection (b) when architectural treatment is required on retaining walls. Add, delete, or replace options as necessary. Obtain the approval of Technical Resource for this Section.)

(b) Retaining Walls - For retaining walls, furnish one of the following form liner systems or approved equal:

- Colonial Stone 17014 by Fitzgerald Formliners
1500 East Chestnut Avenue
Santa Ana, CA 92701
Telephone: 1-800-547-7760
- Rocky Mountain Flagstone 1510 by SpecFormliners
1038 East 4th Street
Santa Ana, CA 92701
Telephone: 1-714-429-9500
- Tuscon River Rock 187 by Scott Systems, Inc.
10777 East 45th Avenue
Denver, CO 80239
Telephone: 1-303-373-2500

(Use the following subsection (c) when architectural treatment is required on bridge rails. Add, delete, or replace options as necessary. Obtain the approval of Technical Resource for this Section.)

(c) Bridge Rails - For bridge rails, furnish one of the following form liner systems or approved equal:

- Bush Hammer 17998 by Fitzgerald Formliners
1500 East Chestnut Avenue
Santa Ana, CA 92701
Telephone: 1-800-547-7760
- Medium Bush Hammer 1615 by SpecFormliners
1038 East 4th Street
Santa Ana, CA 92701
Telephone: 1-714-429-9500
- Bush Hammer Stone 1281 by American Formliners
1567 Frontenac Road
Naperville, IL 60563
Telephone: 1-630-615-2170

00543.12 Colored Stain - Furnish a pigmented sealer according to 00540.10(a).

00543.13 Form Release Agents and Patching Materials - Furnish form release agents and patching Materials that are compatible with the form liner system and stain.

00543.14 Form Ties - Furnish form ties with set break-backs at least 1 inch below the finished concrete surface (bottom of rustication groove), so designed that the device can be disengaged and removed without spalling or damaging the concrete.

00543.15 Quality Control - Provide quality control according to Section 00165.

Labor

00543.30 Personnel Qualifications – Perform architectural treatment Work using a company experienced in architectural treatment Work. Provide a company to perform the Work of this Section that has successfully completed a minimum of 5 projects involving comparable textured and colored concrete construction within the previous 5 years. Submit documentation according to 00543.02.

Construction

00543.40 Pre-Production Tests:

(a) Form Liner Test Panels - Construct vertical, unreinforced test panels for each form liner type specified, to demonstrate the surface texture produced by the form liner. The minimum size for the test panel is 8 inches thick by 8 feet wide by 6 feet high.

Include in the test panel one vertical and one horizontal joint between adjacent sections of form liner to demonstrate that the finished pattern meets the appearance requirement of 00543.41.

Insert Project Name Here

Construct test panels in a location designated by the Engineer, using the same concrete class and finishing procedures as proposed for the finished Structure.

The Engineer will examine the surface of the resulting test panel. Remove and dispose of unsatisfactory test panels according to 00290.20(c) and repeat test as required. Do not proceed with the Work prior to receiving the Engineer's approval.

Retain the approved test panel to serve as the standard for accepting subsequent texturing Work.

(b) Coloring Test - Perform one or more color application tests prior to applying stain to the finished Work. Perform test(s) on cured form liner test panel(s) constructed according to 00543.40(a), or other area(s) where directed. If results do not meet Specifications, repeat the test on new test panel(s) until the Engineer approves the results.

The approved test area will serve as the standard for accepting subsequent stain application and may be incorporated into the finished work if approved.

00543.41 Form Liner Installation - Ensure that form liners are clean and free of concrete build-up, blemishes, tears, or other damage prior to each use.

Attach liner to forms following manufacturer's recommendations. Butt adjoining liners with less than 1/4-inch seams. Fill open cracks prior to placing concrete. Assemble and join form liner panels so that the finished pattern has a continuous appearance and is not interrupted by visible vertical or horizontal joints between panels.

Coordinate form tie locations with the form liner pattern. Locate form tie holes in the high point of the rustication groove between stone patterns.

00543.42 Coloring - After the textured concrete has cured as recommended by the pigmented sealer manufacturer, but not less than 28 Days after concrete placement unless approved by the Engineer, apply the pigmented sealer to textured surfaces where shown, and according to 00540.53(d)(2).

Methods that reduce the approved surface texture will not be allowed for cleaning concrete surfaces. If using pressure washing, manage wash water according to Section 00290.

Provide a pigmented surface free of blemishes, discoloration, surface voids, and conspicuous form marks.

Measurement

00543.80 Measurement - The quantities of Architectural Treatment will be measured on the area basis and will be the area of treatment on the indicated concrete faces, including faces of approved test panels incorporated into the main concrete surface.

No measurement of quantities will be made for test panels, including architectural treatment of test panels not included in the main concrete surface.

Payment

Insert Project Name Here

00543.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Architectural Treatment.....	Square Yard
(b) Test Panels	Lump Sum

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Furnishing and placing formliners
- Release agents
- Patch mix
- Finishing
- Caulking compounds
- Concrete surface colorant
- Concrete sealers

SP00545 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
Requires SP00585, SP02001 & SP02410)

SECTION 00545 - REINFORCED CONCRETE BRIDGE APPROACH SLABS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00545 of the Standard Specifications modified as follows:

00545.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of constructing reinforced portland cement concrete bridge approach slabs and sleeper slabs at the locations shown or as directed, and in close conformity to the lines, grades and dimensions shown or established.

(Use the following paragraph and subsection .02 when sleeper slabs are included.)

Add the following subsection:

Insert Project Name Here

00545.02 Definitions:

Sleeper Slab - An individual concrete element at the roadway end of an approach slab that provides foundational support, pavement structure transitioning, and accommodations for expansion joint installation.

00545.10 Materials - Replace the bullet that begins "When pipe under approach ..." with the following bullet:

- When pipe under approach slabs are shown, furnish one of following types:

Replace the bullet that begins "For pipe under approach ..." with the following bullet:

- For pipe under approach slabs, furnish pipe bedding, pipe zone material, and backfill meeting the requirements of 00405.12, 00405.13, and 00405.14.

Replace the bullet that begins "Provide granular structure ..." with the following bullet:

- Furnish granular structure backfill meeting the requirements of 00510.13.

(Use only one of the following options when Sleeper Slabs are included. Delete the option that does not apply.)

[Option 1 - Use the following when SP00755 is not included in the Project Special Provisions.]

Add the following bullet to the end of this subsection:

- Furnish Foundation Concrete, Class 3300 for sleeper slabs, unless otherwise shown.

[Option 2 - Use the following when SP00755 is included in the Project Special Provisions.]

Add the following bullet to the end of this subsection:

- Furnish concrete according to 00755.11 for sleeper slabs, unless otherwise shown.

(Use the following paragraph and subsection .48 when sleeper slabs are included.)

Add the following subsection:

00545.48 Sleeper Slabs - Construct to the dimensions and details shown.

Vibrate concrete in sleeper slabs until it is completely consolidated and the excavations are completely filled. Construct sleeper slabs at least 24 hours before paving operations, unless otherwise allowed. Cure the surfaces of sleeper slab concrete according to 00755.53.

(Use the following .80 when sleeper slabs are included.)

00545.80 Measurement - Add the following paragraph to the end of this subsection:

Insert Project Name Here

The quantities of sleeper slabs will be measured on the length basis. The length will be measured along the joint at the roadway end of the approach slab.

(Use the following .90 when sleeper slabs are included.)

00545.90 Payment - Replace the paragraph that begins "The accepted quantities of reinforced concrete..." with the following paragraphs:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price per unit of measurement for the following item(s):

Pay Item	Unit of Measurement
(a) Reinforced Concrete Bridge Approach Slabs	Square Yard
(b) Bridge Approach Sleeper Slabs	Foot

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00550 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP02001, SP02510, SP02515 & SP02560
Requires SP02080 when grout is required.
Requires SP02210 when concrete coating is required.)

SECTION 00550 - PRECAST PRESTRESSED CONCRETE MEMBERS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00550 of the Standard Specifications modified as follows:

00550.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of the manufacture, storage, transportation and installation of precast prestressed concrete girders, box girders, slabs or other concrete members. Precast prestressed concrete members in this Specification are referred to as members.

(Use the following subsection .06 when precast members with UHPC connection are specified and Camber correction is required.)

Insert Project Name Here

Add the following subsection:

00550.06 Submittals - Submit unstamped plan of differential Camber correction for the adjacent precast concrete members for UHPC joint connections at least 21 Calendar Days before precast member fabrication according to 00150.35. Include step-by-step procedure and identify Equipment, Materials, and any items to be cast into the precast concrete members in the submittal.

00550.12(a) Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of Aggregate is based on the Contractor's quality control testing, if verified, according to Section 00165.

00550.12(b) Plastic Concrete - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of plastic concrete is based on tests performed by the QCT, according to Section 02001.

00550.12(c)(1) General - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of hardened concrete is based on analysis of compressive strength test results of cylinders cast and cured by the Contractor and tested according to AASHTO T 22 by a CSTT at an ODOT certified laboratory and verified according to Section 00165.

00550.12(c)(2) Sampling and Testing - Replace this subsection, except for the subsection number and title, with the following:

Obtain a sample from a delivery vehicle, selected at random, during placement in each bed. Test the sample for temperature, slump, density and air content and cast at least three cylinders for testing at 28 Days. Cure the cylinders in a manner similar to the members they represent. Alternately, the cylinders may be cured in a curing chamber correlated in temperature with the concrete in the beds. Leave the cylinders in the bed with the member or in the curing chamber until the member is stripped. After the member is stripped, place the acceptance cylinders in storage in a moist condition according to AASHTO R 100.

00550.12(c)(3) Acceptance - Replace the paragraph that begins "Hardened concrete members ..." with the following paragraph:

Hardened concrete members with an ASTV meeting or exceeding the specified design strength, f'_c , is acceptable for strength.

00550.20 Prestressing Equipment - Replace the paragraph that begins "Provide hydraulic jacks ..." with the following paragraph:

Provide hydraulic jacks equipped with calibrated pressure gauges. Calibrate the jack and gauge combination and provide a graph or table showing the calibration to the Engineer.

Replace the paragraph that begins "If other types of jacks ..." with the following paragraph:

If other types of jacks are used, provide calibrated proving rings or other devices that accurately indicate the jacking forces.

00550.43(b) Consolidation - Replace the bullet that begins "Vibrate at points uniformly ..." with the following bullet:

- Vibrate at points uniformly spaced and not further than twice the radius where vibration is visibly effective.

00550.46 Release of Prestress - Replace the paragraph that begins "Transfer bond stress to ..." with the following paragraph:

Transfer bond stress to the concrete, or release end anchors, only when the concrete has attained the minimum compressive strength shown or specified for such transfer of load. Cut or release the elements according to the sequence shown on the reviewed Working Drawings so lateral eccentricity of prestress is at a minimum.

Replace the paragraph that begins "Determine the compressive strength ..." with the following paragraph:

Determine the compressive strength of the concrete to establish time for detensioning by testing standard cylinders cast and cured identically with the member. Cast and test cylinders used to determine release time according to AASHTO T 22 and AASHTO R 100.

00550.47(b) Class 1 Surface Finish (Ground and Coated) - Replace the bullet that begins "Thoroughly saturate the ..." with the following bullet:

- Thoroughly saturate the surface with water and coat while damp with a coating material according to 02210.30.

00550.49(a) Lifting - Replace the bullet that begins "Members will be ..." with the following bullet:

- Members are rejected if not handled correctly as specified.

00550.49(c) Transporting - Replace the paragraph that begins "Damaged members will be..." with the following paragraph:

Damaged members are rejected. Replace damaged members, or if allowed by the Engineer, repair damaged members to the Engineer's satisfaction at no additional cost to the Agency.

(Use the following subsection .50 when precast members with UHPC connection are specified and Camber correction is required.)

00550.50 Tie Rods - Delete this subsection.

(Use one of the following options as instructed below. Delete the option that does not apply.)

Insert Project Name Here

00550.51 Keyway Grouting for Slabs, Box Beams, and Integral Deck Members -

[Option 1 - Use the following paragraph when UHPC is NOT used.]

Replace the paragraph that begins "After forms have been removed from..." with the following paragraph:

After forms have been removed from slabs, box beams and integral deck bulb tees, sandblast all keyways. Visually verify the surface profile of all prepared surfaces according to International Concrete Repair Institute (ICRI) Guideline 310.2R-2013 *Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair* - surface profile CSP 3. After the members are in place and the tie rods are tensioned (for slabs and box beams) or welded connections are made (integral deck bulb tee girders), clean the keyways of all foreign material and keep moist for 24 hours before grouting. For slabs and box beams, after the tie rods are tensioned, seal the space remaining at the bottom of the keyways with a backer rod as shown before grouting.

[Option 2 - Use the following paragraph when precast members with UHPC connection are specified and Camber correction is required.]

Delete this subsection.

(Use the following subsection .52 when precast members with UHPC connection are specified and Camber correction is required.)

00550.52 Hot Applied Joint Sealant for Integral Deck Members with AC Wearing Surface - Delete this subsection.

(Use the following subsection .80 when Camber correction is required)

00550.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

The quantities of Work performed under this Section will be measured according to the following:

(a) Length Basis - Precast prestressed members will be measured on the length basis, and will be the sum of the horizontal lengths shown for each type and size of member. Field measurement of each member length will not be made. The quantities will be determined by calculating the theoretical horizontal length shown, added together for a total for each type and size.

(b) Lump Sum - No measurement of quantities will be made for Camber Correction.

Stirrup extension reinforcement will be measured according to 00530.80. Estimated quantities of reinforcement for the lump sum method will be listed in 00530.80(a).

(Use the following subsection .90 when Camber correction is required.)

00550.90 Payment - Add the following Pay Item to the Pay Item list:

Insert Project Name Here

(d) Camber Correction Lump Sum

Replace the paragraph that begins "In item (a)..." with the following paragraph:

In item (a), the girder type and depth is inserted in the blank.

Replace the paragraph that begins "In item (b)..." with the following paragraph:

In item (b), the slab depth is inserted in the blank.

Replace the paragraph that begins "In item (c)..." with the following paragraph:

In item (c), the box beam depth is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

SP00552 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

**Requires SP02001, SP02050, SP02210,
SP02420 SP02510, and SP02560)**

SECTION 00552 - PRECAST REINFORCED CONCRETE MEMBERS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00552 is not a Standard Specification and is included in this Project by Special Provision.

Description

00552.00 Scope - This Work consists of the manufacture, storage, transportation and installation of precast reinforced concrete pile caps, wingwalls, Bridge approach slabs or other precast concrete members. Precast reinforced concrete members in this Specification are referred to as "Members".

00552.02 Submittals - Essential elements of design and section dimensions for Members are as shown. Submit unstamped Working Drawings for all Members for approval according

Insert Project Name Here

to 00150.35. Include lifting details, storage details, erection plan and bracing plan on the Working Drawings for all Members.

00552.03 Alternate Designs: Agency design specifications are provided by the Agency upon request. Do not incorporate alternate Materials or Members into the Work until the proposal is accepted by the Engineer. The Contractor may propose a different steel reinforcing system or different Member dimensions provided the following requirements are met:

- Before manufacturing the Members, submit stamped design calculations, Working Drawings and specifications according to 00150.35.
- With the calculations, show that the Member meets all applicable limit states used for the Agency design.
- Member dimensions are not increased by more than 1 inch. Where overall depth is increased, verify that the required minimum vertical Roadway clearance is maintained.
- Structural changes required to accommodate an approved alternate system or section are made at no additional cost to the Agency.

00552.04 Member Tolerances - Fabricate Members to the dimensional tolerances in the *PCI Manual for Quality Control for Plants and Production of Structural Precast Concrete Products*. Acceptance or rejection of Members outside these tolerances will depend on how the Structure's strength, rideability and appearance are affected.

Materials

00552.11 Materials - Furnish Materials meeting the following requirements:

Concrete Coating	02210
Concrete	02001
Curing Materials	02050
Deformed Bar Reinforcement.....	02510.10
Epoxy Coated Reinforcement	02510.11
Mechanical Splices.....	02510.20
High-Strength Anchor Bolts or Rods	02560.30
Corrugated Metal Pipe	02420.10
Portland Cement Concrete Repair Material	02015
Structural Grout	02080.60

00552.12 Acceptance of Concrete - Acceptance of concrete is according to Section 00165 and the following:

(a) Aggregate - Acceptance of Aggregate is based on the Contractor's quality control testing, if verified, according to Section 00165.

(b) Plastic Concrete - Acceptance of plastic concrete is based on tests performed by the QCT, according to Section 02001.

(c) Hardened Concrete:

(1) General - Acceptance of hardened concrete is based on analysis of compressive strength test results of cylinders cast and cured by the Contractor and tested according to AASHTO T 22 by a CSTT at an ODOT certified laboratory and verified according to Section 00165.

(2) Sampling and Testing - Obtain a sample from a delivery vehicle, selected at random, during placement in each bed. Test the sample for temperature, slump, density and air content and cast at least three cylinders for testing at 28 Days. Cure the cylinders in a manner similar to the Members they represent. Alternately, the cylinders may be cured in a curing chamber correlated in temperature with the concrete in the beds. Leave the cylinders in the bed with the Member or in the curing chamber until the Member is stripped. After the Member is stripped, place the acceptance cylinders in storage in a moist condition according to AASHTO R 100.

(3) Actual Strength Test Value - The ASTV at 28 Days is the average compressive strength of the three cylinders tested.

Discard all specimens that show definite evidence of improper sampling, molding, handling, curing, or testing, except low strength. The average strength of the remaining cylinders are then considered the test result.

(4) Acceptance - Hardened concrete Members with an ASTV meeting or exceeding the specified design strength, f'_c , are acceptable for strength.

If the ASTV is less than f'_c but at least 85 percent of f'_c , the Engineer may review the results to determine if the Member is suitable for the intended purpose. If suitable, the concrete represented by an ASTV less than f'_c may be accepted subject to a price adjustment according to 00150.25.

Concrete that has an ASTV less than 85 percent of f'_c will not be accepted. All costs of removal, replacement, and all related Work are the Contractor's responsibility.

Equipment

00552.20 Vibrators - Provide either internal or external vibrators in working condition meeting the manufacturer's rating. When epoxy coated reinforcement is used, use internal vibrators fitted with a manufactured rubber head to minimize damage to the epoxy coating.

Construction

00552.40 Forming - Furnish forms that are mortar-tight and sufficiently rigid to conform to the specified dimensions without appreciable distortion, warping or opening of joints. Before placing concrete in the forms, remove all dirt, sawdust, excess water and other foreign material. Tighten forms before depositing new concrete on or against hardened concrete. Provide a 3/4-inch chamfer on all exposed concrete edges unless otherwise shown.

00552.41 - Placing Reinforcement - Place reinforcement according to the Plans, Section 00530, and these Specifications.

00552.42 Placing Concrete:

(a) General - Place concrete so that the finished Members are uniform and monolithic, free from cold joints.

Do not deposit concrete in the forms until the Engineer has inspected and approved the placement of reinforcement, conduit, and other embedded items.

In preparation for placing concrete, prepare forms according to 00552.40. Remove struts, stays and braces serving temporarily to hold the forms in correct shape and alignment before the placing of concrete or when the concrete placing has reached an elevation rendering them unnecessary. Remove these temporary members entirely from the forms and do not bury them in the concrete.

Place concrete to its final position, without segregation of materials or displacement of the reinforcement.

(b) Consolidation - Consolidate concrete, during and immediately after placing, by mechanical vibration as follows:

- Operate vibrators at frequencies that produce consolidated placements.
- Do not use vibration for shifting concrete to the extent of causing segregation.
- Vibrate at points uniformly spaced and not further than twice the radius over where vibration is visibly effective.
- Continue vibration until the concrete is thoroughly consolidated, but not until segregation occurs or localized areas of grout form.

00552.43 Hot or Cold Weather - Produce and place concrete within the temperature range specified in 02001.20(d). When the air temperature is, or is expected to be, below 40 °F or above 100 °F, observe the following precautions:

- Do not place concrete in forms, on reinforcing steel or on appurtenances when the surface temperature of these facilities is below 40 °F. Provide heat to maintain their temperature at 40 °F minimum.
- Do not place concrete when the surface temperature of forms or reinforcing steel is 100 °F or more.

00552.44 Top Surface Finish - After the concrete is placed and consolidated, strike the concrete to grade and Cross Section shown and float it to produce a uniform surface. Before initial set of the surface concrete and the concrete has hardened sufficiently, provide a surface finish on the top surface as shown or specified.

(a) General Members - Provide a broom finish on top of Members.

(b) Members with Cast-in-place Deck - Provide a rake finish on top of Members. Texture it with a 1/8-inch-wide steel-tined rake tool that will mark the finished concrete to a depth of 1/8 inch to 3/16 inch. Space the markings 3/4 inch on centers. Do not overlap the texturing. Produce the texture transverse to the Roadway centerline and full Member width.

(c) Members with ACP Wearing Surface - Provide a broom finish on top of Members.

00552.45 Curing Concrete:

(a) General Requirements - Cure Members with water, wet burlap, curing compound or other approved methods. Begin curing as soon as possible without damaging the freshly placed concrete. Continue curing for a minimum of 7 Calendar Days after placement.

Keep surfaces not covered by waterproof forms damp by applying water with a fog nozzle until the surface has set sufficiently to allow sprinkling with water or covering with wet burlap and plastic.

Do not interrupt curing for more than one hour during cure period.

(b) Additional Cure Time - If, during the cure time period, the surrounding temperature falls below 45 °F, extend the cure for the number of hours the temperature is below 45 °F.

00552.46 Surface Finish Other Than Top Surface - Provide a surface finish as shown or specified.

Where no finish is shown or specified, provide a general surface finish to concrete surfaces.

For concrete surfaces receiving a Class 1 or Class 2 surface finish, finish the surfaces when the Member is in its final position and finish to a point 1 foot below the finished ground line.

(a) General Surface Finish - Apply a general surface finish as a final finish or preparatory to a higher class finish.

Remove all metal form bolts, snap ties and any other metal to a depth of 1 inch below the finished concrete surface. Repair air pockets over 1/2 inch in depth, all form tie removals, rock pockets and unsound concrete, and fill resulting holes or depressions with concrete or a PCC repair Material from the QPL. On exposed surfaces, correct all bulges, fins, depressions, repairs, stains or discolorations to produce a smooth surface with uniform texture, lines, and appearance.

The Engineer will determine the extent of required repairs.

(b) Class 1 Surface Finish (Ground, Sacked, and Coated) - After completion of the general surface finish, grind the surface with a power grinder or an equivalent method to remove laitance and surface film. Sack the surface to fill all holes using a paste of fine mortar sand, cement, water, and bonding agent. The ratio of bonding agent to water is one part bonding agent to two parts water, or as recommended by the manufacturer. Apply coating according to 00540.53(d).

(c) Class 2 Surface Finish (Ground, Floated and Coated or Uncoated) - After completion of the general finish, grind the surface with a power grinder or an equivalent method to remove laitance and surface film. Float the surface with a rubber or sponge float, using a paste of fine mortar sand, cement, water, and bonding agent to fill air holes or voids and to bring the surface to a uniform texture. Keep the textured surface damp a minimum of 12 hours or until the paste has set, whichever is longer. If dusting occurs after the retextured surface sets and is rubbed, refinish the surface.

Insert Project Name Here

00552.47 Surface Preparation for Members with Overlay or Membrane - Prepare top surface of Members according to Section 00504, not less than 28 Calendar Days after casting.

00552.48 Exposed Reinforcement - After a Member is removed from the form, clean any projecting reinforcement of dirt, oil, grease, rust and corrosives and protect it from damage until concrete is cast around it.

00552.49 Lifting, Storing, Transporting, Erecting, and Bracing - Be responsible for the safety of precast Members during all stages of construction. Lifting, storage, transporting, erecting and bracing of Members is the sole responsibility of the Contractor subject to the following requirements:

(a) Lifting:

- Lift Members so as to prevent damage.
- Lift Members at the support points specified by the manufacturer.
- Lift Members in a manner that does not cause damaging bending or torsional forces.
- Members are rejected if not handled as specified.

(b) Storing - Store Members with support points that are level transversely.

(c) Transporting - Transport Members from the casting yard not less than 7 Calendar Days after casting, not less than 7 Calendar Days after all concrete patching and repairing is complete and after 28-Day compressive strengths have been achieved.

Damaged Members are rejected. Replace damaged Members, or if allowed by the Engineer, repair damaged Members to the Engineer's satisfaction at no additional cost to the Agency.

(d) Erecting and Bracing - After a Member has been erected and until it is secured to the Structure, provide temporary bracing as necessary to resist wind or other loads.

00552.50 Precast Member Connections - Provide connections between Members as shown and specified.

(a) Closure Pour - Provide exposed Aggregate finish up to a 1/4" amplitude at Member interfaces that are in contact with the closure pour Material by using surface retarders from the QPL or other methods approved by the Engineer. Visually verify the surface profile of all prepared surfaces according to *International Concrete Repair Institute (ICRI) Guideline 310.2R-2013 Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair - surface profile CSP 7*.

Furnish necessary forms and seal the closure pour space. Wet Member interfaces for a minimum of 8 hours and to a saturated surface dry condition immediately before placing the closure pour Material. Ensure that the surfaces are free of contaminants. Blow out with compressed air any standing water in depressions, holes or low area.

(b) Welding - Perform structural steel welding according to 00560.26(b).

Insert Project Name Here

(c) Bolting - After Members are set as shown, mark the position of the nut with a permanent felt tip pen or similar marker. Rotate the nut of each anchor bolt past snug-tight by no more than 1/6 turn, unless shown otherwise.

(d) Mechanical Splice - Use mechanical splice from the QPL. Install mechanical splice in Members and make connection between the Members as shown and according to the manufacturer's recommendation.

(Use the following subsection .51, when pile cap socket connection is required.)

00552.51 Pile Cap Socket Connections - Ensure that surface inside pile cap sockets is free of contaminants. After precast pile caps are erected in place as shown and the bottom of sockets are sealed, fill the sockets with the Material as shown and specified. Allow the Material to flow from the vents until water or entrapped air is removed.

Measurement

00552.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

Length Basis - The quantities will be the theoretical horizontal length shown for each Member, added together to calculate a total length for each Member type and size.

Area Basis - The quantities of precast approach slabs will be determined by calculating the theoretical top surface area of the Members based on the dimensions shown. The quantities of precast wingwalls will be determined by calculating the theoretical wall face area projected onto a vertical plane along one side of the precast wingwalls based on the dimensions shown.

Field measurement of Member dimensions will not be made.

Payment

00552.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) _____ Precast Pile Cap	Foot
(b) Precast Bridge Approach Slab	Square Yard
(c) Precast Wingwalls.....	Square Foot

In item (a), the pile cap height and width is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Reinforcement, anchorages, corrugated metal pipe, plates, nuts, mechanical splices, and all other material contained within and extending from the Member

Insert Project Name Here

- Furnishing and placing sand leveling courses
- Furnishing, transporting, and placing Members
- Furnishing and placing anchor bolts, dowels, and threaded rods where applicable
- Furnishing and grouting bolt blockouts, voids, and socket connections
- Providing surface finish on Members
- Plant assembly, fit-up and corrective work

SP00555 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

**Requires SP02020, SP02515,
SP02530 & SP02540)**

SECTION 00555 - POST-TENSIONING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00555 of the Standard Specifications modified as follows:

00555.00 Scope - Replace the paragraph that begins "This Work consists of ..." with the following paragraph:

This Work consists of post-tensioning cast-in-place and precast concrete by furnishing, placing and tensioning stressing steel according to details shown and specified. This Work also includes furnishing and installing any items necessary for the stressing system used including, but not limited to, anchorage assemblies, ducts and grout for pressure grouting. Concrete that is to be stressed by the post-tensioning method is referred to as a member.

00555.03 Anchorage Devices - Replace the paragraph that begins "Secure all post-tensioned stressing ..." with the following paragraph:

Secure all post-tensioned stressing steel at the ends by means of approved permanent type anchorage devices. Design anchorage devices according to the current AASHTO *LRFD Bridge Design Specifications*. Identify post-tensioning anchorage systems as either "Normal Anchorage Devices" or "Special Anchorage Devices" as defined in the AASHTO *LRFD Bridge Design Specifications*. Provide anchorage devices that meet all testing and construction requirements of the AASHTO *LRFD Bridge Design Specifications* and the AASHTO *LRFD Bridge Construction Specifications*. Equip all anchorages with a permanent fiber reinforced plastic grout cap that encloses the whole wedge plate. Provide a grout cap that is vented, bolted to the anchorage and rated for a minimum pressure of 145 psi. Seal the grout cap to the anchor plate using either a neoprene gasket or epoxy bonding agent.

00555.12 Tendon Grout - Replace the paragraph that begins "For grouting post-tensioning ducts ..." with the following paragraph:

For grouting post-tensioning ducts, furnish a commercial, prepackaged, thixotropic tendon grout meeting the requirements of 02080.50. Label each grout bag with application, mixing and pumping instructions, lot number, date of manufacture and shelf life. A grout expiration date may be used in lieu of the date of manufacture and shelf life. Tendon grout is rejected if the shelf life or expiration date has been exceeded.

00555.13(a) Flow Cone - Replace the bullet that begins "When thoroughly mixed, the ..." with the following bullet:

- When thoroughly mixed, the efflux time of grout is the time to fill a 1 Liter container that is placed directly under the flow cone. Ensure the efflux time of the grout immediately after mixing is between 5 and 30 seconds.

00555.13(b) Bleed – Replace the paragraph that begins "Determine bleed resistance according ..." with the following paragraph:

Determine bleed resistance according to ASTM C940 or ASTM C1741 and the PTI *Specification for Grouting of Post-Tensioned Structures M55.1*, modified as follows:

00555.20 Certified Calibrated Jacking Equipment - Replace the bullet that begins "A pressure gauge with an ..." with the following bullet:

- A pressure gauge with an accurate reading dial at least 6 inches in diameter and of such capacity that the final pressure reading is in the upper half of its range. Calibrate each jack and its gauge as a unit with the cylinder extension in the approximate position used at final jacking force, and provide a calibration chart certified by an independent testing agency; or

Replace the bullet that begins "A certified, calibrated load ..." with the following bullet:

- A certified, calibrated load cell with an indicator where the stressing force in the tendon may be determined, and with a range such that the lower 10 percent of the manufacturer's rated capacity will not be used in determining the jacking stress.

Replace the paragraph that begins "Adjustment or repair of jacks, gauges ..." with the following paragraph:

Adjustment or repair of jacks, gauges, or load cell after certification is cause for rejection.

00555.21 Grouting Equipment - Replace the bullet that begins "Equipment which will ..." with the following bullet:

- Equipment that will accurately measure solids and liquids to be batched.

Replace the paragraph that begins "Provide standby water ..." with the following paragraph:

Provide standby water flushing Equipment that:

Insert Project Name Here

00555.40 Required Submittals - Replace the title of this subsection with "**Submittals**".

Replace the paragraph that begins "Furnish reinforcement Working Drawings ..." with the following paragraph:

Provide reinforcement Working Drawings that are compatible with the approved Post-Tensioning System Working Drawings.

00555.41(a) General - Replace this subsection, except for the subsection number and title, with the following:

Make ducts mortar-tight and place them accurately at the locations shown or as directed. Provide positive, metallic, mortar-tight connection joints between sections of rigid duct that do not permit angle changes at the joints. Use waterproof tape at connections.

00555.41(c) Repair - Replace this subsection, except for the subsection number and title, with the following:

Before placing concrete, repair all holes or openings in the ducts. Holes less than 1/4 inch may be repaired by several wraps of waterproof tape. Repair holes larger than 1/4 inch with a split metal sleeve that overlaps itself by 3 inches, extends at least 3 inches on either side of the hole, is sealed with waterproof tape, and is secured to the duct. Cut out indentations that cannot be repaired and repair as above for holes larger than 1/4 inch.

00555.42(a) General - Replace the paragraph that begins "Protect stressing steel ..." with the following paragraph:

Protect stressing steel against physical damage and rust or other corrosion at all times until grouted. A corrosion inhibitor may be used. Stressing steel that has sustained physical damage, detrimental rust, pitting or other results of corrosion at any time is rejected. Stressing steel with only light rust is acceptable if rust spots can be removed by rubbing or scraping with the fingernail and only light streaks of rust remain.

00555.42(e) Measuring Prestressing Force - Replace the paragraph that begins "Conduct tensioning so the ..." with the following paragraph:

Conduct tensioning so the tension being applied and the elongation of the stressing steel may be measured at any time. Keep a record of gauge pressures, load cell reading and elongations. Provide a copy of the record to the Engineer when requested.

00555.43(c) Grouting Procedure - Replace the bullet that begins "Inject grout at any other ..." with the following bullet:

- Inject grout at any other vent that has been, or is ready to be, closed as long as a one-way flow of grout is maintained. If this procedure is used, fit the vent used for injection with a mechanical shutoff valve.

(Use the following subsection .80 to list the estimated quantities of materials. Select the type of material used. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Obtain the information from the Bridge Designer.)

00555.80 Measurement - Add the following sentence to the end of this subsection:

The estimated quantity of prestressing steel, based on the use of (1/2 Inch 7-wire prestressing strands)(prestressed bars)(cables), is _____ pounds.

00555.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00556 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00504)

SECTION 00556 - MULTI-LAYER POLYMER CONCRETE OVERLAY

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00556 of the Standard Specifications modified as follows:

00556.05(a) Supervisory Personnel - Replace the paragraph that begins "Hold a pre-placement conference ..." with the following paragraph:

Hold a pre-placement conference with all supervisory personnel, Subcontractors, Suppliers, MPCO manufacturer and other personnel who are involved in the overlay Work. Meet at a mutually agreed time approximately 2 weeks in advance of the Work. Present and discuss all phases of the overlay Work.

00556.10(a) Multi-Layer Polymer Concrete Overlay - Replace the paragraph that begins "Resin shall meet the requirements ..." with the following paragraph:

Furnish resin meeting the requirements of ASTM C881, Type III.

00556.21(a) Tools - Replace this subsection, except for the subsection number and title, with the following:

Provide squeegees, rollers, and other approved tools to apply the primer/sealer and the polymer resin.

Provide a power broadcaster to uniformly apply the MPCO Aggregate.

Provide pickup type power brooms capable of removing loose Aggregate.

Insert Project Name Here

00556.21(b) Coring Equipment - Replace the paragraph that begins "Furnish core cutting ..." with the following paragraph:

Provide core cutting Equipment that can produce a core at least 3 inches in diameter.

00556.21(c) Bond Testing Equipment - Replace the paragraph that begins "Furnish bond testing Equipment ..." with the following paragraph:

Provide bond testing Equipment that:

00556.21(d) Resin Conditioning Equipment - Replace the paragraph that begins "Furnish Equipment capable ..." with the following paragraph:

Provide Equipment capable of conditioning resin to between 65 °F and 85 °F.

00556.21(e) Aggregate Heating Equipment - Replace the paragraph that begins "Furnish heating Equipment capable ..." with the following paragraph:

Provide heating Equipment capable of pre-heating Aggregate to a minimum of 70 °F as measured at the time of placement.

00556.21(f) MPCO Heating Equipment - Replace the paragraph that begins "If required, or as a means ..." with the following paragraph:

If required, or as a means to accelerate curing, provide heating Equipment that:

00556.21(g) Concrete Moisture Meter - Replace the paragraph that begins "Furnish a pin-type ..." with the following paragraph:

Provide a pin-type, instant read, concrete moisture meter meeting ASTM F2659. Provide current calibration documentation.

00556.21(h) Dew Point Measurement Equipment - Replace the paragraph that begins "Furnish dew point ..." with the following paragraph:

Provide dew point measurement Equipment that:

00556.44 Delamination Survey and Repair - Replace the paragraph that begins "Make all repairs before ..." with the following paragraph:

Make all repairs before opening to traffic or, if the resurfaced area is opened to traffic at the Contractor's request before completing repairs, all additional traffic control to complete the repairs is at no additional cost to the Agency.

00556.80 Measurement - Replace the bullet that begins "Furnish MPCO Material and Constructing ..." with the following bullet:

- **Furnish MPCO Material and Constructing MPCO** - Furnishing and constructing multi-layer polymer concrete overlay will each be measured on the area basis. The area is determined by measuring the actual surface area of the resurfaced bridge deck.

00556.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00557 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00504)

SECTION 00557 - PREMIXED POLYMER CONCRETE OVERLAYS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00557 of the Standard Specifications modified as follows:

00557.02 Submittals - Replace the bullet that begins "The type of scarifying Equipment ..." with the following bullet:

- The type of scarifying Equipment used for deck preparation according to Section 00504.

Replace the bullet that begins "Notice when bulk resin ..." with the following bullet:

- Notice when bulk resin is used on the Project. Bulk resin is resin that is stored in containers exceeding 55 gallons.

00557.05(a) Supervisory Personnel - Replace this subsection, except for the subsection number and title, with the following:

Hold a mandatory pre-placement conference with all supervisory personnel, Subcontractors, Suppliers, the System Provider's technical representative (SPTR), the quality control technician (ACI Concrete Field Testing Technician Grade 1), and all other personnel who are involved in the PPC pavement overlay work. Meet at a mutually agreed time at least 14 Calendar Days before placing the PPC pavement overlay including the trial overlay. Schedule the pre-placement conference after all submittals have been reviewed and approved. Present and discuss all phases of the PPC pavement overlay work.

00557.12(d) Aggregate - Replace the bullet that begins "When Aggregate retained on ..." with the following bullet:

Insert Project Name Here

- When Aggregate retained on the No. 4 and No. 8 sieves is combined, ensure the Aggregate has a maximum of 45 percent crushed particles with at least one fractured face when tested according to AASHTO T 335.

00557.16(a) General - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of PPC is based on Contractor's modulus of elasticity and bond strength test results.

00557.16(b) Required Properties and Tolerances - Replace the paragraph that begins "Perform acceptance testing according ..." with the following paragraph:

Perform acceptance testing according to the referenced tests, and provide samples to the Engineer as required. Failing test results may be cause for rejection of the mix with removal and replacement of the affected material at no additional cost to the Agency. If the Engineer determines that the PPC is suitable for the intended purpose, the PPC may be allowed to remain in place, subject to a price adjustment according to 00150.25.

00557.16(c) Density - Replace this subsection, except for the subsection number and title, with the following:

Determine the unit weight of the PPC mixture according to AASHTO T 121 (ASTM C138). Submit test results to the Engineer. The correlation factor established through density testing is used to determine equivalency between weight and volume for purposes of payment. Perform density testing at the rate of one test per batch.

00557.21 Mixing Equipment - Replace the paragraph that begins "Furnish mechanically operated ..." with the following paragraph:

Provide mechanically operated continuous mixers specifically built or modified for PPC that:

Replace the bullet that begins "Has a readout gauge ..." with the following bullet:

- Has a readout gauge, visible to the Engineer at all times, that displays the weights being recorded.

00557.22 Finishing Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide slip-form finishing equipment with an automatic grade control device to strike off the PPC mixture to the established grade and Cross Section, or other Equipment such as 30-foot floating beams as approved by the Engineer. Fit the finishing equipment with vibrators or other means of consolidating the PPC.

00557.23(a) Hand Tools - Replace this subsection, except for the subsection number and title, with the following:

Provide hand tools for placing and finishing the PPC. Use manual type screeds with approved vibrators attached to consolidate and finish smaller areas where it is impractical to use a finishing machine.

00557.23(b) Straightedge - Replace this subsection, except for the subsection number and title, with the following:

Provide a 12-foot metal straightedge.

00557.23(c) Coring Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide core cutting equipment that can cut a core at least 2 inches in diameter.

00557.23(d) Bond Testing Equipment - Replace the paragraph that begins "Furnish bond testing equipment ..." with the following paragraph:

Provide bond testing equipment that:

00557.23(e) Diamond Grinders - Replace this subsection, except for the subsection number and title, with the following:

Provide power-driven self-propelled machines with the cutting head made up of diamond cutting blades to correct non-specification surface variations.

00557.23(f) Concrete Moisture Meter - Replace this subsection, except for the subsection number and title, with the following:

Provide a pin-type, instant read, concrete moisture meter meeting ASTM F2659. Provide current calibration documentation.

00557.30 Personnel Qualifications - Replace the bullet that begins "The name of the company ..." with the following bullet:

- The name of the company that is performing the PPC pavement overlay work.

Replace the bullet that begins "A project reference list ..." with the following bullet:

- A project reference list of at least three PPC pavement overlay projects, successfully completed within the last five years, that has used the same PPC pavement overlay system and materials that are used on this Project. The minimum PPC overlay qualification area is 2,000 square feet. Include the following information for each qualifying project:

00557.41 Trial Overlay Strip - Replace the paragraph that begins "Construct trial overlays meeting ..." with the following paragraph:

Construct trial overlays meeting the acceptance criteria of 00557.16, except test the modulus of elasticity at 24 ± 1 hours. Perform testing at locations designated by the Engineer. Construct each trial overlay 12 feet wide by at least 20 feet long, and at the same thickness as the final PPC overlay. Construct trial overlays when weather conditions are similar to those expected during construction of the PPC overlay. Use the same equipment, including deck preparation equipment, that is used for the PPC overlay.

Insert Project Name Here

00557.43 Placing Prime Coat - Replace the bullet that begins "A noticeable increase in viscosity ..." with the following bullet:

- A noticeable increase in viscosity of the prime coat resin before it is placed is cause for rejection.

00557.44(c) Placing PPC - Replace the bullet that begins "Place PPC in Panel widths ..." with the following bullet:

- Place PPC in Panel widths that hold the location of the longitudinal joints to the lane lines.

00557.44(g) Batch Weight - Replace the paragraph that begins "Furnish a batch ticket ..." with the following paragraph:

Provide a batch ticket to the Engineer at the end of each work shift or as requested. Provide batch tickets that contain the following information:

00557.45(c) Surface Tolerance - Replace the paragraph that begins "The finished surface ..." with the following paragraph:

Ensure the finished surface of the PPC overlay, when tested with a 12-foot straightedge, does not vary by more than 1/4 inch. Provide and operate the straightedge under the direction of the Engineer.

00557.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00558 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-06-26

**This Section requires SP00504 or SP00505,
SP00540, SP02001, SP02011,
SP02050, SP02440 and SP02690.)**

SECTION 00558 – HIGH EARLY STRENGTH CONCRETE OVERLAY

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00558 is not a Standard Specification and is included in this Project by Special Provision.

Description

00558.00 Scope - This Work consists of constructing high early strength concrete (HESC) overlays.

00558.03 Submittals – At least 21 Calendar Days before the pre-placement conference, provide the following information and samples to the Engineer for approval:

- Personnel qualifications according to 00558.30 and 00558.31.
- The HESC mix design.
- A detailed work plan, by the hour, for the HESC preparation, resurfacing, and cleanup.
- Equipment specifications for all Work.

00558.04 Preplacement Conferences:

(a) Supervisory Personnel - Hold a pre-placement conference with all supervisory personnel, Subcontractors, Suppliers, QCT, CCT, and all other personnel who are involved in the resurfacing Work. Meet at a mutually agreed time at least 14 Calendar Days in advance of the Work. Present and discuss all phases of the resurfacing Work.

(b) Placement Crew - Hold a second pre-placement conference with the Engineer and the entire resurfacing work crew and the QCT, at the job site 1/2 hour before resurfacing Work begins to discuss placement duties and procedures. Hold additional pre-placement conferences for additional shifts or changes in personnel. Do not begin the resurfacing Work until this meeting is held.

Materials

00558.10 Materials - Furnish Materials meeting the following requirements:

Concrete	02001
Rapid Hardening Hydraulic Cement.....	02011
Curing Materials	02050
Portland Cement Concrete Repair Material.....	02015
Preformed Joint Fillers for Concrete.....	02440.10
Synthetic Macro Fiber Reinforcing	02045.20

00558.11 Class of Concrete - Furnish Class HESC4000 - 3/4" concrete designed to attain high early strength, according to Section 02001 except as modified by this Section.

Furnish macro fiber reinforcement according to 02045.20. Introduce and mix the fibers in a way that will achieve uniform distribution.

00558.12 Permeability - Furnish the following permeability reducing admixture, dosed at the manufacturer's recommended rate.

Insert Project Name Here

Liquid Low-PTM (Liquid admixture)
CTS Cement Manufacturing Corp.
12442 Knott Street
Garden Grove, CA 92841
Contact: Tony Tomasini
Phone: (360) 607-3553

00558.13 Maturity - Establish a strength-maturity relationship for HESC mix designs according to AASHTO T 276 and AASHTO T 325 during the mix design phase for the purpose of opening to traffic. Take a minimum of seven early age readings at 1, 2, 3, 4, 5, 6, and 24 hours. Each reading requires averaging the two maturity cylinders and breaking two compressive strength specimens. Submit the required concrete maturity data outlined in the "Reports" sections 11.1.1 through 11.1.10 of AASHTO T 276 and 11.1.1 through 11.1.5 of AASHTO T 325 for approval by the Engineer.

00558.15 Quality Control - Provide quality control according to Section 00165 and the following:

- Sample and test according to Section 00165, matching the frequencies from Section 00559
- For all HESC, provide personnel according to 02001.50 to sample and test the mix for temperature, air content, water-cementitious ratio, density, and yield when:
 - The first load of each placement is made.
 - There is a visible change in the slump of the concrete.
 - A set of cylinders is obtained.
- Sample and cast maturity cylinders from the last truck of the shift.

If the results of any test are outside of the specification limits, stop placement of the load. Correct the load or, if the load cannot be corrected, do not incorporate it into the Work. Test subsequent loads before any further concrete placement. Correct subsequent loads if any of the tests are still outside the specification limits. Return to the specified test frequency when the test results from two consecutive loads are shown to meet the specification limits.

00558.17 Acceptance of Concrete – Acceptance of concrete is according to Section 00165 and the following:

(a) Aggregate - Acceptance of Aggregate is according to 02690.12.

(b) Plastic Concrete - Acceptance of the plastic concrete is based on the tests performed by the Contractor's QCT, according to the tolerances and limits for water/cementitious ratio, air entrainment, and temperature of Section 02001.

(c) Hardened Concrete - Acceptance of hardened concrete is based on one set of three cylinders cast from each 50 cubic yards of concrete placed. Cast a minimum of one set per production shift. Cast and cure the test specimens according to AASHTO R 100 in 4 x 8 inch single-use plastic molds and test at 28 Days according to AASHTO T 22.

(1) General - For all HESC, acceptance of hardened concrete is based on an analysis of compressive strength tests of cylinders cast by the QCT. Test the cylinders at an Agency certified laboratory.

(2) Actual Strength Test Value (ASTV) - The ASTV at 28 Days is the average compressive strength of the three cylinders tested. Discard all specimens that show definite evidence, other than low strength, of improper sampling, molding, handling, curing, or testing. The average strength of the remaining cylinders is considered the test result.

(3) Acceptance - Hardened concrete with an ASTV meeting or exceeding the specified design strength, f'_c is accepted for strength. If the ASTV is less than f'_c but at least 85 percent of f'_c , the Engineer may review the results to determine if the concrete represented by the cylinders is suitable for the intended purpose. Remove concrete that has an ASTV less than 85 percent of f'_c unless otherwise authorized in writing by the Engineer. If the concrete is removed, the cost of removal, replacement and all related Work is the Contractor's responsibility. If the Engineer determines that the concrete is suitable for the intended purpose, the concrete may be allowed to remain in place, subject to a price adjustment according to 00150.25.

If an ASTV falls below f'_c , the Contractor may submit a written plan outlining a proposed alternate method of evaluating compressive strength. Submit the plan for review by the Engineer within 3 Days of the test. Provide evidence that a reasonable f'_{cr} (over-design) was maintained and that there is credible evidence (besides low strength) that warrants consideration of this option. The Engineer may allow an alternate method of acceptance if the compressive strength test results are determined to be suspect from definable external factors.

Equipment

00558.20 Equipment - Remove all Equipment that leaks oil or other contaminants from the work area until they are repaired.

00558.21 Mobile Mixer for HESC - Provide self-contained, mobile, continuous mixing Equipment for proportioning, mixing and placing HESC that:

- Is self-propelled and carries sufficient unmixed dry bulk cement, Sand, Coarse Aggregate, admixtures, and water to produce a minimum of 6 cubic yards of concrete on site.
- Provides positive measurement of cement being introduced into the mix by meter or counter.
- Provides positive control of the flow of water into the mixing chamber. Water flow is readily adjustable to provide for minor variations in Aggregate moisture.
- Is calibrated to automatically proportion and blend all components according to the mix design on a continuous or intermittent basis as required by the placing operation.

Perform a calibration and yield test on each mixer prior to the first placement to accurately proportion the specified mix. Use a written calibration procedure from the mixer manufacturer, a procedure provided by the Agency or other written procedure acceptable to the Agency. Calibrate the mixer in the presence of the Engineer. Provide the Engineer with information

Insert Project Name Here

about the scheduled date, time and place for the calibration. Perform a new calibration on every Project and when the source of Materials changes, when the mixer undergoes a major repair, or when requested by the Engineer.

00558.22 Finishing Equipment - Provide a roller screeds or truss screeds capable of providing a smooth travel surface. Roller screeds are to be of adequate diameter and weight as to not float on the surface of the placement or flex during finishing operations.

00558.23 Miscellaneous Equipment:

(a) Hand Tools - Provide hand tools for placing and finishing concrete. Use manual type screeds with approved vibrators attached to consolidate and finish smaller areas where it is impracticable to use a finishing machine. Use spud vibrators when depths exceed 2 1/2 inches. Use supplemental vibration along the meet lines where adjacent pours come together at bulkheads, and along curb lines, unless it can be shown that vibration reaches the meet lines.

(b) Straightedge - Provide a 12-foot metal straightedge.

(c) Recording Thermometer - Provide a 24-hour recording thermometer accurate to ± 1 °F.

(d) Coring Equipment - Provide core cutting Equipment that can produce a core at least 3 inches in diameter.

(e) Bond Testing Equipment - Provide bond testing Equipment that:

- Is compatible with the core tested.
- Can exert a tensile load to the core sufficient to exceed 300 psi.
- Is equipped with a measuring device capable of reading tensile force exerted within 1 percent accuracy.

(f) Wet-dry Vacuum Equipment - Provide vacuum Equipment that can remove puddled water ahead of the concrete placement.

(g) Strength-Maturity Relationship Testing Equipment - Provide temperature sensors that meet the requirements of AASTHO T 276 and AASHTO T 325.

Labor

00558.30 Personnel Qualifications - Demonstrate the company's qualifications and experience and the qualifications of personnel performing the HESC overlay work by providing the Engineer the following:

- A project reference list of at least three structural overlay projects, successfully completed within the last five years. Include the following information for each qualifying project:
 - A brief description of each project.
 - Each project's name.

Insert Project Name Here

- The owner's contact person's name, title, and current phone number for each project.
- Alternate owner's contact person's name, title, and current phone number for each project.
- Documentation that demonstrates that the mobile mixer operators and the finishing machine operators have completed at least one structural overlay project within the last three years.

The Engineer may suspend the HESC overlay work if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of mixer operators and finishing machine operators to the Engineer.

00558.31 Quality Control Personnel - Provide certified technicians according to 02001.50.

Construction

00558.40 Trial Overlay Strip - Conduct one or more trial overlays on a concrete base to demonstrate the effectiveness of deck preparation, mixing, placing, and finishing equipment and methods proposed. Construct trial overlay when weather conditions are similar to those expected during the construction of the overlay. Use the same Equipment and personnel, including deck preparation equipment used for the overlay. Hydrodemolition equipment is not required to be demonstrated at the trial overlay. Acceptance of the trial overlay is based on concrete plastic properties, hardened concrete ASTV, concrete strength-maturity, bond strength, and surface tolerance. Perform testing at locations designated by the Engineer. Construct each trial overlay the same width as the final overlay placement and at least 20 feet long.

(Select either Section 00504 or Section 00505. Delete parentheses and the words in parentheses as needed.)

00558.41 Surface Preparation - Perform surface preparation according to (Section 00504 or Section 00505).

00558.42 Placing:

(a) Mixing and Delivering HESC - Mix HESC according to mobile mix supplier's recommendations.

(b) Placement Conditions - Place structural concrete overlays according to 00540.49 and the following:

- The surface temperature of the prepared deck is 40 °F or greater and less than 80 °F.
- If the surface temperature is between 40 °F and 45 °F, the temperature is rising.
- Measure the surface temperature with an infra-red thermometer at a minimum of three locations on the deck in the presence of the Engineer.

(c) Thickness - Place HESC with a minimum thickness of 2 inches, as shown.

(d) Construction Limitations - Place HESC against a firmly fixed bulkhead. Control sagging or running of freshly placed HESC in areas of steep gradient by one or both of the following methods:

- Modifying direction or method of placement
- Modifying slump

Slow traffic in the adjacent lane by flagging for at least 3 hours after completion of the pour. The Engineer may adjust the time limits due to weather or traffic conditions.

(e) Placement Procedures:

(1) Preceding Placement - Each Day before placing concrete operate the finishing Equipment, in the presence of the Engineer, over the deck to check that the required thickness of concrete overlay is achieved. Place concrete working up-grade, unless otherwise approved.

(2) Joints - At transverse and longitudinal joints, sawcut the section previously placed to form a straight, vertical edge before placing any adjacent sections. Sawcutting joints may be omitted if the bulkhead produces a straight, smooth, vertical surface. On both sawcut and formed joints remove all loose material by sand blasting or water blasting the face of the joints.

a. Longitudinal Joint - A longitudinal construction joint is allowed only at the centerline of the Roadway or at lane lines unless otherwise shown or directed.

b. Transverse Joint - When placement operation is delayed by 1/2 hour or more, form a construction joint by removing all material not up to finish grade, in a straight line.

(3) Grout Coat - After the deck surface has been cleaned and immediately before resurfacing, broom a thin coat of HESC (grout) onto the prepared deck. Remove Coarse Aggregate during the brooming procedures. Ensure that all parts of the prepared deck receive a vigorous brooming that scrubs the grout into the deck surface and results in an even coat with no excess grout collecting in pockets. Broom the grout at a rate to prevent drying and remove excess Aggregate from the deck before being covered by the HESC Overlay. If the grout does dry, stop the overlay, remove the dried grout, clean and prepare the affected area of the deck, and reapply grout according to this subsection. Grout coat is not required on surfaces prepared by hydrodemolition.

(4) Roadway Finish - After the overlay has been struck off with a finishing machine, mist the surface horizontally with water and float it, if necessary, to produce a smooth, uniform, sealed surface. Hand finishing may be required along edges of concrete placement. Use a 12-foot straightedge during placement to verify deck grades and to correct defects in hand finished areas.

(5) Curing - Cure HESC by placing curing blankets and applying water to the deck surface within 15 minutes from placement and continually for a minimum of 3 hours. Prior to opening to traffic, place a curing compound on the deck surface. The Engineer will approve the Equipment, Materials, and method of curing .

00558.43 Bond Strength - Perform two bond tests for each placement in the presence of and at locations designated by the Engineer within 28 Calendar Days of overlay placement. Cut 3-inch diameter cores and conduct bond tests on the cores.

The bond tests consist of:

- Coring through the overlay and approximately 1 inch into the existing concrete. Locate reinforcement prior to coring, do not core through reinforcement.
- Attaching a device to the top of the core.
- Exerting a tensile load to the core sufficient to cause failure or achieve 300 psi, whichever occurs first.

A successful test is the failure of the concrete substrate or bond failure at or above 175 psi.

After coring and testing, restore the area voided by the cores by blowing with compressed air and filling with an approved PCC repair material.

00558.44 Delamination Inspection - The Engineer will inspect the surface for delamination, bond failure, or other damage by use of a chain drag, coring, or other devices. Core samples are at no additional cost to the Agency.

Repair all delaminated areas of 1 square foot or greater as directed by the Engineer. Delaminated areas of less than 1 square foot will not require repair.

00558.45 Surface Finish, Tolerance, and Texturing:

(a) Surface Tolerance - Furnish a finished surface, when tested with a 12-foot straightedge, that does not vary by more than 1/8 inch. Provide the straightedge and operate it under the direction of the Engineer.

If the concrete surface does not meet the surface tolerance, stop the operation until revised methods, changes in Equipment, or correction of procedures are proposed and approved.

Correct all non specification surface tolerance after curing and before texturing with a self-propelled diamond grinder. Correct the surface tolerances before opening the Roadway to traffic at no additional cost to the Agency.

(b) Surface Texturing - Texture the concrete according to 00540.50(c) as early as feasible after duration of cure and a minimum of 2,500 psi strength is met, as determined by the strength-maturity relationship.

00558.46 Crack Inspection and Sealing - The Engineer will inspect the surface for cracks.

After correcting non specification surface tolerances and after texturing the deck surface, seal all visible cracks as follows:

- In areas where cracks are 10 feet or more apart, seal each crack separately.

Insert Project Name Here

- In areas where the cracks are numerous or are less than 10 feet apart, seal the entire area where the cracks occur.

Seal with a low modulus concrete and crack sealer from the QPL.

Perform all repair and sealing Work at no additional cost to the Agency. Complete all repair and sealing Work as soon as feasible.

00558.47 Use of New Surface - Do not open sections to traffic or allow vehicles or construction Equipment on the new HESC surface until curing is complete and the concrete has met a minimum average compressive strength of 2,500 psi.

Measurement

00558.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(a) Furnish HESC Material - Furnishing concrete material will be measured on the volume basis. The quantities will be determined from the delivery vehicle batch tickets and checked using the yield factor according to AASHTO T 121 (ASTM C138).

A deduction will be made for Material placed and removed beyond sawcuts or formed construction joints.

(b) Construct HESC Overlay - Construct HESC overlay will be measured on the area basis. The area will be determined by measuring the actual surface area of the resurfaced bridge deck.

Payment

00558.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Furnish High Early Strength Concrete	Cubic Yard
(b) Construct HESC Overlay	Square Yard

Surface texturing will be paid for according to 00540.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00559 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP00540, SP02001 & SP02050.
Requires SP00505 when using hydrodemolition.)

SECTION 00559 - STRUCTURAL CONCRETE OVERLAYS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00559 of the Standard Specifications modified as follows:

00559.04(a) Supervisory Personnel - Replace this subsection, except for the subsection number and title, with the following:

Hold a pre-placement conference with all supervisory personnel, Subcontractors, Suppliers, the quality control technician, the concrete control technician, and all other personnel who are involved in the resurfacing Work. Meet at a mutually agreed time approximately 2 weeks in advance of the Work. Present and discuss all phases of the resurfacing Work.

00559.11 Class of Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish class HPC(IC)4500 - 3/4 inch according to Section 02001 unless otherwise shown.

00559.13 Acceptance of Concrete - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of concrete is according to Section 00165.

00559.21 Finishing Equipment - Replace the paragraph that begins "Furnish a concrete ..." with the following paragraph:

Provide a concrete finishing machine for all new surfaces that is:

00559.22 Miscellaneous Equipment - Replace this subsection, except for the subsection number and title, with the following:

(a) Hand Tools - Provide hand tools for placing and finishing concrete. Use manual type screeds with approved vibrators attached to consolidate and finish smaller areas where it is impracticable to use a finishing machine. Use spud vibrators when depths exceed 2 1/2 inches. Use supplemental vibration along the meet lines where adjacent pours come together at bulkheads, and along curb lines, unless it can be shown that vibration reaches the meet lines.

(b) Straightedge - Provide a 12-foot metal straightedge.

(c) Recording Thermometer - Provide a 24-hour recording thermometer accurate to ± 1 °F.

(d) Coring Equipment - Provide core cutting Equipment that can produce a core at least 3 inches in diameter.

(e) Bond Testing Equipment - Provide bond testing Equipment that:

- Is compatible with the core tested.
- Can exert a tensile load to the core sufficient to exceed 300 psi.
- Is equipped with a measuring device capable of reading tensile force exerted within 1 percent accuracy.

(f) Wet-dry Vacuum Equipment - Provide vacuum Equipment that can remove puddled water ahead of the concrete placement.

(Use the following .41 when hydrodemolition is required.)

00559.41 Surface Preparation - Replace this subsection, except for the subsection number and title, with the following:

Perform surface preparation according to Section 00505.

00559.43(c)(1) Preceding Placement - Replace this subsection, except for the subsection number and title, with the following:

Each Day before placing concrete operate the finishing machine, in the presence of the Engineer, over the deck to check that the required thickness of concrete overlay is achieved. Place concrete working up-grade, unless otherwise approved.

00559.43(c)(3) Placing - Replace the paragraph that begins "After the deck surface has ..." with the following paragraph:

After the deck surface has been cleaned and immediately before resurfacing, broom a thin coat of grout onto the prepared deck. Ensure that all parts of the prepared deck receive a vigorous brooming that scrubs the grout into the deck surface and results in an even coat with no excess grout collecting in pockets. Do not extend grout placement more than 15 feet ahead of the overlay being placed. Furnish a grout mixture of water and cement with a w/c ratio of between 0.45 and 0.50. Broom the grout at a rate to prevent drying before being covered by the overlay. If the grout does dry, stop the overlay, remove the dried grout, clean and prepare the affected area of the deck, and reapply grout according to this Subsection. A grout coat is not required on decks prepared with hydrodemolition.

00559.43(d) Roadway Finish - Replace this subsection, except for the subsection number and title, with the following:

After the deck has been struck off with a finishing machine, fog the surface horizontally with water according to 00540.28 and float it, only if necessary, to produce a smooth, uniform, sealed surface. Do not spray water directly on the freshly placed concrete and do not allow water to puddle or pond. Hand finishing may be required along edges of concrete placement. Use a 12-foot straightedge during placement to verify deck grades and to correct defects in hand finished areas. Ensure the finished surface, when tested with a 12-foot straightedge, does not vary by more than 1/8 inch. If the concrete surface does not meet the surface tolerance, stop the operation until revised methods, changes in Equipment, or correction of procedures are proposed and approved.

Insert Project Name Here

00559.48 Crack Sealing - Replace the paragraph that begins "The surface will be ..." with the following paragraph:

The surface is inspected by the Engineer for cracks.

Replace the paragraph that begins "Perform all repair and sealing ..." with the following paragraph:

Perform all repair and sealing Work at no additional cost to the Agency. Complete all repair and sealing Work before opening to traffic. If the Bridge is opened to traffic at the Contractor's request before completing repair Work, all additional traffic control to complete the repair Work is at no additional cost to the Agency.

00559.60 Protection of Concrete - Replace the bullet that begins "The concrete attains a compressive strength..." with the following bullet:

- The concrete attains a compressive strength of at least 3000 psi as determined by testing at least three cylinders cured according to AASHTO R 100 (field cure) and tested according to AASHTO T 22. The maturity method, AASHTO T 325, may be used to estimate concrete strength for opening Pavement to construction traffic. Install at least two maturity thermocouples for each Day's placement in areas where the maturity method is used for early opening. Install the thermocouples near the Day's final placement for areas being evaluated for early opening. When the maturity method is used, the Engineer may verify the maturity method with strength specimens. Establish a new strength-maturity relationship if strength specimens deviate more than 10 percent from the maturity-estimated strengths. Suspend use of the maturity method for opening Pavements to traffic when the strength-maturity relationship deviates by more than 10 percent until a new strength maturity relationship is established.

00559.80(c) Sawcut Texturing - Replace this subsection with the following subsection:

00559.80(c) Surface Texturing - Surface texturing will be measured according to 00540.80.

00559.90 Payment - Delete the Pay Item Sawcut Texturing.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Add the following sentence to the end of this subsection:

Surface texturing will be paid for according to 00540.90.

SP00560 (Special Provisions for the 2024 Book)

**(Bidding on or after: 11-01-26
Last updated: 07-23-26
Requires SP02530 & SP02560)**

*Requires SP00594
when coating work is required.)*

SECTION 00560 - STRUCTURAL STEEL BRIDGES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00560 of the Standard Specifications modified as follows:

00560.03 Working Drawings - Replace the paragraph that begins "Submit unstamped Working Drawings ..." with the following paragraph:

Submit unstamped Working Drawings according to 00150.35. Any Work performed before review of these drawings is at the Contractor's risk. When Material is ordered in advance, obtain approval before placing the order.

00560.03(b) Revisions - Replace this subsection, except for the subsection number and title, with the following:

Submit copies of any revisions to the detailed Working Drawings for review. Work performed before review of these revisions is at the Contractor's risk.

00560.04 Erection Plan - Replace the bullet that begins "Load test and certify the lifting ..." with the following bullet:

- Load test and certify the lifting bracket for a load at least twice the working load and at all angles it is used at (angle of load or rigging). Certification documentation from a previous project may be submitted.

(Use the following two paragraphs for straight single span bridges less than 150 feet)

Replace this subsection, except for the subsection number and title, with the following:

Submit an erection plan with unstamped Working Drawings according to 00150.35 at least 21 Calendar Days before the start of the steel erection Work. Include the proposed erection method and the amount and character of Equipment to be used for review. Do not perform Work until approval has been obtained. This review does not relieve the Contractor of the responsibility for the safety of the method or Equipment, or from carrying out the Work in full according to the Plans and Specifications.

00560.22(a) Test Results Certificate and Initial Identification - Replace the paragraph that begins "Furnish test results certificates ..." with the following paragraph:

Insert Project Name Here

Provide test results certificates, showing chemical analysis and physical tests for each heat or plate of steel, for all members according to 00165.35 and Section 02530. Identify each piece of steel to be fabricated.

Replace the paragraph that begins "Material that can be identified ..." with the following paragraph:

Material that can be identified by heat number and mill test report may be provided from stock.

00560.22(b) Steel Identification during Fabrication - Replace the paragraph that begins "During fabrication, and until ..." with the following paragraph:

During fabrication, and until member assembly, mark each piece of steel, other than AASHTO M 270 (ASTM A709), Grade 36 steel, clearly and legibly with its specification identification color code shown in AASHTO M 160 (ASTM A6).

Replace the paragraph that begins "Mark individual pieces of ..." with the following paragraph:

Mark individual pieces of steel, other than AASHTO M 270 (ASTM A709), Grade 36 steel, that are furnished in tagged lifts or bundles with the AASHTO M 160 (ASTM A6) specification identification color code immediately on being removed from the bundle or lift.

Replace the paragraph that begins "Pieces of steel, other ..." with the following paragraph:

Mark pieces of steel, other than AASHTO M 270 (ASTM A709), Grade 36, for grade by steel die stamping or by a substantial tag firmly attached before assembling into members and subject to fabricating operations such as heating, blast cleaning, galvanizing or other coating that might obliterate paint color code marking. Use only rounded characters when primary stress components are identified by steel die stamping. Ensure impressions have a maximum allowable depth of 0.010 inch and are placed a minimum distance of 2 inches from edges of tension-stressed plate members. Use characters that are 1/4 inch to 3/8 inch high and have a minimum face radius of 0.015 inch.

00560.22(c) Check Samples - Replace this subsection, except for the subsection number and title, with the following:

To verify the accuracy of test reports, obtain check samples from material furnished for fabrication. The plates, shapes or bars from where check samples are required are as designated on the Plans. Order plates, shapes or bars from the mill with the extra size required for samples. The Engineer may take additional samples from drop-offs or scrap material as deemed necessary. No more than two samples are required from any one plate according to AASHTO M 270 (ASTM A709) Grade 36, 50, HPS 50W and HPS 70 W with QT processing, or from any one shape or bar. Remove material for check samples in the presence of the Engineer. The Engineer will select the locations where samples are to be taken. Check samples may be ordered cut from either end of the designated steel plate, according to AASHTO M 270 (ASTM A709) Grade 36, 50, HPS 50W and HPS 70 W with QT processing, or shape or bar. To verify accuracy of test reports for HPS 50W and HPS 70W with thermo-mechanical control process, check samples of both ends of each plate is required.

Provide rectangular plate check samples, not less than 24 inches long in the required direction, depending on plate width, for the longitudinal axis of tensile specimens, and 5 inches wide. Provide bend specimens, where required, not less than 24 inches long in the direction of rolling of the plate. Provide check samples in bars or shapes that are the full section and at least 24 inches long. In removing the sample, take care not to damage it by overheating. The Agency is responsible for the necessary machining of check test specimens and their testing. To expedite obtaining test results, the Contractor may, if approved, perform machining and testing of specimens, in the presence of the Engineer.

The normal basis of acceptance of Material is the mill report or other test report, and fabrication need not be held up pending results of check tests. If the check tests indicate Material with properties failing to meet the minimum requirements of the material specification, the Material may be rejected and the Contractor required to order new Material at no additional cost to the Agency.

For purposes of determining compliance with the Specifications, if the results on an original tensile specimen are within 2,000 psi of the required tensile strength, within 1,000 psi of the required yield point, or within 2 percent of the required elongation, a retest is allowed on two random specimens from the heat or lot. If the results from both of these retest specimens meet Specifications, the heat or lot is accepted. Orient the specimens with the final direction of rolling in the same manner as the original specimen, and may come from any location within the plate. The extra material from plates, shapes or bars that is not used for check testing becomes the property of the Contractor.

00560.22(d) Certification of Identification - Replace this subsection, except for the subsection number and title, with the following:

Upon request, provide an affidavit certifying that throughout the fabrication operation the identification of steel has been maintained according to this Specification.

00560.23(a) Facilities - Replace this subsection, except for the subsection number and title, with the following:

Provide facilities for the inspection of Material and Work in the mill and shop. Allow the Engineer free access to the Material and Work for inspection.

00560.23(b) Testing - Replace this subsection, except for the subsection number and title, with the following:

Provide samples for testing as specified according to Section 00165.

00560.25(d) Bent Plates - Replace the paragraph that begins "Unwelded, cold-bent ..." with the following paragraph:

Fabricate unwelded, cold-bent, load-carrying, rolled-steel plates that are:

Replace the bullet that begins " Rounded at the corners ..." with the following bullet:

- Rounded at the corners of the plate before bending, to a radius of 1/16 inch throughout the portion of the plate that the bending is to occur.

00560.26(a) Bridge Welding - Replace this subsection, except for the subsection number and title, with the following:

All welding, welder qualifications, prequalification of weld details, and inspection of welds for Bridge Structures is according to AWS D1.5.

00560.26(b) Non-Bridge Structures - Replace this subsection, except for the subsection number and title, with the following:

All welding, welder qualifications, prequalification of weld details and inspection of welds for non-Bridge Structures is according to AWS D1.1. Non-Bridge Structures include bridge railing posts, railing splices, deck expansion joints and similar Structures. Submit all welding procedure specifications to the Engineer for approval.

00560.27(a) Punched Holes - Replace this subsection, except for the subsection number and title, with the following:

Use a die with a diameter not exceeding the diameter of the punch by more than 1/16 inch. Ream any holes that are required to be enlarged to admit the bolts. Make clean cut holes without torn or ragged edges. Poor matching of holes is cause for rejection.

00560.27(b) Drilled or Reamed Holes - Replace the paragraph that begins "Poor matching of holes ..." with the following paragraph:

Poor matching of holes is cause for rejection.

00560.27(c) Accuracy of Punched and Drilled Holes - Replace this subsection, except for the subsection number and title, with the following:

Locate all holes punched full size, subpunched, or subdrilled so accurately that after assembling (before any reaming is done) a cylindrical pin 1/8 inch smaller in diameter than the nominal size of the punched hole may be entered perpendicular to the face of the member, without drifting, in at least 75 percent of the connecting holes in the same plane. Non-conforming pieces are rejected. If any hole will not pass a pin 3/16 inch smaller than the nominal size of the hole, the non-conforming pieces are rejected.

00560.27(d) Accuracy of Drilled and Reamed Holes - Replace the paragraph that begins "When holes are drilled ..." with the following paragraph:

When holes are drilled or reamed, do not allow an offset greater than 1/32 inch between adjacent thicknesses of metal in 85 percent of the holes in any connecting group, after drilling or reaming.

00560.27(h)(2) Numerically Controlled Punched or Drilled Field Connections - Replace the paragraph that begins "If numerically controlled punching..." with the following paragraph:

If numerically controlled punching or drilling Equipment is used, the Engineer may require the Contractor, by means of check assemblies, to demonstrate that this punching or drilling procedure consistently produces holes and connections according to 00560.27(g) and 00560.43.

00560.28 Carbon Steel Bolt Connections - Replace the paragraph that begins “Unless otherwise shown or specified...” with the following paragraph:

Unless otherwise shown or specified, make connections with unfinished carbon steel bolts nuts and washers according to Section 02560. Use holes according to 00560.27.

00560.28(a) Turned Bolts - Replace this subsection, except for the subsection number and title, with the following:

Furnish and install turned bolts as follows:

- The body surface with a surface roughness of 125 microinches, or less, according to ANSI B46.1.
- The unthreaded body equals the total thickness of connected parts.
- The outer thread diameter equals the nominal diameter of the bolt specified.
- Hexagonal heads and nuts with standard dimensions for bolts of the nominal size specified or the next larger nominal size.
- Install bolts in carefully reamed holes with a tight driving fit.

00560.28(b) Ribbed Bolts - Replace this subsection, except for the subsection number and title, with the following:

Furnish and install ribbed bolts as follows:

- The body has an approved form with continuous longitudinal ribs.
- The diameter of the body, measured on a circle through the points of the ribs, is 5/64 inch greater than the nominal bolt diameter specified.
- Round heads meeting ASME B 18.5 unless otherwise specified.
- Ribbed bolts making a driving fit with the holes.
- The hardness of the ribs are such that the ribs do not permit the bolts to turn in the holes during tightening.
- If for any reason the bolt twists before drawing tight, ream the hole and use an oversized bolt as a replacement.
- Nuts that are hexagonal, with standard dimensions for bolts of nominal size specified or the next larger nominal size.

00560.28(d) Nuts - Replace this subsection, except for the subsection number and title, with the following:

Use single self-locking nuts or double nuts unless otherwise shown or specified. Ensure the finished side is against the washer or plate.

00560.29(a) General - Replace the paragraph that begins “When shown or specified...” with the following paragraph:

Insert Project Name Here

When shown or specified, assemble structural joint connections with high-strength bolts according to ASTM F3125, Grade A325 or Grade F1852 or equivalent fastener using bolts, nuts, and washers according to Section 02560 and in holes according to 00560.27.

Replace the bullet that begins "Provide all steel ..." with the following bullet:

- Furnish all steel Material within the grip of high-strength bolts (no compressible material such as gaskets or insulation).

00560.29(b) Washer Requirements - Replace the bullet that begins "Where ASTM F3125, Grade A325 or Grade F1852 bolts of any diameter are to be installed in standard ..." with the following bullet:

- Where ASTM F3125, Grade A325 or Grade F1852 bolts of any diameter are to be installed in standard, oversize, or short slotted hole in an outer ply, furnish a hardened washer under the element of the fastener (nut or bolt head) turned in tightening.

Replace the bullet that begins "Where ASTM F3125, Grade A325 or Grade F1852 bolts of any diameter are to be installed in a long ..." with the following bullet:

- Where ASTM F3125, Grade A325 or Grade F1852 bolts of any diameter are to be installed in a long-slotted hole in an outer ply, use plate washers or continuous bars of at least 5/16-inch thickness with standard holes. Furnish washers or bars with sufficient size to completely cover the slot after installation. Make the plate washer from structural grade steel. In addition to a plate washer, furnish a hardened washer under element of the fastener (nut or bolt head) turned in tightening.

00560.29(c)(2) Non-Coated Weathering Steel Members - Replace the paragraph that begins "Prior to final bolting ..." with the following paragraph:

Prior to final bolting, ensure all steel-to-steel contact surfaces have maintained the minimum requirements of SSPC-SP 6 *Commercial Blast Cleaning*. Provide the minimum appearance of the surface that approximates Pictorial Standard Sa 2 of SSPC-VIS 1, Pictorial Surface Preparation Standards for Painting Steel Surfaces. Hand tool or re-blast surfaces that do not meet the requirements of SSPC-SP 6 until the appearance of the blast-cleaned surface closely resembles Pictorial Standard Sa 2-1/2 of SSPC-VIS 1 as determined by the Engineer.

00560.29(d) Verification Testing, Installation, and Inspection - Delete the paragraph and bullets that begin "The Engineer will do the following..."

00560.29(d)(1)(a)(2) Verification Testing - Replace the paragraph that begins "First, demonstrate the method..." with the following paragraph:

First, use a calibrated torque wrench to estimate the snug-tight condition to be used on the final product. Record the snug-tight tension and the torque used to achieve tension. Calibrate the torque wrench annually.

00560.29(d)(1)(c) Inspection - Replace the paragraph that begins "Select at random 10 percent ..." with the following paragraph:

Insert Project Name Here

Select at random 10 percent or at least two, whichever is greater, of the tensioned bolts and nuts on the Structure for each separate connection. Apply the Inspection Torque to each nut in the tensioning direction. If the Inspection Torque does not turn the bolt or nut, the connection is considered properly tensioned. If the Inspection Torque turns the bolt or nut, apply the Inspection Torque to all the bolts and nut in the connection. Re-tension and re-inspect all bolts and nuts that turned at this inspection. The Contractor may re-tension all the bolts in the connection and resubmit it for inspection, provided fasteners assemblies are not damaged.

00560.29(d)(2)(a)(2) Verification Testing - Replace the paragraph that begins “First, demonstrate the method...” with the following paragraph:

First, use a calibrated torque wrench to estimate the snug-tight condition to be used on the final product. Record the snug-tight tension and the torque used to achieve tension. Calibrate the torque wrench annually. Match mark the bolt, nut, and plate.

00560.29(d)(2)(c) Inspection – Replace the paragraph that begins “Select at random 10 percent ...” with the following paragraph:

Select at random 10 percent or at least two, whichever is greater, of the tensioned bolts and nuts on the Structure for each separate connection. Apply the Inspection Torque to each nut the tensioning direction. If the Inspection Torque does not turn the bolt or nut, the connection is considered properly tensioned. If the Inspection Torque turns the bolt or nut, apply the Inspection Torque to all bolts in the connection. Re-tension and re-inspect all bolts and nuts that turned at this inspection. The Contractor may re-tension all the bolts in the connection and resubmit it for inspection, provided fastener assemblies are not damaged.

Replace Table 00560-3 with the following table:

Table 00560-3
Nut Rotation from Snug-Tight Condition ^{1,2}
Disposition of Outer Faces of Bolted Parts

Bolt Length³ (underside of head to end of bolt)	Both faces normal to bolt axis	One face normal to bolt axis and other sloped not more than 1:20 (beveled washer not used)	Both Faces sloped not more than 1:20 from normal to bolt axis (beveled washer not used)
Up to and including 4 diameters	1/3 turn	1/2 turn	2/3 turn
Over 4 diameters but not exceeding 8 diameters	1/2 turn	2/3 turn	5/6 turn
Over 8 diameters but not exceeding 12 diameters	2/3 turn	5/6 turn	1 turn

- ¹ Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For all required nut rotations, the tolerance is plus 60 degrees (1/6 turn) and minus 0 degrees.
- ² Applicable only to joints where all material within the grip is steel.
- ³ No research has been performed by the Research Council on Structural Connections to establish the turn-of-nut procedure for bolt lengths exceeding 12 diameters. Therefore, the required rotation is determined by actual test in a suitable tension measuring device according to 00560.29(d)(2).

00560.30 Fabricators - Replace this subsection, except for the subsection number and title, with the following:

Provide structural steel Bridge fabricators having an American Institute of Steel Construction (AISC) Certified Bridge Fabricator - Intermediate (IBR) certification. For fracture critical Structures, provide a fabricator with an AISC Fracture Critical Endorsement (FC). For earthquake restraints provide fabricators that have either a current AISC IBR certification or a Certified Bridge Fabricator - Simple (SBR) certification.

00560.40(c) Stiffeners - Replace this subsection, except for the subsection number and title, with the following:

Fabricate end stiffeners of girders and stiffeners intended as supports for concentrated loads to have full bearing (either milled, ground, or on weldable steel in compression areas of flanges, welded as specified) on the flanges where they transmit load or from where they receive load. Fabricate stiffeners not intended to support concentrated loads, according to AWS D1.5, unless specified otherwise.

00560.40(d) Abutting Members - Replace this subsection, except for the subsection number and title, with the following:

Mill, sawcut or flame cut abutting members carrying compression at joints in trusses, columns and girder flanges, to give a square joint and uniform bearing. Do not exceed 1/4 inch at joints not required to be faced.

00560.40(e) Annealing and Stress Relieving - Replace the paragraph that begins "Perform finished machining, boring ..." with the following paragraph:

Perform finished machining, boring and straightening on structural members that are specified to be annealed or normalized subsequent to heat treatment. Normalize and anneal (full annealing) according to ASTM A941. Maintain the temperatures uniformly throughout the furnace during the heating and cooling so the temperature at no two points on the member will differ by more than 100 °F at any one time.

00560.40(f) Facing of Bearing Surfaces - Replace the paragraph that begins "The surface finish of bearing ..." with the following paragraph:

Conform the surface finish of bearing and base plates and other bearing surfaces that are to come in contact with each other or with concrete to ANSI surface roughness requirements of ANSI B46.1, Surface Roughness, Waviness and Lay, Part I, and the following table:

Insert Project Name Here

00560.40(g) Pins and Rollers - Replace the paragraph that begins "Turn pins and rollers ..." with the following paragraph:

Turn pins and rollers to the dimensions shown. Make them straight, smooth and free from flaws. Furnish pins and rollers more than 9 inches in diameter that are forged and annealed carbon-steel shafting. Pins and rollers 9 inches or less in diameter may be cold-finished or forged and annealed carbon-steel shafting.

00560.40(h) Pin Holes - Replace the paragraph that begins "The diameter of the pin ..." with the following paragraph:

Do not allow the diameter of the pin hole to be larger than the pins by more than 0.02 inch for pins 5 inches or less in diameter, or by 0.03 inch for larger pins.

Replace the paragraph that begins "The distance outside ..." with the following paragraph:

Do not vary more than 1/32 inch the distance outside-to-outside of end holes in tension members and inside-to-inside of end holes in compression members from that specified. Bore holes in built-up members after the fabrication is completed.

Add the following subsection:

00560.40(j) Surface Finish (Non-Coated Weathering Steel Only) -

(1) Sandblast and Mill Scale Removal - Sandblast all exposed surfaces of AASHTO M 270 (ASTM A709), non-coated weathering steel, according to SSPC-SP6, *Commercial Blast Cleaning*, *SSPC's Steel Structures Painting Manual*. Visually verify the appearance of the blast-cleaned surface using Pictorial Standard Sa 2 of SSPC-VIS 1, *Pictorial Surface Preparation Standards for Painting Steel Surfaces*.

(2) Exterior Face of Fascia Girders - Brush-off blast clean, according to SSPC-SP7, *Brush-Off Blast Cleaning*, *SSPC's Steel Structures Painting Manual* to achieve a uniform surface finish and patina immediately after fabrication and prior to environmental exposure. After brush-off blast, and prior to environmental exposure or shipping, pressure wash exterior faces of fascia girders with a stream of potable water to ensure uniform weathering and patina.

(3) All Non-Coated Weathering Steel - Prior to environmental exposure, clean all exposed surfaces that do not receive a brush-off blast clean according to SSPC-SP 1, *Solvent Cleaning*, *SSPC's Steel Structures Painting Manual* to remove all visible oil, grease, dust, dirt, drawing and cutting compounds, and other visible contaminants.

(4) Post-Fabrication Sandblast - If, as determined by the Engineer, the uniform weathering properties of the steel have been compromised and solvent cleaning is unable to adequately clean the surface, sandblast all exposed surfaces after fabrication and prior to shipment according to SSPC-SP 6. Pressure wash sandblasted surfaces with a stream of potable water to ensure uniform weathering and patina.

00560.42 Cambering - Replace the paragraph that begins "Camber roll beams in ..." with the following paragraph:

Camber roll beams in the fabricating shop by use of heat or hydraulic jacks. Do not exceed 1,200 °F temperature for the heated area, as controlled by pyrometric stick (temperature crayon) or thermometers. Do not quench to accelerate cooling.

00560.43(a) General - Replace the paragraph that begins "Furnish a Camber diagram ..." with the following paragraph:

Provide a Camber diagram, prepared by the fabricator, showing the Camber at each panel point in the cases of trusses or arch ribs, and at the location of field splices and fractions of span length (quarter points minimum, tenth points maximum) in the cases of continuous beam and girders or rigid frames. When the shop assembly is Full Truss or Girder Assembly or Complete Structure Assembly, show the Camber measured in assembly. When any of the other methods of shop assembly is used, show calculated Camber.

00560.43(g) Check Assemblies with Numerically Controlled Punched and Drilled Field Connections - Replace the paragraph that begins "A check assembly consists ..." with the following paragraph:

A check assembly consists of at least three connecting shop sections, or in a truss, all members in at least three connecting panels, but not less than the number of panels in three connecting chord lengths; that is, the length between field splices. Base check assemblies on the proposed order of erection, joints in bearings, special complex points such as the portals of skewed trusses, and similar considerations, as directed. Fabricate check assemblies first for each major structural type to be fabricated.

00560.43(h) Match-Marking - Replace this subsection with the following subsection:

Match-mark connecting parts assembled in the shop for the purpose of reaming holes in field connections, and provide a diagram showing such marks to the Engineer.

00560.45 Marking and Transporting to Site - Replace the bullet that begins "Mark each member with ..." with the following bullet:

- Mark each member with an erection mark for identification and provide an erection diagram showing the erection marks.

Replace the bullet that begins "Furnish as many copies of material ..." with the following bullet:

- Provide as many copies of material orders, shipping statements and erection diagrams as directed and show the weights of the individual members on the statements.

Replace the bullet that begins "Furnish the Engineer stamped detail ..." with the following bullet:

- Provide the Engineer stamped detail Plans of loading, unloading, supporting and bracing of the steel plate girders on trucks or cars for shipment to the Project Site, according to 00150.35. The review will not relieve the Contractor of responsibility for safe transportation of steel members.

Insert Project Name Here

00560.46(e) Bearings and Anchorages - Replace the bullet that begins "Locate anchors and set rockers ..." with the following bullet:

- Locate anchors and set rockers or rollers considering variation from mean temperature at the time of setting, and anticipated lengthening of bottom chord or bottom flange due to dead load after setting. As nearly as practicable, at mean temperature and under dead load, ensure the rockers and rollers stand vertically and anchor bolts at expansion bearings center their slots.

00560.46(f) Assembling Steel - Replace the paragraph that begins "Handle the Material carefully ..." with the following paragraph:

Handle the Material carefully so no parts are bent, broken or otherwise damaged.

Replace the paragraph that begins "Do not perform hammering ..." with the following paragraph:

Do not perform hammering that will injure or distort the members.

00560.46(h) Misfits - Replace this subsection with the following subsection:

The correction of minor misfits involving small amounts of reaming, cutting, and chipping is considered a legitimate part of the erection. However, immediately report to the Engineer any error in the shop fabrication or deformation resulting from handling, storage and transportation that prevents the proper assembling and fitting up of parts by the moderate use of drift pins, or by a moderate amount of reaming and slight chipping or cutting. Make the necessary corrections and replacements in the presence of the Engineer as approved or directed. The Contractor shall be responsible for all misfits, errors and injuries.

00560.70 Finish (Non-Coated Weathering Steel Only) - Replace this subsection with the following subsection:

00560.70 Surface Finish Cleanup (Non-Coated Weathering Steel Only) - At all times during fabrication, shipping, and installation, promptly clean exposed surfaces of steel contaminated with stains, oil or foreign material to preserve conditions for uniform weathering of steel. The use of acids to remove scale and stains in the field is not allowed.

(Use the following subsection .80 to list the estimated quantities of structural steel. Obtain information from the Bridge Designer.)

00560.80 Measurement - Add the following to the end of this subsection:

The estimated quantity of structural steel is:

(Use the appropriate bid item name as the "Steel Type". List each bridge separately.)

Structure	Steel Type	Quantity (Pound)
Bridge No. _____		

Insert Project Name Here

00560.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00564 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-03-26
Requires SP02560)**

SECTION 00564 - FALL ARREST SYSTEM

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00564 is not a Standard Specification and is included in this Project by Special Provision.

Description

00564.00 Scope - This Work consists of designing, fabricating, installing, and testing wire rope fall protection systems for Bridge (Insert Bridge No.) as shown.

00564.01 Safety Requirements - Conform Work, Materials, and components provided under this Section according to the following:

- OSHA 29CFR 1926 Subpart M - Fall Protection
- ANSI A 10.32 Personal Fall Protection for Use in Construction and Demolition Operations
- OR-OSHA OAR 437-003 Subdivision M - Fall Protection

00564.02 Submittals - Submit stamped Working Drawings and design calculations for the fall arrest systems according to 00150.35 at least 21 Calendar Days before starting Work that requires a fall arrest system.

Include the following in the Working Drawings:

- Member profiles
- Sizes
- Elevations

Insert Project Name Here

- Details for anchorages and connections

Materials

00564.10 Materials - Furnish wire rope fabricated from Materials and sizes to meet a minimum breaking strength of 40,000 lbs.

Furnish fasteners meeting the requirements of Section 02560.

Lanyards and full-body harnesses are not required as part of the fall arrest systems.

Construction

00564.40 Installation - Install fall arrest system as shown and accepted in the Working Drawings. Install anchorages and fasteners according to manufacturer's recommendations. Do not load or stress the fall arrest systems until all Materials and fasteners are installed and ready for service.

Measurement

00564.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00564.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Fall Arrest System".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00565 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-01-26)**

SECTION 00565 - CARBON FIBER REINFORCED POLYMER STRENGTHENING - WET LAYUP SYSTEM

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00565 is not in the Standard Specifications and is included for this Project by Special Provision.

Description

00565.00 Scope - This Work consists of the complete installation of Carbon Fiber Reinforced Polymer (CFRP) sheet and laminate material, applied to existing concrete surfaces as shown and specified. This Work also includes the design of the CFRP strengthening by the CFRP system manufacturer's Engineer based on the loading requirements and design parameters as shown.

00565.01 Abbreviations and References:

(a) Abbreviations:

CFRP - Carbon Fiber Reinforced Polymer

ICRI - International Concrete Repair Institute

(b) References:

AASHTO Guide Specifications for Design of Bonded CFRP Systems for Repair

ACI 440.2R, *Guide for the Design and Construction of Externally Bonded FRP Systems for Strengthening Concrete Structures*

ACI 546R, "Guide to Concrete Repair"

ICRI Technical Guideline No. 310.1R, *Guide for Surface Preparation for the Repair of Deteriorated Concrete Resulting from Reinforcing Steel Corrosion*

ASTM D3039, *Standard Test Method for Tensile Properties of Polymer Matrix Composite Materials*

ASTM D4541, *Standard Test Method for Pull-Off Strength of Coatings Using Portable Adhesion Testers*

ASTM D7522, *Standard Test Method for Pull-Off Strength for FRP Laminate Systems Bonded to Concrete Substrate*

00565.02 Submittals:

(a) Materials Certifications - At least 21 Calendar Days prior to starting CFRP system installation Work, provide manufacturer's material certifications for all CFRP materials, the strengthening system, and the surface coating material. Include the supplier's name and ranges of the properties listed below with test methods used for CFRP, epoxy, and system components.

Material	Properties to be Furnished
Primary Fibers	Tensile strength, Elongation, Tensile Modulus
Transverse Fibers	Tensile Strength, Elongation, Tensile Modulus, (Perpendicular to Surface Finishes Primary Fibers)

Insert Project Name Here

Epoxy Resin	Tensile Strength, Elongation, Tensile Modulus, Mix Ratio, Pot Life, Shelf Life, UV Resistance
CFRP System	Tensile Properties, including method of reporting properties (net fiber or gross laminate), Test Methods used, and the statistical basis used for determining the properties

Submit the following information from the CFRP manufacturer:

- Installation instructions, inspection instructions, maintenance instructions, and general recommendations regarding each material to be used. Include surface preparation requirements in the installation procedures.
- Manufacturer's Safety Data Sheet (SDS) for all materials to be used
- Quality-control procedure for tracking CFRP materials and material certifications
- Durability test data for the CFRP system in the types of environments expected

(Use the following paragraph and bullets, except when a sand-mix surface finish is used.)

Submit the following information from the surface finish coating manufacturer:

- Manufacturer's product data sheets
- Manufacturer's material safety data sheet (MSDS)
- A manufacturer's letter containing any surface preparation or application recommendations that differ from the published manufacturer data sheet including additional recommended substrates for application or application to partially cured epoxy resin during CFRP installation

(b) Test Results - At least 21 Calendar Days before starting CFRP system installation Work, conduct longitudinal tensile property testing on 5 samples of a single CFRP ply for each CFRP strengthening system according to ASTM D3039 and submit test results including tensile strength, elongation, modulus of elasticity, fabric material, epoxy, thickness, orientation of fibers, and curing method. Ensure CFRP system samples have the same physical properties as and are from the same manufacturer as the system to be installed in permanent Work.

(c) Personnel Qualifications - Submit personnel qualifications at the pre-construction conference according to 00565.30.

(d) Working Drawings and Calculations - Submit stamped Working Drawings, according to 00150.35(b), for each installation of composite material detailing all information required for the proper construction of the CFRP system at each location. Provide drawings accompanied by design calculations. Design the externally bonded CFRP system according to the requirements of ACI 440.2R or *AASHTO Guide Specifications for Design of Bonded CFRP Systems for Repair* given the design parameters as shown.

On the Stamped Working Drawings include the following information:

Insert Project Name Here

- Properties and locations of CFRP materials
- Number, thickness and fiber orientation of layers. Except for a complete wrap system, limit a number of CFRP plies to 3 or fewer, unless otherwise shown.
- A separate drawing showing the locations where each CFRP layer is discontinued, if thickness of the CFRP laminate is changed.
- Details of joints and ends
- Anchorage system details to enhance bond and to develop required strength of CFRP laminate. Design anchorage system having tensile capacity at least 5 percent greater than the design tensile strength of the CFRP strengthening system, unless otherwise shown.

As-constructed plans of the existing structure(s) are available from the Engineer.

Do not begin CFRP work until the stamped Working Drawings and supporting calculations have been reviewed by the Engineer.

Materials

00565.10 General - Select a manufacturer and Materials from the QPL. Furnish all components to construct CFRP strengthening system from a single manufacturer. No substitutions are allowed, except as recommended by the manufacturer and as approved by the Engineer.

00565.11 Acceptance Testing - The following test is required for acceptance of the CFRP strengthening work:

(a) Bond Test - Conduct 5 bond tests to verify adhesion between CFRP laminate and the concrete surface. Prepare specimens at the Project Site, using the same CFRP materials, epoxy and number of CFRP plies used on each type of installation on the bridge. Ensure the test complies with the requirements of ASTM D4541, ASTM D7522 or other approved method. Under the bond test, ensure the bond between CFRP laminate and concrete is stronger than the shear strength of the concrete (the laminate should peel off with concrete still attached to the bond surface).

Submit test results and inspection results including fiber orientation, delaminations, cure of resins and cured thickness to the Engineer for evaluation and acceptance.

(Use the following paragraph, except when a sand-mix surface finish is used.)

00565.12 Surface Finish Coating - Furnish a water based 100% acrylic or acrylic copolymer coating designated for exterior vertical and overhead applications, on concrete, masonry, stucco, and FRP as recommended by the CFRP manufacturer. Provide a color that matches existing concrete.

Labor

00565.30 Personnel Qualifications - Provide a CFRP Application Advisor, certified by the manufacturer of the CFRP materials to have been trained in installation of CFRP, to provide

Insert Project Name Here

technical assistance prior to and during CFRP Work. Ensure the CFRP Application Advisor remains available for consultation until the completion and acceptance of all CFRP Work.

Provide trained personnel for installation of the CFRP system.

Provide the following information to verify the contractor's experience and the qualifications of personnel scheduled to perform the CFRP system:

(1) CFRP System Application Advisor Certification - Submit the CFRP manufacturer's certification of the Contractor's designated CFRP Application Advisor.

(2) CFRP System Application Advisor Certification Experience - Submit documentation showing that the Contractor's designated CFRP Application Advisor has experience as CFRP Application Supervisor, CFRP Application Advisor, or lead worker on 3 Bridge or building projects using CFRP wet-layup system in the last 5 years. The CFRP material used on projects submitted for experience does not need to be from the same manufacturer as material proposed for this Project.

For each project submitted, include:

- Project name
- Contract number
- Location
- Owner, including contact person's name and telephone number
- Date of contract acceptance (month and year)
- Material used and material manufacturer

(3) Applicators Certification - Submit certification from the CFRP material manufacturer, or from the Contractor's designated CFRP Application Advisor, affirming that the applicators installing the CFRP system have been trained in the installation of CFRP.

Construction

00565.40 Surface Preparation - Prepare surfaces for CFRP application according to the following:

(a) Surface Cleaning - Prepare concrete surfaces to be coated with CFRP according to the manufacturer's recommendations. Grinding, sandblasting, or a combination of both may be necessary. Comply with ACI 546R, *Concrete Repair Guide* and ICRI Technical Guideline No. 310.1R, *Guide for Surface Preparation for the Repair of Deteriorated Concrete Resulting from Reinforcing Steel Corrosion*. Provide a minimum concrete surface profile (CSP) 3 according to ICRI. The Engineer will resolve any conflict between the manufacturer's recommendations and the named guides. Ensure the concrete surface is clean, structurally sound, dry and free of standing water. Remove dust, laitance, grease, curing compounds, impregnation, waxes, foreign particles, any disintegrated materials and any other bond-inhibiting matter using abrasive or water-blasting techniques.

Collect material removed during surface-preparation operations on plastic tarps or geotextile fabric, or by other approved methods. Dispose of all materials according to 00290.20.

(b) Crack Repair - Inject cracks that are 1/64 inch and greater in width according to Section 00538.

(c) Surface Repair - Use approved repair mortar recommended by the CFRP manufacturer to repair uneven surfaces and fill voids larger than 1/2-inch diameter or 1/8 inch deep. After the surface is repaired, ensure the residual unevenness is no more than the tolerances recommended by the CFRP manufacturer or 1/32 inch over 1 foot, whichever is smaller.

(d) Concrete Substrate Test - Verify the adhesive strength of the concrete after surface preparation at a random location by using a pull-off test according to 00565.11(b). A minimum tensile strength of 200 psi with concrete substrate failure is acceptable.

(e) Corners - Where CFRP sheet wraps around the corners of rectangular cross sections, round and smooth the corners to a minimum 1/2-inch radius.

(f) Priming Concrete Surface - Apply primer to the concrete surface according to the CFRP manufacturer's recommendations.

(g) Epoxy Resin Undercoating - If required by the CFRP manufacturer, apply epoxy resin undercoating according to the CFRP manufacturer's recommendations and the instructions of the resin manufacturer. The Engineer will resolve any conflict between the CFRP manufacturer's recommendations and the resin manufacturer's instructions. Do not apply epoxy resin, unless surface temperature and ambient temperature are between 50 °F and 90 °F.

00565.41 Curing CFRP Material - Cure CFRP material using the manufacturer's suggested methods and temperatures. Ensure that cured composites have uniform thickness and density, complete bonding between layers, and no porosity.

(Use one of the following subsection .42 Options.)

00565.42 Application of Final Surface Finish –

[Option 1 - Use the following except when a sand-mix surface finish is used.]

Roughen the surface by lightly sanding with 100 to 150 grit sandpaper using hand or power tool methods or as recommended by the CFRP and coating manufacturers. Do not expose the fibers of the composite. Wipe the surface clean using clean cloths and water or solvent as recommended by the coating manufacturer. The coating may be applied to tacky epoxy surfaces that do not transfer any material and are hard to the touch without surface preparation if approved by the coating manufacturer. Prepare all surfaces that have reached full cure, are no longer tacky to the touch, or after 7 Days, whichever is less, by hand or power tool methods approved by the Engineer.

Apply 2 surface finish coats, following all manufacturer recommendations. Prior to applying the finish coat, prepare a 3 feet by 3 feet sample for the Engineer's approval on an

Insert Project Name Here

inconspicuous area of the Structure. Allow to dry. Obtain the Engineer's approval of the color before proceeding with the final surface finish.

Ensure all cured coatings are well adhered by probing edges or surface imperfections with a dull putty knife. Repair all cracked or delaminated coatings by removing the damaged coatings by hand or power tool methods and reapplying the coatings following all manufacturer recommendations. Feather edges 1 to 2 inches.

[End Option 1]

[Option 2 - Use the following when a sand-mix surface finish is used.]

Apply No. 8 sand mix with the final coat of epoxy resin on all exposed surfaces, unless shown otherwise. Broadcast the sand mix to the final coat before epoxy resin solidifies.

After curing of the final coat, float the surface with a rubber or sponge, using a paste of fine mortar sand, cement, water, and bonding agent to fill air holes or voids to bring the surface to a uniform texture. Keep the retextured surface damp a minimum of 12 hours or until the paste has set, whichever is longer. If dustings occur after the retextured surface sets and is rubbed, refinish the surface. Provide a finish color of shade that matches existing concrete.

Prior to applying the finish coat, prepare a 3 feet by 3 feet sample for the Engineer's approval on an inconspicuous area of the structure. Allow to dry. Obtain the Engineer's approval of the color before proceeding with the final surface finish.

[End Option 2]

00565.43 Repair of Installed CFRP System Defects - Repair delamination areas of installed CFRP strengthening system with epoxy injection for defect size between 1/4 inches and 6 inches in diameter. Replace delamination areas for defect size greater than 6 inches in diameter.

Measurement

(Fill in the blank with the square feet.)

00565.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

The estimated quantity for the proposed CFRP strengthening is _____ square feet despite the number of layers.

(Include the following paragraph when Sand-mix Surface Finish is specified. Fill in the blank.)

The estimated quantity for the sand-mix surface finish is _____ square feet.

Payment

Insert Project Name Here

00565.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "CFRP Strengthening - Wet Layup System."

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, tools, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Furnishing and applying a surface coating.
- Training and certification of personnel.
- Repair of delamination areas due to installation defects.

SP00566 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00566 - CARBON FIBER REINFORCED POLYMER STRENGTHENING - NEAR SURFACE MOUNTED

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00566 of the Standard Specifications modified as follows:

00566.03 Required Submittals - Replace the title of this subsection with **"Submittals"**

00566.03(b) Test Results - Replace this subsection, except for the subsection number and title, with the following:

At least 21 Calendar Days before starting Work, conduct longitudinal tensile property testing on five samples of the CFRP bar according to Part 2 of ACI 440.3R, ASTM D7205, or ASTM D3039 and submit test results. Furnish sample CFRP bars having the same physical properties as and be from the same manufacturer as the bars that are installed in permanent Work.

00566.10 Pre-Approved CFRP Manufacturers and Material List - Replace the paragraph that begins "Furnish all bars having a ..." with the following paragraph:

Furnish all bars having a textured, deformed, or roughly sanded surface and marked at regular intervals along the length, spaced not more than 6 feet, showing the manufacturer's mark, size designation and production lot number.

00566.12 Material Sampling - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Provide five samples per lot of CFRP bar materials for testing by the Agency. Provide samples from the same lot(s) used in the permanent work. Provide the samples at least 21 Calendar Days before starting CFRP installation work. Prepare samples' length and end anchors according to ASTM D7205 or ASTM D3039.

Allow the Engineer to select six additional samples per lot of CFRP bar materials delivered to the site for testing by the Agency. Provide samples a minimum of 8 feet in length.

00566.42(a) Surface Cleaning - Replace this subsection, except for the subsection number and title, with the following:

Clean the groove according to the manufacturer's recommendations. If the manufacturer has not provided recommendations, thoroughly clean the groove with high-pressure water and a non-metallic brush. Before the groove dries out, blow it free of water and debris with compressed air. Ensure that all dust, sand, laitance, grease, curing compounds, and any other bond-inhibiting matter is removed from the groove. Ensure the concrete surface of grooves is clean and structurally sound prior to installing CFRP bars.

00566.44 CFRP Bar Installation - Replace the paragraph that begins "Center the CFRP bar ..." with the following paragraph:

Center the CFRP bar in the groove using approved centering devices at one-third points along the CFRP. Provide centering devices having not less than 1/8-inch resin cover when installed. Place nylon or polyethylene spacer material between the CFRP bars and exposed, existing steel reinforcing.

00566.80 Measurement - Add the following to the end of this subsection:

The estimated length of required CFRP bars is shown below.

(Obtain structure number and quantities from the Bridge Designer.)

Structure	Quantity (Feet)
Bridge No. _____	
Bridge No. _____	

00566.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00567 (Special Provisions for the 2024 Book)

**(Bidding on or after: 10-01-26
Last updated: 06-22-26)**

SECTION 00567 - TITANIUM ALLOY REINFORCEMENT SYSTEM

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00567 is not a Standard Specification and is included in this Project by Special Provision.

Description

00567.00 Scope - This Work consists of furnishing and installing a complete, near surface mounted, titanium alloy reinforcement system as shown or specified. The system is comprised of titanium alloy reinforcement ("bars") embedded in sawcut grooves and anchor holes with epoxy.

00567.01 Submittals - Submit the following to the Agency at least 21 Calendar Days before starting Work. Do not begin Work before receiving written approval of submittals from the Engineer.

(a) Materials Certifications - Submit the manufacturer's Material certifications and mill test certificates for the titanium alloy reinforcement system according to 00150.37. Include the supplier's name, ranges of the properties listed below, and test methods used for titanium alloy reinforcement and epoxy resin.

Material	Properties to be Furnished
Titanium Alloy	Tensile Strength Elongation Tensile Modulus Cross-Sectional Area Chemical Composition
Epoxy Resin	Tensile Strength Elongation Tensile Modulus Mix Ratio Pot Life Shelf Life UV Resistance

(b) Titanium Alloy Reinforcement Installation Plan - Before beginning girder preparation submit the following according to 00150.37:

Insert Project Name Here

- The sequence of anchor hole and groove preparation as it relates to the overall construction Plan.
- Methods for locating and protecting existing steel reinforcement. Details regarding the Equipment and structural attachments required for installation of the titanium alloy reinforcement. Include rail mount locations and dimensions required for accurate groove placement in bridge elements.
- Details of the proposed method, if different than specified, for ensuring the titanium alloy reinforcement is installed as shown.
- Details regarding construction tolerances for preparation, including groove depth, width and anchor hole dimensions.

(c) Order Lists and Bending Diagrams - Before ordering Material, submit all order lists according to 00150.37 and unstamped bending diagrams according to 00150.35 for approval. Do not order Material until such lists and bending diagrams are approved.

The review of order lists and bending diagrams by the Engineer will in no way relieve the Contractor of responsibility for the correctness of such lists and diagrams. Revise lists and diagrams as required to make them comply with the Plans at no additional cost to the Agency.

Material

00567.10 Titanium Alloy Reinforcement - Furnish deformed titanium alloy reinforcement conforming to the requirements of ASTM B1009. Unless otherwise shown or specified, furnish all titanium alloy bars that conform to the following mechanical properties:

Yield Strength	Ultimate Strength	Elastic Modulus	Elongation
130,000 psi	140,000 psi	15,000,000 psi	10%

Calculate elastic modulus using slope of the stress-strain curve between a stress range of 20,000 psi and 60,000 psi. Use 0.2 percent offset of the calculated elastic modulus line to obtain a yield strength of titanium alloy bars.

Furnish uniform deformations equally spaced along the titanium alloy bars with a minimum deformation height of 0.01 inch and a maximum spacing of 0.06 inch. Sharp stress risers are not allowed. Furnish the final cross-sectional area of the bars including the deformations that are not less than 96 percent of the nominal area of undeformed bars.

An approved source for titanium alloy reinforcement is Perryman Company, 213 Vandale Drive Houston, PA 15342. Contact the Infrastructure Development Manager, at 724-746-9390.

00567.11 Fabrication - Hot bend reinforcing bars to the shapes shown. Shop bending or field bending is allowed, unless otherwise shown or directed. Heat reinforcing bars a minimum of three inches on each side beyond the bend section. At 400 °F, the bars will turn yellow or straw color. Continue heating until the bars turn blue approximately equal to 800 °F, that is the desired color and temperature for bar bending. Do not heat reinforcing bars more

Insert Project Name Here

than 1300 °F or until the bars turn red hot. Discard the red hot (overheated) bars. After the bending is complete, grind surface of the inside bend radius to remove the deformations. Make bends, tag, mark and ship reinforcing bars according to the current edition of the CRSI *Manual of Standard Practice*. Re-bending of reinforcing bars is not permitted.

00567.12 Material Sampling - Furnish sufficient material for the Engineer to select three samples from each lot of titanium alloy reinforcement delivered to the site, for testing by the Agency. Furnish samples that are a minimum of 4 feet in length.

00567.13 Epoxy Resin - Furnish epoxy resin from one of the following list of pre-approved epoxy resins.

Manufacturer

Material

Hilti, Inc.
7250 Dallas Parkway, Suite 1000
Plano, Texas, 75024
Contact: Pete Anderson
Phone: (972) 403-5948

HIT-RE 500 V3

Adhesive Technology Corp
450 East Copans Road
Pompano Beach, Florida, 33064
Contact: Mike Gaffigan
Phone: (954) 541-7091

Ultrabond HS-1CC

(Use the following Epoxy resin only for projects with construction on top surfaces due to high flowability. Contact the Bridge Designer.)

Pilgrim Permocoat, Inc.
402 South 22nd Street
Tampa, Florida, 33605
Contact: Robert Forlong
Phone: (813) 248-3328
FAX: (813) 248-1076

Magmaflow Grout-Pak CF

Construction

00567.40 Protection of Material - Protect reinforcement at all times from damage. Ensure reinforcement is free of dirt, detrimental scale, paint, oil and other foreign substances when placed in the Work.

00567.41 Existing Reinforcement Location and Concrete Cover - Use rebar detectors or other approved devices, capable of locating existing reinforcement within 0.1 inch, to locate existing reinforcement and to determine the thickness of concrete cover. Before constructing anchor holes and grooves, provide the Engineer with a summary of cover thickness and clear distance measurements between existing reinforcement and the titanium alloy reinforcement system.

00567.42 Drilling Anchor Holes and Sawcutting Grooves - Drill holes for hook embedment depth and size as shown using a rotary hammer drill with a carbide tipped drill

bit. If existing reinforcement is encountered, stop drilling and adjust the hole location. Adjust the location of the holes for the end anchorage up to 3 inches longitudinally and laterally to avoid conflicts. Maintain the titanium bar lengths.

Cut grooves as shown to the designed width and depth $\pm 1/8$ inch. Make grooves deep enough to allow the titanium bar to be installed at least $1/8$ inch below the surface in all locations along the length of bars. Do not cut into existing rebar during construction of sawcut grooves. Visually inspect all existing rebar locations after sawcutting grooves. When existing reinforcement is cut, notify the Engineer before installation of titanium alloy reinforcement.

Groove spacing may be adjusted in the field as necessary to avoid existing reinforcement or other unforeseen conflicts; however, the average spacing of all grooves over any 2-foot-long section may not be more than the spacing as shown. Maintain a minimum clear spacing greater than three times the diameter of the bar and a minimum clear edge distance of six times the diameter of the bar.

00567.43 Anchor Hole and Groove Preparation - Prepare sawcut grooves and anchor holes for titanium reinforcement installation as follows:

(a) Surface Cleaning - Clean the groove and anchor holes thoroughly with high-pressure water and a nonmetallic brush. Before the groove and anchor holes dry out, blow it free of water and debris with compressed air. Ensure that all dust, sand, laitance, grease, curing compounds, and any other bond-inhibiting matter is removed from the groove and anchor holes. Ensure the concrete surface of groove and anchor holes is clean and structurally sound prior to installing titanium alloy bars.

(b) Moisture on Groove and Hole Surfaces - Before installation of titanium alloy bars, dry groove and anchor hole surfaces using a drying method approved by the Engineer and according to the epoxy manufacturer's recommendations. Do not directly apply a flame to the groove and anchor holes surfaces.

00567.44 Compressed Air - When using high-pressure air for cleaning, use adequate separators and traps to ensure that the air is free of water, oil, or any other Material detrimental to the titanium alloy reinforcement system. Compressed air cleanliness may be tested by the Engineer according to ASTM D4285.

00567.45 Titanium Alloy Bar Installation - Begin installation only after groove and anchor hole preparation Work is complete.

Install the titanium alloy bars to the embedment depths and in the anchor holes as shown.

Do not install the titanium alloy bars and epoxy resin when the concrete temperature is below 50 °F, unless otherwise advised by the resin manufacturer's recommendations.

Mask the concrete adjacent to the groove to prevent excess epoxy from adhering to the concrete outside the groove.

Place nylon or polyethylene spacer material between the titanium alloy bars and exposed, existing steel reinforcement.

Insert Project Name Here

Fill two-thirds of the anchor hole and one-half of the groove with epoxy resin. Press the titanium alloy bar in the anchor holes and in the center of groove using approved centering devices at one-third points along the titanium alloy bar. Install centering devices with a minimum of 1/8-inch resin cover.

Ensure epoxy resin is well consolidated around the bars without air pockets. Level epoxy resin flush with the surface of the adjacent concrete.

00567.46 Surface Cleanup - Remove excess epoxy resin outside the groove.

Measurement

00567.80 Measurement - No measurement of quantities will be made for Work performed under this Section. The estimated quantity of titanium alloy reinforcement system is shown below.

(Obtain structure number and quantities from the Bridge Designer. Delete the entire row if the diameter specified is not used on the project.)

Structure	Quantity (Feet)
Bridge No. _____ - 0.375 Inch Diameter	
Bridge No. _____ - 0.500 Inch Diameter	
Bridge No. _____ - 0.625 Inch Diameter	
Bridge No. _____ - 0.750 Inch Diameter	

Payment

00567.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete pay item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the pay items.)

Pay Item	Unit of Measurement
(a) Titanium System, 0.375 Inch Diameter.	Lump Sum
(b) Titanium System, 0.500 Inch Diameter.	Lump Sum
(c) Titanium System, 0.625 Inch Diameter.	Lump Sum
(d) Titanium System, 0.750 Inch Diameter.	Lump Sum

Payment will be payment in full for furnishing, fabricating and placing all Materials and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00568 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26
Requires SP02415, SP02515,
SP02530, SP02560, and SP02810)**

SECTION 00568 – STRUCTURAL RODS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00568 is not a Standard Specification and is included in this Project by Special Provision.

Description

00568.00 Scope - This Work consists of furnishing and installing structural rods as shown or specified. This Work also includes forming holes in concrete with ducts, drilling holes in steel or concrete, and furnishing and installing items necessary for structural rod installations including but not limited to anchorage plates, washers, nuts, ducts, grout for bedding of anchor plates, and grout for filling annular voids around structural rods.

00568.01 Plans - Plans of existing Structures are available from the Engineer upon request.

Materials

00568.10 Materials - Furnish Materials meeting the following requirements:

Polypropylene Pipe	02415.40
Polyvinyl Chloride Pipe	02415.50
Steel Pipe	02810.30
Structural Steel for Non-Bridge Structures	02530.20
Structural Grout	02080.60
Tie Rods, Anchor Bolts, and Anchor Rods	02560.30
Tendon Duct	02515.50
Tendon Grout	02080.50

00568.11 Ducts:

(a) UngROUTED Ducts - Furnish ungrouted ducts for structural rod installations as steel pipe, Polyvinyl Chloride (PVC) pipe, High Density Polyethylene (HDPE) pipe, or tendon duct suitable for forming a straight annular hole in concrete during concrete placement and until the concrete has hardened.

(b) Grouted Ducts - When grouting ducts to fill annular voids around structural rods is shown or specified, furnish tendon ducts according to 02515.50. Furnish suitable injection ports, grout tubes, venting, anchor plates with keyways or ports, as necessary to pump or gravity feed the grout into the void. Furnish liquid tight pipes, tubes, and connections. Furnish valves or other means to retain all grout placed in the hole.

00568.12 Centralizers - Furnish centralizers made from non-metallic materials.

Equipment

00568.21 Concrete Core Drilling Equipment - Unless shown or specified, provide concrete core drills having a drill motor mounted on and guided by a rigid rail or track system, adjustable in alignment to match the detailed orientation of the hole, and able to maintain that alignment throughout drilling. Provide a rigid base for the rail or track system that can be secured to the concrete surface. Provide core drill bits having an embedded diamond leading edge.

Construction

00568.41 Drilled Holes - Mark entrance and exit locations of drilled holes on the bridge member entirely before drilling holes. Locate reinforcement by using an electronic rebar mapping device. Mark locations of reinforcing bars on the concrete surface at each end of the drilled hole. Obtain the Engineer's approval of hole locations before drilling holes. If conflicts are likely or reinforcement is encountered during drilling, adjust the hole location by no more than 2 inches to avoid conflicts. When hole location adjustments exceed 2 inches, adjust hole locations as shown or directed. Fill abandoned holes with a PCC repair material meeting the requirements of Section 02015 and according to the manufacturer's recommendations.

Drill holes for rod installations using core drilling equipment.

Drill holes for rod installations so that any deviation from the specified alignment in any direction is less than 1/2 inch per 10 feet of hole length.

When core-drilled holes to be grouted are shown as having a roughened inside surface, core drill holes to a diameter 1/4 to 1/2 inch smaller than the required diameter. Roughen the inside surface of the core-drilled hole by reaming to the required diameter using a 4-point carbide star tipped rotary drill bit. Reaming may be done using guided or non-guided drills.

00568.42 Formed Holes - Install ducts to be embedded in concrete as shown. For ducts to be grouted, install ducts according to 00555.41. Install metallic anchor plates, and ducts, without contact with metallic reinforcing to prevent electrical continuity.

00568.43 Loose Anchor Plate - Bed loose anchor plates or steel bracket plates bearing against existing or previously hardened concrete using a layer of trowelable consistency structural grout. Make the bedding a minimum of 1/4 inch thickness above the highest protrusions or the location of closest clearance under the anchor plate footprint. Squeeze out excess bedding grout using minimal tightening of nuts while maintaining alignment of anchor plates and brackets. Install steel shims as necessary to align the anchor plate perpendicular to the axis of the rod. Do not tighten the nuts further until bedding grout has attained a minimum compressive strength of 3,000 psi.

00568.44 Embedded Anchor Plate - Locate and secure anchor plates to be fully encased in concrete. Do not tighten the nuts on rods until concrete has attained the minimum specified compressive strength.

Insert Project Name Here

00568.45 Structural Rod - Install structural rod as shown and the following:

- Galvanize rods, plates, nuts, and washers according to 02530.70 or 02560.40, unless otherwise shown.
- Clean and lubricate rods and nuts before installation.
- Lubricate rods and nuts with a lubricant from the QPL containing dye that visibly contrasts with the color of galvanizing or coating.
- Tighten the nuts to a snug tight condition then mark the position of one nut with a felt tip pen or similar marker. Tighten the nut, while preventing the rod from rotating, by 1/6 turn.

00568.46 Grouted Hole - When annular voids of holes are to be grouted, grout the voids according to Section 00555.

Measurement

00568.80 Measurement - No measurement will be made for the quantities of Work to be performed under this Section. The estimated quantity is based on a density of 490 pounds/cubic foot for the structural rods. The estimated quantity does not include the weight of anchorage plates, washers, nuts, and ducts.

The estimated quantity of structural rods are:

Type	Quantity (Pounds)
UngROUTED Structural Rods	_____
Grouted Structural Rods	_____

Payment

00568.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) UngROUTED Structural Rods	Lump Sum
(b) Grouted Structural Rods	Lump Sum

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for locating and marking of reinforcement and holes and for preparation and testing of grout.

SP00570 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP02130, SP02140, SP02150, SP02190 & SP02530
Requires SP02210 when coatings for timber are required)

SECTION 00570 - TIMBER STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00570 of the Standard Specifications modified as follows:

00570.00 Scope - Replace the paragraph that begins "This Work consists of furnishing ..." with the following paragraph:

This Work consists of furnishing and installing timber and glue laminated timber in Bridges and other timber Structures as shown or directed. Timber and lumber is identified as timber in this Section.

(Use the following subsection .10 to list grading requirements. Obtain grading requirements from the Bridge Designer.)

00570.10 Materials - Add the following to the end of this subsection:

Furnish timber and lumber meeting the following grading requirements:

-

(Use the following paragraph when preservative treatment is required but is not shown on the plans. Obtain information from the Bridge Designer.)

Preservative treatment of timber is required. The types of treatments that are allowed are:

-

(Use the following subsection .11 when ACZA preservative treatment is allowed. Check with Bridge Designer.)

00570.11 Metal Parts - Add the following to the end of this subsection:

Galvanized connectors are allowed on ACZA treated timber only when the timbers are kiln dried to 19 percent after treatment. If ACZA treated timber is not kiln dried, use stainless steel connectors only.

(Use the following lead-in paragraph and subsection .15 when lightweight metal connectors are required. Obtain the capacity requirements from the Bridge Designer.)

Add the following subsection:

Insert Project Name Here

00570.15 Lightweight Metal Connectors - Furnish lightweight metal connectors according to 02150.10(e), and with the following minimum capacities:

-

00570.42(a) Pile Bents - Replace the paragraph that begins "Drive piles according to ..." with the following paragraph:

Drive piles according to Section 00520. No shimming on tops of piles is allowed.

00570.42(b) Framed Bents - Replace the paragraph that begins "Fasten posts to sills ..." with the following paragraph:

Fasten posts to sills as shown. Remove all earth from contact with all timber so there is free air circulation around them.

00570.43 Stringers - Replace the bullet that begins "Knots near edges ..." with the following bullet:

- Knots near edges are in the top portions of the stringers.

00570.44(a) Planking - Replace the paragraph that begins "Provide planking ..." with the following paragraph:

Furnish planking that is surfaced on four sides (S4S).

00570.44(b) Covering Materials - Replace the bullet that begins "1-inch-thick tongue and ..." with the following bullet:

- 1-inch-thick tongue and groove structural CD exterior grade plywood. Nail the plywood with face grain parallel to stringers using 10d galvanized or zinc coated ring shank nails. Place nails at 6-inch centers along all edges and 12-inch maximum centers intermediate. Fasten expanded metal grillage with a minimum opening of 1/4 inch and a minimum thickness of 1/8 inch to the top of the plywood for the entire Roadway area. Fasten, at a minimum, at 12-inch centers each direction using 8d galvanized common nails. Cover deck with a Level 2, 1/2-inch ACP wearing surface according to Sections 00744 and 00745, as applicable.

00570.46 Trusses - Replace this subsection, except for the subsection number and title, with the following:

Furnish finished trusses showing no irregularities of line. Furnish chords straight and true from end to end in horizontal projection and show a smooth curve through panel points according to the correct Camber. Fit all bearing surfaces accurately. Uneven or rough cuts at the points of bearing are cause for rejection of the piece containing the defect.

00570.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00581 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP02530 & SP02560)

SECTION 00581 - BRIDGE DRAINAGE SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00581 of the Standard Specifications modified as follows:

00581.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00582 (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-26

Last updated: 09-02-26

May require SP00560 for rockers and hangers,

SP02570 for composite bearings

SP02571 for elastomeric bearings)

SECTION 00582 - BRIDGE BEARINGS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00582 of the Standard Specifications modified as follows:

00582.20 Composite Bearings - Replace the paragraph that begins "Provide only one type..." with the following paragraph:

Furnish only one type of Composite Bearing from the QPL for each Bridge, subject to the following requirements:

Replace the bullet that begins "Provide rotational elements between ..." with the following bullet:

- Furnish rotational elements between upper and lower units to meet the following:

Replace the bullet that begins "**Upper Unit** - The upper unit ..." with the following bullet:

- **Upper Unit** - The upper unit consists of a distribution plate that is permanently attached to the Superstructure and a sole plate attached to the distribution plate with cap screws. For a Guided or Nonguided bearing, weld a stainless steel sheet to the bottom surface of the sole plate.

Replace the bullet that begins "**Lower Unit** - The lower unit ..." with the following bullet:

- **Lower Unit** - The lower unit consists of a masonry plate permanently anchored to the structural support and a base plate attached to the masonry plate with cap screws. A separate masonry plate and base plate are not necessary for Fabric Pad Bearings fabricated as outlined in 00582.27, third paragraph.

Replace the bullet that begins "The base pot of a Pot ..." with the following bullet:

- Weld the base pot of a Pot Bearing, the lower bearing plate of a Disc Bearing, or the convex plate of a Spherical Bearing to the base plate.

Replace the bullet that begins "For Guided or Nonguided ..." with the following bullet:

- For Guided or Nonguided bearings, furnish a polytetrafluoroethylene (PTFE) sheet recessed into and bonded to the top surface of the piston of a Pot Bearing, the upper bearing plate of a Disc Bearing, the top surface of the concave plate of a Spherical Bearing, or a steel backing plate bonded to the top surface of a fabric pad forming a sliding surface with the stainless steel surface of the sole plate.

Replace the bullet that begins "For Fixed bearings ..." with the following bullet:

- For Fixed bearings, weld the piston of a Pot Bearing, the upper bearing plate of a Disc Bearing, or the concave plate of a Spherical Bearing to the sole plate.

Replace the paragraph that begins "Provide bearings that accommodate ..." with the following paragraph:

Furnish bearings that accommodate the loads, movements, and rotations as shown.

00582.21 Disc Bearings - Replace this subsection, except for the subsection number and title, with the following:

Design Disc Bearings according to the following:

- Furnish the shear restriction mechanism that allows free rotation but prevents any shear being applied to the rotational element.
- Furnish guided bearings that resist the total horizontal load at the bent or hinge where it is located.

00582.25(b) Polytetrafluoroethylene Rotational Surface for Spherical Bearings - Replace this subsection, except for the subsection number and title, with the following:

Use only woven PTFE having a minimum thickness of 1/8 inch. Recess the PTFE 1/16 inch into the spherical element.

Furnish PTFE fabric having a minimum thickness of 1/16 inch when measured according to ASTM D1777.

00582.25(c) Stainless Steel Sliding Surfaces - Replace the paragraph that begins "Provide a flat stainless ..." with the following paragraph:

Provide a flat stainless steel sliding surface that completely covers the PTFE surface in all operating positions, plus at least 2 inches more in every direction of possible movement.

00582.26 Guide Bars for Composite Bearings - Replace the paragraph that begins "Provide a sliding surface ..." with the following paragraph:

Provide a sliding surface between the Guide Bars and the guide element made of polished stainless steel against virgin PTFE. Bond and mechanically fasten the virgin PTFE to the Guide Bars. Provide Guide Bars that:

00582.27 Sole, Base, Distribution, and Masonry Plates for Composite Bearings - Replace the paragraph that begins "For Fabric Pad Bearings ..." with the following paragraph:

For Fabric Pad Bearings, fasten keeper bars at least 1/4 inch thick to the top surface of the base plate, around the perimeter of the fabric pad, with high-strength cap screws. Provide a gap at all bar ends to allow drainage.

Replace the paragraph that begins "Provide studded anchors ..." with the following paragraph:

Furnish studded anchors or threaded bolts, as shown or specified, to anchor the masonry plates to the supported and supporting members. Locate anchoring devices to avoid conflict with metal reinforcement and prestressing systems.

00582.32(a) Steel Backing Plate - Replace the paragraph that begins "Minimum thickness of ..." with the following paragraph:

The minimum thickness of the steel backing plate is 3/8 inch.

00582.35(a) Polytetrafluoroethylene Sliding Surfaces - Replace the paragraph that begins "After completion of the ..." with the following paragraph:

After completion of the bonding operation, ensure the PTFE surface is smooth and free of bubbles.

00582.36 Guide Bars for Composite Bearings - Replace the paragraph that begins "Construct Guide Bars parallel ..." with the following paragraph:

Insert Project Name Here

Construct Guide Bars parallel to the surface where they bear and to other Guide Bars to within a tolerance of plus or minus 1/32 inch for the full length of the bar.

00582.39(a) Pads - Replace this subsection, except for the subsection number and title, with the following:

Pads 1/2 inch and less in thickness are to be made entirely of elastomer. Pads over 1/2 inch in thickness consist of alternate laminations of elastomer and metal.

00582.39(b) Pad Sizing - Replace this subsection, except for the subsection number and title, with the following:

Mold pads individually to the sizes required. No shearing to size or drilling of holes is allowed except pads 1/2 inch and less in thickness may be sheared.

00582.39(c) Tolerances and Finishes - Replace this subsection, except for the subsection number and title, with the following:

Provide tolerances and finishes according to 02571.20(d).

00582.50(b) Elastomeric Bearings - Replace the paragraph that begins "Construct bearing seats ..." with the following paragraph:

Construct bearing seats for Elastomeric Bearings parallel to the bottom surfaces of the members that will bear on them. Install as follows:

00582.90 Payment - Replace the paragraph that begins "In item (a) ..." with the following paragraph:

In item (a), the type "disc", "fabric pad", "pot", "spherical" of Composite Bearing device is inserted in the blank.

Replace the paragraph that begins "In item (b) ..." with the following paragraph:

In item (b), for steel-reinforced elastomeric bearing pads, the width of bearing pad is inserted in the first blank, the length of the bearing pad is inserted in the second blank, and the thickness of the bearing pad is inserted in the third blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00583 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP02560)**

SECTION 00583 - ELECTRICAL CONDUIT ON STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00583 of the Standard Specifications modified as follows:

00583.03 Submittals - Replace the paragraph that begins "Submit detailed descriptions ..." with the following paragraph:

Submit detailed descriptions of all Materials to the Agency according to 00150.37 at least 21 Calendar Days before the scheduled start of the Work. Identify all relevant constituents and properties of each Material and the Specifications that it complies with. Data published by the manufacturer is acceptable.

00583.10(a) Extruded PVC - Replace this subsection, except for the subsection number and title, with the following:

Extruded PVC electrical conduit and factory bent elbows according to UL 651. Furnish gray conduit and elbows. Furnish solvent cement according to ASTM D2564 or as recommended by the conduit manufacturer.

00583.10(b) Hot-dip GRC - Replace this subsection, except for the subsection number and title, with the following:

Hot-dip GRC and elbows according to UL 6 and ANSI C80.1 with each end threaded per ANSI B1.20.1. Factory threads are to be hot-dip galvanized after cutting. Conform coating thickness to ASTM A153.

00583.10(c) 316 SS RMC - Replace this subsection, except for the subsection number and title, with the following:

316 SS RMC and elbows according to UL 6A and ANSI C80.1 with each end threaded per ANSI B1.20.1.

00583.10(d) RTRC - Replace this subsection, except for the subsection number and title, with the following:

RTRC and elbows according to UL 2515 for above ground applications. Furnish conduit with UV stabilized gray pigmented resin. Furnish a joint adhesive recommended by the manufacturer.

00583.10(e) LFNC - Replace this subsection, except for the subsection number and title, with the following:

LFNC according to UL1660.

Insert Project Name Here

00583.11 Fittings and Conduit Bodies - Replace the paragraph that begins "Furnish fittings and conduit ..." with the following paragraph:

Furnish fittings and conduit bodies according to UL 514B. Furnish conduit bodies with a weather tight gasket and expansion fittings with a weather tight seal. Set screw type fittings and conduit bodies are not allowed. Furnish fittings and conduit bodies meeting one of the following requirements:

00583.12(a) PVC or Thermoplastic - Replace this subsection, except for the subsection number and title, with the following:

PVC or thermoplastic according to NEMA 250 Type 4X. Furnish gray junction boxes.

00583.12(b) Galvanized Steel - Replace this subsection, except for the subsection number and title, with the following:

Galvanized steel according to NEMA 250 Type 4. Coating thickness according to ASTM A153.

00583.12(c) 316 SS - Replace this subsection, except for the subsection number and title, with the following:

316 SS according to NEMA 250 Type 4X

00583.12(d) GFRP - Replace this subsection, except for the subsection number and title, with the following:

GFRP according to NEMA 250 Type 4X.

00583.13(b) 316 SS - Replace the paragraph that begins "316 SS wedge type anchors ..." with the following paragraph:

316 SS wedge type anchors, bolts, threaded rod and nuts according to ASTM A193/194, Grade B8M, B8MA, B8M2, or B8M3, Class 1, 1A, 1D, or 2 or ASTM F593/594 Group 2 Condition CW. Furnish 316 SS channel strut, hangers, clamps, support straps, and coil inserts, and washers.

00583.16 Pull Line - Replace the bullet that begins "Furnish nylon, ..." with the following bullet:

- Furnish nylon, polypropylene, or polyester pull line or rope with a minimum tensile strength of 1,000 pounds.

00583.40 General - Replace the bullet that begins "Any other local rules ..." with the following bullet:

- Any other local rules, regulations and ordinances that may apply

Replace the paragraph that begins "Metallic raceways, fittings ..." with the following paragraph:

Insert Project Name Here

Furnish metallic raceways, fittings, boxes, and cabinets free from contact with reinforcing steel.

00583.44 Joints and Terminations - Replace the paragraph that begins "Join RTRC conduit using ..." with the following paragraph:

Join RTRC conduit using adhesive and fittings according to all manufacturer's recommendations.

00583.90 Payment - Replace the paragraph that begins "In items (a), (b), (c) ..." with the following paragraph:

In items (a), (b), (c), and (d) the nominal size of the pipe is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00584 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

This requires SP00501)

SECTION 00584 - ELASTOMERIC CONCRETE NOSING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00584 of the Standard Specifications modified as follows:

00584.00 Scope - Add the following paragraph to the end of this subsection:

This Work also includes the replacement of existing elastomeric concrete nosing as shown and specified.

00584.10 Materials - Replace the paragraph that begins "Provide Materials delivered ..." with the following paragraph:

Furnish Materials delivered in their original, undamaged containers bearing the manufacturer's label with the following information:

Replace the paragraph that begins "Provide sufficient Materials in storage ..." with the following paragraph:

Insert Project Name Here

Furnish sufficient Materials in storage at the site prior to beginning construction to complete the entire elastomeric concrete nosing as detailed on the Plans or as directed. Store the Materials to prevent damage by the elements and to ensure the Materials maintain their original quality.

00584.30 Manufacturer's Representative - Replace the paragraph that begins "Provide a manufacturer's representative on-site ..." with the following paragraph:

Provide a manufacturer's representative on-site during the installation of the elastomeric concrete nosing. The manufacturer's representative is either someone independent of the Contractor's work force or a member of the Contractor's work force that possesses certification from the manufacture that the Contractor's representative has the knowledge, skills, and training to install the elastomeric concrete nosing. Discuss the Work to be done with the manufacturer's representative to review the methods of installation and the Equipment needed before beginning the Work.

Replace the paragraph that begins "The representative shall..." with the following paragraph:

The representative makes recommendations to both the Engineer and the Contractor on proper installation procedures to assure correct installation of the elastomeric concrete nosing.

00584.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

The quantities of Work performed under this Section will be measured according to the following:

(a) Elastomeric Concrete Nosing Material - Elastomeric concrete nosing Material will be measured on the volume basis for Material placed in the nosing. When using a mobile mixer, the quantities will be determined by converting the weight identified on the mixer's automatic metering device to volume, using the manufacturer's published unit weight and yield factor. When hand batching, the quantities will be determined based on volumes calculated by batch weights and published unit weights of the Material. If placed monolithically with a premixed polymer concrete overlay, the volume will be calculated by multiplying the average depth of the nosing by the measured area.

(b) Constructing Elastomeric Concrete Nosing - Constructing elastomeric concrete nosing will be measured on the area basis. The length will be determined by measuring from face of curb to face of curb along the centerline of the joint. The width will be determined by measuring to the outer limits of the installed Material perpendicular to the joint. Subtract the area of the joint opening from the area calculation.

Joint seal Material will be measured according to 00585.80.

00584.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Insert Project Name Here

Pay Item

Unit of Measurement

- (a) Elastomeric Concrete Nosing Material Cubic Foot
- (b) Constructing Elastomeric Concrete Nosing Square Foot

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Joint seal Material will be paid for according to 00585.90.

No separate or additional payment will be made for providing the manufacturer's representative.

SP00585 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-23-26

Requires SP02001, SP02440 & SP02530

**Requires SP02570 when elastomer, PTFE and
stainless steel sliding surfaces are required.**

Requires SP02690 when PCC Aggregate is required.)

SECTION 00585 - EXPANSION JOINTS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00585 of the Standard Specifications modified as follows:

(Use the following subsection .00 when replacing a gland in existing strip seals or reconstruction of joint surfaces.)

00585.00 Scope - Add the following paragraphs to the end of this subsection:

(Use the following paragraph when replacing glands.)

This Work also consists of replacing glands in existing strip seals.

(Use the following paragraph when reconstructing joint surfaces.)

This Work also includes concrete removal and reconstruction of joint surfaces and edges as shown.

00585.01 Definitions - Add the following paragraph after the paragraph that begins “Asphaltic Plug Joint...”

Insert Project Name Here

Bonded Preformed Silicone Seal - A Closed Joint system consists of a preformed silicone seal bonded to joint surfaces with epoxy adhesive recommended by the joint manufacturer to complete the joint system.

Replace the paragraph that begins “**Filled Joint...**” with the following paragraph:

Filled Joint - A joint using a preformed joint filler placed prior to concrete pour. Hot applied joint sealant or poured joint seal may be placed on top of the joint filler.

Add the following paragraph after the paragraph that begins “**Filled Joint...**”

Hot Applied Joint Seal - A joint filled with hot applied, single component sealant.

Replace the paragraph that begins “**Poured Joint Seal ...**” with the following paragraph:

Poured Joint Seal - A Closed Joint seal made of Materials that remain flexible that is poured into the gap of a joint and adheres to the sides of the gap.

Replace the paragraph that begins “**Precompressed Foam Silicone ...**” with the following paragraph:

Precompressed Foam Silicone Joint Seal - A Closed Joint system consisting of a preformed, pre-compressed, silicone-coated, self-expanding foam joint system bonded to joint faces using epoxy adhesive.

Replace the paragraph that begins “**Preformed Compression Joint ...**” with the following paragraph:

Preformed Compression Joint Seal - A preformed elastomeric device that is precompressed in the gap of a joint to form a Closed Joint.

00585.02(b) Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

At the pre-construction conference, submit the following:

- Joint installer personnel certifications(s) from the manufacturer affirming that the installers have been trained in application methods of Materials and health and safety to install Closed Joints as detailed.
- A letter from the manufacturer affirming that the technical representative is qualified to provide technical assistance regarding expansion joint installation.

(Use the following subsection .02(d) when replacing a gland)

Add the following subsection:

00585.02(d) Gland Replacement - At least 21 Calendar Days before starting Work, submit the following:

- The manufacturer’s recommended gland.

Insert Project Name Here

- Material specifications. Published product data sheet is acceptable.
- Preparation plan for gland retainer.
- Installation procedure.

00585.10 Materials - Add the following Material to the Material list:

Bonded Preformed Silicone Seal02440.24
Portland Cement Concrete Repair Material.....02015

00585.11 Concrete for Blockout Opening - Replace this subsection with the following subsection:

00585.11 Material for Blockout Opening - Fill blockout openings with the same class and type of concrete used in the deck, unless otherwise shown.

For joint surface reconstruction, fill openings with Material as shown or specified. If not shown, fill openings with one of the following Materials:

- Structural polymer concrete with a minimum compressive strength of 10 ksi, a minimum tensile strength of 1 ksi, and a minimum modulus of elasticity of 2,500 ksi.
- High early strength concrete (HESC), Class HESC4000 – 3/4 inch, designed according to Section 02001. Incorporate the following:
 - Rapid hardening hydraulic cement meeting the requirements of Section 02011.
 - Aggregate meeting the requirements of Section 02690.
 - Macro fibers meeting the requirements of 02045.20.
- Portland cement concrete repair materials meeting the requirements of Section 02015.

00585.30(b) Expansion Joint Seal Manufacturer's Representative - Replace this subsection with the following subsection:

00585.30(b) Expansion Joint Seal Manufacturer's Technical Representative - Provide a manufacturer's technical representative during the Work. Prior to beginning the Work, discuss with the representative regarding the Work to be done, methods of installation, installation procedures, and required Equipment to assure correct expansion joint installation. Ensure the manufacturer's technical representative remains available for consultation until the completion and acceptance of the Work. For strip seals, the manufacturer's technical representative is required to be on-site during the Work.

00585.42(c) Joint Preparation - Replace the paragraph that begins "For joint replacement, remove..." with the following paragraph:

For joint replacement, remove joint material from existing joints and clean the existing joints full depth and full width as directed by the Engineer. If existing joint surfaces have spalled, cracked, or deteriorated concrete, repair as shown or directed to provide a uniform and smooth surface. Unless otherwise shown or directed, epoxy inject cracks according to Section 00538 and repair surfaces using an approved PCC repair material.

(Use the following two paragraphs when replacing glands.)

Insert Project Name Here

Add the following paragraphs to the end of this subsection:

For gland replacement in existing strip seals, remove existing gland and prepare existing joint surfaces as specified and according to the joint manufacturer's recommendations. Ensure that steel edgebeam and retainer surfaces to receive a new gland are sound, dry, clean, and frost-free at the time of joint installation.

(Use the following two paragraphs when reconstructing joint surfaces.)

Add the following paragraphs to the end of this subsection:

For joint surface reconstruction, remove existing joint surface as shown or specified. Prepare the concrete surface according to the manufacturer's recommendations and ICRI *Guideline No. 310.2R*. Shotblast or sandblast the final surface to a CSP 5-7.

00585.43 Armored Corners – Replace the title of this subsection with “**Armored Corners and Edgebeam**”

Replace the paragraph that begins "Provide joint corner armoring ..." with the following paragraph:

Furnish joint corner armoring or Edgebeam with anchors as shown or specified, and according to the following:

00585.43(a) Tolerance - Replace the paragraph that begins "Install armored corners that are straight..." with the following paragraph:

Install Armored Corners or Edgebeams that are straight and do not deviate from a true line by more than 1/4 inch horizontal and 1/8 inch vertical over the length of the joint, nor more than 1/16 inch in either direction from a 12-foot straightedge.

00585.43(b) Installation - Replace the paragraph that begins "Furnish armored corners in the longest ..." with the following paragraph:

Furnish Armored Corners or Edgebeams in the longest practical length as controlled by transportation and installation.

Replace the paragraph that begins "For new construction, install armored ..." with the following paragraph:

For new construction, install Armored Corners or Edgebeams with anchors in preformed blockouts at least 14 Days after the deck is cast with the joint opening as shown. Support the Armored Corners or Edgebeams securely in position before placing concrete in the joint blockout. Install the preformed seal at least 7 Days after the concrete blockouts have been cast and after the deck concrete reaches 3,000 psi.

00585.44 Asphaltic Plug Joint Seal - Replace the bullet that begins "Provide a clean, intact ..." with the following bullet:

- Provide a clean, intact, and plane surface to place the steel bridging plate on.

00585.47 Strip Seal - Replace the bullet that begins "Use steel retainers acting ..." with the following bullet:

- Use steel retainers acting as the Edgebeams according to 00585.43.

00585.48 Precompressed Foam Silicone Joint Seal - Replace the paragraph that begins "Install Precompressed Foam Silicone Joint ..." with the following paragraph:

Use this joint system for joint rehabilitation only, unless shown otherwise. Install Precompressed Foam Silicone Joint Seal according to the manufacturer's recommendations and the following:

00585.49 Hot-Dip Galvanizing - Replace this subsection with the following subsection:

00585.49 Bonded Preformed Silicone Seal - Use this joint system for joint rehabilitation only, unless shown otherwise. Install Bonded Preformed Silicone Seal according to the manufacturer's recommendations and the following:

- Ensure that top of joint system is at a minimum distance below deck surface as shown.
- Install joint seal in one continuous strip that extends across the full roadway width and into the bridge rails without splices.

00585.50 Control Joint - Replace this subsection with the following subsection:

00585.50 Hot Dip Galvanizing - Hot dip galvanize steel expansion joint surfaces, except stainless steel, according to AASHTO M 111 (ASTM A123).

Furnish contact surfaces at all galvanized slip critical structural bolted connections meeting Class C (slip coefficient 0.33) surface preparation requirements.

Add the following subsection:

00585.51 Control Joint - Construct Control Joints as shown. If details of the Control Joint are not shown, sawcut the surface 1 1/2 inches deep and 1/2 inch wide. Flush the sawcut thoroughly with a high-pressure water stream after the cut has been made. Before the cut dries out, blow it free of water and debris with compressed air. Fill the sawcut joint with a hot applied joint sealant from the QPL.

Add the following subsection:

00585.52 Hot Applied Joint Seal Replacement - Remove existing hot applied joint sealant from joint. Clean and repair joint surfaces and edges. Install hot applied joint sealant from the QPL and according to the manufacturer's recommendations.

Add the following subsection:

00585.53 Joint for Sidewalk, Multi-Use Path, or Other Facility Intended for Pedestrian Travel - Furnish an expansion joint seal having a firm, stable, and slip resistant top surface, not more than 3/8 inch below finished surface.

Insert Project Name Here

For joint seals installed greater than 1/4 inch below finished surface, bevel the joint surface corners with a Slope not steeper than 1V:2H.

For Precompressed Foam Silicone Joint Seals, furnish a joint seal having at least double width of the seal designed for the joint size. Install the joint seal according to the manufacturer's recommendations.

For joint openings 3 inches or wider, design and detail a steel cover plate for facilities with a Pedestrian Accessible Route, Temporary Pedestrian Accessible Route, Multi -Use Path, or other structures intended for pedestrian travel. Hot-dip galvanize the steel plate and provide a slip-resistant surface or coating. Limit the elevation change between the steel plate and deck surface with a vertical face to 1/4 inch not to exceed 1/2 inch. When the elevation change is greater than 1/4 inch, bevel the steel plate corners to a Slope not steeper than 1V:2H.

(Use the following subsection .54 when replacing a gland.)

Add the following subsection:

00585.54 Gland Replacement - Field verify existing gland cavity profile before ordering new gland and construction. Install a replacement gland in one continuous strip, extending across the full Roadway width and into curb joints without splices and according to the manufacturer's recommendations.

00585.80 Measurement - Replace the paragraph that begins "No measurement of ... with the following paragraph:

No measurement of quantities will be made for joints, gland replacement for strip seals, or joint surface reconstruction. Estimated quantities of joints, gland replacement, and joint surface reconstruction are listed below. The listed quantities are based on the theoretical horizontal length from gutter line to gutter line.

Add the following to the end of the subsection:

The estimated quantities of joints are:

(List all applicable joint types, e.g. expansion joints, control joints, or hot applied joint sealant, as the Pay Item name. Obtain information from the Bridge Designer.)

Structure	Joint Type	Quantity (Foot)
Bridge No. _____		
Bridge No. _____		

The estimated quantities of gland replacements are:

Structure	Joint Type	Quantity (Foot)
-----------	------------	--------------------

Insert Project Name Here

Bridge No. _____
Bridge No. _____

Strip Seals
Strip Seals

The estimated quantities of joint surface reconstruction are:

(List Material type for the joint surface reconstruction, i.e. structural polymer concrete, HESC, or PCC, as the Pay Item name. Obtain information from the Bridge Designer.)

Structure	Material Type	Quantity (Cubic Yard)
Bridge No. _____		
Bridge No. _____		

(Delete pay item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the pay items. Also delete the paragraph that begins with "Item (x) includes..." for the corresponding pay item(s) that are being deleted. Update the lead-in sentence to have the correct number of paragraphs listed. Select the appropriate unit of measurement, delete the one that does not apply, and delete all purple parentheses.)

00585.90 Payment - Replace Pay Item (h) with the following Pay Item:

(h) Hot Applied Joint Seal Replacement..... Lump Sum

Add the following Pay Items to the Pay Item list:

(i) Bonded Preformed Silicone Seal Lump Sum
(j) Gland Replacement Lump Sum
(k) Removal of Existing Joint Surfaces..... Lump Sum
(l) Joint Surface Reconstruction Lump Sum

Replace the paragraph that begins "In item (d) ..." with the following paragraph:

In item (d), the type of compression joint seal is inserted in the blank.

Add the following (four) paragraphs after the paragraph that begins "In item (d), the....":

Item (g) includes sawcutting and hot applied joint sealant.

Item (h) includes removing existing seal material, cleaning joint, repairing joint surfaces and edges, and installing hot applied joint sealant.

Item (j) includes removing existing gland material, cleaning and repairing steel edgebeam and retainer surfaces, and furnishing and installing the new gland.

Item (k) includes removing concrete and existing Armored Corner or Edgebeams, if applicable, for new blackout opening.

Insert Project Name Here

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Add the following four paragraphs after the paragraph that begins "Payment will be payment....":

Elastomeric concrete nosing incorporated in the Work will be paid for according to 00584.90.

Payment for steel reinforcing will be paid for according to 00530.90.

Payment for concrete will be paid for according to 00540.90.

Modification to existing gland retainer Edgebeam or expansion joint type change will be paid for according to 00195.20.

In the paragraph that begins "No separate or additional payment...", replace the bullet beginning with "elastomeric concrete ..." with the following bullet:

- structural patching material used to provide a smooth contact surface with joint seals, to provide a plane surface on which to place the steel bridging plate, or to make level surfaces between joint.

In the paragraph that begins "No separate or additional payment...", add the following bullet to the end of the bullet list:

- Furnishing and installing hot-dip galvanized steel cover plate with slip-resistant surface or coating for facilities with a Pedestrian Access Route.

SP00586 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26
Requires SP02440, SP02530,
and SP02570)**

SECTION 00586 - EXPANSION JOINTS, MODULAR

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Section 00586 is not a Standard Specification and is included in this Project by Special Provision.

Description

00586.00 Scope - This Work consists of designing, fabricating, testing, and installing modular bridge joint systems (MBJS) according to the geometry and movements shown and specified.

00586.01 Acceptable Manufacturers - Select one of the following pre-approved manufacturers of MBJS:

(List qualified modular bridge joint system manufacturers. Obtain information from the bridge joint specialist.)

_____, (manufacturer name) _____, telephone: _____

_____, (manufacturer name) _____, telephone: _____

_____, (manufacturer name) _____, telephone: _____

00586.02 Design Requirements - Design MBJS according to the AASHTO *LRFD Bridge Design Specifications* and interim revisions and the following:

- Design and detail MBJS to provide inspection and maintenance access to all internal components.
- Detail MBJS to provide at least 3 inches of concrete, with reinforcement over the top of support boxes. Provide sufficient top plate thickness to prevent concrete cracking over the support boxes.
- Detail MBJS and bridge deck steel reinforcement to assure concrete consolidation can be achieved underneath all support boxes.
- Detail expansion joint seals so that they do not protrude above the top of the expansion joint system under any service condition. Split extrusions may be used at curb upturns.
- Design elastomeric or urethane springs and bearings to be removable and replaceable. Furnish extruded elastomeric seals that can be removed and reinstalled from above the joint with at least a 1 1/4-inch gap width. Install seals in one continuous strip, extending across the full roadway width and into the curbs without splices.
- Design MBJS to be watertight.
- Design and detail MBJS to accommodate all movements shown.
- Design and detail a steel cover plate for facilities with a pedestrian access route (as defined in 00759.00), Temporary Pedestrian Accessible Route, or Multi-Use Path intended for pedestrian travel. Hot-dip galvanize the steel plate and furnish a slip-resistant surface or coating. Limit the elevation change between the steel plate and deck surface with a vertical face to 1/4 inch not to exceed 1/2 inch. When the elevation change is greater than 1/4 inch, bevel the steel plate corners to a slope not steeper than 1V:2H.

00586.03 Submittals - Submit stamped Working Drawings, design calculations, and the following for the MBJS:

Insert Project Name Here

- Plan, elevation, and section of the MBJS for each movement rating and bridge deck width. Specify all dimensions and tolerances.
- Sections showing all materials composing the MBJS with complete details of all individual components including all bolted and welded shop splices and connections.
- All ASTM, AASHTO, or other material designations.
- Installation plan including sequence, lifting mechanisms and locations, details of temporary anchorage during setting, temperature adjustment devices, opening dimensions relative to temperature, installation details at curbs, and seal installation details.
- Plan for achieving and testing water tightness.
- Details and material designations pertinent to the corrosion protection system.
- Requirements and details related to temporary support of the MBJS for shipping, handling, and job site storage.
- Design calculations for all structural elements including all springs and bearings. Include calculations for fatigue design for all structural elements, connections, and splices.
- Welding procedures comply with AWS D1.5.
- A written maintenance and part replacement plan, including drawings, to facilitate replacement of parts subject to wear. Include a list of parts, instructions for maintenance inspection, acceptable wear tolerances, methods for determining wear, procedures for replacing worn parts, and procedures for replacing seals.
- Any required modifications to blockout reinforcing steel to accommodate the MBJS.
- Design and details for MBJS temperature adjustments. Specify each MBJS gap width set to correspond with the ambient temperature at the time of setting.
- Design and details for positioning the MBJS in the block-outs to provide a minimum of 3 inches clearance between the block-out surface and the bottom of support boxes for concrete placement.
- Documentation that the manufacturer is certified through the AISC Quality Certification Program under the category Highway Component Manufacturer.
- Documentation that welding inspection personnel are qualified and certified as welding inspectors according to AWS QC1.
- Documentation that personnel performing nondestructive testing (NDT) are qualified and certified as NDT Level II under the American Society for Nondestructive Testing (ASNT) Recommended Practice SNT-TC-1a.
- Manufacturer's certificate of compliance for all polytetrafluoroethylene (PTFE) sheeting, PTFE fabric, and elastomer.
- Certified mill test reports for all steel and stainless steel in the MBJS assemblies.
- Certified test reports confirming that the springs and bearings meet the design load requirements.
- A Quality Assurance Inspection program performed by an independent inspection agency provided by the MBJS manufacturer. Include the name of the independent inspection agency, details of the proposed inspection program including inspection frequency, and all applicable reporting forms.

Insert Project Name Here

- A temporary bridging method for each MBS where traffic is anticipated to cross before joint concrete has fully cured.

Materials

00586.10 Materials - Furnish MBS Materials meeting the following requirements:

Elastomeric Strip Seal	02440.20
Lubricant and Adhesive	ASTM D4070
Polytetrafluoroethylene (PTFE)	02570.10
Stainless Steel Sliding Surfaces	02570.10
Structural Steel	02530.20

00586.20 Tests - Test MBS according to AASHTO *LRFD Bridge Construction Specifications*, Appendix A19. Perform the following tests:

- Open Movement and Vibration (OMV) Test
- Seal Push-Out (SPO) Test
- Fatigue test

Labor

00586.30 Manufacturer's Representative - Provide a manufacturer's representative on-site during installation of each MBS.

The representative duties include:

- Discussing the Work to be done, the methods of installation, and the required Equipment to use.
- Advise the Engineer and the Contractor on proper installation procedures to assure correct installation of each MBS.

Construction

00586.40 Installation - Install MBS according to the manufacturer's approved Working Drawings and the recommendations of the manufacturer's representative and the following:

- Install each MBS to match the finished bridge deck profile and grades.
- Protect each MBS from damage and protect concrete blockouts and supporting systems from damage and construction traffic prior to installation. Do not apply any construction loads on the MBS until installation is complete.
- Set each MBS gap width to correspond with the ambient temperature at the time of setting.
- Remove all forms and debris that may impede movement of the MBS.

00586.47 Watertightness Test - Test each MBS for watertightness after installation. Flood each completed MBS with water to at least 3 inches deep for 1 hour. If leakage is observed, repair the joint at no additional cost to the Agency according to the manufacturer's recommendations. Repeat the watertightness test after repairs are complete.

Insert Project Name Here

00586.48 Manufacturer's Representative Certification - When the MBS installation is complete and accepted, provide written certification from the manufacturer's representative stating that each MBS was installed according to the manufacturer's recommendations and the approved Working Drawings.

Measurement

00586.80 Measurement - No measurement of quantities will be made for modular bridge joints.

The estimated quantities of modular bridge joints are:

(List the structure number and quantities for modular bridge joints. Obtain information from the Bridge Designer.)

Structure	Quantity (Feet)
Bridge No. _____	
Bridge No. _____	

Payment

00586.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Modular Bridge Joint Systems".

Payment will not be made before joints have passed the watertightness test. No payment will be made for any Material installed as replacement Material for that removed, unless the Engineer determines that the reason for the removal was beyond the Contractor's control, or that the Plans specifically required the removal.

Payment will be payment in full for designing, furnishing, and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for providing the manufacturer's representative.

SP00587 (Special Provisions for the 2024 Book) (Bidding on or after: 12-01-26
Last updated: 08-25-26
Requires SP02001, SP02530, SP2560,
and SP02810.
Requires SP01050 and SP03010 when
protective fence or ornamental protective fence is required.)

SECTION 00587 - BRIDGE RAILS

Insert Project Name Here

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00587 of the Standard Specifications modified as follows:

00587.00 Scope - Replace the paragraph that begins "Bridge rails will be ..." with the following paragraph:

Bridge rails are classified as concrete or steel according to the predominant Material used in the rail.

(Use the following two paragraphs when protective fencing is included on the Project)

Replace the paragraph beginning "This Work consists of..." with the following:

This Work consists of constructing bridge rails and protective fence of the Material or combination of Materials shown or specified.

(Use the following two paragraphs when ornamental protective screening is included on the Project.)

Add the following to the end of this subsection:

Work also includes ornamental protective screening, of the Material or combination of Materials, as shown or directed.

(Use the following subsection .01 when protective fence or ornamental protective screening is required.)

Add the following subsection:

00587.01 Definitions -

Panel - A Panel is a portion of screening between adjacent posts.

Run - A Run is the length of fence between end posts, intermediate posts and corner posts.

(Use the following subsection .10 when protective fence or ornamental protective screening is required.)

00587.10 Materials - Add the following to the end of this subsection:

Fasteners	02560
Fencing Materials	03010
Resin Bonded Anchor System	00535.10
Structural Steel.....	02530

Insert Project Name Here

(Add the following paragraph when vinyl coated fabric fencing without exact color matching is required. Indicate the color within the parentheses. Fill in the blank with black, dark green, or brown. Delete all purple parentheses.)

Provide PVC coating of the color (____). Provide coated fencing materials of matching color.

00587.42(a) General - Replace the bullet that begins "Construct expansion joints ..." with the following bullet:

- Construct expansion joints that permit freedom of movement. After all other Work is completed, use a sharp chisel to remove all loose or thin shells of concrete likely to spall under movement at expansion joints.

00587.42(b) Fixed Forms - Replace this subsection, except for the subsection number and title, with the following:

Provide forms that are smooth and tight fitting, rigidly held in line and grade, and removed without damage to the concrete. Make form joints in vertical planes. Construct all moldings, panel Work, and bevel strips as shown. Make corners in the finished Work true, sharp and free from cracks, spalls or other defects.

00587.42(c) Slipformed - Replace the paragraph that begins "Concrete rails may be ..." with the following paragraph:

Concrete rails may be slipformed if the Plans contain details for slipforming. Before slipforming any permanent rail, meet one or both of the following requirements (1) and (2) as directed:

00587.42(c)(2) Replace the bullet that begins "Provide concrete with ..." with the following bullet:

- Furnish concrete with a slump of 1 inch $\pm$ 1/2 inch.

00587.43(a) Construction - Replace this subsection, except for the subsection number and title, with the following:

Furnish structural steel tubing, tube or metal thrie beam rail as shown or specified. Fabricate and erect metal rails according to Section 00560. Adjust metal rails before fixing in place to ensure proper matching at abutting joints and correct alignment and Camber throughout their length.

(Use the following subsection .44 when protective fencing is required.)

Add the following subsection:

00587.44 Protective Fence:

(a) Posts and Braces - Set all metal end posts, intermediate end posts, and chain link fence posts as shown.

(b) Chain Link Fence Fabric and Wire - Assemble and install chain link Fence fabric and wire according to 01050.45(c).

(c) Welding - Weld according to AWS D1.1 Structural Welding Code.

(d) Resin Bonded Anchor System - Place posts and fully cure all resin bonded anchors before installation of the screening panels. Install anchors according to Section 00535.

(Use the following paragraph when gates are required)

(e) Gate - Install gates according to 01050.48.

[Option 1 – Use the following option when only one structure requires coating]

(f) Coatings -

(Use the following paragraph when vinyl coated fabric fencing is required.)

Apply coatings from the QPL with approximate top coat color of provided Fencing Material to galvanized or uncoated fasteners and Fencing Material hardware and repair coating damage due to handling and erection according to 00594.60 after installation. Follow all fencing and coating manufacturer recommendations.

(Use the following paragraph when precise top coat color or additional corrosion protection is required. Include SP00593 where top coat color is specified.

Powder coat Fencing Materials according to Section 00593. Apply coatings from the QPL with identical top coat color to fasteners, exposed portions of resin bonded anchors and other uncoated or galvanized components and repair damage due to handling and erection according to 00593.60 after installation. Follow all coating manufacturer recommendations.

[End Option 1]

[Option 2 – Use the following option when multiple structures require coating. Indicate structure number(s) to which each paragraph applies. Insert the structure number(s) and delete all purple parentheses.]

(f) Coatings -

(Use the following paragraph when vinyl coated fabric fencing is required.)

For Structure(s) (_____) apply coatings from the QPL with approximate top coat color of provided Fencing Materials to galvanized or uncoated fasteners and Fencing Material hardware and repair coating damage due to handling and erection according to 00594.60 after installation. Follow all fencing and coating manufacturer recommendations.

(Use the following paragraph when precise top coat color or additional corrosion protection is required. Include SP00593 where top coat color is specified.

Insert Project Name Here

For Structure(s) () powder coat Fencing Materials according to 00593. Apply coatings from the QPL with identical top coat color to fasteners, exposed portions of resin bonded anchors and other uncoated or galvanized components and repair damage due to handling and erection according to 00593.60 after installation. Follow all coating manufacturer recommendations.

[End Option 2]

(Use the following subsection .45 when ornamental protective screening is required.)

Add the following subsection:

00587.45 Ornamental Protective Screening -

(a) General - Complete a check assembly for each panel of ornamental protective screening. Include all members except for welded wire mesh panels. Check assemblies based on the specified geometry, alignment and splice locations, proposed order of erection, and similar considerations that affect field erection of screening, as directed. If the check assembly fails to demonstrate that the required accuracy is being obtained, additional check assemblies may be required at no additional cost to the Agency. Acceptance of the check assembly does not relieve the Contractor of the responsibility for assuring accurate fit-up during erection.

The sequence of assembly may start from any location in the Structure and proceed in one or both directions, so long as the preceding requirements are satisfied.

Do not exceed 0.01 foot / foot difference in slope between the longitudinal channels or plates and the bridge rail for any given screening panel. Maintain the vertical alignment of wire mesh and square tubing.

Match-mark connecting parts assembled in the shop for the purpose of reaming holes in field connections, and provide a diagram showing such marks to the Engineer. Before fabrication, field verify required dimensions.

Erect ornamental fence to the lines and grades shown. The overall height of the fence when erected is the height above the grade as shown.

Place posts and fully cure all resin bonded anchors before installation of the screening panels. Install anchors in new concrete according to 00535.40.

(b) Woven Wire Fabric - Assemble and install woven wire fabric according to 01050.44.

(c) Welding - Weld according to AWS D1.1 Structural Welding Code.

(d) Coatings - Hot dip galvanize all steel frames, panels and hardware according to 02530.70 and 02560.40.

(Use the following paragraph when coatings for aesthetics or additional corrosion protection is required. Include SP00593 where top coat color is specified.)

Insert Project Name Here

When shown, powder coat ornamental protective screening according to Section 00593. Apply coatings from the QPL with identical top coat color to fasteners, exposed portions of resin bonded anchors and other uncoated or galvanized components and repair damage due to handling and erection according to 00593.60 after installation. Follow all coating manufacturer recommendations.

(Use the following paragraph when a custom ornamental protective screening requires preassembly due to unique and complex elements.)

(e) Preassembly - When shown, fabricate and preassemble ornamental protective screening components in the shop, and ream holes to specified size while the connections are assembled. Obtain approval for each assembly, including horizontal and vertical curvature, alignment, accuracy of holes, and fit of milled joints before reaming is commenced or before a numerically controlled drilled check assembly is dismantled.

00587.80 Measurement - Replace the paragraph that begins "No measurement of quantities ..." with the following paragraph:

No measurement of quantities will be made for bridge rails performed under this Section.

Add the following to the end of this subsection:

The estimated quantity of bridge rail is:

(List rail type as the Pay Item name. Obtain information from the Bridge Designer.)

Structure	Rail Type	Quantity (Foot)
Bridge No. _____		
Bridge No. _____		

(Use the following paragraph when protective fence or ornamental protective screening is required.)

Bridge protective fence or ornamental protective screening will be measured on the length basis. Measurement will be between beginning and ending locations as shown.

(Use the following subsection .90 when Bridge protective fence or Ornamental protective fence is required.)

00587.90 Payment -

(Use the following three paragraphs when Bridge protective fence is required.)

Add the following paragraphs after the paragraph beginning "The accepted quantities..."

Bridge protective fence will be paid for at the Contract unit price, per foot, for the item " _____ Foot Type _____ Protective Fence".

Insert Project Name Here

The height of the fence is inserted in the first blank. The type of fence is inserted in the second blank.

(Use the following two paragraphs when ornamental protective screening is required.)

Add the following paragraphs after the paragraph beginning "The accepted quantities..."

The accepted quantities of ornamental protective screening will be paid for at the Contract unit price per foot for the item "Ornamental Protective Screening".

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00588 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

**Requires SP02001, SP02080, SP02510,
SP02530 & SP02810)**

SECTION 00588 - PRECAST HISTORIC ORNAMENTAL BRIDGE RAILS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00588 is not a Standard Specification and is included in this Project by Special Provision.

Description

00588.00 Scope - This Work consists of constructing precast historic ornamental Bridge rails ("Stealth Rails") of the Material or combination of Materials shown and specified.

Precast Work includes:

- Field measurement of all existing rail segment lengths, curves, miter angles, superelevations, and Slopes
- Providing forms for cast-in-place posts
- Providing templates to locate concrete anchors to fasten precast rails to the Bridge

Cast-in-place Work includes:

- Providing and placing concrete according to Section 00530 and Section 00540 for the cast-in-place rail components
- Installing bolted connections according to Section 00560
- Installing anchor bolts and associated nuts and washers
- Applying water repellent concrete sealer

00588.02 Definitions:

Stealth Rail - Structural steel frame encased in a precast ornamental concrete rail section.

00588.03 Working Drawings - Essential elements of design and section dimensions for rail are as shown.

Submit unstamped Working Drawings for approval according to 00150.35. Include details of lifting, storage, transporting, erecting, and bracing.

Materials

00588.10 Materials - Furnish Materials meeting the following requirements:

Concrete	02001
Keyway Grout	02080.30
Reinforcement	02510
Structural Steel	02530
Structural Steel Tubing	02810.20
Synthetic Micro Fiber Reinforcing	02045.10
Pipe	02810.30

Furnish concrete containing synthetic micro fiber reinforcing at a rate of 0.75 lb/cu yd or as recommended by the fiber manufacturer.

00588.12 Acceptance of Concrete - Acceptance of concrete is according to Section 00165 and the following:

(a) Aggregate - Acceptance of Aggregate is based on the Contractor's quality control testing, if verified, according to Section 00165.

(b) Plastic Concrete - Acceptance of plastic concrete is based on tests performed by the QCT, according to Section 02001.

(c) Hardened Concrete:

(1) General - Acceptance of hardened concrete is based on analysis of compressive strength test results of cylinders cast and cured by the Contractor and tested according to AASHTO T 22 by a CSTT at an ODOT-certified laboratory and verified according to Section 00165.

(2) Sampling and Testing - Obtain a sample from a delivery vehicle, selected at random, during each Day's production for each mix design used. Test the sample for temperature, slump, density, and air content and cast at least three cylinders for testing at 28 Days. Cure the cylinders in a manner similar to the members they represent. Alternately, the cylinders may be cured in a curing chamber correlated in temperature with the concrete in the forms. Leave the cylinders in the form with the member or in the curing chamber until the member is stripped. After the member is stripped, place the acceptance cylinders in storage in a moist condition according to AASHTO R 100.

(3) Acceptance - Concrete members with an Actual Strength Test Value (ASTV) meeting or exceeding the specified design strength, f'_c , is acceptable for strength.

If the ASTV is less than f'_c but at least 85 percent of f'_c , the Engineer may review the results to determine if the member is suitable for the intended purpose. If suitable, the concrete represented by an ASTV less than f'_c may be accepted subject to a price adjustment according to 00150.25.

Concrete that has an ASTV less than 85 percent of f'_c will not be accepted. All costs of removal, replacement, and all related work are the Contractor's responsibility.

Equipment

00588.25 Vibrators - Provide either internal or external vibrators in working condition meeting the manufacturer's rating.

When epoxy coated reinforcement is used, use internal vibrators fitted with a manufactured rubber head to minimize damage to the epoxy coating.

Construction

00588.40 General - Construct Bridge rails:

- True to line, grade and dimensions shown or established, with a smooth and even top rail that does not follow any unevenness in the Superstructure.
- Vertical, rather than normal to the deck, whether the deck is superelevated or not, unless shown otherwise. Constructing rail or baluster normal to the deck requires the Engineer's approval.
- After falsework has been removed, so that the span is self-supporting.

00588.41 Forms:

(a) General - Construct forms for precast and cast-in-place components from metal or polymer Material. Furnish forms that are smooth and tight fitting, rigidly held in line and grade, and removable without damage to the concrete. Make form joints in vertical planes. Construct all moldings, panel work, and bevel strips as shown. Make corners in the finished work true, sharp, and free of cracks, spalls, and other defects.

Forms for cast-in-place base may be constructed from high density overlay (HDO) plywood.

Insert Project Name Here

Allowable construction tolerance for forms is 1/16 inch.

Construct rail post or transitions with fixed forms as shown.

Remove and replace any unsatisfactory Work at no additional cost to the Agency.

(b) Test Section - Construct a test section of precast historic ornamental Bridge rail at least 5 feet in length to demonstrate accuracy and quality of formwork and finish. With the Engineer's approval, a section of rail of similar design constructed for a previous project may be designated as the test section. Production casting will not be allowed until the test section has been approved by the Engineer.

A test section may be permanently installed in the Work if approved.

00588.42 Placing Reinforcement - Place reinforcement as shown and according to Section 00530.

00588.43 Placing Concrete:

(a) General - Place concrete so that the finished members are uniform and monolithic, free of cold joints.

Do not deposit concrete in the forms until the Engineer has inspected and approved the placement of reinforcement, conduit, and other embedded items.

Prepare forms according to 00588.41. Remove temporary struts, stays, and braces when the concrete has reached an elevation rendering them unnecessary. Remove these temporary members entirely from the forms and do not bury them in the concrete.

Place concrete close to its final position, without segregation of Materials or displacement of the reinforcement.

(b) Consolidation - Consolidate concrete, during and immediately after placing, by mechanical vibration as follows:

- Operate internal vibrators at frequencies that produce consolidated placements.
- Do not use vibration for shifting concrete to the extent of causing segregation.
- Vibrate at points uniformly spaced and not further than twice the radius over where vibration is visibly effective.
- Continue vibration until the concrete is thoroughly consolidated, but not until segregation occurs or localized areas of grout form.
- Use external vibration through a mechanical means other than internal vibrator to consolidate locations not accessible to internal vibrators.

00588.44 Curing - Cure precast members with low-pressure steam or radiant heat inside a suitable enclosure to contain the steam or heat and minimize moisture and heat loss.

(a) Curing Temperature - Measure cure temperature by one of the following methods:

(1) Measuring Enclosure Temperature - Equip the enclosure with 24-hour recording thermometers at each end of each casting bed. Record the temperature for each thermometer on a single chart for each 24-hour period.

Do not allow the curing temperature within the enclosure to exceed 160 °F. During the initial application of live steam or radiant heat, do not allow the temperature within the enclosure to increase at a rate exceeding 40 °F per hour.

(2) Measuring Concrete Temperature - Embed a thermocouple 6 to 8 inches from the top or bottom of the member on its centerline and near its midpoint.

Record the concrete temperature with a calibrated recorder that provides a continuous record of time and temperature throughout the curing cycle.

Do not allow the concrete temperature to exceed 190 °F. During the initial application of steam or radiant heat, do not allow the concrete temperature to increase at a rate exceeding 80 °F per hour.

(b) Curing with Low-Pressure Steam - Make the initial application of steam after initial set of concrete as determined by AASHTO T 197 (ASTM C403).

Provide a steam supply line to the enclosure equipped with a motor-operated modulating steam control valve operated by a temperature-sensing element located in the enclosure.

Provide steam at 100 percent relative humidity.

Do not apply steam directly on the concrete, form surfaces, or test cylinders.

Distribute the steam within the enclosure through suitable ports located on each side of the units within the enclosure at not more than 30-foot centers, to keep the units being cured completely and uniformly surrounded with steam.

(c) Curing with Radiant Heat - Radiant heat may be applied to beds by means of pipes circulating steam, hot oil, or hot water; by electric blankets or heating elements adjacent to forms; or by circulating warm air under and around forms. Do not allow pipes, blankets, or heating elements to be in contact with concrete, form surfaces, or test cylinders.

(d) General Wet Cure Requirements - Cure precast or cast-in-place Work with water. Begin curing as soon after placement as possible without damaging the freshly placed concrete. Continue curing for 7 Calendar Days after placement.

Keep surfaces not covered by waterproof forms damp by applying water with a fog nozzle until the surface has set sufficiently to allow sprinkling with water or covering with wet burlap and plastic or an approved wet or dry Material.

Do not interrupt curing for more than one hour during the cure period.

If, during the cure time, the surrounding temperature falls below 45 °F, extend the cure for the number of hours the temperature is below 45 °F.

(In the first sentence below, use “coated” for Projects including a concrete sealer. Otherwise, use “uncoated.” Delete the unused word and all parentheses.)

00588.45 Surface Finish - Provide all exposed concrete surfaces with a Class 2 surface finish (ground, floated, and (coated) (uncoated)) according to 00540.53(c). Completely fill holes and depressions at least 1/8 inch or more in depth or diameter by sacking with an approved Patching Material. Hand-scrape the patched surface with a carbide blade to the original plane surface. Color the Patching Material to match the Bridge rail. For concrete surfaces that are not exposed, provide a Class 1 surface finish according to 00540.53(c).

00588.46 Lifting, Storing, Transporting, Erecting, and Bracing - Be responsible for the safety of precast members during all stages of construction. Lifting, storage, transporting, erecting, and bracing details will not be reviewed by the Engineer. Lifting, storage, transporting, erecting, and bracing of members are the sole responsibility of the Contractor.

Lift members at the support points specified by the manufacturer and in a manner that does not cause damage, bending, or torsional forces. Members are rejected if not handled as specified.

00588.47 Anchor Location Templates - Use fabricator-supplied templates to accurately mark anchor bolt locations for drilling on the Bridge.

(Use the following subsection .48 when a concrete sealer is required.)

00588.48 Water-Repellent Concrete Sealer - Apply a clear water-repellent concrete sealer from Section 02060.30 of the QPL, containing 100 percent silane, to all exposed exterior surfaces. Prepare and coat concrete according to the sealer manufacturer's recommendations. Apply two coats of sealer at the manufacturer's minimum yield.

Apply each coat in a uniform layer, completely covering the preceding coat. Correct runs, sags, skips, and other deficiencies before applying succeeding coats. Such corrective work may require recleaning, application of additional coating Materials, or other measures as directed, at no additional cost to the Agency.

Apply coating Materials by air or airless sprayer, brush, roller, any combination of these methods, or as recommended by the coating Material manufacturer, unless otherwise specified. If air is used for application, ensure that it is free of water, oil, and any other Material detrimental to the coating system. Provide adequate separators and traps and test air cleanliness daily according to ASTM D4285, or as directed. Regardless of the method used to apply the coating, use brushes to push the coating Material into complex details, crevices, gaps, difficult-to-access areas, and where spraying does not adequately cover or penetrate. Provide application techniques meeting the requirements of Section 7 in SSPC-PA 1 and the applicable sections of SSPC *Paint Application Guide No. 11*.

(Use the following subsection .49 when electrical components are encased in concrete.)

00588.49 Electrical Systems - Install electrical system components permanently encased within the precast or cast-in-place ornamental concrete rail according to Sections 00960, 00970, and 00990.

Insert Project Name Here

Measurement

00588.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

The estimated quantity of precast historic ornamental concrete Bridge rail is:

(List the Structure number and quantities of ornamental concrete Bridge rail. Obtain information from the Bridge Designer.)

**Structure
No.**

**Quantity
(Feet)**

Payment

00588.90 Payment - The accepted quantities of precast historic ornamental concrete rails will be paid for at the Contract lump sum amount for the Pay Item "Precast Historic Ornamental Concrete Rail".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Payment includes payment for electrical system components permanently encased within the Bridge rail.

No separate or additional payment will be made for anchor bolts and anchorage devices, except those cast in precast concrete members.

Payment for anchor bolt and anchorage devices in cast-in-place concrete members, and for reinforcement extending from a precast unit, cast-in-place deck, wall, or Bridge approach slab into the rail will be included in payment made for the precast unit, cast-in-place deck, wall, or Bridge approach slab, as appropriate.

Payment for guardrail terminal connectors, connection plates, spacer blocks, and other connection hardware will be included in payment for the guardrail transition item according to 00810.90.

SP00589 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02530, SP02540,

SP02560 & SP02910.

**Requires SP01140 when a waterline
is attached to a bridge)**

SECTION 00589 - UTILITIES ON STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00589 is not a Standard Specification and is included in this Project by Special Provision.

Description

00589.00 Scope - This Work consists of furnishing and installing Utilities on new and existing Structures as shown or directed.

(Use the following two paragraphs when Structures have been designated "Special Structures" by Bridge Engineering Section. List the designated Special Structures by Bridge number.)

The following Structures are designated "Special Structures":

- Bridge No. _____
- Bridge No. _____

Furnish Utility installations on Special Structures that do not alter the appearance of the Structure. Position Utilities only inside the girder line, as close as possible to the soffit, or as required to make the installation as inconspicuous as practicable.

00589.01 Definitions:

Carrier Pipe - A pipe specifically designed to carry liquids or gases.

Conduit - An enclosure that is specifically designed and approved to carry and protect electrical or communications wiring.

Protective Casing - A protective sleeve located at strategic locations to shield and isolate the Carrier Pipe or Conduit from external loads, environmental exposure, or damage, or to shield adjacent Structures or Soils.

Materials

00589.10 General - Furnish Utility installations (other than for electrical Conduits) using Materials from the QPL and meeting the following requirements:

Structural Steel	02530
Forgings, Shafting, Castings, and Nonferrous Materials	02540
Fasteners	02560
Reflective Sheeting	02910.20(a)

Insert Project Name Here

Resin Bonded Anchor System 00535.10

Furnish brackets constructed of stainless steel or hot-dip galvanized structural steel.

Furnish Materials for electrical Conduits according to 00583.10.

Construction

00589.40 General - Provide sufficient space around utilities for maintenance activities.

Avoid drilling through reinforcing steel. If reinforcing steel is hit, move the anchor location and patch the hole with an approved patching material from the QPL.

Attach conduits or brackets to concrete Structures with resin bonded concrete anchors, unless otherwise shown or approved.

00589.41 Natural Gas Lines - Conform to the portions of CFR 49 Part 192 that are applicable to the Work. Furnish isolation valves 200 feet from each end of the Bridge as shown.

(Include the following subsection .42 when a Protective Casing is requested by the Utility Coordinator. Delete the item from the subsection that does not apply, but do not change the alpha characters next to the title. Fill in the blank with the appropriate information.)

00589.42 Protective Casing –

(a) Natural Gas Casing - Install steel pipe casing for natural gas lines below bridge deck as shown. Natural gas line is installed within casing by others.

(b) Communication Casing - Install (insert the type of casing as discussed with the Utility Owner) casings for communications lines below the bridge deck as shown. Communication lines are installed within casings by others.

(Include the following Subsection .43 when a waterline is attached to a Bridge)

00589.43 Water Line - Install ductile iron pipe and fittings with restrained joints according to 01140.00 through 01140.52 below the bridge deck as shown and specified.

00589.48 Labeling - Clearly label all piping or conduit systems according to the following APWA color code:

Table 00589-1

Type of Utility	Marker Background Color
Electrical Power Lines, Cables, Conduits, Lighting Cables	Red
Gas, Oil, Steam, Petroleum, Gaseous Materials	Yellow

Insert Project Name Here

Type of Utility	Marker Background Color
Communications, Alarm, Signal Lines, Cables, or Conduits	Orange
Potable Water	Blue
Reclaimed Water, Irrigation, Slurry Lines	Purple
Sewers, and Drain Lines	Green

Generate purple by placing purple transparent film over white reflective sheeting. Furnish transparent film with a purple tint that matches Federal Standard Color 595B No. 37100.

Furnish labels with a minimum size as shown in Table 00589-2.

Table 00589-2

Pipe O.D. Min.	Pipe O.D. Max.	Length of Label	Width of Label
3/4"	1 1/4"	8"	3/4"
1 1/2"	2"	8"	1"
2 1/2"	6"	12"	2"
8"	10"	12"	2"
10"	—	12"	2"

Place labels on each Carrier Pipe, Conduit, or Protective Casing, visible on each side of every bent, and at each entrance to a box girder.

Where piping is above or below normal line of sight, place pipe labels so that label may be seen from normal eye height.

Measurement

00589.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

No measurement of quantities will be made for Utility attachments on Structures.

The quantities of Carrier Pipe, Conduit and Protective Casing will be measured on the length basis.

Payment

00589.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Utility Attachment on Structure, _____	Lump Sum
(b) _____ Carrier Pipe, _____	Foot
(c) _____ Conduit, _____	Foot
(d) Protective Casing, _____	Foot

Insert Project Name Here

In item (a) the type of Utility is inserted in the blank.

In items (b) and (c) the type of Utility is inserted in the first blank, the size and type of the Carrier Pipe or Conduit is inserted in the second blank.

In item (d) the size and type of the Protective Casing is inserted in the blank.

Payment will payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Electrical Conduit installed on Structures will be paid for according to 00583.90.

SP00590 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00504.

Requires SP00730 when emulsified asphalt tack coat is required.)

SECTION 00590 - POLYMER MEMBRANE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Use this specification only for cast-in-place decks. Obtain information from the Bridge Designer.)

Comply with Section 00590 of the Standard Specifications modified as follows:

00590.05(a) Supervisory Personnel - Replace the paragraph that begins "Hold a pre-placement conference ..." with the following paragraph:

Hold a pre-placement conference with the Engineer and all supervisory personnel, Subcontractors, Suppliers, and all other personnel involved in the membrane work. Meet at a mutually agreed time at least 14 Calendar Days before beginning the membrane work. Present and discuss all phases of the membrane work, including ACP placement.

00590.10(b) Polymer Membrane - Replace this subsection, except for the subsection number and title, with the following:

Furnish epoxy polymer from section 00556.10(a) of the QPL. Furnish epoxy polymer and primer from the same manufacturer.

00590.20(a) Tools - Replace this subsection, except for the subsection number and title, with the following:

Provide squeegees, heavy nap rollers, and other approved tools to apply the primer and the membrane polymer resin.

Provide a mechanical broadcaster to uniformly apply the membrane Aggregate.

Provide pickup type power brooms capable of removing loose Aggregate.

00590.20(b) Coring Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide core cutting Equipment that can produce a core 2 inches in diameter.

00590.20(c) Bond Testing Equipment - Replace the paragraph that begins "Furnish bond testing ..." with the following paragraph:

Provide bond testing Equipment that:

00590.20(d) Resin Conditioning Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide Equipment capable of conditioning resin to between 65 °F and 85 °F.

00590.20(e) Aggregate Heating Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide heating Equipment capable of pre-heating Aggregate to a minimum of 70 °F as measured at the time of placement.

00590.20(f) Membrane Heating Equipment - Replace the paragraph that begins "If required, furnish ..." with the following paragraph:

If required, provide heating Equipment that:

00590.30 Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

Provide supervisory personnel who are approved by the polymer material manufacturer, in writing, as qualified and who oversees the placement of the polymer membrane.

00590.40(e) Daily Report Requirements - Replace the paragraph that begins "Submit a daily written ..." with the following paragraph:

Submit a daily written report to the Engineer by the end of each Day that Work is being performed under this Section. Include the following in the daily written report:

00590.44 Delamination Survey and Repair - Replace the paragraph that begins "Perform bond testing on ..." with the following paragraph:

Perform bond testing on repair areas to ensure a membrane bond strength of at least 150 psi before paving and 250 psi if traffic is allowed on the membrane. Test at locations as identified by the Engineer.

Insert Project Name Here

00590.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals required to complete the Work as specified.

SP00591 (Special Provisions for the 2024 Book)

**(Bidding on or after: 09-01-26
Last updated: 06-01-26)**

SECTION 00591 – SPRAY WATERPROOFING MEMBRANE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not renumber or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00591 is not a Standard Specification and is included in this Project by Special Provision.

Description

00591.00 Scope - This Work consists of furnishing and placing spray waterproofing membrane on Buried Structures as shown.

00591.01 Definitions:

Buried Structures - Complete Structures or structural elements shown that are placed below grade with fill material on all sides.

00591.02 Submittals - Submit the following at least 7 Calendar Days before the pre-placement conference:

- The manufacturer's product data sheet.
- The manufacturer's written installation instructions.
- A Material Safety Data Sheet for each primer and epoxy polymer component.
- Manufacture dates and shelf-life expiration dates for each production lot of primer and epoxy polymer components.
- Tabulated data indicating the estimated cure time, in minutes, for the allowable ambient temperature range, in increments of 10 °F, for both the primer and polymer membrane.
- A detailed work plan for the membrane preparation, application, and cleanup.
- The Manufacturer's recommended application rate, square feet per gallon, to achieve a minimum membrane thickness of 3/16 inch.

Insert Project Name Here

- Names of manufacturer-approved supervisory personnel meeting the requirements of 00591.31.
- For each spray membrane proposed for use, submit for the Engineer's review a manufacturer approved procedure for preparing the surfaces to receive membrane and applying the membrane. Include in the procedure the identification of the manufacturer's representative, the number of persons required, Equipment, installation sequence, traffic control, and the estimated time schedule for installing the membrane.
- For Buried Structures with curbs, head walls or concrete rails, submit unstamped manufacturer Working Drawings according to 00150.35, detailing membrane placement at the curbs or rail.

00591.04 Pre-Placement Conference - Hold a pre-placement conference with the Contractor's supervisory personnel, the manufacturer's authorized representative, the manufacturer certified applicator(s), and the Engineer at least 14 Calendar Days before applying each membrane.

Materials

00591.10 Materials - Furnish a spray waterproofing membrane system that complies with the profile grades shown. Profile grade limitations for products are listed in the QPL and are available from the manufacturer.

(a) **Primer** - Furnish a primer from the QPL.

(b) **Spray Membrane** - Furnish spray waterproofing membrane from the QPL.

(c) **Handling Materials** - Store spray waterproofing membrane at a temperature between 55 °F and 95 °F or as recommended by the manufacturer, whichever is more restrictive.

Labor

00591.30 Personnel Qualifications - Provide manufacturer authorized applicators. Provide applicators that are certified yearly by the manufacturer.

00591.31 Manufacturer's Representative - Provide the services of a manufacturer's representative authorized to observe the installation of each membrane system. Provide a manufacturer's representative that is an employee of the membrane system manufacturer. Do not begin membrane Work until the manufacturer's representative is on site and authorizes the Work to begin.

Follow the recommendations of the manufacturer's representative when installing the spray membrane system, as provided in this Section. Instruct the manufacturer's representative to alert the Contractor and the Engineer of anything that could affect the performance of the spray waterproofing membrane.

Submit a daily written report to the Engineer that has been prepared by the manufacturer's representative and details all membrane-related activities, test results, observations, repairs, and post-spray survey results. Submit the daily written report by the end of each Day until the Work is complete.

Construction

00591.40 Construction -

(a) General - Do not begin membrane installation until all Materials and Equipment necessary to perform the installation and required repairs, and qualified personnel are at the Project Site.

(b) Application Conditions - Apply the spray waterproofing membrane on prepared surfaces when the following conditions are met:

- The prepared surface has been visually dry for at least 72 hours.
- The ambient temperature and prepared surface temperature are between 50 °F and 90 °F.
- The prepared surface temperature is at least 5 °F above the dew point.
- No rain is forecasted for the duration of the membrane installation.

00591.41 Preparing Buried Structures - Prepare all surfaces that are to be in contact with the spray waterproofing membrane according to Section 00504.

00591.42 Installation - Install spray waterproofing membrane according to the following:

- Spray, squeegee, or roll primer at a rate of 1 gallon per 100 to 200 square feet of surface area or as recommended by the manufacturer.
- Spray membrane over primed surfaces at a minimum rate of 1 gallon per 20 square feet of surface area, or as recommended by the manufacturer, to achieve a minimum thickness of 80 mils. Apply the spray membrane using methods recommended by the manufacturer.
- In the presence of the Engineer, perform a post spray survey of the membrane by infrared imaging or other approved methods to locate any delamination, bubbles, or other defects. Repair all defects in a manner consistent with the manufacturer's recommendations and satisfactory to the Engineer and document on the daily written report.

The Engineer must accept each layer of the waterproofing membrane system before application of the next layer is allowed.

00591.46 Primer Bond Test - Before placing the membrane, test prepared surface to primer bond according to ASTM D4541, Method E, using Type V tester and 20 mm dollies. Unless otherwise directed, randomly select test locations with a minimum of one test per 750 square feet.

Minimum bond strength is 175 psi or substrate failure.

00591.47 Dry Film Thickness Test - Test spray membrane dry film thickness using test methods approved by the Engineer. Unless otherwise directed, randomly select test locations with a minimum of one test per 750 square feet.

Insert Project Name Here

00591.48 Membrane System Bond Test - Before backfilling over the membrane, test the full depth membrane system according to ASTM D4541, Method E using Type V tester and 50 mm test dollies. Minimum bond strength is 175 psi or substrate failure. Cut 2-inch diameter cores full depth through the membrane and 1/4 inch into concrete substrate. Unless otherwise directed, randomly select test locations with a minimum of one test per 750 square feet. Repair core holes with matching membrane system Materials.

Maintenance

00591.60 Correction of Defects - Correct all defects in Materials and Work, as directed, at no additional cost to the Agency. Defects are defined as leakage of the membrane or delamination of the membrane from the substrate.

Submit a detailed repair plan to the Engineer for approval within 14 Calendar Days of notification of defects. Unless otherwise approved in writing by the Engineer, complete permanent repairs within 60 Calendar Days of notification of defects. Until permanent repairs are completed and accepted, complete temporary repairs as required by the Engineer. Use Materials and procedures meeting the Specifications. Match repairs to finished grade. Coordinate timing of repair Work with the Engineer.

Measurement

00591.80 Measurement - The quantities of spray waterproofing membrane will be measured on the area basis, and will be the sealed surface area, and will be limited to the Neat Lines and dimensions shown or directed.

Payment

00591.90 Payment - The accepted quantities of spray waterproofing membrane will be paid for at the Contract unit price, per square foot, for the item "Spray Waterproofing Membrane".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00592 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00504

Requires SP00730 when emulsified asphalt tack coat is required.)

SECTION 00592 - ROLLED WATERPROOFING MEMBRANE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

(Use this specification for cast-in-place or precast slab bridge decks where a minimum 4 inches of asphalt is designed on the bridge. Obtain information from the Bridge Designer.)

Comply with Section 00592 of the Standard Specifications modified as follows:

00592.03 Submittals - Replace the bullet that begins " Submit a primer application ..." with the following bullet:

- Submit a primer application plan according to 00592.42(c) that includes a manufacturer's letter indicating primer is compatible with the rolled membrane.

00592.04(a) Supervisory Personnel - Replace the paragraph that begins "Hold a pre-placement conference ..." with the following paragraph:

Hold a pre-placement conference with the Engineer and all supervisory personnel, Subcontractors, Suppliers, and all other personnel involved in the membrane Work. Meet at a mutually agreed time at least 14 Calendar Days before beginning the membrane Work. Present and discuss all phases of the membrane Work, including ACP placement.

00592.10 Rolled Waterproofing Membrane System - Replace the paragraph that begins "Furnish a rolled waterproofing ..." with the following paragraph:

Furnish a rolled waterproofing membrane system that is a sheet membrane according to ASTM D6153 Type III and meeting the following criteria:

Replace the paragraph that begins "Furnish test result ..." with the following paragraph:

Provide test result certificates showing physical tests for the rolled waterproofing membrane system according to 00165.35.

Replace the paragraph that begins "Provide a membrane ..." with the following paragraph:

Furnish a membrane that can be used for the maximum profile grades and super elevations shown. Profile grade and super elevation limitations are available from the manufacturer.

00592.42(b) ACP Base Course - Replace this subsection, except for the subsection number and title, with the following:

Place a 2-inch ACP Base Course, according to Section 00744 or Section 00745 to provide a uniform surface to apply the rolled membrane. Construct the ACP Base Course using the same ACP specified for the ACP wearing Course, unless otherwise shown or directed.

00592.43 Daily Report Requirements - Replace the paragraph that begins "Submit a written report ..." with the following paragraph:

Submit a written report to the Engineer by the end of each Day that Work is being performed under this Section. Include the following in the daily written report:

00592.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals required to complete the Work as specified.

SP00593 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26)

SECTION 00593 - POWDER COATING METAL STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00593 of the Standard Specifications modified as follows:

00593.01(b) Definitions - Replace the paragraph that begins "Substrate ..." with the following paragraph:

Substrate - A surface where a Coating is to be applied. This may be the prepared surface of the metal Structure or a previous Coating.

00593.03 Required Submittals - Replace the title of this subsection with "Submittals"

00593.03(a) Powder Coating Plan - Replace the bullet that begins "A letter from the firm ..." with the following bullet:

- A letter from the firm performing galvanizing, if other than the Contractor, certifying that neither water quenching nor a chromate conversion coating is used on the surfaces that are to be powder coated.

00593.10(a)(1) Steel Substrates - Replace the paragraph that begins "Provide a two-coat system ..." with the following paragraph:

Provide a two-coat system for steel substrates consisting of a zinc-rich epoxy primer and a polyester topcoat, according to the following:

00593.10(a)(2) Galvanized and Other Non-Steel Metallic Substrates - Replace the paragraph that begins "Provide a two-coat system ..." with the following paragraph:

Provide a two-coat system for galvanized and non-steel metallic substrates consisting of an epoxy primer and polyester topcoat, according to the following:

(Use the following subsection .10(b) to list topcoat colors that aren't identified in the Standard Specifications. Fill in the blanks as instructed and obtain information

Insert Project Name Here

from the Designer. Copy and repeat the paragraph as needed. For color number, only use numbers 14159 to 28915 from the SAE AMS-STD-595 color index.

Example:

For the combination rail on Bridge No. 12345A, provide a topcoat color of High Gloss Black that conforms to SAE AMS-STD-595 color # 17038.)

00593.10(b) Color - Replace the paragraph that begins "Unless otherwise specified ..." with the following paragraph:

Unless otherwise specified, furnish top-coat color according to the following:

Add the following to the end of this subsection:

For (Structure number or item description), provide a topcoat color of (Color Name) that matches SAE AMS-STD-595 color # (Color Number).

00593.10(c) Slip-Critical Connections - Replace this subsection, except for the subsection number and title, with the following:

Furnish a primer coat on steel-to-steel contact surfaces at all slip-critical bolted joints using high strength bolts that conforms to Class B (slip coefficient of 0.5) Coating requirements in *Test Method to Determine the Slip Coefficient for Coatings Used in Bolted Joints*, as adopted by the Research Council on Structural Connections.

00593.11 Blasting Abrasives - Replace this subsection, except for the subsection number and title, with the following:

Furnish abrasives that have no corrosion products, water, oil, or any other material detrimental to the application and adherence of the Coatings. Furnish abrasives that conform to SSPC-AB 1. When directed, test cleanliness according to ASTM D7393 and ASTM D4940. Do not exceed 100 microsiemens per centimeter conductivity results from ASTM D4940.

00593.12 Caulking - Replace the paragraph that begins "Furnish structural steel ..." with the following paragraph:

Furnish structural steel caulking from the QPL and approved for use by the Coating manufacturer. Unless the caulking is to be over coated, furnish a clear caulking color or the approximate the color of the top Coating.

00593.42(a) Steel Structures - Replace this subsection, except for the subsection number and title, with the following:

Clean new steel Structure surfaces to be coated according to SSPC-SP 10 / NACE No. 2 *Near White Metal Blast Cleaning*, except as modified by the Specifications. Closely approximate the appearance of the final blast-cleaned surface to Pictorial Standard SP 10 of SSPC-Vis 1 and have a 1.0 to 2.5 mil profile finish.

00593.42(b)(2) Aluminum, Stainless Steels, and Non-Ferrous Metals - Replace the bullet that begins "Solvent clean surfaces ..." with the following bullet:

- Solvent clean surfaces to be coated according to SSPC-SP 1, followed by a light brush blast according to SSPC-SP 16 *Brush-Off Blast Cleaning of Coated and Uncoated Galvanized Steel, Stainless Steels, and Non-Ferrous Metals* with a maximum nozzle pressure of 75 psi. Ensure the prepared surface has a 1.0 to 2.5 mil profile finish.

00593.42(c)(1) Cleaning Methods - Replace the paragraph that begins "Surfaces shall be ..." with the following paragraph:

Dry surfaces before Cleaning. Use methods specified in SSPC-SP 1, *Solvent Cleaning*, SSPC-SP 2, *Hand Tool Cleaning*, SSPC-SP 3, *Power Tool Cleaning*, and SSPC-SP 15 *Commercial Grade Power Tool Clean*, as necessary to augment blast-cleaning.

00593.42(c)(2) Abrasives - Replace the paragraph that begins "Perform blast-cleaning ..." with the following paragraph:

Perform blast-cleaning using an abrasive of a size that will continually produce an angular Surface Profile of at least 1 mil, but not more than 4 mils, as measured according to ASTM D4417 using replica tape on the prepared surface. Perform blast-cleaning that results in a roughened steel surface comparable to a Keane-Tator Surface Profile Comparator for sand or grit using ASTM D4417.

Replace the paragraph that begins "Use abrasives conforming..." with the following paragraph:

Use abrasives meeting 00593.11. Wet abrasives are allowed if wet sandblasting methods are used.

00593.43(c)(2) Coating Thickness and Coverage Requirements - Replace this subsection, except for the subsection number and title, with the following:

Each Coat consists of as many applications as necessary to cover the Work and achieve the minimum thickness specified. Apply each Coat in sufficient thickness to achieve uniform and complete coverage and appearance. If all thickness measurements are not within the specified minimum dry film thickness, or if the visual inspection does not satisfy the Engineer, make additional applications, as necessary, to meet the thickness and coverage required. Film thickness is measured above the peaks of the profile of the anchor pattern in the substrate.

The dry film thickness is measured for acceptance using a Type 2 gauge according to SSPC-PA 2. If a question arises about an individual Coat thickness or coverage, it will be verified using a Tooke gauge, according to ASTM D4138. If the Tooke gauge shows a prime Coat to be less than the specified minimum thickness the total Coating System is rejected even if the thickness of the total system equals or exceeds the total specified thickness.

00593.44 Inspecting - Replace the paragraph that begins "Provide documentation of the QA/QC ..." with the following paragraph:

Provide documentation of the QA/QC testing to the Engineer. Assemblies failing these tests are rejected. Repair and recoat the rejected assemblies as directed.

Insert Project Name Here

00593.45(c) Handling, Shipping, or Surface Damage - Replace the paragraph that begins "After erection, repair ..." with the following paragraph:

After erection, repair marred and damaged coated surfaces due to the Contractor's shipping, storage, handling, and erection operations according to 00593.60 at no additional cost to the Agency.

00593.90(b) Existing Metal Structures - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00594 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

This Section requires SP00084 when a coating system warranty is required in subsection .75. Requires SP00253 when work access/containment is required. Requires SP00296 when lead is anticipated.)

SECTION 00594 - PREPARING AND COATING METAL STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00594 of the Standard Specifications modified as follows:

(Use the following subsection .00 when coating any structures that require a more detailed scope – e.g. bridges, sign structures, ornamental rail, if lead based coatings are involved, etc.)

00594.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of preparing and coating existing steel on Bridge No. ____.

(Insert bridge/scope description here – i.e. length, number of spans, general area to be coated (above or below deck), etc. Provide previous coating history including materials used and surface preparation if known. Obtain information from the Designer.)

(Use the following paragraph when mill scale will be exposed by this work.)

Mill scale will be exposed by the preparation and coating Work.

(Use the following paragraph when lead-based coating will be affected by the work.)

Lead-based coatings will be affected by the preparation and coating Work.

(Use the following paragraph when chromates will be affected by the work.)

Coatings that contain chromates will be affected by the preparation and coating work.

00594.01(b) Definitions - Replace the paragraph that begins "**Hold Point** ..." with the following paragraph:

Hold Point - A time when the Contractor is required to stop a particular activity until a phase of Work is inspected or tested. If the Engineer finds this phase conforms to the Specifications, the subsequent phase of Work may proceed.

Replace the paragraph that begins "**Paint** ..." with the following paragraph:

Paint - A pigmented liquid, applied as a thin layer, that is converted to a solid colored film after curing. This film provides a decorative and protective Coating to the Substrate. The binder is a resin that may or may not be modified with natural vegetable oils, fish oils, or other ingredients.

Replace the paragraph that begins "**Skimming** ..." with the following paragraph:

Skimming - The process where a film forms over a liquid Coating, either during storage or after application.

Replace the paragraph that begins "**Substrate** ..." with the following paragraph:

Substrate - A surface where a Coating is to be applied. This may be the prepared surface of the metal Structure or a previous Coating.

00594.01(c) References - Replace the paragraph that begins "In these Specifications, references ..." with the following paragraph:

In these Specifications, references are made to FTMS 141, *Paint, Varnish, Lacquers, and Related Materials: Methods of Inspection, Sampling and Testing*, that is distributed by the U.S. General Services Administration.

(Use the following subsection .05 when lead is anticipated on the project.)

00594.05 Waste Handling and Disposal - Add the following paragraph to the end of this subsection:

When lead is contained in the waste, dispose of waste material according to 00290.20, Section 00296, and the applicable requirements of SSPC-Guide 7.

Insert Project Name Here

(Use the following subsection .10 to list coating materials. Obtain information from the Designer. Use the appropriate QPL subsection for the classification of work [i.e. non-ferrous, weathering steel, rehab, maintenance, high performance, shop, shop pile].)

00594.10 Materials - Add the following to the end of the subsection:

(Fill in the first blank with a description of the work item and the second blank with the bridge number. Use the appropriate QPL subsection for the classification of work (i.e. non-ferrous, weathering steel, rehab, maintenance, high performance, shop, shop pile).

Example:

For steel pipe pile at Bent No. 1 on Bridge No. 01234A:

Furnish a shop pile coating, 4 coat system with tar from the QPL. Provide top-coat color that conforms to #27038 of SAE AMS-STD-595.

Repeat the following language as necessary for multiple bridges, work items, coating systems, colors, etc.)

For _____ on Bridge No. _____:

Furnish a _____ coating, ____ coat system with _____ from the QPL. Provide top-coat color that conforms to #_____ of SAE AMS-STD-595.

(Use the following paragraph when weatherized guardrail and painting of guardrail transitions and terminals are required according to SP00810.)

Furnish coating materials for metal galvanized guardrail transition and guardrail terminal materials according to Non-Steel Metallic Substrates except the color shall be brown that closely matches aged weatherized steel. Submit samples to the Engineer for review and approval.

00594.10(b) Color - Replace the paragraph that begins "Unless otherwise specified ..." with the following paragraph:

Unless otherwise specified, furnish top-coat color according to the following colors:

00594.11(b) Packaging - Replace the bullet that begins "If necessary, constructed ..." with the following bullet:

- If necessary, constructed with an interior lining to prevent attack by the Coating Material. Furnish container wall lining that does not delaminate and contaminate the Coating.

00594.11(d) Slip-Critical Connections - Replace this subsection, except for the subsection number and title, with the following:

Furnish a primer Coat on steel-to-steel contact surfaces at all slip-critical structural bolted connections using high strength bolts according to Class B (slip coefficient of 0.5) Coating requirements in *Test Method to Determine the Slip Coefficient for Coatings Used in Bolted Joints*, as adopted by the Research Council on Structural Connections.

00594.12 Caulking - Replace the paragraph that begins "Furnish structural steel ..." with the following paragraph:

Furnish structural steel caulking from the QPL and approved for use by the Coating manufacturer. Furnish a caulking color that is clear, approximate the color of the top Coating, or be over coated.

00594.30 Quality Control Personnel - Replace this subsection, except for the subsection number and title, with the following:

Provide an on-site quality control manager who is responsible for managing quality control related to all Preparation and Coating quality control activities. Provide a quality control manager that is not employed in a supervisory role for any Preparation or Coating Work.

(Use the following subsection .40(b) when coating existing steel structures. Obtain information from the Designer.)

00594.40(b) Existing Steel Structures - Add the following paragraphs and bullets to the end of this subsection:

Prepare and coat the following surfaces:

(List below what is to be coated.)

-

Do not coat the following:

(List below what is not to be coated.)

-

(Use the following subsection .40(d) when existing non-steel metallic substrates are to be coated. Obtain information from the Designer.)

00594.40(d) Non-Steel Metallic Substrates - Add the following paragraph and bullets to the end of this subsection:

Existing non-steel metallic substrates to be prepared and coated include:

(List below what existing non-steel metallic substrates are to be coated.)

-

00594.42(a) New Steel Structures - Replace this subsection, except for the subsection number and title, with the following:

Clean new steel Structure surfaces to be coated according to SSPC-SP 10 / NACE No. 2 *Near White Metal Blast Cleaning*, except as modified by this Section. Closely approximate the appearance of the final blast-cleaned surface to Pictorial Standard SP 10 of SSPC-Vis 1.

00594.42(c) Rehabilitation of Existing Steel Structures - Replace this subsection, except for the subsection number and title, with the following:

When performing Rehabilitation on a Structure that is not receiving a Maintenance Coating outside the immediate area of the Rehabilitation details, prepare all existing steel surfaces to be coated according to SSPC-SP 15, *Commercial Grade Power Tool Cleaning*. Provide a cleaned surface with a minimum Surface Profile of 1 mil.

Prepare all existing coated surfaces exposed by the removal of the existing components involved in the Rehabilitation, all areas that rivets, bolts, or plates are to be removed, and areas damaged by erection or other Contractor operations. Completely clean all existing lead-based Coatings exposed by the removal of any structural or miscellaneous member to SSPC-SP 15 *Commercial Grade Power Tool Cleaning* requirements. Extend all prepared areas at least 2 inches into tightly adhering, intact paint. Overlap the subsequent Coating and the still intact Coating by a minimum of 2 inches. Lightly sand the overlap area of the intact Coating to provide a profile for the subsequent repair Coating to adhere to.

00594.42(e)(1) Cleaning Methods - Replace the paragraph that begins "Surfaces shall be ..." with the following paragraph:

Dry surfaces before Cleaning unless a wet blast Cleaning method is used. Use methods specified in SSPC-SP 1, *Solvent Cleaning*, SSPC-SP 2, *Hand Tool Cleaning*, SSPC-SP 3, *Power Tool Cleaning*, and SSPC-SP 15 *Commercial Grade Power Tool Clean*, as necessary to augment blast-cleaning.

00594.42(e)(2) Abrasives - Replace the paragraph that begins "Perform blast-cleaning using ..." with the following paragraph:

Perform blast-cleaning using an abrasive of a size that will continually produce an angular Surface Profile of at least 1 mil, but not more than 4 mils, as measured according to ASTM D4417 using replica tape on the prepared surface. Perform blast-cleaning that results in a roughened steel surface comparable to a Keane-Tator Surface Profile Comparator for sand or grit using ASTM D4417.

Replace the paragraph that begins "Provide abrasives that have ..." with the following paragraph:

Provide abrasives that have no corrosion products, water, oil, or any other material detrimental to the application and adherence of the Coatings. Provide abrasives according to SSPC-AB 1. When directed, test cleanliness according to ASTM D7393 and ASTM D4940. Do not exceed 100 microsiemens per centimeter for the conductivity results from ASTM D4940. Wet abrasives are allowed if wet sandblasting methods are used.

(Use the following subsection .42(e-7) when coating existing steel within 2 miles of a salt water source or when required by the Designer.)

Add the following subsection:

00594.42(e)(7) Soluble Salt Testing and Removal - Conduct soluble salt tests on all cleaned surfaces, except locations where rust inhibitors, chloride removers, or lead/chromate-treating abrasive additives are used, in accordance with SSPC *Technology Guide 15*, Section 4.1.1. Conduct tests after final blow down, before any coating application, and on the same Day as the coating operation. Follow all of the recommendations and instructions from the test equipment manufacturer. Convert soluble salt measurements to a standard temperature of 77 °F using a temperature correction factor of 1.11 percent per °F. Perform three tests for the first 1000 square feet cleaned each Day, and one test for each subsequent 1000 square feet cleaned, with a minimum of two tests per work shift. Perform tests at the locations identified by the Engineer. The Engineer may perform additional soluble salt testing. The maximum acceptable concentration of soluble salts is 70 microsiemen per centimeter. If the total concentration of soluble salts found in any test exceeds allowable limits, the entire area represented by the test will be rejected. Provide additional surface cleaning in rejected areas before repeating the tests. Each area will be accepted when all soluble salt test readings in the area are within acceptable limits.

For areas where rust inhibitors, chloride removers, or lead/chromate-treating abrasive additives are used, test all cleaned surfaces for the presence of soluble salts in accordance with SSPC *Technology Guide 15*, Section 5.2.5.1. Follow all of the recommendations and instructions from the test equipment manufacturer. Perform three tests for the first 1000 square feet cleaned each Day, and one test for each subsequent 1000 square feet cleaned, with a minimum of two tests per work shift. Perform tests at the locations identified by the Engineer. The Engineer may perform additional soluble salt testing. The maximum acceptable concentration of soluble salts is 5 micrograms per square centimeter. If the total concentration of soluble salts found in any test exceeds allowable limits, the entire area represented by the test will be rejected. Provide additional surface cleaning in rejected areas before repeating the tests. Each area will be accepted when all soluble salt test readings in the area are within acceptable limits.

00594.43(b)(3) Thinning - Replace this subsection, except for the subsection number and title, with the following:

Do not add additional Thinner at the application site unless approved by the Engineer. If allowed, furnish the amount and type of Thinner according to the Manufacturer's Recommendations.

00594.43(c)(2) Application Methods - Replace the paragraph that begins "Apply Coating Materials ..." with the following paragraph:

Apply Coating Materials by air or airless spray, brush, roller, any combination of these methods, or as recommended by the Coating Material manufacturer, unless otherwise specified. If air is used for application, ensure that it is free of water, oil, or any other material detrimental to the Coating System. Provide adequate separators and traps and test air cleanliness daily according to ASTM D4285, or as directed. Regardless of the application method used to apply the Coating, use brushes to push the Coating into complex details, crevices, gaps, areas difficult to access, and where spraying does not adequately cover or penetrate. Conform all application techniques to Section 7 in SSPC-PA 1 and the applicable sections of SSPC Paint Application Guide No. 11.

Insert Project Name Here

00594.43(d)(1) Number of Coats and Film Thickness - Replace the paragraph that begins "The dry film ..." with the following paragraph:

Ensure the dry film thickness of the primer on steel-to-steel contact surfaces is not less than 3 mils nor more than the manufacturer's class "B" certification allows.

00594.43(d)(2) Stripe Coats - Replace the paragraph that begins "Apply a prime stripe Coat ..." with the following paragraph:

Apply a prime stripe Coat by brush after applying the full brush augmented prime Coat and apply an intermediate stripe Coat by brush before applying the full intermediate Coat. For two Coat Paint systems, except non-ferrous Coating Systems from the QPL, apply a top Coat stripe Coat prior to full top Coat application. Apply the stripe Coat by brush only. Use brushes to push the Coating around and into complex details and irregular surfaces identified as usually stripe coated by SSPC Paint Application Guide No. 11. Make each stripe Coat a different color than the preceding and subsequent full Coat, extending a minimum of 1 inch from the irregular surface, and completely hiding the Substrate. Furnish a different color for the stripe Coat. Coat the stripe coat approximately 3 mils thick. Each stripe Coat has its own Hold Point and is not be used to correct deficiencies in the preceding or subsequent Coats. Apply stripe Coats according to the applicable sections of SSPC Paint Application Guide No. 11 that do not conflict with this Section or the Special Provisions.

00594.43(d)(3) Coating Thickness and Coverage Requirements - Replace this subsection, except for the subsection number and title, with the following:

The Engineer will take dry Coating thickness measurements after the application of each Coat and before application of the succeeding Coat. In addition to Coating thickness measurements, a visual inspection for complete coverage is made by the Engineer after each Coat. Apply each Coat in sufficient thickness to achieve uniform and complete coverage and appearance. If all thickness measurements are not within the specified minimum dry film thickness, or if the visual inspection does not satisfy the Engineer, make additional applications, as necessary, to meet the thickness and coverage required. Film thickness is measured above the peaks of the profile of the anchor pattern in the metal Substrate.

The Engineer will take dry film thickness measurements with a type 2 gauge according to SSPC-PA 2. Furnish a minimum dry film thickness measurements and frequency of measurements according to SSPC-PA 2, modified as follows:

Take a single gauge reading for each 10 square feet of surface area.

A spot measurement is only taken at locations where a gauge reading is less than 100 percent of the Project's specified minimum DFT.

Meet 100 percent of the Project's specified minimum DFT for all spot measurements.

Additional readings may be required to identify the limits of the non-compliant areas.

If a question arises about an individual Coat thickness or coverage, it will be verified using a Tooke gauge, according to ASTM D4138. If the Tooke gauge shows a prime Coat to be less than the specified minimum thickness, or reveals a missing intermediate Coat, the total Coating System is rejected even if the thickness of the total system equals or exceeds total specified thickness.

Insert Project Name Here

In areas where dry film thickness measurements are impracticable, Wet Film Thickness measurements are made according to ASTM D4414.

00594.43(h) Environmental Conditions - Replace the paragraph that begins "If a Coating System allows ..." with the following paragraph:

If a Coating System allows application in environmental conditions different from those specified, submit a letter from the manufacturer stating the conditions that the Coatings can be applied. Application under conditions other than specified is not allowed without the Engineer's written approval.

00594.43(i) Stenciling - Replace this subsection, except for the subsection number and title, with the following:

Stencil the month and year of application and the type of Coating used in block letters 2 inches high at a location on each end of each span on the Structure being coated. The exact location of stenciling is determined by the Engineer. Use flat black color stenciling unless otherwise directed.

00594.45(c) Handling, Shipping, or Surface Damage - Replace the paragraph that begins "Repair marred or damaged ..." with the following paragraph:

Repair marred or damaged coated surfaces according to 00594.60 at no additional cost to the Agency.

00594.45(d) Other Damage - Replace the bullet that begins "Abrasive material or ..." with the following bullet:

- Abrasive material or debris falling into an area that would create a traffic hazard.

(Use the following subsection .75 when a coating system warranty and supplemental warranty performance bond are required. Fill in the first blank with the structure number. Fill in the second blank with a discount to the value of the completed coating system work. The value of the coating system work shall include the value of all pay items listed in subsection 00594.90, subsection 00253.90, barges, and any additional painting work, based on the project cost estimate. Contact the Structure Coatings Engineer for the specific discount for the project. Be sure to include SP00084 when a coating system warranty is required.)

00594.75 Coating System Warranty and Supplemental Warranty Performance Bond - Add the following paragraph to the end of this subsection:

Provide a coating system warranty for Structure No. _____ and a supplemental warranty Performance Bond in the sum of \$ _____ to the Project Manager.

00594.75(a) Coating System Warranty - Replace the paragraph that begins "Unconditionally warrant to ..." with the following paragraph:

Unconditionally warrant to the Agency that all Coating Work and the Coating Systems, above deck and below deck, performed and applied on this Project are and shall be free of all defects for a period of 36 months. Provide a written 36-month warranty using the

Insert Project Name Here

Agency-supplied Coating System warranty form that is included near the front of the Special Provisions booklet. Provide the written warranty 30 Calendar Days before the precoating conference. "Unconditionally warrant" means that the warranty covers all defects, regardless of the source or cause of the defect, including, without limitation, whether the source or cause is or may be related to workmanship, inspection, or choice of materials.

Replace the paragraph that begins "The 36-month Coating System ..." with the following paragraph:

The 36-month Coating System warranty will begin on the date of Second Notification. During this warranty period, the Agency will inspect the Coating System for defects three times; at approximately 12, 24, and 36 months after issuance of the Second Notification. The Contractor will be notified in advance of each inspection and is permitted to accompany the Agency Inspector. Make repairs and correct all defects to the Coating System. Make all corrections and repairs according to the Contract requirements.

00594.75(b) Supplemental Warranty Performance Bond - Replace the paragraph that begins "Provide a supplemental ..." with the following paragraph:

Provide a supplemental warranty Performance Bond, in addition to the regular Performance Bond for the Contract, executed by a Surety authorized to do business in the State of Oregon. Provide the supplemental warranty Performance Bond 30 Calendar Days before the precoating conference. The supplemental warranty Performance Bond dollar amount is listed above.

(Use the following subsection .90(a) when coating new metal structures and payment for the coating will not be made under Section 00594.)

00594.90(a) New Metal Structures - Replace this subsection, except for the subsection number and title, with the following:

No separate payment will be made for preparing and coating new metal Work. Payment for this Work, including correction of damages, will be included in payment made for appropriate items under which this Work is required.

00594.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00595 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-23-26

Requires SP02001 & SP02510

May require SP00560 if welding is required)

SECTION 00595 - REINFORCED CONCRETE BOX CULVERTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00595 of the Standard Specifications modified as follows:

00595.10 Cast-in-Place Materials - Replace the paragraph that begins "Unless otherwise shown ..." with the following paragraph:

Unless otherwise shown, furnish Class 3300 - 1 1/2" or 3/4" portland cement concrete.

00595.11 Precast Materials - Replace the paragraph that begins "Unless otherwise shown ..." with the following paragraph:

Unless otherwise shown, furnish portland cement concrete according to the following:

00595.42(c) Rejection - Replace this subsection, except for the subsection number and title, with the following:

Sections not meeting fabrication or shop assembly tolerances are rejected. The Inspector's inspection of any Material, Work, or finished members will not prevent their subsequent rejection, if later found damaged or defective, nor relieve the Contractor of the responsibility to correct or replace the Work at no additional cost to the Agency.

00595.43(a) Repair Cracked or Damaged RCBC - Replace the bullet that begins "Cracks 0.01 inch or wider..." with the following bullet:

- Cracks 0.01 inch or wider and greater than 12 inches long that do not pass through the wall or slab thickness.

Replace the bullet that begins "Chipped or spalled edges ..." with the following bullet:

- Chipped or spalled edges 1 inch and greater in depth from the end of the bell or spigot and not exceeding the depth of the joint provided the cumulative length of chip or damage is not more 50 percent of the RCBC span or rise, whichever is greater, and no individual length of chip or damage is more than 25 percent of the structure's span or rise, whichever is greater. Provide a repaired sealing surface free of spalls, cracks, or imperfections that would adversely affect the performance of the joint. Replace sections with chipped or spalled edges exceeding these values.

00595.44 Precast Installation - Replace the bullet that begins "Horizontal and Vertical Joint ..." with the following bullet:

- Horizontal and Vertical Joint Variation - The maximum variation between mating surfaces in any assembled transverse joint, between Box Sections before grouting, is no more than 1/2 inch. The allowed joint width variance is no more than 3/8 inch over the length of the joint.

Insert Project Name Here

(Include the following bullet if welding is to be performed. Select the appropriate 00560.26(a) for bridge size culverts or 00560.26(b) for non-bridge culverts. Check with the designer.)

Add the following to the end of this subsection:

- Perform structural steel welding according to (00560.26(a) or 00560.26(b)).

(Use the following .80 for estimated quantities for wing walls and aprons.)

00595.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of reinforcement and concrete for wingwalls and aprons are:

(Fill in the appropriate amount of wingwall and apron reinforcement and concrete. Delete wingwall items that do not apply. Obtain information from the Bridge Designer.)

	Reinforcement (Pound)	Concrete (Cubic Yard)
Wingwalls:		
Cast in Place		
Precast		
Aprons		

00595.90 Payment - Add the following paragraph to the end of this subsection:

Item (e) includes CIP wingwalls and precast wingwalls with precast footing.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, including reinforcement and concrete, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00596A (Special Provisions for the 2024 Book) **(Bidding on or after: 11-01-26)**
Last updated: 07-23-26
Requires SP00350, SP00440, SP02001,
SP02010, SP02320, SP02340 & SP02560
Requires SP02630 when base aggregate is required
Requires SP02690 when PCC Aggregate is required.)

SECTION 00596A - MECHANICALLY STABILIZED EARTH RETAINING WALLS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then

Insert Project Name Here

include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00596A of the Standard Specifications modified as follows:

(Use the following subsection .01 and bullets when the Contractor will be required to select a permanent proprietary MSE wall system. For "Bridge" retaining walls and "Highway" retaining walls, fill in the blank with the structure number. If the retaining wall does not have a structure number, delete the phrase ", structure no. ____ ,".)

00596A.01 Proprietary MSE Walls - Add the following to the end of this subsection:

Select one of the following preapproved proprietary MSE retaining wall systems for the wall, structure no. _____, as shown:

(Fill in the blanks with the proprietary retaining wall system name (including the "™" symbol), company name and telephone number from the ODOT Geotechnical Design Manual, appendix 15-D.)

- _____ MSE Retaining Wall System,
provided by _____, telephone: _____.
- _____ MSE Retaining Wall System,
provided by _____, telephone: _____.
- _____ MSE Retaining Wall System,
provided by _____, telephone: _____.

00596A.04(a) Working Drawings - Replace the paragraph that begins "Working Drawings shall meet..." with the following paragraph:

Submit Working Drawings meeting the requirements of the Project documents and the AASHTO *LRFD Bridge Design Specifications*, as modified by the ODOT GDM, and are consistent with the preapproved Retaining Wall System.

00596A.04(a)(7) Facing Components - Replace the bullet that begins "Details necessary to construct ..." with the following bullet:

- Details necessary to construct the facing components. For two-stage MSE retaining walls, provide details for stage-1 wire facing and stage-2 concrete facing.

Replace the bullet that begins "Location of tension Soil ..." with the following bullets:

- Location and details of soil reinforcement and anchorage connections to the permanent facing. For two-stage MSE retaining walls, provide details and calculations demonstrating permanent anchorage and connection of stage-2 facing to the MSE wall.
- Unstamped Working Drawings for reinforcing steel in the stage-2 reinforced concrete facing are allowed unless changes are made to the details shown.

Insert Project Name Here

(Use the following subsection .04(b) to list proprietary wall geotechnical and seismic design parameters. Obtain information from the designer. Delete what does not apply. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Copy and paste the structure number, station limits, and associated bullets for each separate retaining wall.)

00596A.04(b) Design Calculations - Replace the paragraph that begins "Design calculations shall meet..." with the following paragraph:

Submit design calculations meeting the requirements of the Project documents and AASHTO *LRFD Bridge Design Specifications*, as modified by the ODOT GDM, and are consistent with the preapproved Retaining Wall System. Retaining wall design parameters are listed below.

Add the following to the end of this subsection:

The following retaining wall design parameters have been established for this Project:

Structure No. _____ : **Sta.** _____ **to Sta.** _____ **(Lt.)(Rt.)**

- Foundation soil unit density _____ lbs./cu. ft.
- Foundation soil angle of internal friction _____ degrees
- Foundation soil nominal (unfactored)
bearing resistance _____ lbs./sq. ft.
- Retained soil unit density _____ lbs./cu. ft.
- Retained soil angle of internal friction _____ degrees
- Reinforced soil unit density _____ lbs./cu. ft.
- Reinforced soil angle of internal friction _____ degrees
- Peak ground acceleration coefficient (PGA) _____
- Short period spectral acceleration coefficient (S_s). _____
- Long period spectral acceleration coefficient (S_1) _____
- Site class _____
- Peak seismic ground acceleration coefficient
modified by zero period site factor (A_s) _____
- Horizontal seismic acceleration coefficient (k_h) _____

(Use the following bullet and sub-bullet when the Mononabe-Okabe method is not required. Repeat as necessary for variations in wall height and backslope along the wall.)

- Between Station _____ and Station _____ **(Lt.)(Rt.):**
 - Total (static plus seismic) external
seismic thrust (P_{AE}) lbs./ft.

(Use the following bullet and sub-bullets to specify minimum length of soil reinforcement. Repeat as necessary for variations in wall height, backslope, bearing resistance and other parameters which can change along the wall.)

- Between Station _____ and Station _____ (Lt.)(Rt.):
 - Minimum length of soil reinforcement for overall stability _____ ft.
 - Minimum length of soil reinforcement for external stability _____ ft.

00596A.04(b)(4) Internal Stability Calculations - Replace the bullet that begins "Calculations showing adequate resistance ..." with the following bullet:

- Calculations showing adequate resistance against soil reinforcement rupture, pullout, and reinforcement-facing connection failure. For two-stage MSE retaining walls include calculations showing adequate resistance against soil reinforcement rupture, pullout, and reinforcement to stage-1 wire facing connection failure; and calculations showing adequate resistance against failure for anchorage of the stage-2 concrete facing.

00596A.04(c) Manufacturer's Field Construction Manual - Replace this subsection, except for the subsection number and title, with the following:

Provide a field construction manual from the manufacturer that includes detailed instructions for constructing the retaining wall.

00596A.10(b) Nonproprietary Retaining Wall Systems - Replace this subsection, except for the subsection number and title, with the following:

Furnish Materials according to the applicable material Specifications.

00596A.11(b)(1) Material Passing No. 200 Sieve - Replace this subsection, except for the subsection number and title, with the following:

Ensure the amount of Material passing the No. 200 sieve does not exceed 15 percent by weight. Test according to AASHTO T 11.

00596A.11(b)(2) Plasticity Index - Replace this subsection, except for the subsection number and title, with the following:

Ensure the plasticity index of the Material passing the No. 40 sieve does not exceed 6. Test according to AASHTO T 90.

00596A.11(b)(4) Organic Content - Replace this subsection, except for the subsection number and title, with the following:

Ensure the organic content of material finer than the No. 10 sieve does not exceed 1.0 percent. Test according to AASHTO T 267.

00596A.12(b)(1) Aggregate, Strength, Freeze-Thaw Durability, Unit Weight, and Water Absorption - Replace the bullet that begins "Test, no longer than 18 months ..." with the following bullet:

Insert Project Name Here

- Test, no longer than 18 months before delivery, freeze-thaw durability of five test specimens made with the same materials, concrete mix design, manufacturing process, and curing method that are used on the Project. A weight loss of not more than 1 percent of the block's initial weight after 150 freeze-thaw cycles as tested according to ASTM C1262 is required in at least four of the five test specimens.

00596A.12(b)(7) Acceptance of Blocks - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is determined on tolerances, visual inspection, compressive strength, water absorption, freeze-thaw durability, and unit weight. Acceptance of compressive strength, water absorption, and unit weight is based on production sublots. The maximum number of blocks per production subplot is 2,000 blocks. Test blocks at the frequency of one set for each production subplot. Acceptance of freeze-thaw durability is based on the freeze-thaw testing requirements of 00596A.12(b)(1).

00596A.12(b)(10) Rejection - Replace this subsection, except for the subsection number and title, with the following:

Blocks not meeting the requirements of this Subsection are rejected.

00596A.12(c)(1) Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish Class 4000 structural concrete meeting the requirements of Section 02001. Furnish aggregate with 3/4 inch or greater maximum nominal aggregate size.

00596A.12(c)(7) Acceptance of Blocks - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is determined by tolerances, visual inspection, and concrete strength. Concrete strength is based on production sublots. A production subplot is 20 blocks or a single Day's production, whichever is less. The production subplot is represented by a single compressive strength sample of one set of cylinders.

00596A.12(c)(8) Rejection - Replace the paragraph that begins "Blocks not meeting requirements ..." with the following paragraph:

Blocks not meeting requirements of this Subsection, or that exhibit any of the following defects, are rejected:

(Use the following subsection .12(e)(1) when precast concrete panel facing is required. Use one of the following options as instructed below. Delete the option that does not apply.)

00596A.12(e)(1) Portland Cement Concrete - Add the following paragraph to the end of this subsection:

[Option 1 - Use the following paragraph when an ARES™ wall system is not specified.]

Furnish Class 4000 structural concrete meeting the requirements of Section 02001.

[Option 2 - Use the following paragraph when an ARES™ wall system is specified.]

For ARES™ retaining wall systems, furnish Class 4500 structural concrete meeting the requirements of Section 02001, except the maximum water-cementitious material ratio shall not exceed 0.44. For all other retaining wall systems use Class 4000 structural concrete meeting the requirements of Section 02001.

00596A.12(e)(5)(b) Soil Reinforcement Connection Devices - Replace the bullet that begins "Retention slots within ..." with the following bullet:

- Retention slots within ± 1 inch of the plan location. Do not exceed 1/8-inch slot openings. Check all slot openings with a Manufacturer supplied feeler gauge according to the manufacturer's recommendations. Panels from where the feeler gauge is pulled from the slot are rejected.

00596A.12(e)(6) Acceptance of Panel Concrete Strength - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is according to 00540.17 except:

- Acceptance of concrete strength is determined based on production sublots. A production subplot will consist of either 40 panels or a single Day's production, whichever is less. Cast one set of cylinders for each production subplot.
- Precast panel concrete strength may be conditionally accepted if the 7-Day initial strength exceeds 85 percent of the required 28-Day strength. Final acceptance of precast panel concrete strength is based on the required 28-Day test results.

00596A.12(e)(9) Rejection - Replace this subsection, except for the subsection number and title, with the following:

Panels not meeting the requirements of this Subsection are rejected.

00596A.14(f)(1) Geotextile - Replace this subsection, except for the subsection number and title, with the following:

Furnish geotextile according to Section 02320.

00596A.14(f)(2) Geogrid - Replace this subsection, except for the subsection number and title, with the following:

Furnish geogrid according to Section 02320.

(Use the following subsection .16 when KeySystem I™, LANDMARK™, or MESA™ wall systems are specified in 00596A.01.)

00596A.16 Concrete Modular Block Facing Connection Devices - Add the following to the end of this subsection:

Insert Project Name Here

(Use the following paragraph when the KeySystem I™ wall system is specified.)

For KeySystem I™ wall systems, furnish connection pins that conform to AASHTO M 32 and are galvanized after fabrication according to AASHTO M 111.

(Use the following paragraph and table when the LANDMARK™ wall system is specified.)

For LANDMARK™ wall systems, furnish lock bars that are made of a rigid, polyvinyl chloride polymer conforming to the following requirements:

Property	Limits	Specification
Specific Gravity	1.4 (min.)	ASTM D792
Tensile Strength (at yield)	2,700 psi (min.)	ASTM D638

(Use the following paragraphs and tables when the MESA™ wall system is specified.)

For MESA™ wall systems, furnish block connectors for block courses with geogrid reinforcement that are glass fiber reinforced, high density polypropylene conforming to the following minimum material requirements:

Property	Limits	Specification
Polypropylene: Group 1, Class 1, Grade 2	73% ± 2%	ASTM D4101
Fiberglass Content	25% ± 3%	ASTM D2584
Carbon Black	2% (min.)	ASTM D4218
Specific Gravity	1.08 ± 0.04	ASTM D792
Tensile Strength (at yield)	8,700 psi ± 1,450 psi	ASTM D638
Melt Flow Rate	(0.37oz. ± 0.16 oz.)/10 minutes	ASTM D1238

For MESA™ wall systems, furnish block connectors for block courses without geogrid reinforcement that are glass fiber reinforced, high density polyethylene (HDPE) conforming to the following minimum material requirements:

Property	Limits	Specification
HDPE: Type III, Class A, Grade 5	68% ± 3%	ASTM D1248
Fiberglass Content	30% ± 3%	ASTM D2584
Carbon Black	2% (min.)	ASTM D4218
Specific Gravity	1.16 ± 0.06	ASTM D792
Tensile Strength (at yield)	8,700 psi ± 725psi	ASTM D638
Melt Flow Rate	(0.11 oz. ± 0.07 oz.)/10 minutes	ASTM D1238

00596A.41 Excavation and Foundation Preparation - Replace the bullet that begins "Do not construct backfill ..." with the following bullet:

- Do not construct backfill when the backfill, the foundation, or the embankment it would be placed on is frozen, or unstable.

00596A.44(g)(1) Placement - Replace the paragraph that begins "Place geotextile wrapped ..." with the following paragraph:

Place geotextile wrapped-face construction according to Section 00350 and the ODOT GDM.

00596A.44(g)(2) Tolerances - Replace the bullet that begins "Maximum outward bulge ..." with the following bullet:

- Maximum outward bulge of the face between Soil reinforcement layers does not exceed 6 inches.

00596A.46(a) Inextensible Soil Reinforcement Components - Replace the paragraph that begins "To avoid horizontal obstructions ..." with the following paragraph:

To avoid horizontal obstructions, it is permissible to deflect Soil reinforcements up to 15 degrees along a vertical plane normal to the wall face (vertical skew). Construct soil reinforcement deflections that are gradual and smooth to avoid damage to the steel galvanization.

00596A.47(c)(3)(c) Spread Footing for Bridge Abutment on MSE Retaining Wall - Replace the bullet that begins "Extends to a depth ..." with the following bullet:

- Extends to a depth that is twice the footing width or 6 feet, whichever is greater.

00596A.47(c)(4)(b) Test Pad Method - Replace this subsection, except for the subsection number and title, with the following:

Determine the number of compaction Passes necessary to achieve the specified density by constructing a test pad that is at least 5 feet wide, 15 feet long, and 2 feet deep. Construct test pad fill in layers no more than 8 inches thick using the same Equipment and methods that are used to compact the wall backfill. Perform at least one density test according to AASHTO T 310 on each test pad layer. Construct and test a new test pad when changes in material occur or different Equipment is used during the construction of the wall backfill.

(NOTES to Specification Writer:

(1) The bid item quantity for MSE retaining walls is "Lump Sum," and includes all labor, materials, and inclusive items necessary to complete the work. Items such as excavation, shoring, reinforced backfill, and standard copings are considered inclusive items to the wall pay item.

Items such as sidewalk copings, traffic barrier, moment slabs, guardrail and fencing are considered appurtenances along with the following items and should be included as separate bid items:

Insert Project Name Here

Items associated with project specific details such as architectural treatments, geomembrane barriers.

Items associated with incidental work, such as scour protection, dewatering, or foundation improvement, and items that cost more than 5 percent of the lump sum cost.

(2) For proprietary retaining wall systems, where details of wall construction are generally not known until after the construction contract is awarded, do not include estimated quantities for inclusive items.)

00596A.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of retaining walls are:

(Provide wall area below. The wall area is bounded by the beginning and end of the wall, top of the wall (excluding wall coping), and top of the footing or leveling pad. If no footing or leveling pad exists, the bottom of the wall is used. Copy and paste more lines, as necessary, to list estimated areas for each retaining wall.)

Structure Number _____ :

Station Limits

Area

Sta. _____ to Sta. _____ (Lt.)(Rt.) _____ (Wall area here) sq. ft.

(Use the following paragraph to list estimated quantities for nonproprietary retaining wall systems only. Ensure that the Wall (Bridge) Designer provides estimated quantities for all-inclusive items such as excavation, shoring, reinforced backfill, leveling pads, wall drainage backfill/geotextile, and standard coping. Copy and paste more lines, as needed, to list estimated quantities for each nonproprietary retaining wall.)

The estimated quantities of listed Materials are:

Structure No. _____ : Sta. _____ to Sta. _____ (Lt.)(Rt.)

Material

Estimated Quantities

____ cu. yd.
____ foot
____ lb.

00596A.90 Payment - Replace the paragraph that begins "In item (b) ..." with the following paragraph:

In item (b), the height of barrier is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

In the paragraph that begins "No separate or additional..." add the following bullet:

- Stage-1 and stage-2 facing for two-stage MSE retaining walls

SP00596B (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP00350, SP00440, SP02001, SP02010, & SP02320

Requires SP02340 if gabion baskets are required.

Requires SP02350 if metal bin retaining walls are required.

Requires SP02630 when base aggregate is required.

Requires SP02690 when PCC Aggregate is required.)

SECTION 00596B - PREFABRICATED MODULAR RETAINING WALLS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00596B of the Standard Specifications modified as follows:

(Use the following subsection .01 and bullets when the contractor is required to select a permanent proprietary Prefabricated Modular wall system. For "Bridge" retaining walls and "Highway" retaining walls, fill in the blank with the structure number. If the retaining wall does not have a structure number, delete the phrase ", structure no. ____ ,".)

00596B.01 Proprietary Prefabricated Modular Walls - Add the following paragraph and bullet list to the end of this subsection:

Select one of the following preapproved Prefabricated Modular proprietary retaining wall systems for the wall, structure no. ____ , as shown:

(Fill in the blanks with the proprietary retaining wall system name (including the "™" symbol), company name and telephone number from the ODOT Geotechnical Design Manual, appendix 15-D.)

- _____ Retaining Wall System, **provided**
by _____, telephone: _____.
- _____ Retaining Wall System, **provided**
by _____, telephone: _____.
- _____ Retaining Wall System, **provided**
by _____, telephone: _____.

00596B.03 Definitions - Add the following definition after the definition for “Manufacturer”:

Minor Retaining Wall - A prefabricated modular retaining wall that meets all of the following conditions for the full length of the wall:

- Wall height (H) from the top of leveling pad to the top of wall does not exceed 4.0 feet.
- Wall fore slope and back slope are both flatter than 1V:4H within a horizontal distance of H, measured from the nearest point on the wall.
- Surcharge loading is not allowed on the retaining wall back slope within a horizontal distance of H, measured from the nearest point on the wall.
- Failure of the wall would not result in significant loss of access and performance of adjacent public or private structures.
- The wall is labeled as a Minor Retaining Wall in the Plans.

Replace the definition that begins “Nonproprietary Retaining Wall System...” with the following definition:

Nonproprietary Retaining Wall System - A Retaining Wall System that is fully designed in the bid documents.

Replace the definition that begins “Preapproved Proprietary Retaining Wall System...” with the following definition:

Preapproved Proprietary Retaining Wall System - A wall system that is listed in Appendix 16-D of the Geotechnical Design Manual (GDM).

00596B.04 Proprietary Retaining Walls - Replace the bullet that begins “Complete stamped Working...” with the following bullet:

- Complete stamped Working Drawings and design calculations according to 00150.35. Minor Retaining Walls do not require stamped Working Drawings unless prepared by a registered professional engineer. Preparation of Working Drawings and design calculations for Minor Retaining Walls does not require professional engineering registration according to ORS 672.060 (See also OAR 820-040-0005(4)(d)(A)).

00596B.04(a) Working Drawings - Replace the paragraph that begins "Working Drawings shall ..." with the following paragraph:

Submit Working Drawings meeting the requirements of the Project documents and the AASHTO *LRFD Bridge Design Specifications*, as modified by the ODOT GDM, and are consistent with the preapproved Retaining Wall System.

(Use the following subsection .04(b) to list proprietary wall design parameters. Obtain information from the designer. Delete what does not apply. Copy and paste the structure number and bullets for each separate retaining wall.)

00596B.04(b) Design Calculations - Replace the paragraph that begins "Design calculations shall ..." with the following paragraph:

Insert Project Name Here

Submit design calculations meeting the requirements of the Project documents and AASHTO *LRFD Bridge Design Specifications*, as modified by the ODOT GDM, and are consistent with the preapproved Retaining Wall System.

Add the following to the end of this subsection:

The following retaining wall design parameters have been established for this Project:

Structure Number _____

- Foundation soil unit density _____ kips/cu. ft.
- Foundation soil angle of internal friction _____ degrees
- Foundation soil nominal (unfactored)
bearing resistance _____ kips/sq. ft.
- Retained soil unit density..... _____ kips/cu. ft.
- Retained soil angle of internal friction..... _____ degrees
- Peak ground acceleration coefficient (PGA)..... _____
- Long period spectral acceleration coefficient (S_1) _____
- Site class _____

(Use the following two bullets when the Mononabe-Okabe method is required.)

- Peak seismic ground acceleration coefficient
modified by short period site factor (A_s)..... _____
- Horizontal seismic acceleration coefficient (K_h)..... _____

(Use the following bullet and sub-bullet when the Mononabe-Okabe method is not required. Repeat as necessary for variations in wall height and backslope along the wall.)

- Between Station _____ and Station _____ (Lt.)(Rt.):
 - Total (static plus seismic) external
seismic thrust (P_{AE})..... _____ kip/ft.

(Use the following bullet and sub-bullets to specify minimum base width for external and overall stability. Repeat as necessary for variations in wall height and backslope along the wall.)

- Between Station _____ and Station _____ (Lt.)(Rt.):
 - Minimum base width for overall stability _____ ft.
 - Minimum base width for external stability _____ ft.

00596B.04(c) Manufacturer's Field Construction Manual - Replace this subsection, except for the subsection number and title, with the following:

Prepare a field construction manual from the manufacturer that includes detailed instructions for constructing the retaining wall.

Insert Project Name Here

00596B.10(a) Proprietary Retaining Wall Systems - Replace this subsection, except for the subsection number and title, with the following:

Furnish all Proprietary Retaining Wall System components from the same wall Manufacturer. If there are conflicts between the Manufacturer's requirements and the Agency's requirements, the Agency's requirements prevail.

00596B.10(b) Nonproprietary Retaining Wall Systems - Replace this subsection, except for the subsection number and title, with the following:

Furnish Materials according to the applicable material Specifications.

00596B.11(d)(1) Material Passing No. 200 Sieve - Replace this subsection, except for the subsection number and title, with the following:

Ensure the amount of Material passing the No. 200 sieve does not exceed 15 percent by weight. Test according to AASHTO T 11.

00596B.11(d)(2) Plasticity Index - Replace this subsection, except for the subsection number and title, with the following:

Ensure the plasticity index of the material passing the No. 40 sieve does not exceed 6. Test according to AASHTO T 90.

00596B.12(b)(6) Acceptance of Bin Unit Concrete Strength - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is according to 00540.17, except acceptance of concrete strength is determined based on production sublots. A production subplot will consist of either 10 units or a single Day's production, whichever is less. Cast one set of cylinders for each production subplot. The concrete strength of a production subplot is represented by a single compressive strength test on a cylinder.

00596B.12(b)(9) Rejection - Replace this subsection, except for the subsection number and title, with the following:

Units not meeting the requirements of this Subsection are rejected.

00596B.12(c)(1) Aggregate, Strength, Freeze-Thaw Durability, Unit Weight, and Water Absorption - Replace the bullet that begins "Test, no longer than ..." with the following bullet:

- Test, no longer than 18 months before delivery, freeze-thaw durability of five test specimens made with the same materials, concrete mix design, manufacturing process, and curing method that will be used on the Project. A weight loss of not more than 1 percent of the block's initial weight after 150 freeze-thaw cycles as tested according to ASTM C1262 is required in at least four of the five test specimens.

00596B.12(c)(7) Acceptance of Blocks - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Acceptance is determined on tolerances, visual inspection, compressive strength, water absorption, freeze-thaw durability, and unit weight. Acceptance of compressive strength, water absorption, and unit weight is based on production sublots. The maximum number of blocks per production subplot is 2,000 blocks. Test blocks at the frequency of one set for each production subplot. Acceptance of freeze-thaw durability is based on the freeze-thaw testing requirements of 00596B.12(c)(1).

00596B.12(c)(10) Rejection - Replace this subsection, except for the subsection number and title, with the following:

Blocks not meeting the requirements of this Subsection are rejected.

00596B.12(d)(1) Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish Class 4000 structural concrete meeting the requirements of Section 02001. Furnish aggregate with 3/4 inch or greater maximum nominal aggregate size.

00596B.12(d)(7) Acceptance of Blocks - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is determined by tolerances, visual inspection, and concrete strength. Concrete strength is based on production sublots. A production subplot is 20 blocks or a single Day's production, whichever is less. The production subplot is represented by a single compressive strength sample of one set of cylinders.

00596B.12(d)(8) Rejection - Replace the paragraph that begins "Blocks not meeting the ..." with the following paragraph:

Blocks not meeting the requirements of this Subsection, or that exhibit any of the following defects are rejected:

00596B.12(e)(6) Acceptance of Concrete Strength - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of concrete strength is determined based on production sublots. A production subplot will consist of either 100 Crib Wall members or a single Day's production, whichever is less. Cast one set of cylinders for each production subplot. The concrete strength of a production subplot is represented by a single compressive strength test on a cylinder.

00596B.12(e)(7) Rejection - Replace this subsection, except for the subsection number and title, with the following:

Crib units not meeting the requirements of this Subsection are rejected.

00596B.40(a) Proprietary Retaining Walls - Replace the paragraph that begins "Construct proprietary retaining ..." with the following paragraph:

Construct proprietary retaining walls according to Agency requirements, Manufacturer's Working Drawings, and the Manufacturer's field construction manual. If the Manufacturer's

Insert Project Name Here

Working Drawings or the Manufacturer's field construction manual conflict with Agency requirements, Agency requirements take precedence.

00596B.41 Excavation and Foundation Preparation - Replace the bullet that begins "Do not construct backfill ..." with the following bullet:

- Do not construct backfill when the backfill, the foundation, or the embankment that it would be placed on is frozen, or unstable.

00596B.44(c)(1) General - Replace the bullet that begins "Minimum overlap shall ..." with the following bullet:

- With a minimum overlap of 12 inches.

00596B.47(b)(5)(a) Test Pad Method - Replace this subsection, except for the subsection number and title, with the following:

Before placing the wall backfill, determine the number of Passes necessary to achieve the specified density by constructing a test pad that is at least 5 feet wide, 15 feet long, and 3 feet in final depth. Construct test pad fill in layers no more than 8 inches thick using the same Equipment and methods that are used to compact the wall backfill. Perform at least one density test according to AASHTO T 310 on each test pad layer. Construct and test a new test pad when changes in material occur or different Equipment is used during the construction of the wall backfill, except a new test pad is not required for modular block drainage backfill.

00596B.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of retaining walls are:

(Provide wall area below. Copy as necessary.)

Station Limits	Area
Sta. _____ to Sta. _____ (Lt.)(Rt.)	_____ (Wall area here) _____ sq. ft.

(Use the following paragraph to list estimated quantities for nonproprietary retaining wall systems only. Ensure that the Wall (Bridge) Designer addresses quantities for excavation, shoring (if needed), and leveling pad concrete and rebar, and backfill. Copy and paste more lines to address the estimated quantities for nonproprietary retaining wall systems. For Minor Retaining Walls (walls that are not assigned a structure number), revise the Structure Number column heading to a descriptor that will match the plans identification for the wall.)

The estimated quantities, for estimating purposes only, of excavation, shoring, leveling pads, and specified backfill for nonproprietary retaining wall systems are:

Structure Number	Material	Estimated Quantities
____#____	_____	_____ cu. yd.

Insert Project Name Here

#

____ foot
____ lb.

00596B.90 Payment - Replace the paragraph that begins "In item (b) ..." with the following paragraph:

In item (b), the height of barrier is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00596C (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP00440 & SP02320
Requires SP02630 when base aggregate is required)

SECTION 00596C - CAST-IN-PLACE CONCRETE RETAINING WALLS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00596C of the Standard Specifications modified as follows:

00596C.02 Cost Reduction Proposals - Replace this subsection, except for the subsection number and title, with the following:

According to 00140.70, cost reduction proposals are considered for Proprietary Retaining Wall Systems that are preapproved by the Agency before Advertisement of the Project.

00596C.03 Definitions - Replace the paragraph that begins "**Semi-Gravity Cantilever Retaining Wall System** ..." with the following paragraph:

Semi-Gravity Cantilever Retaining Wall System - A retaining wall composed of a cast-in-place reinforced concrete flexural stem and base slabs that resist the moments and shears that they are subjected to and depends on concrete self-weight and from the weight of backfill over its heel for stability.

00596C.11(a)(1) Material Passing No. 200 Sieve - Replace this subsection, except for the subsection number and title, with the following:

Ensure the amount of material passing the No. 200 sieve does not exceed 15 percent by weight. Test according to AASHTO T 11.

Insert Project Name Here

00596C.11(a)(2) Plasticity Index - Replace this subsection, except for the subsection number and title, with the following:

Ensure the plasticity index of the material passing the No. 40 sieve does not exceed 6. Test according to AASHTO T 90.

00596C.41 Excavation and Foundation Preparation - Replace the bullet that begins "Do not construct backfill ..." with the following bullet:

- Do not construct backfill when the backfill, the foundation, or the embankment that it would be placed on is frozen, or unstable.

00596C.42(e)(1) Test Pad Method - Replace this subsection, except for the subsection number and title, with the following:

Before placing the wall backfill, determine the number of Passes necessary to achieve the specified density by constructing a test pad that is at least 5 feet wide, 15 feet long, and 3 feet in final depth. Construct test pad fill in layers no more than 8 inches thick using the same Equipment and methods that are used to compact the wall backfill. Perform at least one density test according to AASHTO T 310 on each test pad layer. Construct and test a new test pad when changes in material occur or different Equipment is used during the construction of the wall backfill.

00596C.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of retaining walls are:

(Provide wall area below. Copy as necessary.)

Station Limits	Area
Sta. _____ to Sta. _____ (Lt.)(Rt.)	_____ (Wall area here) _____ sq. ft.

(Use the following paragraph to list estimated quantities. Ensure that the Wall (Bridge) Designer addresses quantities for concrete, reinforcement, excavation, shoring (if needed), and backfill. Copy and paste more lines to address the estimated quantities for retaining wall systems.)

The estimated quantities, for estimating purposes only, of concrete, steel reinforcement, excavation, shoring, and specified backfill for retaining wall systems are:

Structure Number	Material	Estimated Quantities
_____ #	_____	_____ cu. yd.
_____ #	_____	_____ foot
_____ #	_____	_____ lb.

00596C.90 Payment - Replace the paragraph that begins "In item (c) ..." with the following paragraph:

Insert Project Name Here

In item (c), the height of barrier is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00596D (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
*Requires SP00510, SP00560, SP02001, SP02130,
SP02190, SP02510, SP02520 & SP02530.
This Section may require SP00530, SP00540, SP00543, SP00596E, SP00840.)*

SECTION 00596D - SOLDIER PILE RETAINING WALLS

(Follow all instructions and make all edits with "Track Changes" turned on. This template provides a basic special provision layout for use with a soldier pile retaining wall (cut wall construction) in predrilled hole. It may be necessary to delete, add, or revise content for Project specific design. In general, do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Note to spec writer: SP00510 should be included for temporary shoring, structure excavation for soldier pile wall construction, including quantity breakdown as needed. SP00530, SP00540, and SP00543 should be included for cast-in-place permanent facing reinforcement, concrete, and architectural treatment including quantity breakdown as needed.)

Section 00596D is not a Standard Specification and is included in this Project by Special Provision.

Description

00596D.00 Scope - This Work consists of furnishing and constructing permanent soldier pile retaining walls composed of steel soldier piles placed and backfilled in predrilled holes, top-down wall excavation, and installation of lagging, wall drainage system and permanent facing.

Select the drilling method and Equipment, and construction procedures to meet the requirements of these Special Provisions, subject to the review and approval of the Engineer.

(Use the following sentence when tie back retaining walls are required.)

See Section 00596E for requirements of permanent ground anchors in tie back retaining walls.

Insert Project Name Here

00596D.01 Abbreviations and Definitions:

CGC - Commercial Grade Concrete

CLSM - Controlled Low Strength Material

Soldier Pile - Steel H-pile, wide flange beam, or built-up section, including shear connector studs and connection plates. Soldier piles are placed in predrilled holes spaced at regular intervals and backfilled before top-down excavation begins for retaining wall construction.

00596D.02 Submittals - Submit Working Drawings, Equipment lists and other submittals according to 00150.35 and 00150.37.

(a) Unstamped Submittals:

(1) Soldier Pile Retaining Wall Work Plan including:

- Construction schedule and sequence.
- Descriptive data and operating procedure for Equipment to be used.
- Method of drilling, cleanout, and disposal of drilling spoils, including water or contaminated CLSM or CGC expelled from the top of the hole or casing.
- Method for ensuring predrilled hole stability. If temporary casing is proposed, provide material, size, installation and removal information. If drilling slurry is proposed, provide mix design, and procedure for use, removal and disposal.
- Details of soldier pile installation and bracing, including centralizers.
- Details of CLSM and CGC placement including operational procedures for pumping and tremie methods.
- Wall excavation Lifts and lagging placement.
- Connection of geocomposite drains to lagging or facing and to subsurface drain.
- Reinforced concrete facing construction.

(Use the following bullet when tie back retaining walls are required.)

- Ground anchor construction, installation, and testing procedures according to Section 00596E if used.

(2) Personnel qualifications according to 00596D.30.

(3) Materials certificates of compliance and quality compliance documents size, grade and strength of Materials to be used.

(4) Shop assembly and erection details, including:

- Plan and profile views with soldier pile locations shown and numbered.
- Members and connections for any portion of the system not shown are to be detailed by the Contractor and indicated on the Working Drawings.

Insert Project Name Here

- Indicate all welds by standard welding symbols of the AWS A2.4.
- Reinforced concrete shop drawing for cast-in-place facing according to Section 00540
- Precast concrete panel lagging.

(b) Stamped Working Drawings:

- Contractor designed temporary ground support.
- Mix designs for structural concrete in cast-in-place facing and precast concrete panel lagging.
- Design, layout and details of forms and falsework support for cast-in-place facing according to Section 00540.

Clearly indicate by flagging and clouding any changes, additions or alterations to submittals that are deviations from the Contract documents or changes to previously approved or accepted submittals. Provide a written explanation of changes accompanying each submittal.

Materials

00596D.10 Steel Soldier Pile - Furnish structural steel soldier piles of the shape, material and grade shown. Furnish Materials meeting the following requirements:

Drilling Slurry	00512.14
Steel Piles	02520.10
Structural Steel Plates, Shapes, Bars and Miscellaneous Metals	02530
Shear connector studs	AASHTO M169, AWS D1.1

00596D.11 Steel Casing - Furnish temporary casing meeting the requirements of ASTM A 252 or ASTM A 36. Use casing of sufficient strength to resist handling, transportation and installation stresses and the external stresses of the subsurface Materials. Ensure that the casing is clean and watertight prior to placement.

00596D.12 Drilling Slurry - Furnish drilling slurry meeting the requirements of 00512.14.

00596D.13 Backfill in Predrilled Holes for Soldier Piles - Furnish CGC as shown and meeting the requirements of Section 00440 except furnish the mixture with a slump of 8 inches $\pm$ 1 1/2 inches. Furnish CLSM as shown and meeting the requirements of Section 00442.

00596D.14 Subsurface Drains - Furnish subsurface drainage pipe, drain backfill material and drainage geotextile as shown and according to Section 00430.

(In subsection .15, modify the list of products as advised by the wall designer.)

00596D.15 Prefabricated Geocomposite Wall Drains - Furnish one of the following products, or other approved equal:

- SiteDrain™ Sheet-184 by American Wick Drain, Inc., Monroe, NC

Insert Project Name Here

- Delta® Drain 6000 HI-X by Cosella-Dorken Products, Inc., Beamsville, ON
- TenCate Mirafi® G100N by TenCate Geosynthetics Americas, Pendergrass, GA

Furnish geocomposite drains in rolls wrapped with a protective covering and stored in a manner that protects the drains from mud, dirt, dust, sunlight and damage.

(Use one of the three options for subsection .16 shown below, as appropriate to the type of lagging to be used. Delete the other options.)

[Option 1 - Use the following bullet when timber lagging is used]

00596D.16 Timber Lagging - Furnish construction-grade, rough-cut douglas fir timber meeting the requirements of Section 02130. When treated timber lagging is shown, furnish preservative treatment according to Section 02190.

[Option 2 - Use the following bullet when precast concrete lagging panels are used]

00596D.16 Precast Concrete Lagging Panel Facing - Furnish structural concrete of the class shown, according to Sections 00540 and 02001. Furnish steel reinforcement meeting the requirements of Sections 00530 and 02510.

[Option 3 - Use the following bullet when steel plate lagging is used]

00596D.16 Steel Plate Lagging - Furnish ASTM A 572, Grade 50 structural steel plate meeting the requirements of Section 02530.

00596D.17 Cast-in-Place Reinforced Concrete Facing - Furnish structural concrete of the class shown, according to Sections 00540 and 02001. Furnish reinforcement according to Sections 00530 and 02510.

00596D.18 Architectural Treatment - Furnish architectural treatment according to Section 00543.

Equipment

00596D.20 Approval of Predrilling Equipment for Soldier Pile Holes - 10 Calendar Days before the preconstruction meeting, submit the following (unstamped) according to 00596D.02:

- Drilling Equipment data including suitability, based on the Contractor's understanding of the site and subsurface conditions.
- Project history of the drilling Equipment that demonstrates the successful use of the Equipment in drilling boreholes of equal or greater diameter and depth and through subsurface conditions similar to those expected to be encountered on this Project.

Procedural approvals given by the Engineer are subject to trial in the field and will not relieve the Contractor of the responsibility to satisfactorily complete the Work.

Labor

00596D.30 Personnel Qualifications - 10 Calendar Days before the preconstruction meeting, submit the following:

- A list identifying the personnel performing and supervising the soldier pile work. Include a list of the locations and dates of previous projects and reference contacts for verification to support the experience requirements listed below.
- Proof of successfully completing at least three temporary or permanent soldier pile retaining wall projects in the last 5 years.
- Proof that drill operator has successfully performed three projects with similar drilled holes in the last 5 years.
- Welder qualifications and welding procedures in accordance with American Welding Society Standard AWS D 1.1, *Structural Welding Code*.

Do not start Work on any soldier pile wall, or order Materials, until the personnel qualifications have been approved by the Engineer.

00596D.31 Quality Control Personnel - Provide technicians with CAgT and CDT certifications.

Construction

00596D.40 Predrilled Holes for Soldier Piles - Predrill holes at the locations and to the depths and diameters shown. Maintain a stable hole meeting the minimum required diameter for the full depth shown. Ensure that the sidewalls of holes do not collapse during drilling. Frequently check the plumbness, alignment, and dimensions of the hole during construction.

Dispose of materials removed from the predrilled hole according to 00290.20. Divert all surface water away from holes and prevent all surface water from entering holes by approved means.

Notify the Engineer of completion of each hole to permit inspection. No more than 2 inches of loose or disturbed Material is allowed at the bottom of the predrilled hole. Hole cleanliness is determined by the Engineer. Measure and record final bottom of the hole elevation after final cleaning to verify that the bottom elevation meets Contract requirements. Do not proceed with soldier pile installation until the hole bottom cleanliness requirements have been met and the bottom elevation is approved.

Install temporary casing according to the approved installation plan. Ensure that temporary casing is clean and watertight before installation. Remove all temporary casing during or after completion of backfill placement.

00596D.41 Steel Soldier Piles - Furnish and place steel soldier piles as shown and according to the following:

- (a) **General** - Shop fabricate soldier pile with attachments such that no field welding is necessary.
- (b) **Storage and Handling** - Store and handle steel soldier piles in ways that protect them from damage. Bent or kinked piles are rejected.

(c) End Treatment - Cut pile ends square.

(d) Splices - Do not splice piles unless approved by the Engineer.

(e) Welding - Perform structural steel welding according to 00560.26(a) and steel piling welding according to 00520.43(g). Do not begin welding until all of the following have been approved by the Engineer:

- Welding Procedure Specification (WPS)
- Procedure Qualification Records (PQR)
- Welder Qualification Test Records (WQTR)
- Material Test Report (MTR)
- AWS Certified Welding Inspector (CWI)

Following completion of all welding, submit the following:

- An inspection report stating that the welding under the Contract was performed according to AWS D1.1 that includes a review of the WPS, a review of welder qualifications, and a report on visual inspection of the welds on the job site. Have a certified welding inspector (CWI) holding QC1 certification as defined in AWS D1.1 sign the inspection report.

(f) Cutoff Lengths - Cut off the tops of all permanent piles square and smooth at the elevations shown or as directed. All cut-off pile becomes the property of the Contractor. Dispose of according to 00290.20.

(g) Placement - Do not place steel soldier piles in predrilled holes prior to receipt of the Engineer's approval of the hole. Fit piles with approved centralizers to keep the pile in the center of the hole. Obtain the Engineer's approval of the centralizer Material type, attachment method, and placement before use.

(Edit the tolerance values as needed for Project specific design requirements. The dimensional tolerances given are estimated to be adequate for most cases, however, less stringent location tolerances may be acceptable based on the Project.)

Position each pile meeting the following tolerances:

- Within 2 inches of the plan location shown, perpendicular to wall face, measured from top of wall face elevation.
- Within 2 inches of the plan location shown, parallel to wall face, measured from top of wall face elevation.
- Within 2 inches of the plan elevation.
- Vertical plumbness tolerance of 1 inch per 10 feet for each axis of the soldier pile.
- Provide minimum required bearing contact between lagging and soldier pile flange as shown.

- Provide minimum required edge distance between pile edges and the predrilled hole as shown.

00596D.42 Backfilling Predrilled Holes for Soldier Piles - Place concrete in predrilled holes immediately after completion of soldier pile installation, and with approval of the Engineer. Concrete may be placed without mechanical vibration in those areas of predrilled holes that are not formed or are below the ground line.

Restrain the soldier pile from vertical and horizontal movement during concrete placement. Place concrete with a tremie pipe, beginning near the bottom of the hole. Place concrete continuously until concrete at the top of the predrilled hole is free of water, Soil, and debris, and uncontaminated concrete extends to the elevation shown. If a temporary casing is used, fill the space between the casing and the soldier pile with pile concrete as the casing is withdrawn, maintaining a minimum 5-foot head of backfill above the bottom of the casing. A slight downward movement of the casing while exerting downward pressure, or hammering or vibrating the casing is permitted to facilitate extraction. Dispose of all contaminated concrete and CLSM pile backfill expelled from the top of the predrilled hole in an approved manner. Remove waste pile backfill from the site. If a delay in pile backfill placement occurs because of a delay in pile backfill delivery or other factors, reduce the placement rate to maintain a flow of fresh pile backfill into the predrilled hole.

Do not wait longer than 60 minutes between pile concrete placements or use concrete older than 90 minutes from batch time, unless allowed by the approved mix design. Use procedures for concrete placement that ensure the concrete in the predrilled hole forms a monolithic, homogeneous unit.

Place pile concrete using hoses or pipes having watertight joints. For concrete placement by gravity tremie, use a hose or pipe having an inside diameter of at least 8 inches. For placement by concrete pump, use a hose with an inside diameter of at least 4 inches. Provide a backup delivery system that can be used in case of failure of the primary delivery system. Place concrete only against the bottom of the predrilled hole or into fresh concrete.

If caving occurs during concrete placement, the prebored pile may be rejected at the discretion of the Engineer.

Following the concrete placement, backfill the remainder of the predrilled hole with CLSM.

00596D.43 Excavation and Lagging Installation - Do not begin general excavation in the area in front of the wall until after the soldier piles are constructed. Maintain a stable excavation site and safe working conditions. Place lagging as shown. Place lagging from the top down as wall excavation proceeds. Minimize excavation required to install the lagging and fill resulting voids behind the lagging with granular wall backfill.

Prior to the start of excavation perform survey to establish baseline location of the tops of soldier piles. Perform survey and frequent visual inspection during excavation and lagging installation to monitor wall movement and maintain tolerance according to 00596D.41(g).

Where lagging is installed above original ground, carefully place granular wall backfill against the lagging as required to minimize the formation of voids. Place backfill at a rate that prevents movement of the wall and loss of ground.

Insert Project Name Here

(Use the following sentence when tie back retaining walls are required.)

See Section 00596E for installation, stressing and testing of permanent ground anchors in tie back retaining walls.

00596D.44 Wall Drainage Systems - Place geocomposite drains according to manufacturer's installation guidelines. Construct seams, top, bottom and end caps to prevent concrete or backfill from entering the geocomposite. Install the geocomposite drains between the piles with the geotextile fabric facing toward the lagging and the impervious backing away from the lagging. Secure the drains in position so as to prevent concrete from contaminating the geotextile facing. Install continuous drains from the top of the lagging to the bottom of the concrete facing.

Construct wall subsurface drain according to Section 00430.

00596D.45 Reinforced Concrete Facing - Construct reinforced concrete facing to the limits shown, according to Sections 00530 and 00540 and the approved Working Drawings.

Measurement

00596D.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(Delete Work that is not required on the Project.)

(a) Predrilling and Encasing Soldier Piles - Predrilling and backfilling holes for soldier piles will be measured on the length basis by the vertical excavated length from the bottom of the predrilled hole to the top of predrilled hole elevation.

(b) Steel Soldier Piles - Steel soldier piles will be measured on the length basis by the length of each pile from the pile tip to the top of the pile elevation. No measurement will be made for welded attachments to the piles.

(c) Lagging - Lagging will be measured on the area basis by the square foot area of lagging installed. The quantity will be computed based on the vertical dimension from the highest lagging elevation to the lowest lagging elevation between each pair of adjacent soldier piles as the height dimension and the center-to-center spacing of the soldier piles as the length dimension.

(d) Wall Drainage and Filter System - No measurement of quantities will be made for Structure drainage system.

The estimated quantities of Materials for Structure drainage system are:

(List by structure number then item and quantity. Revise item list as appropriate. Obtain information from the Retaining Wall Designer.)

Structure Number	Material	Quantities
------------------	----------	------------

Insert Project Name Here

#	6-inch Drain Pipe	_____ foot
#	Drainage Geotextile, Type 1	_____ sq. ft.
#	Geocomposite Drains	_____ sq. ft.
#	Granular Drain Backfill	_____ cu. Yd.

Delineators at subsurface drain outlets will be measured according to 00840.80.

Structure excavation will be measured according to 00510.80.

The quantities of reinforcement used in cast in place concrete facing will be measured according to 00530.80.

The quantities of structural concrete in cast in place facing will be measured according to 00540.80.

Payment

00596D.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item

Unit of Measurement

(Delete Pay Items not included in the Schedule of Items. Do not change the alpha characters next to the Pay Items.)

- (a) Predrilling and Encasing Soldier Piles Foot
- (b) _____ Steel Soldiers Piles Foot
- (c) Lagging Square Foot
- (d) Wall Drainage and Filter System..... Lump Sum

In Item (b), the type and size of pile is inserted in the blank.

Item (a) includes providing, moving, setting up, and removing the drilling Equipment to the Project at the various locations on the Project. It also includes predrilling holes for soldier piles and disposing of the excavated Material while furnishing, placing, removing temporary casings, and backfilling the predrilled hole with specified concrete after steel soldier pile installation.

Item (b) includes furnishing complete fabricated soldier piles with welded assemblies, installing, supporting, and trimming the piles.

Item (c) includes furnishing and installing lagging and filling voids behind lagging with granular wall backfill.

Item (d) includes furnishing and installing geocomposite drain and subsurface drain pipe, Aggregate and geotextile.

Structure excavation will be paid for according to 00510.90.

Insert Project Name Here

Reinforcement in cast in place concrete facing will be paid for according to 00530.90.

Concrete in cast in place concrete facing will be paid for according to 00540.90.

Delineators at subsurface drain outlets will be paid for according to 00840.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for welding inspection performed according to 00596D.41(e).

SP00596E (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP02020, SP02080 & SP02515)

SECTION 00596E – GROUND ANCHORS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Notes for use: Provide LRFD factored design loads, locations, minimum unbonded length, minimum bond lengths, soil or rock-grout bond strength, Class I corrosion protection requirement, and any limitations on anchor inclination in the plans or special provisions. The Contractor is then responsible for selecting the type of anchor and designing the anchor system to satisfy the design criteria provided. Sufficient foundation information must be given to permit the Contractor to perform the design and installation. This special provision is written for common downward inclined ground anchors like those used as tie-backs for top-down construction retaining walls. Special uses such as vertical seismic tie-down anchors will need additional project specific revision.)

Section 00596E is not a Standard Specification and is included in this Project by Special Provision.

Description

00596E.00 Scope - This Work consists of designing, furnishing, installing, testing, stressing and locking-off prestress load in permanent Ground Anchors at locations shown and as specified. The Work also includes installation and testing of sacrificial Ground Anchors for design verification, and furnishing, installing and removing assemblies necessary to perform the Work.

Select the Ground Anchor type, drill hole diameter, Bond Length, drilling method, installation method and grouting method to provide the specified load-carrying capacity and satisfy the acceptance criteria.

00596E.01 Definitions:

Alignment Load (AL) - A nominal load applied to each anchor to maintain correct position of testing equipment.

Anchor Head - The Anchor Head includes wedges and a wedge plate for strand tendons or an anchor nut for bar tendons. The Anchor Head transfers the prestressing force from the prestressing steel to the Bearing Plate.

Anchorage - The combined system of Anchor Head, Bearing Plate, Trumpet, and corrosion protection that transfers prestressing force from the prestressing steel to the surrounding ground or the supported structure.

Bearing Plate - A steel plate under the Anchor Head that distributes the prestressing force to the anchored structure.

Bond Length - The grouted length of the Ground Anchor that is bonded to surrounding Soil or Rock and transfers applied tensile load to the surrounding Soil or Rock.

Class I Corrosion Protection System - A Class I Corrosion Protection System encases the prestressing reinforcement inside a plastic sheath filled with either grout or corrosion-inhibiting compound. A Class I protected tendon is also referred to as an encapsulated tendon or a double-corrosion-protected tendon.

Creep Test - A test to determine the movement of the Ground Anchor at a constant load. Ground Anchor movement is recorded at specified intervals in the Creep Test.

Factored Design Load (FDL) - The value shown or specified for the Ground Anchor design controlling limit state combination of factored loads determined by AASHTO LRFD methodology. Test schedules presented herein present incremental load and the maximum test load in terms of Factored Design Load (FDL).

Free Stressing Length - The designed length of the tendon that is not bonded to the surrounding ground or grout during stressing. Free Stressing Length is also referred to as unbonded length.

Ground Anchor - A structural system consisting of a tendon installed in a drilled and grouted hole in the ground (Soil or Rock) that is stressed after installation and used to transmit the applied tensile load to the ground. Anchorage, Free Stressing Length, and Bond Length are the basic components of a Ground Anchor.

Lock-Off Load - The load transferred to the Anchorage after the load testing is complete and the anchor has been accepted.

Insert Project Name Here

Performance Test - Cyclic incremental test loading and unloading of a production anchor and recording the total movement of the Anchor Head at each increment. A Creep Test is performed at the maximum test load in a cycle as indicated in the Performance Test schedule.

Preproduction Verification Test - Cyclic incremental test loading and unloading of a sacrificial anchor and recording the total movement of the Anchor Head at each increment. A Creep Test is performed at the maximum test load in a cycle as indicated in the Preproduction Verification Test schedule. Preproduction Verification Test is used to verify Contractor's Ground Anchor design and installation procedure.

Proof Test - Incremental loading and unloading of a production anchor and recording the total movement of the Anchor Head at each increment. A Creep Test is performed at the maximum test load as indicated in the Proof Test schedule. Proof Test is used to verify grout/ground bond strength.

Tendon Bond Length - The length of tendon bonded to the anchor grout.

Transition Tube - A common sheath that is inserted into the top of the fluid grout and extended into the Trumpet.

Trumpet - Device to provide corrosion protection in the transition length from the Bearing Plate to the Free Stressing Length.

00596E.04 Preconstruction Working Drawings, Design Calculations, and Submittals - Submit preconstruction Working Drawings, design calculations and submittals according to 00150.35 except as modified by this Subsection.

(a) Ground Anchor Design - Design Ground Anchors with Class 1 corrosion protection using LRFD design method according to the current edition of the following:

- *AASHTO LRFD Bridge Design Specifications,*
- *Geotechnical Engineering Circular No. 4 Ground Anchors and Anchor Systems (FHWA-IF-99-015),*
- *Post Tensioning Institute Recommendations for Prestressed Rock and Soil Anchors.*

Select the type of tendon and size the tendon to ensure the Factored Design Load and maximum test load do not exceed 80 percent of the minimum ultimate tensile strength of the prestressing steel.

(The minimum bond lengths in the following paragraph may be reduced/revised if recommended by the geotechnical report.)

Determine the Bond Length necessary to develop the given Factored Design Load. The minimum Bond Length for strand is 15 feet. The minimum Bond Length is 10 feet for bars 1.75-inch diameter and smaller, and 15 feet for bars larger than 1.75-inch diameter.

The minimum Free Stressing Length (unbonded length) is 15 feet for strand and 10 feet for bar, unless a greater minimum length is shown or specified.

(b) Stamped Working Drawings - Before beginning construction of permanent Ground Anchors, submit the following stamped Working Drawings and calculations according to 00150.35. Include all stamped design calculations, details, dimensions, quantities, ground profiles, and cross-sections necessary to construct Ground Anchor tiebacks, and for members and connections for any portion of the anchor not shown. Include the following:

(1) Ground Anchor schedule including:

- Ground Anchor number,
- Type, size and specification of Ground Anchor tendon,
- LRFD Factored Design Load and maximum test load,
- Lock-off Load,
- Minimum Tendon Bond Length,
- Minimum Bond Length,
- Minimum unbonded length,
- Minimum total anchor length.

(2) Shop drawings of the Ground Anchor and the corrosion protection system including the following details:

- The relationship of the Ground Anchors to Right-of-Way and easement lines, utilities, structures and other construction,
- Tendon bar size or number of strands,
- Spacers and their location,
- Centralizers and their location, including the permanent rubber seal between the Trumpet and the tendon unbonded length corrosion protection and the transition between the Tendon Bond Length and the unbonded tendon length,
- Bar tendon coupler locations, if used,
- Unbonded length corrosion protection system,
- Bond breaker in the unbonded length,
- Bond Length corrosion protection system,
- Anchorage and Trumpet,
- Anchorage corrosion protection system,
- Grout tubes,
- Drilling methods including drill hole diameter, Equipment, and access space requirements,
- Pre-packaged grout from the QPL and manufacturer's mix design indicating exact brand and batch quantities of pre-packaged grout and water including dosages proposed, test procedure, placement Equipment and procedure, minimum cure time,
- Jacking frame and bracing assembly, method and Equipment for testing and measuring movement during testing.

(3) Design calculations including:

Insert Project Name Here

- The Ground Anchor system and Bond Length,
- Testing and stressing frame assembly,
- Verification test reaction pad.

(4) Construction procedure, installation plan, and testing procedure

(c) Unstamped Submittals - Submit the following before beginning construction of permanent Ground Anchors:

- Materials certificates of compliance and quality compliance documents for:
 - Prestressing reinforcement,
 - Portland cement,
 - Prestressing hardware,
 - Bearing Plates,
 - Corrosion protection system.
- Personnel qualifications according to 00596E.30.
- Equipment list according to 00596E.20.
- Calibration data for each test jack, load cell, primary pressure gauge and reference pressure gauge to be used.

00596E.05 Ground Anchor Construction and Test Data Report Submittals - Submit a summary report to the Engineer before the end of the work day that each anchor is installed and tested unless otherwise noted. Include the following information:

- Project and date,
- Names of personnel responsible for design, fabrication, installation and testing of the anchor and Agency's Inspector,
- List of testing Equipment used,
- Drawing showing the Ground Anchor's location, orientation, anchor type, anchor capacity, tendon type, total anchor length, Bond Length, unbonded length, and Tendon Bond Length,
- Drill hole diameter, drilling method, elevation groundwater encountered, subsurface conditions encountered,
- Grouting pressure and quantity,
- Results of the load test, including completed testing field data records for load increments and time periods in 00596E.42(b), 00596E.42(d), and 00596E.42(e) and appropriate presentation figures, charts and graphs,
- Summary statement of test results, including whether the load test met or failed to meet the criteria.

Submit test data reports as Stamped Working Drawings according to 00150.35.

Materials

00596E.10 General - Furnish Materials meeting the requirements of this Section. Do not deliver Materials to the site until the Engineer has approved the Materials submittals outlined in 00596E.04. Store and handle prestressing steel strands and bars according to the manufacturer's recommendations and in such a manner that no damage to the component parts occurs. Protect all steel components from the elements at all times. Store cement and additives for grout under cover and protect against moisture.

00596E.11 Materials - Furnish Materials meeting the following requirements:

(a) Ground Anchor - Furnish the complete anchor system according to the *Post Tensioning Institute (PTI) Recommendations for Prestressed Rock and Soil Anchors*, including prestressing reinforcement, Anchorage, Class I corrosion protection, sheathings, spacers, centralizers and grout. Corrosion protection is not required for sacrificial verification test anchors.

(In the bullet list, delete the types of prestress reinforcement that will not be considered for use on the project, if any. Check with the designer.)

(b) Prestressing Reinforcement - Fabricate tieback tendons from single or multiple elements of the following:

- Seven-wire low-relaxation strand according to 02515.10,
- Continuously Threaded High Strength Steel Bars according to 02515.30,
- "Compact" seven-wire, low-relaxation strands according to ASTM A779,
- Epoxy coated steel bars according to ASTM A775.

Hollow-core, self-drilling bar tendons are not acceptable.

Use prestressing steel bar couplers capable of developing 100 percent of the minimum ultimate tensile strength of the prestressing steel bar.

Use continuous prestressing strand reinforcement without splices or couplers.

(c) Tendon Bond Length Encapsulations - Fabricate the Tendon Bond Length encapsulation from one of the following:

- High density corrugated polyethylene tubing meeting the requirements of AASHTO M 252 and having a minimum wall thickness of 0.16 inch except pregouted tendons may have a minimum wall thickness of 0.04 inch.
- Deformed steel tubing or pipes meeting the requirements of ASTM A53 Grade B or ASTM A500 Grade B ($F_y = 46$ ksi for square sections, and $F_y = 42$ ksi for round sections) with a minimum wall thickness of 0.04 inch.
- Corrugated, polyvinyl chloride tubes manufactured from rigid PVC compounds meeting the requirements of ASTM D1784, Class 13464-B.
- Fusion-bonded epoxy meeting the requirements of AASHTO M 284.

Furnish end caps from the same material as the encapsulation tubing.

Provide Tendon Bond Length encapsulation that meets all of the following performance requirements:

- Capable of transferring stresses from the grout surrounding the tendon to the Bond Length grout,
- Able to accommodate movements during testing and after lock-off,
- Resistant to chemical attack from aggressive environments, grout or grease,
- Resistant to aging by ultra-violet light,
- Fabricated from materials nondetrimental to the tendon,
- Capable of withstanding abrasion, impact and bending during handling and installation,
- Capable of resisting internal grouting pressures developed during grouting.

(d) Anchorage Devices - Furnish a combination of either a steel Bearing Plate with wedge plate and wedges, or a steel Bearing Plate with a threaded anchor nut. The steel bearing and wedge plate may also be combined into a single element. Ensure Anchorage devices are capable of developing 95 percent of the minimum ultimate tensile strength of the prestressing steel tendon. Ensure Anchorage devices meet the static strength requirements of Section 3.1.6(1) and 3.1.8(1) and (2) of the *PTI Post-Tensioning Manual*.

(1) Bearing Plate - Fabricate the Bearing Plate from steel meeting the requirements of AASHTO M 270, Grade 36, or a ductile iron casting meeting the requirements of ASTM A536.

(2) Wedges and Wedge Plates - Use wedges designed to preclude premature failure of the prestressing steel due to notch or pinching effects under static and dynamic strength requirements of Section 3.1.6(1) and Sections 3.1.8(1) and (2) of the *PTI Post-Tensioning Manual*. Do not reuse wedges.

(3) Anchor Nuts - Size anchor nuts and other threaded hardware for epoxy coated bars to thread over the epoxy-coated bar and still comply with the requirements for carrying capacity.

(4) Trumpet - Furnish Trumpets fabricated from steel pipe or tube meeting the requirements of ASTM A53 for pipe or ASTM A500 for tubing. Furnish steel Trumpets having a minimum wall thickness of 1/8 inch for diameters up to 4 inches and 3/16 inch for larger diameters.

(5) Anchorage Cover - Furnish Anchorage covers fabricated from steel or plastic with a minimum thickness of 1/8 inch. Ensure the joint between the cover and the Bearing Plate is watertight.

(e) Bondbreaker - Fabricate the bondbreaker sleeve for the anchor Free Stressing Length from a smooth plastic tube or pipe having the following properties:

- Resistant to chemical attack from aggressive environments, grout, or corrosion inhibiting compound,
- Resistant to aging by ultraviolet light,

- Fabricated from material non-detrimental to the tendon,
- Capable of withstanding abrasion, impact, and bending during handling and installation,
- Enables the tendon to elongate during testing and stressing,
- Allows the tendon to remain unbonded after lock-off.

(f) Corrosion Inhibiting Compound - Furnish corrosion inhibiting compound for placement in the Free Stressing Length or the Trumpet area. Furnish grease, gel or wax corrosion inhibiting compound meeting the requirements of Section 4.6 of *PTI Recommendations for Prestressed Rock and Soil Anchors*.

(g) Sheathings - Use a sheath as part of the corrosion protection system for the unbonded length portion of the tendon.

Furnish sheathing fabricated from one of the following:

- A polyethylene tube pulled or pushed over the prestressing steel. Use Type II, III, or IV polyethylene as defined by ASTM D1248 (or approved equal). Use tubing with a minimum wall thickness of 0.06 inch.
- A hot-melt extruded polypropylene tube. Use polypropylene of cell classification B55542-11 as defined by ASTM D4101 (or approved equal). Use tubing with a minimum wall thickness of 0.06 inch.
- A hot-melt extruded polyethylene tube. Use high density Type III polyethylene as defined by ASTM D1248 (or approved equal). Use tubing with a minimum wall thickness of 0.06 inch.
- Steel tubing meeting the requirements of ASTM A500, Grade B ($F_y = 46$ ksi for square sections, and $F_y = 42$ ksi for round sections). Use tubing with a minimum wall thickness of 0.25 inch.
- Steel pipe meeting the requirements of ASTM A53, Grade B. Use pipe with a minimum wall thickness of 0.25 inch.
- Plastic pipe or tube of PVC meeting the requirements of ASTM D1784 Class 13464-B. Use Schedule 40 pipe or tube at a minimum.
- Heat shrink sleeves according to 00596E.11(h) with a minimum wall thickness of 0.04 inch

Furnish sheathing that meets all of the following performance requirements:

- Resistant to chemical attack from aggressive environments, grout or corrosion inhibiting compound,
- Resistant to aging by ultraviolet light,
- Fabricated from material nondetrimental to the tendon,
- Capable of withstanding abrasion, impact and bending during handling and installation,
- Enables the tendon to elongate during testing and stressing,
- Allows the tendon to remain unbonded after lock off.

(h) Bar Tendon Coupler Protection - On encapsulated bar tendons, cover the coupler and any adjacent exposed bar section with a corrosion-proof compound or wax-impregnated cloth tape. Cover the coupler area with a smooth plastic tube complying with 00596E.11(g), overlapping the adjacent sheathed tendon by at least 1 inch. Seal the two joints with a coated heat-shrink sleeve of at least 6 inches in length, or approved equal. Completely fill the space inside the cover tube with the corrosion-proof compound.

Furnish heat shrinkable sleeves fabricated from a radiation cross-linked polyolefin tube with a nominal thickness of 0.24 inches and internally coated with an adhesive sealant with a nominal thickness of 0.2 inches.

(i) Spacers and Centralizers:

(1) Spacers - Use spacers to separate the elements of a multi element tendon and permit grout to freely flow around the tendon and up the drill hole. Fabricate spacers from plastic, steel, or material that is non-detrimental to the prestressing steel. Do not use wood. A combination centralizer-spacer may be used. Use spacers to separate individual steel strands at intervals of no more than 10 feet.

(2) Centralizers - Fabricate centralizers from plastic, steel or material that is non-detrimental to the prestressing steel. Do not use wood. Use centralizers capable of supporting the tendon in the drill hole and position the tendon so a minimum of 1/2 inch of grout cover is provided and permits grout to freely flow around the tendon and up the drill hole.

Furnish centralizers at intervals of no more than 10 feet with the deepest centralizer located 1 foot from the end of the anchor and the upper centralizer for the bond zone located no more than 5 feet from the top of the Tendon Bond Length.

(j) Grout and Grout Tubes - Furnish a commercial, pre-packaged, thixotropic grout meeting the requirements of 02080.80. Use grout that is a pumpable neat mixture of cement and water that is stable (bleed less than 2 percent), fluid, and provides a compressive strength of at least 3,000 psi at time of stressing. Furnish water for mixing grout according to Section 02020.

Admixtures that control bleed, improve flowability, reduce water content and retard set may be used in the grout subject to the approval of the Engineer. Furnish admixtures, if used, compatible with prestressing reinforcement and mixed according to the manufacturer's recommendations. Expansive admixtures may only be used for filling sealed encapsulations, Trumpet, and Anchorage covers. Do not use accelerators.

Submit a detailed written mix design of the exact brand and batch quantities of pre-packaged grout and water including dosages proposed. Prior to installing the first Ground Anchor, mix a trial batch of grout using the Equipment, Materials, proportions, and grouting crew proposed for use on the Project. Perform the following tests:

- **Bleeding** - Determine bleed resistance according to ASTM C940. The maximum allowable bleeding is 2 percent.
- **Compressive Strength** - Determine compressive strengths according to ASTM C109. Sample 2 sets of 3 cubes at least once for each trial batch.

Insert Project Name Here

Demonstrate the grout achieves at least 3,000 psi compressive strength at the end of the wait time before stressing.

If the proposed grout mix design does not produce acceptable trial batch results, revise the mix design and perform another trial batch. Results from previous projects will not be considered acceptable documentation. Grouting may proceed after approval of the trial batch.

Furnish grout tubes with an adequate inside diameter to enable the grout to be pumped to the bottom of the drill hole and capable of withstanding a minimum grouting pressure of 150 psi or the Contractor's maximum anticipated grout pressure.

Equipment

00596E.20 General - Provide an Equipment list and a review of all Equipment suitability based on the Contractor's understanding of the site subsurface conditions, the associated installation plan, and Ground Anchor testing procedures. Before drilling, obtain approval in writing of drilling, grouting, stressing and testing Equipment.

00596E.21 Drilling Equipment - Provide drilling Equipment appropriate for the subsurface conditions shown. Drilling Equipment includes all Equipment necessary to make holes of the diameter and depth required, maintain an open hole, and place anchors.

00596E.22 Mixing and Grouting Equipment - Provide mixers, storage tanks, pumps, and necessary Equipment that satisfy the following:

- Mixer that produces a neat cement grout that is free of lumps and undispersed cement and continuously agitated during grouting operations,
- Pump and pressure gauge capable to monitor grout pressures at least 150 psi or twice the actual grout pressures used, whichever is greater,
- Grouting Equipment sized to enable the grout to be pumped in one continuous operation.

00596E.23 Anchor Stressing and Testing Equipment - Provide Equipment to demonstrate the anchor acceptance criteria through testing and to stress and lock off the tendon at the load specified. Furnish Equipment with rated capacity adequate for stressing the tendon to the maximum specified test load.

(a) Hydraulic Jack and Pump - Provide the following:

- Stressing Equipment capable of stressing the whole tendon in one stroke to the specified test load within 75 percent of the rated capacity. Provide a pump capable of applying each load increment in less than 60 seconds.
- Stressing Equipment capable of stressing the anchor in increments so that the anchor load can be raised or lowered according to the test specifications and allow the anchor to be lift-off tested to confirm the Lock-off Load and properly selected for the type and number of stressing elements.

Insert Project Name Here

(b) Stressing Anchorage - Furnish stressing Anchorage according to 00596E.11(d) to grip the prestressing reinforcement during loading.

(c) Pressure Gauges and Load Cells - Provide the following:

- A primary pressure gauge consisting of a dial gauge or vernier scale capable of measuring to 0.001 inch to measure the Ground Anchor movement. Use a movement-measuring device that has a minimum travel equal to the theoretical elastic elongation of the total anchor length at the maximum test load plus two inches and adequate travel so the Ground Anchor movement can be measured without resetting the device at an interim point.
- A reference calibrated pressure gauge for checking the primary pressure gauge.
- An electrical resistance load cell and readout for use in combination with a pressure gauge for extended Creep Test.

Adjustment or repair of jacks, gauges, or load cell after certification requires recalibration at no additional cost to the Agency.

Provide stressing Equipment calibrated by an independent firm traceable to the National Institute of Standards and Technology (NIST). Perform certified calibration of stressing system within 55 Calendar Days of the date of calibration submittal to the Engineer. Provide calibration accuracy of plus or minus 2 percent prior to use. Keep the calibration certificate and graph available on-site during testing and stressing.

Labor

00596E.30 Personnel Qualifications - Perform the Work using personnel with the required minimum experience in Ground Anchor installation, stressing, and testing. Submit for review a list identifying the Subcontractor (if not performed by the Contractor), Project Site supervisors and drill rig operators assigned and the experience relevant to the Project. Submit the following:

- Project reference list of at least three Ground Anchor projects successfully completed in the last 5 years. Include a brief description of each project and the owner's contact person's name and current phone number for each project listed.
- Experience documentation of the supervising engineer for the On-Site Work with at least 3 years' experience in Ground Anchor design and construction. Provide experience information including the direct supervisory responsibility for the installation, stressing and testing operations.
- Provide experience information for drill operators with at least 1 year experience in the construction of permanent Ground Anchors.

Construction

00596E.40 Ground Anchor Storage and Handling - Store and handle anchors so as to avoid mechanical damage, corrosion and contamination with dirt or deleterious substances. Use padding under banding for prefabricated anchors to avoid damage to the anchor corrosion protection. Store Materials delivered prior to time required in a dry, clean ventilated place, heated, if necessary, to prevent accumulation of moisture on the Materials or in the

wrapping. Do not store on the ground or expose to weather. Rusting sufficient to cause excessive surface roughness, pitting visible to the naked eye, or unevenness, is cause for rejection. Bent anchors that have surface damage or have been subject to excessive rusting are rejected.

The storage method is subject to review and approval prior to delivery of Materials to the Project Site. Do not weld anchor components. Protect anchors from any nearby welding operations to avoid touching the anchor with the electrode and to avoid electrical circuits that may cause resistance heating from passing through the anchors. Lift pre-grouted anchors so as to avoid excessive bending, that can debond the prestressing steel from the surrounding grout. Do not expose prestressing steel to excessive heat.

00596E.41 Ground Anchor Installation:

(a) Drilling Anchor Holes - Drill anchor holes to the length and diameter shown on the approved shop drawings and within 1 degree of the inclination shown. Utilize a drilling method to establish a stable hole of adequate dimensions within the tolerances specified. Drilling methods may involve, amongst others, rotary, percussion, rotary/percussive or auger drilling; or percussive- or vibratory-driven casing. Jetting is not allowed. Case the drilled anchor holes as necessary to prevent sloughing or caving of material into the hole.

Thoroughly clean the holes of loose debris and re-drill any anchor hole that caves, sloughs, or otherwise does not provide suitable Anchorage as required.

(b) Anchor Insertion - Place anchors according to the Plans, details and recommendations of the anchor manufacturer. Insert the anchor into the drill hole to the desired depth without damaging the sheathing, coating, and grout tubes. Align the center of the anchor with the center of the drill hole. If the anchor cannot be completely inserted, remove the anchor from the drill hole and clean or re-drill the hole to permit insertion. Do not drive or force partially inserted anchors into the hole.

Prior to inserting an anchor in the drilled hole, allow the Engineer to examine the entire anchor for damage. Repair damaged anchors according to the manufacturer's recommendations, as approved by the Engineer, and replace anchors as required, at no additional cost to the Agency.

(c) Anchor Grouting - After the anchor is inserted, grout the drill hole in one continuous grouting operation. Inject grout from the lowest point of the drill hole.

Record the quantity of the grout and grout pressures.

Provide separation between grout and the back of the Structure or the bottom of the Trumpet at the top of the drill hole. The grout tube may remain in the hole on completion of grouting if the tube is filled with grout.

After grouting, do not load the anchor for a minimum of 3 Calendar Days and the time demonstrated in the trial batch testing.

(d) Anchorage Installation - Install the anchor Bearing Plate and the Anchor Head or nut perpendicular to the anchor, within ± 3 degrees and centered on the Bearing Plate, without bending or kinking of the prestressing elements. Ensure that wedge holes and

wedges are free of rust, grout, and dirt. Clean and protect the stressing tail and protect from damage until final testing and lock-off. After the anchor has been accepted, cut the stress tail to its final length according to the anchor manufacturer's recommendations.

Extend the corrosion protection surrounding the unbonded length up beyond the bottom seal of the Trumpet or 4 inches into the Trumpet if no Trumpet seal is furnished. If the protection does not extend beyond the seal or sufficiently far enough into the Trumpet, extend the corrosion protection or lengthen the Trumpet.

Do not contact the corrosion protection surrounding the unbonded length with the Bearing Plate or the Anchor Head during testing and stressing. If the protection is too long, trim the corrosion protection to prevent contact.

00596E.42 Ground Anchor Testing - Test Ground Anchors according to the following:

(a) General - Test each Ground Anchor. Apply the Alignment Load and set dial gauges. Do not stress anchors beyond the Alignment Load prior to testing. Do not exceed 80 percent of the anchor's minimum ultimate tensile strength during testing.

Measure and record anchor movement to the nearest 0.001 inch with respect to an independent fixed reference point. Monitor load with the primary pressure gauge. Place reference pressure gauge in series with the primary pressure gauge during each test.

For Performance and Proof Tests, at loads other than the maximum test load, hold load just long enough to obtain the movement reading. Hold the maximum test load for a minimum of 10 minutes. Continually adjust jack pressure to maintain a constant load. Start load-hold period as soon as the maximum test load is applied. Record anchor movement at 1 minute, 2, 3, 4, 5, 6 and 10 minutes. If anchor movement between 1 minute and 10 minutes exceeds 0.04 inches, hold the maximum test load for an additional 50 minutes, and record anchor movement at 15 minutes, 20, 30, 40, 50 and 60 minutes.

For all verification, Performance, and Proof tests, submit an anchor test data report, according to 00596E.05. The Engineer will respond within 5 Calendar Days after receipt of the report with either acceptance or rejection of the tested anchor.

(b) Preproduction Verification Tests - Prior to installation of permanent Ground Anchors, construct two sacrificial verification test anchors and verification test reaction pads according to the approved Working Drawings and in the locations shown.

Perform verification tests to verify that the Contractor installed anchors meet the anchor acceptance criteria, verify that the length of the anchor bond zone is adequate, and verify the Contractor's design and installation methods. For each verification test, provide the anchor Test Data Report to the Engineer within 5 Calendar Days of completing the testing. Do not begin installation of permanent ground anchors until verification test reports have been reviewed and accepted by the Engineer.

Verification test anchor locations may be adjusted by the Engineer depending on actual site conditions and other factors. If additional verification test anchors are needed, the location is determined by the Engineer.

Insert Project Name Here

For verification test anchors, use the drilling and grouting methods, casing and reinforcement details, depth of embedment (bond zone), and all other installation Materials and methods specified for the production anchors, unless otherwise approved by the Engineer. At the completion of verification testing, remove test anchors down to 2 feet below Roadway Subgrade or as directed.

Conduct verification tests according to the Performance Test schedule in 00596E.42(c).

Do not proceed with further Ground Anchor testing or construction without verification test approval.

(1) Verification Test Anchor Acceptance Criteria - The acceptance criteria for anchor verification load tests are:

- Total elastic movement at the maximum test load exceeds 90 percent of the theoretical elastic elongation of the unbonded length.
- At the end of the 1.0 FDL Creep Test load increment, test pile creep rate does not exceed 0.04 inch/log cycle time (1 to 10 minutes) or 0.08 inch/log cycle time (6 to 60 minutes or the last log cycle if held longer) and the creep rate is linear or decreasing throughout the creep load hold period.
- Failure does not occur at the 1.0 FDL maximum test load. Failure is defined as the load where the slope of the load versus head deflection curve (at the end of increment) first exceeds 0.025 inch/kip.

(2) Verification Test Anchor Rejection - If a verification-tested Ground Anchor fails to meet the acceptance criteria, modify the design, the construction procedure, or both. These modifications may include modifying the installation methods, increasing the Bond Length, or changing the Ground Anchor type. Submit to the Engineer any modifications that necessitate changes to the Structure.

(c) Performance Test - Performance Test the first production anchors installed for each row and as directed by the Engineer. If changes are made to the Equipment, means, or methods, conduct an additional Performance Test at no additional cost to the Agency. Conduct Performance Test according to the following schedule:

Performance Test Schedule

Step	Loading	Applied Load
1		AL
2	Cycle 1	0.20FDL*
		AL
3	Cycle 2	0.20FDL
		0.40FDL*
		AL
4	Cycle 3	0.20FDL
		0.40FDL
		0.60FDL*
		AL

Insert Project Name Here

5	Cycle 4	0.20FDL
		0.40FDL
		0.60FDL
		0.80FDL*
		AL
6	Cycle 5	0.20FDL
		0.40FDL
		0.60FDL
		0.80FDL
		0.90FDL*
7	Cycle 6	0.20FDL
		0.40FDL
		0.60FDL
		0.80FDL
		0.90FDL
8	Maximum load 1.00FDL hold period per 00596E.42(e)	1.00FDL*
9	Cycle 6 continued	Reduce to Lock-off Load
10	Lift off test	
11	Adjust Lock-off Load	

AL=Alignment Load

FDL=Factored Design Load

Plot the prestressed soil anchor movement versus load for each load increment marked with an asterisk (*) in the Performance Test schedule, and plot the residual movement of the tendon at each Alignment Load versus the highest previously applied load.

(d) Proof Test - Proof Test each production anchor not performance tested. Perform Proof Test by incrementally loading the Ground Anchor according to the following schedule:

Proof Test Schedule

Applied Load

(LRFD Design)

AL

0.20FDL

0.40FDL

0.60FDL

0.80FDL

1.00FDL

Hold test load 10 minutes
minimum.¹

Reduce to
Lock-off Load

Lift-off test

AL = Alignment Load

FDL = Factored Design Load

¹Perform Creep Test measurements on the maximum load in the test. Start the load-hold period as soon as the maximum test load is applied. Measure and record the Ground Anchor movement at 1 minute, 2, 3, 4, 5, 6, and 10 minutes. If the Ground Anchor movement between 1 minute and 10 minutes exceeds 0.04 in., hold the maximum test load for an additional 50 minutes. If the load hold is extended, record the Ground Anchor movement at 15 minutes, 20, 30, 40, 50, and 60 minutes. If the Creep Test is extended, the creep movement between the 6-and 60-minute readings is required to be less than 0.08 inches for acceptance. Construct a graph showing a plot of Ground Anchor movement versus load for each load increment in the Proof Test. Obtain Engineer's approval of graph format prior to use.

(e) Ground Anchor Acceptance Criteria - The Engineer will analyze the permanent Ground Anchor test results. Ground Anchor acceptance is based on satisfying each of the following criteria: creep, movement, and Lock-off Load:

- A performance or proof tested anchor with a 10-minute load hold is acceptable if the anchor resists the maximum test load with less than 0.04 inches of movement between 1 minute and 10 minutes and the total elastic movement at the maximum test load exceeds 90 percent of the theoretical elastic elongation of the unbonded length.
- A performance or proof tested anchor with a 60-minute load hold is acceptable if the anchor resists the maximum test load with a creep rate that does not exceed 0.08 inches in the last log cycle of time and the total elastic movement at the maximum test load exceeds 90 percent of the theoretical elastic elongation of the unbonded length.
- A verification, performance, or proof tested anchor subjected to extended Creep Testing is acceptable if the anchor resists the maximum test load with a creep rate that does not exceed 0.08 inches in the last log cycle of time and the total elastic movement at the maximum test load exceeds 90 percent of the theoretical elastic elongation of the unbonded length.
- Initial lift-off reading is within ± 5 percent of the designed Lock-off Load. Perform liftoff test according to 00596E.42(h).

(f) Procedures for Anchors Failing Acceptance Criteria - Anchors that fail the acceptance criteria are handled as follows:

- Anchors that do not satisfy the minimum apparent free length criteria are rejected and replaced at no additional cost to the Agency.
- Re-groutable anchors satisfying the minimum apparent free-length criteria but failing to satisfy creep criteria may be post-grouted and retested. Anchors that cannot be

post-grouted or re-grouted anchors that do not pass the acceptance criterion are rejected.

In the event that an anchor fails, modify the design or construction procedures. These modifications may include installing additional anchors, modifying the installation methods, increasing the Bond Length, reducing the anchor design load by increasing the number of anchors, increasing the total anchor length, or changing the anchor type. Complete design or construction modification at no additional cost to the Agency. Submit a description of any proposed modifications to the Engineer in writing. Do not implement proposed modifications until receiving written approval from the Engineer.

(g) Anchor Lock-Off - Apply Lock-off Loads to permanent Ground Anchors as follows:

- After testing has been completed and anchors have been accepted by the Engineer, set the Anchorage to achieve the design Lock-off Load considering seating losses.
- Limit the Lock-off Load to a maximum 70 percent of the anchor minimum ultimate tensile strength.
- Seat the wedges at a minimum load of 50 percent of the anchor minimum ultimate tensile strength. If the Lock-off Load is less than 50 percent of the anchor minimum ultimate tensile strength, use shims under the wedge plate and seat the wedges at 50 percent of the anchor minimum ultimate tensile strength. Remove shims after seating to reduce the load in the anchor to the design Lock-off Load.
- Adjust Lock-off Load using shims. Do not regrip strand anchors where regripping would result in overlapping wedge bites below the Anchorage wedge plate.

(h) Anchor Liftoff Test - After transferring the Lock-off Load to the Anchorage, and prior to removing the jack, conduct a liftoff test to confirm the magnitude of the load in the anchor. This load is determined by reapplying load to the anchor to lift off the wedge plate (or anchor nut) without unseating the wedges (or turning the anchor nut). This moment represents zero time for any long term monitoring. In the event that the load is removed from the anchor for any reason, repeat the anchor liftoff test procedure.

If the initial liftoff reading for any anchor is not within 5 percent of the designated Lock-off Load, adjust the anchor load accordingly and repeat the liftoff test. Repeat the liftoff until the liftoff reading is within 5 percent of the designated Lock-off Load.

Measurement

00596E.80 Measurement - The quantities of Work performed under this Section will be measured on the unit basis.

Payment

00596E.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Permanent Ground Anchor	Each
(b) Performance Test	Each

(c) Verification TestEach

Item (a) includes Contractor design of bonded length and for designing, furnishing, placing, and proof testing permanent Ground Anchors.

Item (c) includes design and construction of verification test reactions pads, and for designing, furnishing, placing, and testing of sacrificial anchors.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00597 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-23-26
Requires SP02440 when preformed expansion joint filler is required)

SECTION 00597 - SOUND WALLS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00597 of the Standard Specifications modified as follows:

(Use the following subsection .00 when only one type of sound wall is allowed. Fill in the blank with one of the following: "Concrete Block Walls", "Precast Concrete Panel Walls", or "Concrete Panel Fence Walls." Obtain information from the Bridge Designer.)

00597.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of furnishing and constructing _____ at the location shown or directed.

00597.10 Materials - Replace this subsection, except for the subsection number and title, with the following:

Obtain all manufactured materials for the selected sound wall type from the same company. Only one type of wall is allowed on the Project unless otherwise specified.

Store concrete masonry units and cementitious materials at the Project Site in a manner that will protect the materials from contact with Soil and weather. Store mortar and grout materials in original unbroken packages.

00597.11(a) Concrete Blocks - Replace this subsection, except for the subsection number and title, with the following:

Furnish concrete blocks meeting the following requirements:

- Hollow, lightweight or medium weight load-bearing blocks with 28-Day compressive strength on net cross sectional area $f'_c = 1,800$ psi (individual unit) and 2,000 psi (average of three units) according to ASTM C90.
- Kiln dried to 33 percent total absorption
- Split face pattern on exposed areas unless noted otherwise.
- Standard block on unexposed areas
- Nominal 8-inch x 8-inch x 16-inch blocks at walls and nominal 16-inch x 8-inch x 16-inch blocks at pilasters.

Do not tint concrete blocks. Use uniform colored blocks along the length of individual walls.

00597.11(b) Concrete Caps - Replace the bullet that begins "Nominal 8 inch by 4 inch..." with the following bullet:

- Nominal 8-inch x 4-inch x 16-inch cap blocks at walls and nominal 16-inch x 4-inch x 16-inch cap blocks at pilasters.

00597.11(e) Mortar and Grout - Replace this subsection, except for the subsection number and title, with the following:

Furnish Type S mortar meeting the requirements of ASTM C270 that attains an ultimate compressive strength of at least 1,800 psi at 28 Days.

Furnish coarse grout meeting the requirements of ASTM C476 with a suitable consistency for pouring without segregation of material and attains an ultimate compressive strength of 2,000 psi at 28 Days.

00597.40 General - Replace this subsection, except for the subsection number and title, with the following:

Perform structure excavation according to Section 00510 to the limits and stages shown. Conform all sound walls, regardless of type, to the top of wall profile shown. Provide footings as shown or approved.

00597.41(a) General - Replace the paragraph that begins "Place the first course of ..." with the following paragraph:

Place the first course of masonry on the footing in a full mortar bed. Construct mortar joints between units that are 3/8 inch thick with full mortar coverage on vertical and horizontal face shells only. Shove tight vertical joints.

Replace the paragraph that begins "Grout all cells containing ..." with the following paragraph:

Grout all cells containing reinforcing bars. Full bed join walls and crosswebs forming cells to prevent leakage of grout. Position vertical steel in the center of the cell and securely tie in

Insert Project Name Here

place at intervals not more than 5 feet. Use grout that is sufficiently fluid to flow into all grout spaces, leaving no voids. Perform grouting according to either "low-lift grouting" or "high-lift grouting" as follows:

00597.41(b) Waterproofing - Replace this subsection, except for the subsection number and title, with the following:

Treat all masonry wall cap surfaces with a waterproofing application of a high-build filler and rubber sealer. Treat at least 14 Calendar Days after the wall is completed. Apply filler by spraying or rolling according to the manufacturer's recommendations. Apply two coats of sealer to a minimum thickness of 10 mils. Use the color "Summer Gray" for the finished product.

00597.42 Precast Concrete Panel Sound Walls - Replace this subsection, except for the subsection number and title, with the following:

Construct precast concrete panel sound walls plumb, level and true and free of major cracks. The Engineer will measure the cracks in panels after they have been placed and walls have been backfilled. Cracks greater than 0.02 inch may require repairs or panel replacement, at the discretion of the Engineer.

00597.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00599 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00440 & SP02510

Requires SP02080 when grout is required.)

SECTION 00599 - CONCRETE SLOPE PAVING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00599 of the Standard Specifications modified as follows:

00599.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00610 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26
Last updated: 04-22-26)

SECTION 00610 - RECONDITIONING EXISTING ROADWAY

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00610 of the Standard Specifications modified as follows:

00610.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of reconditioning and preparing existing Subgrades, Bases, Surfacing and Pavements where an additional layer or Course of Material is to be placed, under the Contract. The Work includes existing Shoulders, cut ditches, road connections, approach roads, ramps, bridge decks if not provided for elsewhere, and other Roadbed areas where construction Work under the Contract is to be performed.

SP00620 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26
Last updated: 04-22-26
*This Section requires SP00744
or SP00745 when traffic is not
allowed on the cold planed surface.)*

SECTION 00620 - COLD PLANE PAVEMENT REMOVAL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00620 of the Standard Specifications modified as follows:

00620.40(b) Depth 1 inch to 2 inches - Replace this subsection, except for the subsection number and title, with the following:

If the depth of the existing Pavement to be removed is 2 inches or less, but more than 1 inch and the section is under traffic, schedule the Work so the full width and length of travel lanes Pavement can be removed during the same shift. Remove the Shoulder area within 24 hours.

00620.40(c) Depth over 2 inches - Replace this subsection, except for the subsection number and title, with the following:

If the depth of the existing Pavement to be removed is over 2 inches and the section is under traffic, schedule the Work so the full width and length of the travel lanes and Shoulders can be removed, leaving no longitudinal or transverse drop-offs, during the same shift.

00620.41 Surface Tolerance - Replace this subsection, except for the subsection number and title, with the following:

Test with a 12-foot straightedge furnished and operated by the Contractor, as directed. The maximum variation of the top of the ridges from the testing edge of the straightedge, between any two ridge contact points, is 1/4 inch.

00620.43 Maintenance Under Traffic - Replace this subsection, except for the subsection number and title, with the following:

If the cold planed Pavement surface is exposed to traffic, sweep and clean prior to allowing traffic to use the Roadway.

(Use these two paragraphs when traffic is allowed on cold planed areas for a limited duration. Obtain time limit from the pavement designer.)

Traffic is allowed on the cold planed surface up to ____ Calendar Days after removing the existing surface. Sweep and clean the cold planed surface before opening to traffic.

Before beginning paving operations, make repairs to the existing cold planed surface as directed. Payment for the repairs will be made according to 00195.20.

(Use this paragraph when cold planed areas are required to be paved before opening to traffic. Delete subsection number in parentheses that does not apply. Delete all purple parentheses. Be sure to include 00744.51 or 00745.51 in the special provisions, as appropriate.)

Traffic is not allowed on the cold planed surface. Before opening the area to traffic, pave the surface according to (00744.51)(00745.51).

(Use the following subsection .44 when requested by the pavement design report and a secondary cold plane Pay Item is included.)

Add the following subsection:

00620.44 Inspection of Cold Plane Surfaces – The Engineer will inspect the primary cold plane surface immediately after it is swept clean to determine if secondary cold plane pavement removal is required. The Engineer will determine the locations for secondary cold plane pavement removal required, mark locations, and notify the Contractor immediately after marking locations.

(Use the following subsection .80 when requested by the pavement design report and a secondary cold plane Pay Item is included.)

Insert Project Name Here

00620.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

The quantities of cold plane pavement removal and secondary cold plane pavement removal will be measured on the area basis, in place.

When the depth of cold plane pavement removal is variable, the depth as shown is an estimate and is approximate only. No guarantee is made that the actual depth will be the same as the estimated depth.

The depth of secondary cold plane pavement removal is an estimate. In areas where directed to perform additional depth of secondary cold plane pavement removal, the areas will be adjusted by converting to an equivalent number of square yards on a proportionate volume basis.

(Use the following subsection .90 when requested by the pavement design report and a secondary cold plane Pay Item is required.)

00620.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Cold Plane Pavement Removal, _____ Deep.....	Square Yard
(b) Secondary Cold Plane Pavement Removal, _____ Deep .	Square Yard

In item (a), the depth of Pavement removal will be inserted in the blank. If the depth is variable, the depth range will be inserted in the blank.

In items (b), the estimated depth of secondary pavement removal will be inserted in the blank.

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for temporary wedges constructed, maintained, and removed under 00620.40(d), or for replacement of cutting teeth.

SP00621 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-03-26

This Section requires SP00744

or SP00745 when traffic is not

allowed on the cold planed surface.)

SECTION 00621 - AMG COLD PLANE PAVEMENT REMOVAL

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00621 is not a Standard Specification and is included in this Project by Special Provision.

Description

00621.00 Scope - This Work consists of removing existing Pavement to a grade represented by a 3D Construction Model using Automated Machine Guidance to prepare a foundation for placing new surfacing.

00621.02 Definitions:

Automated Machine Guidance (AMG) - AMG is the computerized guidance of construction Equipment to follow the line and grade of the engineered design. Guidance is either by direct control of the machinery or through visual or audible signals to the operator. Operation is based on digital input from positioning systems.

00621.03 Submittals - Submit a 3D Construction Model that accurately represents the Agency 3D Model according to 00150.35.

Equipment

00621.20 Equipment - Provide self-propelled planing machines or grinders:

- Equipped with Automated Machine Guidance for positioning the cutting edge.
- Capable of loosening Pavement Material.
- With a totally enclosed cutting drum with replaceable cutting teeth.
- With an effective means of removing loosened Material from the surface and preventing dust from escaping into the air.
- Capable of providing a true cross-slope grade that allows placement of overlay Pavement to a uniform thickness.

Construction

00621.40 Pavement Removal:

(a) General - Remove the existing Pavement to the depth, width, grade and cross section represented in the approved 3D Construction Model or as directed. The use of a heating device to soften the Pavement is not allowed.

(b) Depth 1 inch to 2 inches - If the depth of the existing Pavement to be removed is 2 inches or less, but more than 1 inch and the section is under traffic, schedule the Work so the full width and length of travel lanes can be removed during the same shift. Remove the Shoulder area within 24 hours.

(c) Depth over 2 inches - If the depth of the existing Pavement to be removed is over 2 inches and the section is under traffic, schedule the Work so the full width and length of the travel lanes and Shoulders can be removed, leaving no longitudinal or transverse drop-offs, during the same shift.

(d) Pavement Removal Alternative - If unable to complete the Pavement removal according to 00621.40(b) and 00621.40(c), then, construct a wedge of asphalt concrete within the same Day and with the approval of the Engineer, at a Slope of 1V:10H or flatter along each exposed longitudinal drop-off, and 1V:50H or flatter along each exposed transverse drop-off. Place wedges completely across the milled area at intersections, points of beginning and ending of the milling operation, and around manholes, valve boxes and other structures. Longitudinal drop-offs of 1 inch or less do not require a wedge. Maintain wedges as long as the area remains under traffic or until Pavement is replaced. Remove and dispose of wedges before placing new Pavement.

(e) Warning Signs - Provide warning signs as required where abrupt or sloped drop-offs occur at the edge of the existing or new surface according to Sections 00221 and 00222.

(f) Rough Grading - Pavement removal prior to preparation of the final milled surface can be constructed using Equipment meeting 00620.20.

00621.41 Surface Tolerance - Match the finished milled surface to the established grade and cross section for the finished surface represented by the approved 3D Construction Model within 0.02 foot at the frequency stated in the *Construction Survey Manual for Contractors* Section 8.2.2 Within Subgrade Area.

00621.42 Disposal of Materials - Dispose of all Materials according to 00290.20.

(Use one of the following three options as instructed. Delete the options that do not apply.)

00621.43 Maintenance Under Traffic -

[Option 1 – Use the following paragraph when traffic is allowed on the cold planed surface.]

Sweep and clean the cold planed Pavement surface prior to allowing traffic to use the Roadway.

[Option 2 – Use the following two paragraphs when traffic is allowed on cold planed areas for a limited duration. Obtain time limit from the pavement designer.]

Traffic is allowed on the cold planed surface up to ____ Calendar Days after removing the existing surface. Sweep and clean the cold planed surface before opening to traffic.

Insert Project Name Here

Before beginning paving operations, make repairs to the existing cold planed surface as directed. Payment for the repairs will be made according to 00195.20.

[Option 3 – Use the following paragraph when cold planed areas are required to be paved before opening to traffic. Delete the subsection number that does not apply. Delete all purple parentheses. Include 00744.51 or 00745.51 in the special provisions, as appropriate.]

Traffic is not allowed on the cold planed surface. Before opening the area to traffic, pave the surface according to (00744.51)(00745.51).

Measurement

00621.80 Measurement - The quantities of AMG cold plane Pavement removal will be measured on the area basis, in place.

Payment

00621.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per square yard, for the item "AMG Cold Plane Pavement Removal".

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for temporary wedges constructed, maintained, and removed under 00621.40(d), or for replacement of cutting teeth.

SP00622 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00622 - GRINDING CONCRETE PAVEMENT

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00622 of the Standard Specification modified as follows:

(Use the following subsection .40 when full depth repairs are needed. Be sure to include Section 00758 and appropriate bid items.)

Add the following subsection:

00622.40 Preparation - Complete full-depth concrete repairs, spall repairs, and joint repairs according to Section 00758 in the area to be ground before beginning grinding operations.

Insert Project Name Here

00622.41 Grinding - Replace the paragraph that begins "The Project's Aggregate ..." with the following paragraph:

The Project's Aggregate hardness tolerance is listed in the Special Provisions.

(Use the following two paragraphs to identify the aggregate hardness tolerance. Fill in the blank with either "Moderately Hard Aggregate" or "Hard Aggregate" as determined by the designer.)

Add the following paragraph to the end of this subsection.

This Project's Aggregate Hardness Tolerance is _____.

00622.43 Surface Finish - Replace the bullet that begins "Has a longitudinal ..." with the following bullet:

- Has a longitudinal line-type texture with corrugations parallel to the outside Pavement edge that presents a narrow ridge corduroy type appearance.

00622.70 Pavement Smoothness - Replace the paragraph that begins "Perform smoothness testing ..." with the following paragraph:

Perform smoothness testing under the observation of the Engineer. If the Contractor performs smoothness measurements on a Day other than the Day Pavement grinding is performed, all additional traffic control required for the smoothness testing, but not required for other Work, is at no additional cost to the Agency.

00622.70(a) Straightedge Testing and Tolerance - Replace this subsection, except for the subsection number and title, with the following:

Test the surface with a 12-foot straightedge perpendicular to the centerline. Do not vary the Pavement surface by more than 1/4 inch. Straightedge testing is not required across longitudinal joints or outside the ground area.

00622.70(b)(1) Pavement Smoothness - Replace the paragraph that begins "The Pavement shall..." with the following paragraph:

Provide Pavement with a profile index of 7.0 inches per mile or less for each wheel path in each 0.1-mile segment or partial segment, and having no individual deviation of 0.3 inch or more.

00622.70(b)(3)a. General - Replace the paragraph that begins "Determine the profile ..." with the following paragraph:

Determine the profile index of Pavement in 0.1-mile segments and partial segments. A segment will end and is considered a partial segment and a new segment begins when the segment sequence is interrupted by stage construction or by profiled areas excluded from the GPT smoothness requirements.

Insert Project Name Here

00622.70(c) Failure To Meet Graphic Profile Requirements - Replace the paragraph that begins "Retest all segments ..." with the following paragraph:

Retest all segments requiring corrective work for the entire length according to 00622.70(b) under the observation of the Engineer. All corrective work and graphic profiling, including traffic control, is at no additional cost to the Agency.

00622.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00630 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP00641 & SP00745)

SECTION 00630 – RUBBLIZING CONCRETE PAVEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00630 is not a Standard Specification and is included in this Project by Special Provision.

Description

00630.00 Scope - This Work consists of rubblizing and seating existing PCC Pavement and PCC patches prior to the placement of ACP.

00630.01 Lines, Grades, and Typical Sections - Conform all finished rubblizing and seating to the lines, grades, and Typical Sections established, shown, or directed.

Materials

00630.10 General - Furnish Materials meeting the following requirements:

Aggregate Base.....	00641
ACP	00745
Subgrade Stabilization	00331

Equipment

Insert Project Name Here

00630.20 Rubblizing Equipment - Provide rubblizing Equipment with multiple independent hammers, capable of uniformly rubblizing a 12-foot concrete panel from the longitudinal joint to the edge of the concrete slab in one Pass.

(In the following paragraph, insert the maximum rubble size (typically between 3 and 12 inches) and the minimum rubble size. Obtain information from the Designer.)

Provide energy and striking patterns that are adjustable to produce rubble with a majority of pieces having a maximum size of _____ inches, a minimum size of _____ inches, and no piece larger than 18 inches. Prevent Equipment from penetrating the existing adjacent PCC surface.

Provide adequate lighting to illuminate rubblizing Equipment and Work areas in front of and behind the rubblizing Equipment according to 00745.24(d).

00630.24 Compactors - Provide rollers capable of reversing without backlash, as follows:

(a) Grid Roller - Provide grid-type metal twin-drum rollers meeting the following requirements:

- Drums with an outside diameter of at least 5 feet.
- Maximum drum width of 32 inches.
- Capable of a 15 Ton loading. The specific loaded weight is as specified, shown, or directed.

Use self-propelled or tractor pulled rollers capable of operating at 15 miles per hour. Do not use a perforated type unless directed by the Engineer.

(b) Pneumatic Roller - Use a pneumatic-tired roller weighing a minimum of 33 Tons and meeting either of the following requirements:

(1) Pulled Roller - Provide tractor-pulled rollers that have four rubber-tired wheels equally spaced across the full width of the machine, mounted in-line on a rigid steel frame such that all wheels carry equal loads, regardless of surface irregularities. Ensure roller tires are capable of satisfactory operation at a minimum inflation pressure of 100 psi. Inflate tires to such pressure as to satisfactorily seat the rubblized Material. At the Contractor's option, tires may contain liquid.

Provide rollers that have a weight body suitable for ballasting to a minimum gross load of 33 Tons. Provide a ballast and ballasting procedure so that the gross roller weight can be readily determined and controlled. Tow the roller with a rubber-tired prime mover.

(2) Self-Propelled Roller - Provide self-propelled rollers that have two axles mounting no more than seven tires, and that meet the requirements in 00630.24(b)(1) concerning tire inflation pressure, surface contact pressure, and gross weight.

(c) Smooth Drum Roller - Provide a self-propelled vibratory roller with a gross static weight of at least 8 Tons.

Construction

(Use one of the following two options for subsection .40.)

[Option 1. Use this subsection.40 if not using Option 2 below. Fill in the blanks. Obtain information from the Designer.]

00630.40 Test Strips - Before beginning rubblizing operations, construct one test strip for each direction of travel. The Engineer will designate locations in the outside travel lane for test strips. Construct test strips between 200 and 820 feet in length. Remove any existing AC Pavement covering the PCC on the test strip. Rubblize the concrete Pavement using varying energy and striking patterns as directed, to create test sections within the strips with Materials varying from a majority of pieces ____ inch in size to a majority of pieces ____ inch in size, with a maximum size of 18 inches for all sections. For each variation in energy and striking pattern, rubblize a section approximately 3 feet long by the full lane width, to full depth of the concrete. Backfill all excavated areas with Aggregate Base according to Section 00641.

The Engineer will conduct falling weight deflectometer (FWD) deflection testing directly on the rubblized Material surface, prior to rolling, after each one-way Pass of the roller and on the first Lift of ACP approximately 24 hours after the first Lift is completed. These test areas are used to determine whether proper breakage is obtained and to assist in determining the most suitable rubblizing procedure. The FWD deflection data is used to determine the minimum particle size that will provide a structurally adequate foundation for the ACP overlay.

The test area is used to verify the appropriate roller pattern to provide satisfactory seating. The number of roller Passes are determined by the Engineer based on the breakover point in the FWD deflections and visual effects of seating the rubblized Materials. Up to seven one-way Passes may be required. Place the first Lift of ACP over the test strips within 48 hours of rubblizing the PCC.

Do not begin rubblization outside the test strip area until a sequence of operations has been established to the satisfaction of the Engineer. Once a sequence of operations has been approved, use this sequence unless field conditions or testing shows a need for modification. Excavate random test sections as directed each Day to verify that the breaking pattern approved in the test strips is maintained. The Engineer may also conduct random FWD deflection testing. Backfill all excavated areas with Aggregate Base according to Section 00641.

The Engineer may require additional test strips any time the breaking pattern, the particle size produced, or the deflections change from those established in the selected test sections.

[End Option 1.]

[Option 2. Use this subsection .40 if required in the pavement design report (typically on small projects).]

00630.40 Test Strip - Use the first 200 feet of rubblization as a test strip. Remove any existing asphalt concrete covering the PCC on the test strip, if present. Use the test strip to develop a pattern to achieve specified size of pieces. Stop the rubblization process at the end of the test strip, and do not continue until directed by the Engineer. Excavate the

Insert Project Name Here

rubblized Material in a section 3 feet long by the full lane width at a representative location or where directed. Backfill all excavated areas with Aggregate Base according to Section 00641.

Conduct additional test strips as directed. Random falling weight deflectometer (FWD) testing may be conducted by the Engineer.

[End Option 2.]

00630.41 Rubblization - Remove all existing asphalt material layers, if present, to expose bare PCC Pavement prior to beginning the rubblizing operation. Remove all joint filler material that debonds during the rubblizing operation and is left loose and exposed on the rubblized surface. Place and compact adjacent roadway materials shown up to the top of existing concrete Pavement elevation prior to rubblization.

Sawcut joints to full depth prior to rubblization where the rubblizing abuts any concrete Pavement or approach slabs that are to remain in place. Keep rubblization hammers at least 1 foot away from adjacent concrete Pavement or approach slabs.

Follow the same sequence of operations and breaking pattern, and produce the same particle size, as approved in the test sections.

Conduct rubblization in a manner that will produce the desired particle size without displacing the concrete more than 1/2 inch vertically.

Protect passing traffic from flying debris during rubblizing operations.

Leave undisturbed reinforcement in place. However, cut off below the surface and remove from the site, any reinforcement exposed as a result of rubblizing or compaction operations. Dispose of reinforcement according to 00290.20.

Prior to placing surfacing, compact the entire width of rubblized Pavement with the approved number of Passes. In the order below, use all three rollers with at least the number of Passes given, unless otherwise approved by the Engineer.

Grid Roller	4 Passes
Pneumatic Roller	2 Passes
Smooth Drum Roller	4 vibratory Passes

Fill in depressions 2 inches or more in depth with dense Base Course ACP according to Section 00745 and strike off level with the surrounding area. Compact ACP leveling according to Section 00745.

In areas showing visible signs of subgrade pumping during rubblization or seating, perform subgrade stabilization according to Section 00331 and as directed.

(Fill in the blanks with the appropriate thickness of ACP and number of days. Obtain the information from the Pavement Design Engineer.)

Do not allow traffic, including Contractor's vehicles and Equipment, on the rubblized Pavement before placing ____ inches of ACP Base Course. Place the first Lift of Base

Insert Project Name Here

Course within 48 hours after rubblizing the PCC. Place the wearing Course within _____ Days before opening to Public Traffic.

Maintenance

00630.60 Care of Work - After rubblizing, seating, and backfilling, maintain the surface in the same condition it was in upon completion of the roller pattern. Prevent or repair segregation, raveling, or rutting as directed, until placement of ACP surfacing.

Measurement

00630.80 Measurement - The quantities of rubblized concrete Pavement will be measured on the area basis. The surface area will be determined by horizontal measurements.

Subgrade stabilization will be measured according to 00331.80.

ACP will be measured according to 00745.80.

Payment

00630.90 Payment - The accepted quantities of rubblized Pavement will be paid for at the Contract unit price, per square yard, for the item "Rubblize PCC Pavement".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Constructing test strips
- Excavating and backfilling test sections
- Aggregate Base
- Water
- Illumination of rubblizing Equipment
- Cutting, removing, and disposing of exposed reinforcement, joint fillers, and other similar material
- Compacting and maintaining the compacted condition of the existing Pavement

Subgrade stabilization will be paid for according to 00331.90.

ACP will be paid for according to 00745.90.

SP00635 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-03-26)**

SECTION 00635 - GRID-ROLLED AGGREGATE SUBBASE

Insert Project Name Here

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00635 is not a Standard Specification and is included in this Project by Special Provision.

Description

00635.00 Scope - This Work consists of furnishing, placing, and compacting with a perforated or grid type roller, one or more layers of Aggregate mixed with water, on a prepared surface to the lines, grades, thicknesses and Cross Sections shown or established.

Materials

00635.10 Materials - Furnish grid rolled Aggregate Subbase Rock Material having a maximum size of 6 inches and meeting the following requirements:

- **Abrasion** - Furnish source materials for Aggregate Subbase that do not exceed 45 percent wear when tested according to AASHTO T 96.
- **Sand Equivalent** - Furnish Aggregate Subbase material that has a sand equivalent of not less than 25 when tested according to AASHTO T 176.

Equipment

00635.20 Compacting Equipment - Provide perforated or grid-type metal twin-drum rollers meeting the following requirements:

- Drums with an outside diameter of at least 5 feet.
- Maximum drum width of 32 inches.
- Capable of a 15 Ton loading. The specific loaded weight is as specified, shown or directed.

Use self-propelled or tractor pulled rollers capable of operating at 15 miles per hour.

Construction

00635.40 Preparation of Foundation - Provide a firm surface where Aggregate Subbase is to be placed according to Section 00320, 00330, or 00610 as applicable.

00635.42 Thickness and Number of Layers - If the required compacted depth of the Subbase exceeds 8 inches, construct it in two or more layers of nearly equal thickness. Furnish layers so that the maximum compacted thickness does not exceed 8 inches.

00635.43 Shaping and Compacting - Compact each layer of the Subbase by as many Passes of the roller as necessary to attain the desired fracture and compaction of the

Insert Project Name Here

material. Operate the roller at the highest speed possible without bounce and without unevenness of compaction.

Perform blading and watering as necessary to provide uniformity of crown, Cross Section, and compaction.

Apply water according to Section 00340 and as directed.

Maintenance

00635.60 Care of the Work - After constructing each layer and completing the Subbase, maintain the layer to specified conditions, and prevent or repair segregation, raveling, or rutting until it is covered with a following layer or until all Contract Work is completed.

Measurement

00635.80 Measurement - The quantities of grid-rolled Aggregate Subbase will be measured on the area basis, constructed to the full thickness. The thickness will be identified on the Plans. The surface area will be determined by horizontal measurements. In areas where directed to grid-roll to thicknesses other than identified on the Plans, the areas will be adjusted by converting to an equivalent number of square yards on a proportionate volume basis.

Payment

00635.90 Payment - The accepted quantities of grid-rolled Aggregate Subbase will be paid for at the Contract unit price, per square yard, for the item "Grid-Rolled Aggregate Subbase, ____ Inches Thick".

The thickness of the Subbase is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for water used to bring the mixture to optimum moisture content or for water used in the care of the Work.

SP00640 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00640 - AGGREGATE BASE AND SHOULDERS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Comply with Section 00640 of the Standard Specifications modified as follows:

00640.16 Acceptance of Aggregates - Replace this subsection, except for the subsection number and title, with the following:

Acceptance is visual by the Engineer.

00640.40 Preparation of Foundation - Replace this subsection, except for the subsection number and title, with the following:

Provide a firm surface that Aggregates are to be placed according to Sections 00320, 00330, or 00610 as applicable.

00640.42(a) Base - Replace the paragraph that begins "If the required compacted ..." with the following paragraph:

If the required compacted depth of the Base Course exceeds 6 inches, construct it in two or more layers of nearly equal thickness. The maximum compacted thickness of any one layer is 6 inches.

00640.42(b) Shoulders - Replace this subsection, except for the subsection number and title, with the following:

Place Shoulder Aggregates in a single layer, or two or more layers of nearly equal thickness. The maximum compacted thickness of any one layer is 9 inches.

00640.43 Shaping and Compacting - Replace the paragraph that begins "Compact each layer ..." with the following paragraph:

Compact each layer of Material placed in Shoulder and Base areas by rollers meeting the requirements of 00641.24 or as directed.

00640.44 Surface Tolerance - Replace this subsection, except for the subsection number and title, with the following:

Parallel the finished surface and the surface of each underlying layer of the Aggregate to the established grade and Cross Section for the finished surface within 0.04 foot.

Do not vary the finished surface of the compacted Aggregate Base, when tested with a 12-foot straightedge, from the testing edge by more than 1/2 inch at any point. Furnish and operate the straightedge as directed.

00640.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00641 (Special Provisions for the 2024 Book)

**(Bidding on or after: 11-01-26
Last updated: 07-22-26)**

Requires SP02630
Requires SP02640 when shoulder aggregate is required)

SECTION 00641 - AGGREGATE SUBBASE, BASE, AND SHOULDERS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00641 of the Standard Specifications modified as follows:

00641.10(a) Base and Shoulder Aggregate - Replace the paragraph that begins "Aggregate for Bases ..." with the following paragraph:

Furnish Aggregate for Bases and Shoulders meeting sizes as specified. Furnish dense-graded Base Aggregate unless otherwise specified. For Shoulder Aggregates use either 1" - 0 or 3/4" - 0 size as the Contractor elects.

(Use the following two paragraphs only when the Contractor has the option of using more than one size of Base Aggregate. Specify sizes in the blanks. Do not use this subsection when the Base Aggregate size is included in the Pay Item name.)

In the paragraph that begins "Aggregate for bases...", add the following sentence after the first sentence:

Furnish Base Aggregate sized either _____ or _____.

00641.10(b) Subbase Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Furnish crushed or uncrushed Aggregate, including Sands, reasonably well graded from coarse to fine for Subbases.

The maximum size Aggregate is not to exceed 75 percent of the compacted thickness of the layer that it is incorporated in. Furnish Aggregates passing the 1/4-inch sieve not less than 10 percent nor more than 50 percent of the whole, by weight. Furnish Aggregate with not more than 10 percent of the Aggregate passing the No. 100 sieve. Within these limits, furnish Subbase Aggregate with a gradation adequate to produce a dense, firm Base when placed and compacted.

(1) Grading - All of the grading requirements are given as percentages by weight. The gradation is determined by sieve analysis according to AASHTO T 27.

(2) Abrasion - Do not exceed 45 percent wear when tested according to AASHTO T 96 for the source materials for Aggregate Subbase unless otherwise approved.

(3) Sand Equivalent - Aggregate Subbase is tested according to AASHTO T 176, with a Sand equivalent of not less than 25.

00641.12 Limits of Mixture - Replace the paragraph that begins "Furnish a mixture ..." with the following paragraph:

Furnish a mixture of Aggregate and water having a uniform moisture content sufficient to obtain the required compaction. Proportions are in percentages by weight and is known as the Mix Design. Determine the proportion of Aggregate and water according to Section 00165. The amount of water for the Mix Design is based on the dry weight of the Aggregate.

00641.15(b) Preproduced Aggregate - Replace the paragraph that begins "Compliance of Aggregates ..." with the following paragraph:

Compliance of Aggregates produced and stockpiled before issuance of Notice to Proceed is determined according to (1) or (2) below.

00641.16 Acceptance of Aggregates - Replace the paragraph that begins "Acceptance will be ..." with the following paragraph:

Acceptance is according to Section 00165.

00641.16(a) Stockpiled Aggregate for Aggregate Base and Shoulders - Replace the paragraph that begins "Acceptance will be ..." with the following paragraph:

Acceptance is based on the Contractor's quality control testing, if verified, as required in Section 00165.

00641.16(a)(2) Non-specification Aggregate Gradation - Replace this subsection, except for the subsection number and title, with the following:

Stockpiled Aggregates having non-specification Aggregate gradation are rejected unless the non-specification material is removed from the stockpile. Do not add additional material to the stockpile until enough non-specification material has been removed so that the QL for each sieve size is equal to or greater than the QL in Table 00165-2 for a 1.00 PF.

No payment is made for non-specification materials.

00641.16(b) Aggregate Base and Shoulder Mixture - Replace this subsection, except for the subsection number and title, with the following:

Acceptance testing is performed on random samples obtained immediately following mixing with water according to Section 00165. For non-specification mixture the Engineer will determine the appropriate price reduction or order its removal from the Work according to 00150.25.

00641.16(c) Aggregate Subbase - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Aggregate Subbase is accepted based on the Engineer's visual inspection. Samples are obtained and tested for compliance with 00641.10 by the Engineer if it is suspected that the material does not meet Specifications.

(Use the following subsection .20 when plant mix only is required.)

00641.20 Mixing Plant - Replace the sentence that begins "Mix Aggregate and water..." with the following two sentences:

Mix Aggregate and water according to subsection 00641.20(a). Road mix is not allowed on this Project.

00641.20(a) Mixing Plant - Replace the bullet that begins "Discharges water into ..." with the following bullet:

- Discharges water into the mixer by weighing or metering. Provide an adjustable device and assure uniform water content in the mixture.

00641.24 Compacting Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide self-propelled rollers and compactors capable of reversing without backlash. Use rollers and compactors with a gross static weight of at least 8 Tons, and capable of compacting to specified density while the mix is still moist.

00641.40 Preparation of Foundation - Replace this subsection, except for the subsection number and title, with the following:

Provide a firm surface or material, where Aggregates are to be placed, according to Sections 00320, 00330, or 00610 as applicable.

00641.41 Mixing, Hauling, and Placing - Replace the sentence that begins "Add water to the Aggregate..." with the following sentence:

Add water to the Aggregate while mixing to provide a moisture content meeting the requirements of 00641.12.

(Use the following two paragraphs when plant mix only is required.)

Replace the sentence that begins "Add water to the Aggregate..." with the following two sentences:

Add water to the Aggregate while mixing to provide a moisture content according to 00641.12 and subsection 00641.41(a). Road mix is not allowed on this Project.

00641.43(a) Aggregate Base Courses - Replace the paragraph that begins "If the required ..." with the following paragraph:

If the required compacted depth of the Base Course exceeds 6 inches, construct it in two or more layers of nearly equal thickness. The maximum compacted thickness of any one layer is 6 inches unless approved.

Insert Project Name Here

00641.43(b) Aggregate Subbase Courses - Replace this subsection, except for the subsection number and title, with the following:

The maximum compacted thickness of any one layer is 9 inches unless approved.

00641.43(c) Shoulder Courses - Replace this subsection, except for the subsection number and title, with the following:

Place Aggregates in Shoulder areas, other than as part of the Base Course, in one layer, or in two or more layers of nearly equal thickness. The maximum compacted thickness of any one layer is 9 inches.

00641.44(a)(2) Open-graded Aggregates - Replace the paragraph that begins "Compact the surface ..." with the following paragraph:

Compact the surface of each layer of open-graded Aggregates using rollers according to 00641.24. Roll until there is no appreciable reaction or yielding under the compactor.

00641.45 Surface Tolerance - Replace this subsection, except for the subsection number and title, with the following:

Parallel the finished surface of the Aggregate and the surface of each underlying layer with the established grade and Cross Section for the finished surface within 0.04 foot.

Do not vary the finished surface of the compacted Aggregate, when tested with a 12-foot straightedge, from the testing edge by more than 1/2 inch at any point. Provide and operate the straightedge as directed.

Add the following subsection:

00641.46 Small, Irregular Areas – Haul, place, shape and compact small irregular areas according to 00640.41 through 00640.43. A small or irregular area is outside of the Traveled Way and requires no more than 5 Tons of Aggregate Base or as otherwise approved by the Engineer.

In areas not accessible to the Equipment specified in 00641.24, use a weighted roller, vibratory plate compactor, tamping rammer compactor, or other approved Equipment suitable for the area as approved by the Engineer.

00641.90 Payment - Replace the paragraph that begins "In items (c) and (e) ..." with the following paragraph:

In items (c) and (e), the designated size of Aggregate to be used is inserted in the blank.

Replace the paragraph that begins "In item (g) ..." with the following paragraph:

In item (g), the depth of Aggregate Base is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00645 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-03-26)

SECTION 00645 - RECYCLED ASPHALT PRODUCTS IN BASE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00645 is not a Standard Specification and is included in this Project by Special Provision.

Description

00645.00 Scope - This Work consists of hauling recycled asphalt products from Agency-provided stockpiles specified in Section 00160 and placing one or more layers of recycled asphalt products, mixed with water, on a prepared surface to the lines, grades, thicknesses, and Cross Sections shown or established.

Materials

00645.10 Materials - Furnish recycled asphalt products of the designated sizes from the stockpiles except discard hardened lumps exceeding 2 inches on any measured face at the stockpile site in a separate new stockpile or reprocess to achieve the desired maximum size limit.

Acceptance of the recycled asphalt products is by visual inspection.

00645.12 Limits of Mixture - Furnish a mixture of recycled asphalt products and water having a uniform moisture content sufficient to obtain the required compaction. Water may be introduced in a mixing plant, or on the grade.

00645.15 Quality Control - Provide quality control according to Section 00165.

Equipment

00645.21 Hauling Equipment - Provide recycled asphalt products hauling vehicles capable of hauling and depositing the recycled asphalt products material with a minimum of material segregation.

Insert Project Name Here

00645.22 Watering and Spreading Equipment - Provide Equipment to add water to the recycled asphalt products and spread to the lines and grades shown or directed.

00645.23 Compacting Equipment - Provide self-propelled rollers and compactors capable of reversing without backlash and meeting the following requirements:

- A gross static weight of at least 10 Tons.
- Adequate to compact to specified density while the recycled asphalt products is still moist.

Labor

00645.30 Quality Control Personnel - Provide a technician having a CDT technical certification.

Construction

00645.40 Preparation of Foundation - Provide a firm surface or material where recycled asphalt products are to be placed, according to Sections 00330 or 00610 as applicable.

00645.41 Mixing, Hauling, and Placing - Load the recycled asphalt products into the hauling vehicle without compacting material remaining in the stockpile.

Add water to recycled asphalt products while mixing to provide moisture content according to 00645.12.

Thoroughly mix the combined recycled asphalt products and water for as long as necessary to produce a homogeneous mixture. Mix, haul, and place the Material by one of the following methods:

(a) Stationary Mixing Plant - Combine Materials in a pug mill or rotary mixer.

Deliver and deposit the mixture without delay. Deliver the mixture to the spreading Equipment by direct deposit into its receiving device, or by placing in uniform windrows in front of the Equipment.

(b) Road Mix - Place Materials for each layer, add water, and mix with a motor grader until a homogeneous mixture is achieved.

00645.43 Thickness and Number of Layers - If the required compacted depth of the Course exceeds 6 inches, construct it in two or more layers of nearly equal thickness. Furnish layers so that the maximum compacted thickness of any one layer does not exceed 6 inches unless approved by the Engineer.

Place each layer in spreads as wide as practical and to the full width of the Course before a succeeding layer is placed.

Insert Project Name Here

00645.44 Shaping and Compacting - Begin compaction of each layer immediately after the Material is spread. Determine optimum roller pattern according to ODOT TM 306 C *Control Strip Method of Compaction*. Maintain optimum roller pattern throughout.

Shape and maintain the surface of each layer, during the compaction operations, to produce a uniform texture, and to meet the requirements of 00645.45.

Apply additional water over the Materials for proper compaction.

00645.45 Surface Tolerance - Provide the established grade and Cross Section so the finished surface of the recycled asphalt products is parallel to the surface of each underlying layer within 5/8 inch.

Provide the finished surface of the compacted recycled asphalt products that does not vary from the testing edge by more than 5/8 inch at any point, when tested with a 12 foot straightedge. Provide and operate the straightedge as directed.

Maintenance

00645.60 Care of the Work - After construction of each layer and completion of recycled asphalt products Course, maintain the layer to specified conditions, and prevent or repair segregation, raveling, or rutting until it is covered with a following layer or until all Work is completed.

Measurement

00645.80 Measurement - The quantities of recycled asphalt products will be measured on the area basis, of recycled asphalt products constructed to the full nominal thickness. In areas and where the thickness is other than the full nominal thickness, the areas will be adjusted by converting it to an equivalent number of square yards at the full nominal thickness on a proportionate volume basis.

Payment

00645.90 Payment - The accepted quantities of recycled asphalt products will be paid for at the Contract unit price, per square yard, for the item "Recycled Asphalt Products in Base, _____ Inches Thick".

The thickness of the recycled asphalt products is inserted in the blank.

Payment will be payment in full for hauling and placing the Agency provided Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for water used to obtain compaction or in care of the Work.

SP00660 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-03-26)**

SECTION 00660 - LEAN CONCRETE BASE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

(Use this lean concrete base specification for non-critical applications such as under sidewalks and curbs. Do not use for critical areas such as under travel lanes.)

Section 00660 is not a Standard Specification and is included in this Project by Special Provision.

Description

00660.00 Scope - This Work consists of constructing a lean concrete base (LCB) to the lines, grades, and dimensions shown or established.

LCB is a mixture of aggregates, portland cement, water and at the option of the Contractor, an admixture for entraining air.

Materials

00660.11 Proportioning of LCB Mixture - Before using any LCB on the Project, provide in writing to the Engineer, the proportions by weight of the following materials, when used:

- Air entraining admixtures
- Cement
- Each size of aggregate
- Fly ash
- Other admixtures
- Water

00660.12 Tolerance and Limits of LCB Mixture - Furnish a workable mixture of LCB that is uniform in composition and consistency, and has the following characteristics:

- **Minimum Cement Content** - Furnish a LCB mixture with minimum cement or (cement + fly ash) content of 270 pounds per cubic yard.
- **Entrained Air** - Furnish air entrainment at the Contractor's option.
- **Slump** - Furnish LCB mixture with a slump not exceeding 4 inches. If a water reducing admixture is used in the mix, the slump limit may be increased to 5 inches.

Insert Project Name Here

- **Compressive Strength** - Furnish LCB that attains a 28-Day compressive strength of at least 1,000 psi.
- **Temperature** - Furnish LCB at a temperature between 50 °F and 90 °F.

00660.14 Acceptance Sampling and Testing:

(a) **General** - Acceptance sampling and testing is based on samples obtained at the site of placement before placement, unless provided otherwise. Provide a QCT to perform all required sampling and testing.

(b) **Batch Masses** - Send a batch ticket with each load recording and attesting to the source, day, time of batch(es), size of load and quantity of individual constituents in the load.

(c) **Plastic LCB** - Acceptance of plastic LCB is based on tests performed by the QCT according to Section 4 of the MFTP and the tolerances and limits of 00660.12.

(d) **Hardened LCB** - Acceptance of the hardened LCB is according to 00540.17(c). Cast one set of cylinders per 20 cubic yards, with a maximum of one set per Day.

00660.15 Quality Control - Provide quality control according to Section 00165.

Labor

00660.30 Quality Control Personnel - Provide certified technicians in the following fields:

- CSTT - Concrete Strength Testing Technician
- QCT

Construction

00660.40 General:

(a) **Mixing** - Mix LCB to the extent that ensures a uniform distribution of materials throughout the mass.

(b) **Placing** - Place LCB according to the following:

- Use placement methods that will avoid segregation.
- Vibrate and spade to achieve a dense homogeneous concrete, free of voids and rock pockets.
- Place within 90 minutes after batching and mixing.

(c) **Forms** - Furnish and place forms for LCB to the lines and grades as shown or as directed.

(d) **Weather** - Do not place LCB when the air temperature is below 35 °F without approval.

Insert Project Name Here

Protect from freezing if the air temperature is expected to drop below 35 °F during the first 5 Calendar Days after LCB placement.

(e) Curing - Cover the LCB immediately after finishing with polyethylene film, waterproof paper or other waterproof material. Weight down as needed to keep the covering in place. Maintain curing cover for at least 3 Days. Membrane forming curing compounds may be used only if the LCB will not be covered with an asphalt mix.

00660.41 Surface Finish - Perform the strike-off, consolidation, final floating, and surface finishing with Equipment, tools, and methods that provides a uniformity compacted mass and is free of laitance, soupy mortar, marks and irregularities.

00660.42 Replacement or Price Reduction - Remove LCB represented by cylinders that fail to meet the minimum strength requirement and replace at no additional cost to the Agency. If the Engineer determines that the LCB is suitable for the purpose intended, the Contractor may accept a price reduction established by the Engineer instead of removal and replacement.

Measurement

00660.80 Measurement - The quantities of LCB will be measured on the area basis. The area will be determined by measuring the width and length of each separately constructed Panel. The width is the design width or measured edge-to-edge width on the surface of the LCB, whichever is less. The length is the horizontal measurement from end to end of the LCB along the center line of the strip.

The measurement of extra thickness of LCB, as shown or as ordered, will be determined by conversion on a proportionate volume basis to an equivalent number of square yards of specified thickness Pavement. Extra thickness of LCB caused by the Contractor's methods, operations, or neglect will not be measured.

Payment

00660.90 Payment - The accepted quantities of LCB will be paid for at the Contract unit price, per square yard, for the item "Lean Concrete Base _____ inches Thick". The thickness of the LCB is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for Aggregate, cement, water, or additives.

SP00670 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-29-26

Requires SP02030 & SP02080)

SECTION 00670 - CONCRETE PAVEMENT UNDERSEALING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00670 is not a Standard Specification and is included in this Project by Special Provision.

Description

00670.00 Scope - This Work consists of undersealing and filling cavities, of portions of existing portland cement concrete (PCC) Pavement by pumping portland cement grout under the Pavement slabs.

Materials

00670.10 Materials - Furnish Materials meeting the following requirements:

Portland Cement Grout	02080.40
Water Reducer (Type A and Type G).....	02040.10
Fly Ash	02030.10
Wooden Plugs	Commercial quality

Equipment

00670.20 Pump - Provide a pump of sufficient size and capacity to inject grout, fill voids, and stabilize existing concrete Pavement but not cause slabs to change in elevation. Provide an acceptable means of measuring the quantity of grout placed for review and approval by the Engineer. Do not exceed an injection pressure of 250 psi.

00670.21 Drill - Provide a drill capable of cutting holes of the appropriate size for the pump.

00670.22 Movement Detector - Provide Equipment capable of measuring slab lift to the nearest 0.001 inch and that is capable of detecting simultaneous movement of slabs at joints.

Construction

00670.40 Weather Limitations - Do not perform grout undersealing in periods of rain or when water is present on the Pavement surface.

00670.41 Cutting and Cleaning Holes - Drill holes of the size required for the Equipment used at the locations, as shown or directed. Do not drill more holes than can be filled or temporarily plugged the same Day, unless otherwise approved.

Immediately prior to pumping grout into the holes, clean out all drilled holes with compressed air at a minimum pressure of 90 psi. Remove all mud and water from the holes before pumping grout.

Insert Project Name Here

00670.42 Pumping Grout and Plugging Holes - Pump grout through holes until all voids are filled, or until one of the following occurs:

- A Pavement slab or portion of a slab begins to rise. Do not raise the slab above the existing grade or 0.08 inch.
- Grouting injection pressure exceeds 250 psi.
- Grout extrudes from adjacent holes, transverse or longitudinal joints, or cracks.
- The Engineer stops undersealing procedure.

Use grout material within 90 minutes of mixing. Grout material held longer than 90 minutes is rejected.

Temporarily plug the hole until all undersealing in the area has been completed.

Fill and tamp core holes with grout at the completion of undersealing operations.

00670.43 Opening to Traffic - Finish grouting operations and plugging all drill holes at least three hours prior to opening to traffic.

Measurement

00670.80 Measurement -

(Use the following paragraph when Pay Item (a) is included in the Pay Item list below.)

The quantities of drilled holes will be measured on the unit basis.

(Use the following paragraph when Pay Item (b) is included in the Pay Item list below.)

The quantities of grout incorporated in the undersealing work will be measured on the volume basis.

Payment

(Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

00670.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item (s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Item s.)

Pay Item

Unit of Measurement

- | | |
|---------------------------------------|------------|
| (a) Drilled Holes..... | Each |
| (b) Concrete Undersealing Grout | Cubic Yard |

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00680 (Special Provisions for the 2024 Book) (Bidding on or after: 10-01-26

Last updated: 06-22-26

Requires SP00641 when Aggregate Base and Shoulder Aggregate is required

Requires SP00715 when Emulsified AC Aggregate is required.)

SECTION 00680 - STOCKPILED AGGREGATES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00680 of the Standard Specifications modified as follows:

00680.11(a) Aggregate Base and Shoulder Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregates in stockpiles of the sizes specified and meeting the requirements of 00641.10.

00680.11(b) Emulsified AC Aggregate - Replace the paragraph that begins "Aggregates in stockpiles ..." with the following paragraph:

Furnish Aggregates in stockpiles meeting the following requirements:

00680.11(b)(1) Quality - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregates meeting the requirements of 00715.10(a), (c), (d), (e) and (f).

(Use the following lead-in paragraph and one of the following subsection .11(c) options for sanding rock. Check with the District Maintenance Manager before using. Modify as needed.)

Add the following subsection:

[Option 1 - Use the following subsection .11(c) when crushed quarry material is required.]

[Begin Option 1]

00680.11(c) Sanding Aggregates - Furnish sanding Aggregates meeting the following requirements:

Insert Project Name Here

(1) Grading - Furnish clean, hard, and durable Aggregate in stockpiles meeting the following grading requirements:

(Use the following gradation when a coarse crushed quarry material is required.)

Sieve Size	Percent Passing (by Weight)
1/2"	100
3/8"	80 - 95
1/4"	10 - 40
No. 8	0 - 6
No. 40	0 - 2

(Use the following gradation when a fine crushed quarry material is required.)

Sieve Size	Percent Passing (by Weight)
1/2"	100
3/8"	85 - 100
No. 8	0 - 10
No. 40	0 - 2

Perform sieve analysis according to AASHTO T 27.

Scalp the Rock or Gravel material from where the Aggregates are produced on a screen, with the entire surface having openings not less than 1/2 inch in size. Furnish material that has passed over the scalping screen that does not contain not more than 5% by weight of material passing the 1/2-inch sieve. If quarry Rock is furnished, apply this requirement to the material after it has passed through the primary crusher. Furnish 95 percent of the quarry Rock that passes a 8-inch sieve following primary crushing.

(2) Elongated Pieces – Evaluate elongated pieces in Aggregate larger than 1/4 inch according to ODOT TM 229, with the proportional caliper device set at a ratio of 5:1, and acceptable material does not exceed 10 percent by weight of the material retained on the 1/4 inch sieve.

(3) Fractured Faces - Furnish Aggregates consisting of broken stone, crushed gravel, or a combination of both. Crush Aggregate such that at least 90% by weight of the total aggregate retained on the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

[End Option 1]

[Option 2 - Use the following subsection .11(c) when cinder material is required.]

[Begin Option 2]

00680.11(c) Sanding Aggregates - Furnish cinder sanding Aggregates in stockpiles meeting the following grading requirements:

Insert Project Name Here

Sieve Size	Percent Passing (by Weight)
3/4"	100
1/2"	80 - 95
No. 10	25 - 50
No. 100	0 - 16

[End Option 2]

00680.15 Aggregate Production Quality Control - Replace the paragraph that begins "Provide sampling, testing ..." with the following paragraph:

Provide sampling, testing, and quality control during production of Aggregate according to Section 00165. Perform sampling and testing according to Section 00641, or Section 00715, as applicable. Aggregates are evaluated for compliance according to the following:

00680.16 Acceptance of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

The Contractor's quality control tests are used for acceptance of Aggregates if verified by the Quality Assurance Program. The Agency will perform Aggregate production quality assurance according to the following:

(a) **ODOT-Administered Projects** - Quality assurance testing on projects administered by ODOT is performed according to Section 00165.

(b) **Projects Administered by Other Agencies** - The quantity of quality assurance testing on projects administered by Agencies other than ODOT is at the discretion of the Agency or as specified.

00680.40(a) Source Sites - Replace this subsection, except for the subsection number and title, with the following:

Prepare and develop the source site according to Section 00235 unless otherwise shown or directed.

00680.41 Piling of Materials - Replace the paragraph that begins "Place each separate ..." with the following paragraph:

Place each separate designated size of material to be stockpiled at a given site in a separate stockpile. Locate each stockpile to occupy as small an area as practicable, and separate each pile so that working room is adequate for removing the materials later. Pile Aggregate at heights not less than 8 feet, nor side Slopes flatter than 1V:1.5H, unless directed. Except in sand sheds, stockpile sanding materials to a height of 15 feet, or as directed.

00680.42 Places of Delivery - Replace the paragraph that begins "Places of delivery ..." with the following paragraph:

Places of delivery and the tentative plans of distribution of the materials is shown or specified.

Insert Project Name Here

(Use one of the following options when specifying place(s) of delivery. Fill in the quantity, type, stockpile site, and location as appropriate. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

[Option 1 – Use when only one stockpile and place of delivery is required.]

Add the following to the end of this subsection:

Deliver _____ (cubic yards)(tons) of _____ Aggregate, and stockpile at _____, located at _____ as shown.

[Option 2 - Use when more than one stockpile and place of delivery is required.]

Add the following to the end of this subsection:

Deliver and stockpile Aggregate at the following locations:

Stockpile Site Location	Quantity and Material to be Stockpiled
ODOT Stockpile Site _____ Highway MP _____	_____ (cubic yards)(tons) _____ (type or size) _____ Rock
ODOT Stockpile Site _____ Highway MP _____	_____ (cubic yards)(tons) _____ (type or size) _____ Rock

(Use the following paragraph when filling sanding sheds.)

Fill the sand shed until full. Stockpile remaining material outside the sand shed as directed.

[End Option 2]

00680.70 Cleaning Up Source Sites - Replace this subsection, except for the subsection number and title, with the following:

Clean up the source sites according to Section 00235 unless otherwise shown or directed.

00680.90 Payment - Replace the paragraph that begins "The respective sizes ..." with the following paragraph:

The respective sizes of stockpiled Aggregates is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials in stockpiles and sand sheds, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SECTION 00705 - EMULSIFIED ASPHALT PRIME COAT AND EMULSIFIED ASPHALT FOG COAT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00705 of the Standard Specifications modified as follows:

00705.10 Aggregate Cover Material - Replace the paragraph that begins " When required by ..." with the following paragraph:

When required by the Special Provisions, furnish Aggregate cover material consisting of crushed or uncrushed Rock free of Clay, loam or other harmful substances and meeting the following gradation. Sieve analysis is determined according to AASHTO T 27. Sieve analysis may be waived and the Aggregate cover material accepted visually if allowed by the Engineer.

Replace the paragraph that begins "* Of the fraction ..." with the following paragraph:

* Of the fraction passing the 1/4-inch sieve, 40 to 60 percent is allowed to pass the No. 8 sieve.

(Use the following two paragraphs when aggregate cover material is required. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

Add the following paragraph to the end of this subsection:

Provide ~~(Fine Cover)~~(Coarse Cover) Aggregate material on this Project.

00705.11 Emulsified Asphalt - Replace this subsection, except for the subsection number and title, with the following:

Furnish asphalt meeting the following requirements:

(a) General - Furnish Emulsified Asphalt according to the requirement of ODOT's publication, *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT Pavement Services Engineer. The applicable specifications are those contained in the current publication on the date the Project is advertised. The materials may be conditionally accepted at the source or point of loading for transport to the Project.

Insert Project Name Here

Obtain samples of Emulsified Asphalt according to AASHTO R 66, prior to dilution with water, according to Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency, within 30 Calendar Days from the Day the sample was taken.

(b) Prime Coat - Furnish CSS-1, CSS-1h, or CMS-2S Emulsified Asphalt for the prime coat.

(c) Fog Coat - Furnish CSS-1, CSS-1h, or HFRS-P1 Emulsified Asphalt for the fog coat.

For every part Emulsified Asphalt, add not more than one part water. Add water at point of supply or point of application as directed, and mix with Emulsified Asphalt. The exact proportion of added water is determined in a manner acceptable to the Engineer.

(Use one of the following options as instructed. Delete the options that do not apply.)

[Option 1 - Use the following paragraphs when polymer modified emulsion is specified in the pavement design report or requested by the Project Manager or District Manager. Fill in the blank with the required grade of emulsified asphalt used on the project]

Furnish _____ Emulsified Asphalt for the fog coat.

[Option 2 - Use the following paragraphs when SP00720 or SP00721 is included in the project special provisions.]

Furnish CSS-1, CSS-1h, HFRS-P1, CMS-2RA, or HFMS-2RA Emulsified Asphalt for the fog coat.

00705.21 Asphalt Distributor - Replace this subsection, except for the subsection number and title, with the following:

Provide an asphalt distributor meeting the following requirements:

- Designed, equipped, maintained, and operated so the Emulsified Asphalt Material is applied uniformly at even heat.
- Capable of applying the asphalt on variable surface widths up to 16 feet, at readily determined and controlled rates from 0.05 to 2.0 gallons per square yard, and with uniform pressure. Do not exceed 0.02 gallons per square yard in variation from any specified rate.
- Includes a tachometer, pressure gauges, accurate volume measuring devices and a thermometer for measuring temperature of tank contents.
- Equipped with a positive power unit for the asphalt pump, and full circulation spray bars adjustable both laterally and vertically. Set the bar height for triple lap coverage.

00705.40 Season and Weather Limitations - Replace the title of this subsection with "Weather Limitations".

Insert Project Name Here

00705.43(a) Prime Coat - Replace this subsection, except for the subsection number and title, with the following:

Apply asphalt at a uniform rate, normally within a range of 0.20 to 0.75 gallons per square yard of surface. The exact rate of application is determined by the Engineer.

(Use the following subsection .43(b) when placing fog coat on existing open graded ACP.)

00705.43(b) Fog Coats - Replace the paragraph beginning “Apply the diluted Emulsified Asphalt...” with the following paragraph:

Apply the diluted Emulsified Asphalt within the range of 0.12 to 0.30 gallons per square yard. The exact rate of application is determined by the Engineer.

00705.80 Measurement - Add the following to the end of the subsection:

If Emulsified Asphalt is diluted by the asphalt supplier prior to delivery, the quantity measured will be reduced to exclude the weight of the added water.

Measurement for Emulsified Asphalt will not include water added as allowed in 00705.11(c).

00705.90 Payment - Delete the sentence beginning “Item (b) includes water...”.

Replace the sentence that begins “Payment will be payment...” with the following sentence:

Payment will be payment in full for furnishing all Materials, mixing Emulsified Asphalt with water, placing all Materials and for providing all Equipment labor, and incidentals necessary to complete the Work as specified.

Add the following paragraph to the end of this subsection:

No separate or additional payment will be made for water added prior to delivery by the Supplier or for water added to dilute the Emulsified Asphalt fog coat by the Contractor after delivery from the Supplier.

SP00706 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP00746, SP00748, & SP02020)

SECTION 00706 - EMULSIFIED ASPHALT SLURRY SEAL SURFACING

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Replace Section 00706 of the Standard Specifications except for the Section number and title with the following:

Description

00706.00 Scope - This Work consists of applying one or more layers of slurry seal consisting of Emulsified Asphalt, water, Aggregate, and additives on a prepared surface as shown or directed.

00706.02 Definitions:

Blast-furnace Slag - The nonmetallic product, consisting essentially of silicates and aluminosilicates of calcium and other bases that is developed in molten condition simultaneously with iron in a blast furnace.

Sublot Size - A sublot is 200 Tons of crushed Aggregate.

00706.03 Submittals - At least 14 Calendar Days prior to the slurry seal pre-placement conference, submit a signed slurry seal mix design for the specific Materials to be used on the Project. Show the percentages of each individual Material required on the mix design report. Provide a complete mix design made with the same Aggregate and Aggregate gradation that is used on the Project. After the mix design has been approved, no substitution is allowed unless approved in writing. Water is allowed to be used as a mix constituent during mix design development.

Submit a plan for preparation of surface according to 00706.41.

00706.04 Slurry Seal Pre-Placement Conference - At least 21 Calendar Days prior to beginning slurry seal placement, hold a pre-placement conference with all Contractor supervisory personnel, all Subcontractors who are to be involved in the slurry seal work, and the Engineer to discuss all phases of slurry seal work.

Materials

00706.10 Aggregate - Provide and stockpile Aggregate according to the following product compliance testing and the MFTP, section 4A:

(a) **General** - Provide clean, angular, durable, well graded, and uniform Aggregate consisting of broken stone, crushed Gravel, Blast-Furnace Slag or a combination of them.

(b) **Fractured Faces** - Crush Aggregate such that at least 90 percent by weight of the total Aggregate retained on the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

(c) **Unit Weight of Aggregate** - Provide Aggregate with a minimum unit weight of 90 pounds per cubic foot according to AASHTO T 19.

(d) **Soundness** - Provide Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

(e) Durability - Provide Aggregate meeting the following durability requirements:

Test	Test Method ODOT	Test Method AASHTO	Maximum Values
Abrasion		T 96	30.0%
Degradation (Coarse Aggregate) Passing No. 20 Sieve	TM 208		30.0%
Sediment Height	TM 208		3.0 inches

(f) Harmful Substances - Provide Aggregate meeting the following harmful substances requirements:

Test	Test Method ODOT	Test Method AASHTO	Limits
Lightweight Pieces		T 113	1.0% maximum
Wood Particles	TM 225		0.1% maximum
Elongated Pieces (Coarse Aggregate at a ratio of 5:1)	TM 229		10.0% maximum
Sand Equivalent	T 176		60 minimum

(g) Grading - Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Provide grading for the slurry seal mix design for the specified type according to the following:

	TYPE I	TYPE II	TYPE III	
Sieve Size	Percent Passing	Percent Passing	Percent Passing	Stockpile Tolerance
3/8"	100	100	100	0
No. 4	100	90 - 100	70 - 90	± 5%
No. 8	90 - 100	65 - 90	45 - 70	± 5%
No. 16	65 - 90	45 - 70	28 - 50	± 5%
No. 30	40 - 65	30 - 50	19 - 34	± 5%
No. 50	25 - 42	18 - 30	12 - 25	± 4%
No. 100	15 - 30	10 - 21	7 - 18	± 3%
No. 200	10.0 - 20.0	5.0 - 15.0	5.0 - 15.0	± 2.0%

After the target gradation has been submitted the percent passing each sieve will not be allowed to vary by more than the stockpile tolerance. Do not exceed the percent passing limits.

(h) Preproduced Aggregate - Provide sampling, testing, and quality control for preproduced Aggregate according to Section 00165.

Insert Project Name Here

00706.11 Emulsified Asphalt and Filler Material - Provide polymer-modified Emulsified Asphalt, additives, mineral fillers, and water according to the following:

(a) Emulsified Asphalt - Furnish CQS-1hP polymer-modified Emulsified Asphalt meeting the requirements of the latest version of ODOT's publication, *Standard Specifications for Asphalt Materials*.

Provide a polymer modifier that is either a solid synthetic rubber or latex material. Combine the polymer modifier with the base asphalt or asphalt Emulsified Asphalt, prior to loading at the manufacturing plant, at the minimum rate of 3 percent polymer solids by weight of asphalt. Provide a polymer modified Emulsified Asphalt that is compatible with the mix design developed for the slurry seal. For each shipment of Emulsified Asphalt, provide a certificate of analysis or certificate of compliance from the manufacturer.

Obtain samples of Emulsified Asphalt according to AASHTO R 66 at the frequency according to Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Test polymer-modified Emulsified Asphalt within 14 Calendar Days from the date it is sampled.

(b) Additives and Mineral Filler - The use of additives and mineral fillers are allowed only when their quantity can be metered. Provide additives and other individual materials in the slurry seal mix at the quantities predetermined by the mix design, or with field adjustments if required, after approval.

Provide portland cement, hydrated lime, limestone dust, fly ash or other approved filler required by the mix design that meet the requirements of AASHTO M 17. These Materials are considered part of the dry Aggregate.

(c) Water - Provide potable water that is compatible with the slurry mix and that meets the requirements of Section 02020.

00706.12 Job Mix Formula (JMF) Requirements - Do not begin production of slurry seal for use on the Project until the JMF is reviewed and written consent is provided to proceed.

(a) JMF Evaluation - Determine the proportions of component Materials and perform the tests described in 00706.12(b). Provide a final mix design meeting the limits described in 00706.12(b) and 00706.12(c) and meeting the grading requirements of 00706.10(b).

(b) Mix Design Tests:

Test	Description	Specification
ISSA TB-106	Slurry Seal Consistency	
ISSA TB-139 (For quick-traffic systems)	Wet Cohesion, 30 minutes set 60 minutes set	0.10 lb.-in. min. 0.17 lb.-in. min.
ISSA TB-109 (For heavy traffic areas only)	Excess Asphalt by LWT and Sand Adhesion	1 lb./sq. yd. max.
ISSA TB-114	Wet Stripping	Pass (90% minimum)

Insert Project Name Here

ISSA TB-100	Wet Track Abrasion Loss One hour soak	1.5 lb./sq. yd. max.
ISSA TB-113	Mix Time *	Controllable to 180 sec. minimum

* Perform the mixing test and set time test at the highest temperatures expected during construction.

Report the quantitative effects of moisture content on the unit weight of the Aggregate (bulking effect) according to AASHTO T 19. Provide a report that clearly shows the proportions of Aggregate, the minimum and maximum proportions of mineral filler and water, additive usage, and asphalt Emulsified Asphalt based on the dry weight of the Aggregate.

Provide component materials in the mix design testing that are representative of the materials proposed for use on the Project.

Show the percentages of each individual material required in the laboratory report. The Engineer will give final approval for all mix adjustments made based on the field conditions during construction.

(c) Component Materials – Furnish the component materials within the following limits:

- **Residual Asphalt:**
 - Type I: 10% - 16%
 - Type II: 7.5% - 13.5%
 - Type III: 6.5% - 12%
 - Based on dry weight of Aggregate
- **Mineral Filler:**
 - 0.5% - 3.0%
 - Based on dry weight of Aggregate
- **Additives** - As needed.
- **Water** - As needed to achieve proper mix consistency. Do not allow total mix liquids to exceed the loose Aggregate voids. Use ISSA T106 to check optimum liquids.

00706.13 Tolerances and Limits - Tolerances for individual materials and the slurry seal mixture during production are as follows:

- Residual asphalt content: JMF +/- 0.5%.
- For the percentage of Aggregate passing each sieve, adhere to the stockpile tolerance range as stated in 00706.10(g).
- Cement content: JMF +/- 0.5%.

Insert Project Name Here

- The rate of application according to 00706.43. Once determined by the Engineer, do not vary the rate of application more than +/- 2 pound per square yard while remaining within the design application rate range.
- Do not exceed the limits of 00706.12(c) for any component material.
- Do not allow the percentage of Aggregate passing to go from the high end to the low end of the specified range of any two successive sieves.
- Do not vary the slurry consistency more than plus or minus 0.2 inch from the job mix formula after field adjustments.

00706.14 Aggregate Production Quality Control - Provide quality control during production of Aggregate and statistically evaluate according to Section 00165.

Compliance of Aggregates produced and stockpiled before the Award of this Contract are determined according to Section 00165.

00706.15 Acceptance of Aggregate - The Contractor's quality control tests are used for acceptance, if verified by the MFTP Quality Assurance Program.

00706.16 Slurry seal Production Quality Control - Provide quality control testing during production of slurry seal material according to the following:

- Determine Emulsified Asphalt content from calibrated meter readings for each Day's total production run.
- Determine moisture content of Aggregates during Equipment calibration, daily prior to each shift of placement, and as directed.
- Determine cement content from uncalibrated meter reading and the total number of bags or cement tickets for each Day's total production run.
- Determine the Aggregate spread rate from calibrated meter readings and the total estimated surface area placed for each Day's total. Provide an application rate meeting the requirements of 00706.43. The Engineer will accept the spread rate visually when filling ruts.

00706.17 Slurry Seal Production Quality Assurance - The Agency will perform verification of quality control testing as follows:

- Verify moisture content of the Aggregates during the Equipment calibration process. A maximum 1% moisture difference is allowed between QC and QA.

Equipment

00706.20 Mixing Equipment - Provide self-propelled, twin-shaft pug mill mixers that are specifically designed and manufactured to accurately deliver and proportion the Aggregate, Emulsified Asphalt, mineral filler, control setting additive and water to a revolving blade mixer that discharges the thoroughly mixed product on a continuous flow basis. Provide a slurry seal machine with a minimum capacity of 7 cubic yards. Truck-mounted mixers are not allowed.

Equip the mixing machine with an approved fine feeder that provides an accurate metering device or method to introduce a predetermined proportion of mineral filler into the mixer at the same time and location that the Aggregate is fed. Use the fine feeder whenever added mineral filler is a part of the Aggregate blend.

Equip the mixing machine, or separate piece of Equipment, with a water pressure system and fog type spray bar adequate for complete fogging of the surface preceding spreading Equipment.

(a) Proportioning Devices - Provide and properly mark individual volume or weight controls, such as revolution counters or similar devices, for proportioning each Material to be added to the mix (for example; Aggregate, mineral filler, additive, Emulsified Asphalt and water). Provide proportioning devices in working order prior to commencing proportioning and mixing operations that are visible when standing near the mixing machine. Instruct the Engineer on how to calculate the application rate per square yard utilizing the Contractor's proportioning devices.

(b) Calibration - Calibrate, in the presence of the Engineer, the Emulsified Asphalt pump and the Aggregate feeder on each mixing unit used on the Project prior to construction. Notify the Engineer at least 1 Calendar Day prior to performing the calibration. Provide the Engineer with access to the Equipment during the calibration process. Previous calibration documentation covering the exact Materials to be used are accepted at the discretion of the Engineer provided the calibration was performed within the previous 60 Calendar Days. Provide documentation that includes an individual calibration of each Material at minimum three settings, that can be related to the machines metering devices. Include in the calibration settings at least one setting above and below the target setting. A machine will not be allowed to work on the Project until the calibration has been completed and accepted. A new calibration test is required when there is a change in Material sources or a change in Equipment components that deliver slurry seal materials to the pugmill mixer.

(1) Aggregate Belt Rate Determinations - Pre-weigh a loaded truck and run a minimum of 3 Tons of Aggregate from the truck mounted hopper, over the belt, and through the pugmill. Register the number of counts on the aggregate belt feeder revolution counter. Re-weigh the truck after the test run, divide the net mass change by the revolutions counted and reduce the results by the moisture content of the Aggregate being used for the calibration to obtain a dry weight of Aggregate per revolution.

This calculation provides the dry weight of Aggregate delivered to the pugmill per unit of the aggregate belt-feeder revolution counter. The type of count does not matter as long as it relates to aggregate belt-feeder movement. The important final product of this calibration is the ability to determine the ratio of pounds of dry Aggregate to the pounds of Emulsified Asphalt, corrected for temperature, while operational.

Continue this operation for a total of three runs at the approximate gate setting to be used during the production of slurry seal. None of these three runs should deviate from their combined mathematical average by more than 1.0 percent.

After using the above procedure to establish belt-feeder delivery consistency, do two more runs that bracket the initial delivery rate. These two runs and the average of the first three runs should produce a straight line plot.

(2) Emulsified Asphalt Pump Rate Determination - Pre-weigh a mixer-spreader truck empty of Aggregate but loaded with Emulsified Asphalt to be used for the Project. Run at least 320 gallons from the truck mounted Emulsified Asphalt storage through the Emulsified Asphalt pump and into a separate tank. Run the Aggregate belt-feeder in an empty mode in order to make the aggregate belt-feeder revolution counter functional. Register the number of counts on the counter. Re-weigh the mixer-spreader truck after the test run. Divide the net mass change by the revolutions counted and reduce the results for any temperature correction to obtain corrected pounds of Emulsified Asphalt per unit of the aggregate belt-feeder revolution counter.

Continue this operation for a total of three runs at the approximate Emulsified Asphalt rate to be used during the production of slurry seal. None of these three runs should deviate from their combined mathematical average by more than 2.0 percent. Use the average of the results produced by the three test runs for the Emulsified Asphalt pump rate determination for use in operational calculations.

If the Contractor elects to use a variable rate Emulsified Asphalt pump, use the following procedure. After using the initial three test runs to establish the Emulsified Asphalt pump delivery consistency, do two more runs that bracket the initial delivery rate. The results of these two runs and the average of the first three runs should produce a straight line plot.

Check that the Emulsified Asphalt pump and all plumbing are free of leaks. Check the thermometer in the Emulsified Asphalt storage tank with a standardized thermometer.

(3) Report - At the conclusion of a successful calibration of proportioning devices, record the span adjustment settings and provide the quantity charts and supporting data to the Engineer.

00706.22 Spreading Equipment - Spreader Box - Provide a spreader box with twin-shafted paddles or spiral augers that is capable of uniformly spreading the slurry seal mixture. Provide a spreader box that is adjustable in width, capable of spreading a Traffic Lane width up to 14 feet, and that has strips of flexible rubber belting or similar material on each side of the spreader box in contact with the Pavement to positively prevent loss of slurry seal from the ends of the box. Provide a spreader box with suitable means to side shift the box to compensate for variations in the Pavement geometry. Maintain spreader box skids in such a manner as to prevent chatter (wash boarding) in the finished mat.

Provide a spreader box with a strike-off blade at the rear of the box that makes close contact with the Pavement and is capable of being adjusted to the various crown shapes, so as to apply a uniform slurry seal coat with a uniform texture free of streaking.

Flexible fabric drags attached to the rear of the spreader box are not allowed in travel lanes. Flexible fabric drags outside of travel lanes are only allowed with Engineer's approval. Clean or change strike-off blades (rubber) daily if problems with cleanliness and longitudinal scouring occur.

Provide a slurry seal spreader box clean and free of slurry seal and Emulsified Asphalt at the start of each work shift and prior to the beginning of each application.

Labor

00706.30 Personnel Qualifications - Provide a resume of work experience for the person signing the mix design, documenting the following minimum work experience:

- Minimum 5 years' experience in slurry seal mix design or construction
- List of minimum 5 successful slurry seal projects person worked on including project name, project location, year of completion, and owner of project.

00706.31 Quality Control Personnel - Provide a technician with CAgT certification.

Construction

00706.40 Weather Limitations - Do not apply the slurry seal if either the Pavement or air temperature is below 50 °F and falling. Apply slurry seal when both the Pavement and air temperature are above 45 °F and rising. Do not apply if there is a danger of freezing within 24 hours of application. Do not apply when weather conditions prolong opening to traffic beyond a reasonable time. Do not apply in the rain. Replace slurry surface damaged by rain after application according to the Specifications, and as determined by Engineer, at no additional cost to the Agency. Clean the street of all remaining slurry seal Materials prior to re-application.

00706.41 Preparation of Surface - At least 7 Calendar Days prior to the slurry seal pre-placement conference submit details of the proposed street cleaning.

Remove organic Materials in cracks or joints.

Prepare the Pavement by flushing and sweeping. Complete flushing, as needed, prior to sweeping. Finish sweeping with a vacuum sweeper no more than 24 hours prior to application of the slurry seal.

Prepare the Pavement where the slurry seal is to be placed as follows and as directed.

(a) Asphalt Concrete Pavement Repairs - When shown, remove and replace Existing Surfacing according to Section 00748, or as determined.

(b) Crack Sealing - A minimum of 30 Days prior to the application of slurry seal, clean and fill cracks 1/4 inch wide and larger inside the proposed slurry seal area according to Section 00746.

(c) Tack Coat - When shown, apply tack coat according to Section 00730 prior to placing the slurry seal. Allow the tack coat to cure thoroughly prior to the application of the slurry seal.

(d) Street Equipment and Procedure - Immediately prior to applying the slurry seal, clear the surface of all loose material, Silt spots, vegetation, oil spots and other objectionable material. If water is used, allow cracks to dry thoroughly before placing slurry seal. The Engineer will approve the surface preparation prior to slurry seal placement.

(e) Utility Covers - Protect manholes, valve boxes, drop inlets and other service entrances from the slurry seal by a suitable method. Clean these covers as quickly as possible after the application of the slurry seal and prior to the final set. If necessary, clean mixture residual from the interior of the Utility covers.

(f) Pavement Markings - Cover, or remove, all reflector buttons before slurry seal is applied to any area, as determined. Remove all thermoplastic and paint Pavement markings prior to applying slurry seal according to 00225.45.

00706.42 General - If required by local conditions, wet the surface by misting ahead of the spreader box. Apply water at such a rate that the entire surface is damp with no apparent flowing water in front of the spreader box. Adjust the rate of application of the misting during the day to suit temperatures, surface texture, humidity, and dryness of Pavement surface. Do not spray additional water into the spreader box.

Provide a slurry seal mixture of proper consistency at all times so as to uniformly spread on the existing surface within the application rate specified in 00706.43. Do not allow lumping, balling or unmixed Aggregate in the spreader box. Do not allow segregation of the Emulsified Asphalt and Aggregate fines from the Coarse Aggregates. If the Coarse Aggregate settles to the bottom of the mix, remove the slurry seal mixture from the Pavement. Do not allow excessive breaking of the Emulsified Asphalt in the spreader box. Do not exceed four minutes mixing time in the pug mill.

Do not leave streaks in the finished surface, such as those caused by oversized Aggregate, mixture build-up, or improper installation of secondary strike-off blades. If excess streaking develops, stop the application until corrected to the satisfaction of the Engineer. Excessive streaking is defined as more than four drag marks greater than 1/2 inch wide by 4 inches long, or 1 inch wide by 3 inches long, in any area of 30 square yards. No transverse ripples or longitudinal streaks of 1/4 inch in depth is permitted when measured by placing a 10 foot straight edge over the surface.

00706.43 Application Rate - Apply the slurry seal mixture within the following range of rates based upon the slurry type:

Slurry Type	Application Rate*
TYPE I	8 - 12 lbs./sq. yd.
TYPE II	14 - 18 lbs./sq. yd.
TYPE III	18 - 24 lbs./sq. yd.

*Application rates are based upon the dry Aggregate weight in the mixture.

The exact rate is determined by the Engineer depending on the surface demand of the Pavement, the size of the largest particles of Aggregate and using the specific weight of the Aggregate determined in the mix design.

00706.44 Applying Slurry Seal Test Strip - Furnish a test strip consisting of two panels approximately 250 feet long, placed side by side to form a typical joint between them. Apply

Insert Project Name Here

each panel at the width shown. Place the strip at least 24 hours prior to the beginning of the Work. Use the strip to calculate and monitor the rate of application in relation to weight of Material per area, and to define the speed of the Equipment related to the rate of application. If the Engineer determines on the basis of this test strip that there are deficiencies in the mix design, method of application, or rate of application, revise the mix design or repair or modify the Equipment or application at the Engineers discretion. After all changes are made, place a new test strip.

00706.45 Joints - Construct a uniform line along the edge and a good seal at curb lines. Construct the flow line at curbs to allow storm drainage flow to catch basins without bonding along the curb line. In the case of a concrete gutter, cover the gutter line joint with the slurry seal, but do not overlap onto the gutter. Remove any overlap, as determined, at no additional cost to the Agency.

Provide joints and Panels that are straight, neat and uniform and follow the contour of the existing curb or concrete gutter. Keep lines straight at intersections.

00706.46 Mix Stability - Provide a slurry seal mixture that is stable and does not break prematurely in the spreader box, that is uniform and homogeneous during mixing and spreading, is free of excess water and emulsion, and is free of segregation.

00706.47 Handwork - Use approved squeegees to spread Material in areas not accessible to the slurry mixer.

Limit handwork at the beginning and end of the Panels to prevent segregation of the Aggregate from the emulsion and to minimize drag marks or defects in the finished product.

Apply the same finish as applied by the spreader box. Complete handwork prior to curing of the Material.

00706.48 Curing - Produce and place slurry seal Material that is capable of curing at a rate such that a Traveled Way may be opened to traffic after application without tracking or damage to the surface. Protect the area for the full curing period with suitable barricades or markers. If the slurry seal does not cure in a timely manner and remains trackable overnight, apply a covering of 1/4 inch minus Material to prevent tracking and related property damage prior to permitting traffic on the street at no additional cost to the Agency.

The Agency will not be responsible for any damage to the slurry seal prior to opening the area. Repair all damage to the slurry, to the satisfaction of the Engineer, at no additional cost to the Agency.

00706.49 Cleanup - Remove all debris associated with the performance of the Work on a daily basis.

Maintenance

00706.60 Correction of Defects - Correct all defects that occur within 15 Days of placing the slurry seal, as directed, at no additional cost to the Agency. Defects include bleeding, raveling, separation, segregation of Materials, non-uniform texture and fouled surfaces preventing full bond between Lifts of mixture. No adjustment in Contract time will be made for corrective work.

Insert Project Name Here

Measurement

00706.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

The quantities of slurry seal will be measured on the area basis, measurement will be limited to the Neat Lines shown or directed.

The quantities of Emulsified Asphalt in slurry seal will be measured on the weight basis.

Payment

00706.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
----------	---------------------

- | | |
|---|-------------|
| (a) Slurry Seal | Square Yard |
| (b) Emulsified Asphalt in Slurry Seal | Ton |

Item (a) includes all components of the mix and the placement of slurry seal except for Emulsified Asphalt.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Emulsified Asphalt for tack coat will be paid for according to 00730.90.

Crack sealing will be paid for according to 00746.90.

Asphalt concrete pavement repairs will be paid for according to 00748.90.

Stripe removal will be paid for according to 00225.90.

SP00706 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP00746, SP00748, & SP02020)

SECTION 00706 - EMULSIFIED ASPHALT SLURRY SEAL SURFACING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Replace Section 00706 of the Standard Specifications except for the Section number and title with the following:

Description

00706.00 Scope - This Work consists of applying one or more layers of slurry seal consisting of Emulsified Asphalt, water, Aggregate, and additives on a prepared surface as shown or directed.

00706.02 Definitions:

Blast-furnace Slag - The nonmetallic product, consisting essentially of silicates and aluminosilicates of calcium and other bases that is developed in molten condition simultaneously with iron in a blast furnace.

Sublot Size - A sublot is 200 Tons of crushed Aggregate.

00706.03 Submittals - At least 14 Calendar Days prior to the slurry seal pre-placement conference, submit a signed slurry seal mix design for the specific Materials to be used on the Project. Show the percentages of each individual Material required on the mix design report. Provide a complete mix design made with the same Aggregate and Aggregate gradation that is used on the Project. After the mix design has been approved, no substitution is allowed unless approved in writing. Water is allowed to be used as a mix constituent during mix design development.

Submit a plan for preparation of surface according to 00706.41.

00706.04 Slurry Seal Pre-Placement Conference - At least 21 Calendar Days prior to beginning slurry seal placement, hold a pre-placement conference with all Contractor supervisory personnel, all Subcontractors who are to be involved in the slurry seal work, and the Engineer to discuss all phases of slurry seal work.

Materials

00706.10 Aggregate - Provide and stockpile Aggregate according to the following product compliance testing and the MFTP, section 4A:

(a) **General** - Provide clean, angular, durable, well graded, and uniform Aggregate consisting of broken stone, crushed Gravel, Blast-Furnace Slag or a combination of them.

(b) **Fractured Faces** - Crush Aggregate such that at least 90 percent by weight of the total Aggregate retained on the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

(c) **Unit Weight of Aggregate** - Provide Aggregate with a minimum unit weight of 90 pounds per cubic foot according to AASHTO T 19.

(d) **Soundness** - Provide Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

Insert Project Name Here

(e) Durability - Provide Aggregate meeting the following durability requirements:

Test	Test Method ODOT	Test Method AASHTO	Maximum Values
Abrasion		T 96	30.0%
Degradation (Coarse Aggregate) Passing No. 20 Sieve	TM 208		30.0%
Sediment Height	TM 208		3.0 inches

(f) Harmful Substances - Provide Aggregate meeting the following harmful substances requirements:

Test	Test Method ODOT	Test Method AASHTO	Limits
Lightweight Pieces		T 113	1.0% maximum
Wood Particles	TM 225		0.1% maximum
Elongated Pieces (Coarse Aggregate at a ratio of 5:1)	TM 229		10.0% maximum
Sand Equivalent	T 176		60 minimum

(g) Grading - Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Provide grading for the slurry seal mix design for the specified type according to the following:

	TYPE I	TYPE II	TYPE III	
Sieve Size	Percent Passing	Percent Passing	Percent Passing	Stockpile Tolerance
3/8"	100	100	100	0
No. 4	100	90 - 100	70 - 90	± 5%
No. 8	90 - 100	65 - 90	45 - 70	± 5%
No. 16	65 - 90	45 - 70	28 - 50	± 5%
No. 30	40 - 65	30 - 50	19 - 34	± 5%
No. 50	25 - 42	18 - 30	12 - 25	± 4%
No. 100	15 - 30	10 - 21	7 - 18	± 3%
No. 200	10.0 - 20.0	5.0 - 15.0	5.0 - 15.0	± 2.0%

After the target gradation has been submitted the percent passing each sieve will not be allowed to vary by more than the stockpile tolerance. Do not exceed the percent passing limits.

(h) Preproduced Aggregate - Provide sampling, testing, and quality control for preproduced Aggregate according to Section 00165.

00706.11 Emulsified Asphalt and Filler Material - Provide polymer-modified Emulsified Asphalt, additives, mineral fillers, and water according to the following:

(a) Emulsified Asphalt - Furnish CQS-1hP polymer-modified Emulsified Asphalt meeting the requirements of the latest version of ODOT's publication, *Standard Specifications for Asphalt Materials*.

Provide a polymer modifier that is either a solid synthetic rubber or latex material. Combine the polymer modifier with the base asphalt or asphalt Emulsified Asphalt, prior to loading at the manufacturing plant, at the minimum rate of 3 percent polymer solids by weight of asphalt. Provide a polymer modified Emulsified Asphalt that is compatible with the mix design developed for the slurry seal. For each shipment of Emulsified Asphalt, provide a certificate of analysis or certificate of compliance from the manufacturer.

Obtain samples of Emulsified Asphalt according to AASHTO R 66 at the frequency according to Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Test polymer-modified Emulsified Asphalt within 14 Calendar Days from the date it is sampled.

(b) Additives and Mineral Filler - The use of additives and mineral fillers are allowed only when their quantity can be metered. Provide additives and other individual materials in the slurry seal mix at the quantities predetermined by the mix design, or with field adjustments if required, after approval.

Provide portland cement, hydrated lime, limestone dust, fly ash or other approved filler required by the mix design that meet the requirements of AASHTO M 17. These Materials are considered part of the dry Aggregate.

(c) Water - Provide potable water that is compatible with the slurry mix and that meets the requirements of Section 02020.

00706.12 Job Mix Formula (JMF) Requirements - Do not begin production of slurry seal for use on the Project until the JMF is reviewed and written consent is provided to proceed.

(a) JMF Evaluation - Determine the proportions of component Materials and perform the tests described in 00706.12(b). Provide a final mix design meeting the limits described in 00706.12(b) and 00706.12(c) and meeting the grading requirements of 00706.10(b).

(b) Mix Design Tests:

Test	Description	Specification
ISSA TB-106	Slurry Seal Consistency	
ISSA TB-139 (For quick-traffic systems)	Wet Cohesion, 30 minutes set 60 minutes set	0.10 lb.-in. min. 0.17 lb.-in. min.
ISSA TB-109 (For heavy traffic areas only)	Excess Asphalt by LWT and Sand Adhesion	1 lb./sq. yd. max.
ISSA TB-114	Wet Stripping	Pass (90% minimum)

Insert Project Name Here

ISSA TB-100	Wet Track Abrasion Loss One hour soak	1.5 lb./sq. yd. max.
ISSA TB-113	Mix Time *	Controllable to 180 sec. minimum

* Perform the mixing test and set time test at the highest temperatures expected during construction.

Report the quantitative effects of moisture content on the unit weight of the Aggregate (bulking effect) according to AASHTO T 19. Provide a report that clearly shows the proportions of Aggregate, the minimum and maximum proportions of mineral filler and water, additive usage, and asphalt Emulsified Asphalt based on the dry weight of the Aggregate.

Provide component materials in the mix design testing that are representative of the materials proposed for use on the Project.

Show the percentages of each individual material required in the laboratory report. The Engineer will give final approval for all mix adjustments made based on the field conditions during construction.

(c) Component Materials – Furnish the component materials within the following limits:

- **Residual Asphalt:**
 - Type I: 10% - 16%
 - Type II: 7.5% - 13.5%
 - Type III: 6.5% - 12%
 - Based on dry weight of Aggregate
- **Mineral Filler:**
 - 0.5% - 3.0%
 - Based on dry weight of Aggregate
- **Additives** - As needed.
- **Water** - As needed to achieve proper mix consistency. Do not allow total mix liquids to exceed the loose Aggregate voids. Use ISSA T106 to check optimum liquids.

00706.13 Tolerances and Limits - Tolerances for individual materials and the slurry seal mixture during production are as follows:

- Residual asphalt content: JMF +/- 0.5%.
- For the percentage of Aggregate passing each sieve, adhere to the stockpile tolerance range as stated in 00706.10(g).
- Cement content: JMF +/- 0.5%.

Insert Project Name Here

- The rate of application according to 00706.43. Once determined by the Engineer, do not vary the rate of application more than +/- 2 pound per square yard while remaining within the design application rate range.
- Do not exceed the limits of 00706.12(c) for any component material.
- Do not allow the percentage of Aggregate passing to go from the high end to the low end of the specified range of any two successive sieves.
- Do not vary the slurry consistency more than plus or minus 0.2 inch from the job mix formula after field adjustments.

00706.14 Aggregate Production Quality Control - Provide quality control during production of Aggregate and statistically evaluate according to Section 00165.

Compliance of Aggregates produced and stockpiled before the Award of this Contract are determined according to Section 00165.

00706.15 Acceptance of Aggregate - The Contractor's quality control tests are used for acceptance, if verified by the MFTP Quality Assurance Program.

00706.16 Slurry seal Production Quality Control - Provide quality control testing during production of slurry seal material according to the following:

- Determine Emulsified Asphalt content from calibrated meter readings for each Day's total production run.
- Determine moisture content of Aggregates during Equipment calibration, daily prior to each shift of placement, and as directed.
- Determine cement content from uncalibrated meter reading and the total number of bags or cement tickets for each Day's total production run.
- Determine the Aggregate spread rate from calibrated meter readings and the total estimated surface area placed for each Day's total. Provide an application rate meeting the requirements of 00706.43. The Engineer will accept the spread rate visually when filling ruts.

00706.17 Slurry Seal Production Quality Assurance - The Agency will perform verification of quality control testing as follows:

- Verify moisture content of the Aggregates during the Equipment calibration process. A maximum 1% moisture difference is allowed between QC and QA.

Equipment

00706.20 Mixing Equipment - Provide self-propelled, twin-shaft pug mill mixers that are specifically designed and manufactured to accurately deliver and proportion the Aggregate, Emulsified Asphalt, mineral filler, control setting additive and water to a revolving blade mixer that discharges the thoroughly mixed product on a continuous flow basis. Provide a slurry seal machine with a minimum capacity of 7 cubic yards. Truck-mounted mixers are not allowed.

Insert Project Name Here

Equip the mixing machine with an approved fine feeder that provides an accurate metering device or method to introduce a predetermined proportion of mineral filler into the mixer at the same time and location that the Aggregate is fed. Use the fine feeder whenever added mineral filler is a part of the Aggregate blend.

Equip the mixing machine, or separate piece of Equipment, with a water pressure system and fog type spray bar adequate for complete fogging of the surface preceding spreading Equipment.

(a) Proportioning Devices - Provide and properly mark individual volume or weight controls, such as revolution counters or similar devices, for proportioning each Material to be added to the mix (for example; Aggregate, mineral filler, additive, Emulsified Asphalt and water). Provide proportioning devices in working order prior to commencing proportioning and mixing operations that are visible when standing near the mixing machine. Instruct the Engineer on how to calculate the application rate per square yard utilizing the Contractor's proportioning devices.

(b) Calibration - Calibrate, in the presence of the Engineer, the Emulsified Asphalt pump and the Aggregate feeder on each mixing unit used on the Project prior to construction. Notify the Engineer at least 1 Calendar Day prior to performing the calibration. Provide the Engineer with access to the Equipment during the calibration process. Previous calibration documentation covering the exact Materials to be used are accepted at the discretion of the Engineer provided the calibration was performed within the previous 60 Calendar Days. Provide documentation that includes an individual calibration of each Material at minimum three settings, that can be related to the machines metering devices. Include in the calibration settings at least one setting above and below the target setting. A machine will not be allowed to work on the Project until the calibration has been completed and accepted. A new calibration test is required when there is a change in Material sources or a change in Equipment components that deliver slurry seal materials to the pugmill mixer.

(1) Aggregate Belt Rate Determinations - Pre-weigh a loaded truck and run a minimum of 3 Tons of Aggregate from the truck mounted hopper, over the belt, and through the pugmill. Register the number of counts on the aggregate belt feeder revolution counter. Re-weigh the truck after the test run, divide the net mass change by the revolutions counted and reduce the results by the moisture content of the Aggregate being used for the calibration to obtain a dry weight of Aggregate per revolution.

This calculation provides the dry weight of Aggregate delivered to the pugmill per unit of the aggregate belt-feeder revolution counter. The type of count does not matter as long as it relates to aggregate belt-feeder movement. The important final product of this calibration is the ability to determine the ratio of pounds of dry Aggregate to the pounds of Emulsified Asphalt, corrected for temperature, while operational.

Continue this operation for a total of three runs at the approximate gate setting to be used during the production of slurry seal. None of these three runs should deviate from their combined mathematical average by more than 1.0 percent.

After using the above procedure to establish belt-feeder delivery consistency, do two more runs that bracket the initial delivery rate. These two runs and the average of the first three runs should produce a straight line plot.

(2) Emulsified Asphalt Pump Rate Determination - Pre-weigh a mixer-spreader truck empty of Aggregate but loaded with Emulsified Asphalt to be used for the Project. Run at least 320 gallons from the truck mounted Emulsified Asphalt storage through the Emulsified Asphalt pump and into a separate tank. Run the Aggregate belt-feeder in an empty mode in order to make the aggregate belt-feeder revolution counter functional. Register the number of counts on the counter. Re-weigh the mixer-spreader truck after the test run. Divide the net mass change by the revolutions counted and reduce the results for any temperature correction to obtain corrected pounds of Emulsified Asphalt per unit of the aggregate belt-feeder revolution counter.

Continue this operation for a total of three runs at the approximate Emulsified Asphalt rate to be used during the production of slurry seal. None of these three runs should deviate from their combined mathematical average by more than 2.0 percent. Use the average of the results produced by the three test runs for the Emulsified Asphalt pump rate determination for use in operational calculations.

If the Contractor elects to use a variable rate Emulsified Asphalt pump, use the following procedure. After using the initial three test runs to establish the Emulsified Asphalt pump delivery consistency, do two more runs that bracket the initial delivery rate. The results of these two runs and the average of the first three runs should produce a straight line plot.

Check that the Emulsified Asphalt pump and all plumbing are free of leaks. Check the thermometer in the Emulsified Asphalt storage tank with a standardized thermometer.

(3) Report - At the conclusion of a successful calibration of proportioning devices, record the span adjustment settings and provide the quantity charts and supporting data to the Engineer.

00706.22 Spreading Equipment - Spreader Box - Provide a spreader box with twin-shafted paddles or spiral augers that is capable of uniformly spreading the slurry seal mixture. Provide a spreader box that is adjustable in width, capable of spreading a Traffic Lane width up to 14 feet, and that has strips of flexible rubber belting or similar material on each side of the spreader box in contact with the Pavement to positively prevent loss of slurry seal from the ends of the box. Provide a spreader box with suitable means to side shift the box to compensate for variations in the Pavement geometry. Maintain spreader box skids in such a manner as to prevent chatter (wash boarding) in the finished mat.

Provide a spreader box with a strike-off blade at the rear of the box that makes close contact with the Pavement and is capable of being adjusted to the various crown shapes, so as to apply a uniform slurry seal coat with a uniform texture free of streaking.

Flexible fabric drags attached to the rear of the spreader box are not allowed in travel lanes. Flexible fabric drags outside of travel lanes are only allowed with Engineer's approval. Clean or change strike-off blades (rubber) daily if problems with cleanliness and longitudinal scouring occur.

Provide a slurry seal spreader box clean and free of slurry seal and Emulsified Asphalt at the start of each work shift and prior to the beginning of each application.

Labor

00706.30 Personnel Qualifications - Provide a resume of work experience for the person signing the mix design, documenting the following minimum work experience:

- Minimum 5 years' experience in slurry seal mix design or construction
- List of minimum 5 successful slurry seal projects person worked on including project name, project location, year of completion, and owner of project.

00706.31 Quality Control Personnel - Provide a technician with CAgT certification.

Construction

00706.40 Weather Limitations - Do not apply the slurry seal if either the Pavement or air temperature is below 50 °F and falling. Apply slurry seal when both the Pavement and air temperature are above 45 °F and rising. Do not apply if there is a danger of freezing within 24 hours of application. Do not apply when weather conditions prolong opening to traffic beyond a reasonable time. Do not apply in the rain. Replace slurry surface damaged by rain after application according to the Specifications, and as determined by Engineer, at no additional cost to the Agency. Clean the street of all remaining slurry seal Materials prior to re-application.

00706.41 Preparation of Surface - At least 7 Calendar Days prior to the slurry seal pre-placement conference submit details of the proposed street cleaning.

Remove organic Materials in cracks or joints.

Prepare the Pavement by flushing and sweeping. Complete flushing, as needed, prior to sweeping. Finish sweeping with a vacuum sweeper no more than 24 hours prior to application of the slurry seal.

Prepare the Pavement where the slurry seal is to be placed as follows and as directed.

(a) Asphalt Concrete Pavement Repairs - When shown, remove and replace Existing Surfacing according to Section 00748, or as determined.

(b) Crack Sealing - A minimum of 30 Days prior to the application of slurry seal, clean and fill cracks 1/4 inch wide and larger inside the proposed slurry seal area according to Section 00746.

(c) Tack Coat - When shown, apply tack coat according to Section 00730 prior to placing the slurry seal. Allow the tack coat to cure thoroughly prior to the application of the slurry seal.

(d) Street Equipment and Procedure - Immediately prior to applying the slurry seal, clear the surface of all loose material, Silt spots, vegetation, oil spots and other objectionable material. If water is used, allow cracks to dry thoroughly before placing slurry seal. The Engineer will approve the surface preparation prior to slurry seal placement.

(e) Utility Covers - Protect manholes, valve boxes, drop inlets and other service entrances from the slurry seal by a suitable method. Clean these covers as quickly as possible after the application of the slurry seal and prior to the final set. If necessary, clean mixture residual from the interior of the Utility covers.

(f) Pavement Markings - Cover, or remove, all reflector buttons before slurry seal is applied to any area, as determined. Remove all thermoplastic and paint Pavement markings prior to applying slurry seal according to 00225.45.

00706.42 General - If required by local conditions, wet the surface by misting ahead of the spreader box. Apply water at such a rate that the entire surface is damp with no apparent flowing water in front of the spreader box. Adjust the rate of application of the misting during the day to suit temperatures, surface texture, humidity, and dryness of Pavement surface. Do not spray additional water into the spreader box.

Provide a slurry seal mixture of proper consistency at all times so as to uniformly spread on the existing surface within the application rate specified in 00706.43. Do not allow lumping, balling or unmixed Aggregate in the spreader box. Do not allow segregation of the Emulsified Asphalt and Aggregate fines from the Coarse Aggregates. If the Coarse Aggregate settles to the bottom of the mix, remove the slurry seal mixture from the Pavement. Do not allow excessive breaking of the Emulsified Asphalt in the spreader box. Do not exceed four minutes mixing time in the pug mill.

Do not leave streaks in the finished surface, such as those caused by oversized Aggregate, mixture build-up, or improper installation of secondary strike-off blades. If excess streaking develops, stop the application until corrected to the satisfaction of the Engineer. Excessive streaking is defined as more than four drag marks greater than 1/2 inch wide by 4 inches long, or 1 inch wide by 3 inches long, in any area of 30 square yards. No transverse ripples or longitudinal streaks of 1/4 inch in depth is permitted when measured by placing a 10 foot straight edge over the surface.

00706.43 Application Rate - Apply the slurry seal mixture within the following range of rates based upon the slurry type:

Slurry Type	Application Rate*
TYPE I	8 - 12 lbs./sq. yd.
TYPE II	14 - 18 lbs./sq. yd.
TYPE III	18 - 24 lbs./sq. yd.

*Application rates are based upon the dry Aggregate weight in the mixture.

The exact rate is determined by the Engineer depending on the surface demand of the Pavement, the size of the largest particles of Aggregate and using the specific weight of the Aggregate determined in the mix design.

00706.44 Applying Slurry Seal Test Strip - Furnish a test strip consisting of two panels approximately 250 feet long, placed side by side to form a typical joint between them. Apply

Insert Project Name Here

each panel at the width shown. Place the strip at least 24 hours prior to the beginning of the Work. Use the strip to calculate and monitor the rate of application in relation to weight of Material per area, and to define the speed of the Equipment related to the rate of application. If the Engineer determines on the basis of this test strip that there are deficiencies in the mix design, method of application, or rate of application, revise the mix design or repair or modify the Equipment or application at the Engineers discretion. After all changes are made, place a new test strip.

00706.45 Joints - Construct a uniform line along the edge and a good seal at curb lines. Construct the flow line at curbs to allow storm drainage flow to catch basins without bonding along the curb line. In the case of a concrete gutter, cover the gutter line joint with the slurry seal, but do not overlap onto the gutter. Remove any overlap, as determined, at no additional cost to the Agency.

Provide joints and Panels that are straight, neat and uniform and follow the contour of the existing curb or concrete gutter. Keep lines straight at intersections.

00706.46 Mix Stability - Provide a slurry seal mixture that is stable and does not break prematurely in the spreader box, that is uniform and homogeneous during mixing and spreading, is free of excess water and emulsion, and is free of segregation.

00706.47 Handwork - Use approved squeegees to spread Material in areas not accessible to the slurry mixer.

Limit handwork at the beginning and end of the Panels to prevent segregation of the Aggregate from the emulsion and to minimize drag marks or defects in the finished product.

Apply the same finish as applied by the spreader box. Complete handwork prior to curing of the Material.

00706.48 Curing - Produce and place slurry seal Material that is capable of curing at a rate such that a Traveled Way may be opened to traffic after application without tracking or damage to the surface. Protect the area for the full curing period with suitable barricades or markers. If the slurry seal does not cure in a timely manner and remains trackable overnight, apply a covering of 1/4 inch minus Material to prevent tracking and related property damage prior to permitting traffic on the street at no additional cost to the Agency.

The Agency will not be responsible for any damage to the slurry seal prior to opening the area. Repair all damage to the slurry, to the satisfaction of the Engineer, at no additional cost to the Agency.

00706.49 Cleanup - Remove all debris associated with the performance of the Work on a daily basis.

Maintenance

00706.60 Correction of Defects - Correct all defects that occur within 15 Days of placing the slurry seal, as directed, at no additional cost to the Agency. Defects include bleeding, raveling, separation, segregation of Materials, non-uniform texture and fouled surfaces preventing full bond between Lifts of mixture. No adjustment in Contract time will be made for corrective work.

Insert Project Name Here

Measurement

00706.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

The quantities of slurry seal will be measured on the area basis, measurement will be limited to the Neat Lines shown or directed.

The quantities of Emulsified Asphalt in slurry seal will be measured on the weight basis.

Payment

00706.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Slurry Seal.....	Square Yard
(b) Emulsified Asphalt in Slurry Seal	Ton

Item (a) includes all components of the mix and the placement of slurry seal except for Emulsified Asphalt.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Emulsified Asphalt for tack coat will be paid for according to 00730.90.

Crack sealing will be paid for according to 00746.90.

Asphalt concrete pavement repairs will be paid for according to 00748.90.

Stripe removal will be paid for according to 00225.90.

SP00710 (Special Provisions for the 2024 Book)

**(Bidding on or after: 11-01-26
Last updated: 07-23-26)**

SECTION 00710 - SINGLE APPLICATION EMULSIFIED ASPHALT CHIP SEAL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00710 of the Standard Specifications modified as follows:

Insert Project Name Here

00710.00 Scope - Replace the paragraph that begins "The chip seal ..." with the following paragraph:

The chip seal design is designated on the Plans or in the Special Provisions.

(Use the following two paragraphs when chip seal size is NOT designated on the plans. Delete the parentheses and types that do not apply.)

Add the following paragraph to the end of this subsection:

Provide (Fine, Single Size Medium, Graded Medium, Coarse) chip seal design type(s) on this Project.

00710.10(a) Size Designation - Replace the paragraph that begins "Provide the size ..." with the following paragraph:

Furnish the size of Aggregate for the single application Emulsified Asphalt chip seal design designated in the Plans or Special Provisions according to the following:

00710.10(b) Fractured Faces - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregates consisting of broken stone, crushed Gravel or a combination of both. Crush Aggregate such that at least 90 percent by weight of the total Aggregate retained on the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

00710.10(c) Grading - Replace the paragraph that begins "Perform sieve analysis ..." with the following paragraph:

Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Furnish grading for the designated single application Emulsified Asphalt chip seal design according to the following:

00710.10(d) Unit Weight of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregate with a minimum unit weight of 90 pounds per cubic foot according to AASHTO T 19.

00710.10(e) Soundness - Replace this subsection, except for the subsection number and title, with the following:

Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

00710.10(f) Durability - Replace the paragraph that begins "Provide Aggregates ..." with the following paragraph:

Furnish Aggregates meeting the following durability requirements:

00710.10(g) Harmful Substances - Replace the paragraph that begins "Provide Aggregates ..." with the following paragraph:

Furnish Aggregates meeting the following harmful substances requirements:

00710.10(h) Taking Aggregates from Agency Stockpiles - Replace this subsection, except for the subsection number and title, with the following:

When it is specified that Aggregates are to be taken from Agency-controlled stockpiles, take the material in an orderly manner. Do not contaminate the materials. Salvage all material possible from the area that the material is taken. Shape unused portions of a stockpile to Neat Lines. The Contractor is charged for materials wasted through negligence or used without authority.

00710.10(i) Stockpiling Contractor Furnished Aggregates on Agency Property - Replace this subsection, except for the subsection number and title, with the following:

Aggregates may be temporarily stockpiled at approved sites on Agency property provided the areas used are as small as practicable. Restore the site to its original condition after the materials have been removed. Any contamination during storage or from reloading operations is cause for rejection.

00710.11 Emulsified Asphalt - Add the following paragraph to this subsection:

(Choose the correct Polymer-Modified or Non-Polymer-Modified emulsified asphalt. It is specified in the pavement design report. Delete the one that does not apply. Remove the parentheses.)

Furnish (Polymer-Modified)(Non-Polymer-Modified) Emulsified Asphalt for this Project.

00710.11(c) Acceptance of Emulsified Asphalt - Replace this subsection, except for the subsection number and title, with the following:

Furnish Emulsified Asphalt according to the requirements of ODOT's publication, *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT Pavement Services Engineer. The applicable Specifications are those contained in the current publication on the date the Project is advertised. The materials may be conditionally accepted at the source or point of loading for transport to the Project.

Excessive delay in the use of the Emulsified Asphalt or excessive pumping of the Emulsified Asphalt may significantly reduce the viscosity and may make the material unsuitable for chip seal use. For this reason limit pumping between the bulk storage tank, hauling transportation, field storage tanks and distributor to an absolute minimum to maintain proper viscosity. Final acceptance of Emulsified Asphalt is at the point of application.

Obtain samples of Emulsified Asphalt according to AASHTO R 66 at the frequency according to Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Non-polymer-modified Emulsified Asphalt is tested within

Insert Project Name Here

30 Calendar Days from the date it is sampled. Polymer-modified Emulsified Asphalt is tested within 14 Calendar Days from the date it is sampled.

00710.15(a)(3) Preproduced Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Compliance of Aggregates produced and stockpiled before the Award of this Contract is determined according to Section 00165.

00710.16 Acceptance of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

The Contractors quality control tests are used for acceptance of Aggregates if verified by the Quality Assurance Program. The Agency will perform Aggregate production quality assurance according to the following:

(a) ODOT Administered Projects - Quality assurance testing on ODOT administered projects are performed according to Section 00165.

(b) Projects Administered by Other Agencies - The quantity of quality assurance testing on projects administered by other Agencies are at the discretion of the Agency or as designated in the Special Provisions.

00710.21 Asphalt Distributor - Replace this subsection, except for the subsection number and title, with the following:

Provide an asphalt distributor designed, equipped, maintained and operated so the Emulsified Asphalt material may be applied uniformly at even heat. Provide a distributor capable of applying the asphalt on variable surface widths up to 16 feet, at readily determined and controlled rates from 0.05 - 2.0 gallons per square yard, and with uniform pressure. Do not vary any specified rate by more than 0.02 gallons per square yard. Provide distributor Equipment that includes a tachometer, pressure gauges, accurate volume measuring devices and a thermometer for measuring temperature of tank contents. Provide distributors equipped with a positive power unit for the asphalt pump, and full circulation spray bars adjustable both laterally and vertically. Set the bar height for triple lap coverage.

00710.23(a) Pneumatic-tired Rollers - Replace this subsection, except for the subsection number and title, with the following:

Provide self-propelled, tandem or multiple axle, multiple wheel type pneumatic-tired rollers with smooth-tread pneumatic tires of equal size. Stagger the tires on the axles at such spacings and overlaps that will provide uniform compacting pressure for the full compacting width of the roller. The minimum load per tire is 2,800 pounds, with tire inflation pressures of 45 psi to 90 psi.

00710.40 Season and Weather Limitations - Replace the title of this subsection with "Weather Limitations".

(Use the following sentence to change hours. Check with the Project Manager for the number of hours that emulsified asphalt and aggregate can be placed before

sunset. It may range form 2 - 4 hours, depending on elevation, work in shaded areas, and other conditions.)

In the sentence that begins "Complete the application of...", replace the words "3 hours" with the words " _____ hours".

(Use the following paragraph for Region 3 Projects. Use the previous subsection number and title if above hours are not changed.)

In the sentence that begins "The placing of single...", replace "July 1" with "June 15".

(Use the following paragraph for Region 4 and 5 Projects. Use the previous subsection number and title if above hours are not changed.)

In the sentence that begins "The placing of single...", replace "July 1" with "June 1".

00710.44 Application Rates - Replace the paragraph that begins "Apply the Emulsified ..." with the following paragraph:

Apply the Emulsified Asphalt and spread the Aggregate within the following ranges of rates for the specified chip seal design. The exact application and spread rate is determined by the Engineer.

00710.45 Applying Emulsified Asphalt - Replace the bullet that begins "Place building paper ..." with the following bullet:

- At the beginning of each Pass and at each transverse joint, remove excess aggregate from the joint and place building paper over the treated surface to ensure that the nozzles are operating properly before the uncovered surface is reached. Remove and dispose of building paper in a manner satisfactory to the Engineer.

(Use the following two paragraphs and bullet to change hours. Check with the Project Manager for the number of hours that courses can be squared up before sunset. It may range form 2 - 4 hours, depending on elevation, work in shaded areas, and other conditions.)

In the third bullet, replace the words "3 hours" with the words " _____ hours".

Replace the bullet that begins "Place building paper over the treated surface ..." with the following bullet:

- At the beginning of each Pass and at each transverse joint, remove excess aggregate from the joint and place building paper over the treated surface to ensure that the nozzles are operating properly before the uncovered surface is reached. Remove and dispose of building paper in a manner satisfactory to the Engineer.

00710.46 Hauling and Spreading Aggregates - Replace the paragraph that begins "Aggregates shall ..." with the following paragraph:

Insert Project Name Here

Furnish surface damp Aggregates at the time of application. Excess free water (water not adhering to the Aggregate surface) on the Aggregate is not allowed.

Replace the paragraph that begins "Do not operate ..." with the following paragraph:

Do not operate the chip spreader at speeds that cause the chips to roll over after striking the emulsion covered surface.

(Use the following subsection .60 if brooming hours are specified.)

00710.60 Power Brooming - In the paragraph that begins "Following the application of...", replace the first sentence with the following sentence:

Between the hours of _____ (p.m.)(a.m.) and _____ a.m. of the Day following the application of the chip seal, carefully broom the entire surface, unless brooming damages the surface, to remove loose aggregate that could damage vehicles.

00710.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00711 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00711 - PRE-COATED AGGREGATE ASPHALT CHIP SEAL

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00711 of the Standard Specifications modified as follows:

00711.10(a) Grading - Replace the paragraph that begins "Perform sieve analysis ..." with the following paragraph:

Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Furnish Aggregate meeting the following gradation:

00711.10(b) Fractured Faces - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregate consisting of broken stone, crushed Gravel, or a combination of both. Crush Aggregate such that at least 90 percent by weight of the total Aggregate retained on

Insert Project Name Here

the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

00711.10(c) Unit Weight of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregate with a minimum unit weight of 90 pounds per cubic foot according to AASHTO T 19.

00711.10(d) Soundness - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate according to AASHTO T 104.

00711.10(e) Durability - Replace the paragraph that begins "Provide Aggregate ..." with the following paragraph:

Furnish Aggregate meeting the following durability requirements:

00711.10(f) Harmful Substances - Replace the paragraph that begins "Provide Aggregate ..." with the following paragraph:

Furnish Aggregate meeting the following harmful substances requirements:

00711.11 Asphalt Binder - Replace this subsection, except for the subsection number and title, with the following:

Furnish AC15-5TR or AC-15P asphalt according to the requirements of ODOT's publication *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT Pavement Services Engineer. The applicable Specifications are those contained in the current publication on the date the Project is advertised.

00711.16 Acceptance of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

The Contractor's quality control tests are used for acceptance of Aggregates if verified by the Quality Assurance Program. The Agency will perform Aggregate production quality assurance according to Section 00165.

Obtain asphalt binder samples according to AASHTO R 66 at a frequency of one sample for each 50 Tons of asphalt binder used. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency.

00711.17 Pre-Coated Aggregate Mixture - Replace the bullet that begins "Achieve at least a 90 ..." with the following bullet:

- Achieve at least a 90 percent coating on all the material retained on the No. 4 sieve by applying between 0.7 and 1.0 percent liquid asphalt of the total weight of the material. Establish the target value and obtain the Engineer's approval before beginning the coating process. The acceptable liquid asphalt tolerance is ± 0.2 percent. Test

according to ODOT TM 321 at a frequency of one test for every 500 Tons of mixture. Coated Aggregate that is not within the acceptable tolerance is rejected.

Replace the bullet that begins "Final acceptance of the ..." with the following bullet:

- Final acceptance of the pre-coated Aggregate mixture is completed at the stockpile staging site.

00711.21 Asphalt Distributors - Replace the bullet that begins "Capable of applying ..." with the following bullet:

- Capable of applying the asphalt on variable surface widths up to 16 feet, at readily determined and controlled rates from 0.05 - 2.0 gallons per square yard, and with uniform pressure. Do not vary any specified rate by more than 0.02 gallons per square yard.

00711.22 Chip Spreaders - Replace the bullet that begins "Equipped with a surface ..." with the following bullet:

- Equipped with a surface temperature thermometer that reads the surface temperature in advance of Rock placement and be visible to the chip spreader operator.

00711.40 Season, Weather and Temperature Limitations - Replace the title of this subsection with "**Weather Limitations**".

00711.44 Application Rates - Replace the paragraph that begins "Apply the asphalt binder ..." with the following paragraph:

Apply the asphalt binder and spread the pre-coated Aggregate mixture within the following ranges of rates. The exact application and spread rate is determined by the Engineer.

00711.47 Shaping and Compacting - Replace the paragraph that begins "Make the initial compaction ..." with the following paragraph:

Make the initial compaction Pass behind the spreader as soon as the pre-coated Aggregate mixture is spread. Hauling Equipment may be used to assist in compaction immediately behind the spreader. Use sufficient pneumatic rollers to cover the width of the pre-coated Aggregate mixture spread in one Pass. Roll in a staggered pattern. Operate rollers to maintain close proximity to the spreader but do not exceed 5 mph. Complete at least three roller Passes within 30 minutes of spreading pre-coated Aggregate mixture. If rollers are unable to keep up with the spreader, stop application of asphalt binder and pre-coated Aggregate mixture until to rollers catch up or provide additional rollers. If pre-coated Aggregate mixture spreading is stopped for more than 2 minutes, move the spreader ahead of or off the surface so that cover Material may be immediately rolled.

00711.60 Power Brooming - Replace the paragraph that begins "After rolling the pre-coated ..." with the following paragraph:

After rolling the pre-coated Aggregate mixture, remove loose Aggregate by brooming the entire surface. Delay brooming if the brooms damage the surface. Broom one Pass in the

Insert Project Name Here

opposite direction that the pre-coated Aggregate mixture was placed. Do not allow uncontrolled traffic on the surface until all brooming of excess Aggregate is completed.

00711.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00712 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-03-26)**

SECTION 00712 - DRY KEY EMULSIFIED ASPHALT CHIP SEAL

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00712 is not a Standard Specification and is included in this Project by Special Provision.

Description

00712.00 Scope - This Work consists of applying polymer-modified Emulsified Asphalt and two spreads of graded Aggregates to form a firm, finished surface as shown or directed.

Materials

00712.10 Aggregates - Furnish Aggregates meeting the following requirements:

(a) Size Designation - Furnish the following sizes of Aggregate for the dry key Emulsified Asphalt chip seal:

(Select the chip seal design ("Medium" or "Course") as designated in the Pavement Design Report. Delete the one that does not apply. Always include "Dry Key".)

Chip Seal Design

Size of Screenings

Dry Key	1/4" - 0
Medium	3/8" - 1/4"
Coarse	1/2" - 3/8"

(b) Fractured Faces - Furnish Aggregates consisting of broken stone, crushed Gravel, or a combination of both. Crush Aggregate such that at least 90% by weight of the total

Insert Project Name Here

aggregate retained on the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

(c) Grading - Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Provide grading for the designated dry key Emulsified Asphalt chip seal design according to the following:

Sieve Size	Coarse 1/2" - 3/8"	Medium 3/8" - 1/4"	Dry Key 1/4" - 0
Percent Passing (by Weight)			
5/8"	100	—	—
1/2"	85 - 100	100	—
3/8"	0 - 30	80 - 100	100
1/4"	0 - 15	0 - 30	80 - 100
No. 8	0 - 4	0 - 4	5 - 30
No. 200	0 - 2	0 - 2	0 - 2
No. 200 *	0 - 1	0 - 1	—

* in gravels

(d) Unit Mass (Weight) of Aggregate - Furnish Aggregate with a minimum unit weight of 90 pounds per cubic foot according to AASHTO T 19.

(e) Soundness - Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12% when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

(f) Durability - Furnish Aggregates meeting the following durability requirements:

Test	Test Method		Maximum Values
	ODOT	AASHTO	
Abrasion		T 96	30.0%
Degradation (Coarse Aggregate)			
Passing No. 20 Sieve	TM 208		30.0%
Sediment Height	TM 208		3.0"

(g) Harmful Substances - Furnish Aggregates meeting the following harmful substances requirements:

Test	Test Method		Limits
	ODOT	AASHTO	
Lightweight Pieces		T 113	1.0% maximum
Wood Particles	TM 225		0.1% maximum
Elongated Pieces			
(Coarse Aggregate			
at a ratio of 5:1)	TM 229		10.0% maximum
Cleanness Value	TM 227		75 minimum

(h) Taking Aggregates from Agency Stockpiles - When it is specified that Aggregates are to be taken from Agency-controlled stockpiles, take the material in an orderly manner. Do not contaminate the materials. Salvage all material possible from the area where the materials are taken. Shape unused portions of a stockpile to Neat Lines. The Contractor will be charged for materials wasted through negligence or used without written authority.

(i) Stockpiling Contractor-Furnished Aggregates on Agency Property - Aggregates may be temporarily stockpiled at approved sites on Agency property provided the areas used are as small as practicable. Restore the site to its original condition after the materials have been removed. Any contamination during storage or from reloading operations is cause for rejection.

00712.11 Emulsified Asphalt - Furnish HFRS-P1, HFRS-P2, or CRS-2P polymer-modified Emulsified Asphalt as the Contractor elects.

Furnish Emulsified Asphalt meeting the requirements of ODOT's publication *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT Pavement Services Engineer. The applicable Specifications are those contained in the current publication on the date the Project is advertised. The materials may be conditionally accepted at the source or point of loading for transport to the Project.

Excessive delay in the use of the Emulsified Asphalt or excessive pumping of the Emulsified Asphalt may significantly reduce the viscosity and may make the material unsuitable for chip seal use. For this reason, limit pumping between the bulk storage tank, hauling transportation, field storage tanks and distributor to an absolute minimum to maintain proper viscosity. Final acceptance of Emulsified Asphalt is at the point of application.

Obtain samples of asphalt according to AASHTO T 40 at the frequency in the MFTP. Test samples at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Test polymer-modified Emulsified Asphalt within 14 Calendar Days from the day the sample was taken.

00712.15 Aggregate Production Quality Control - Provide quality control during production of Aggregate according to Section 00165. Provide a CAgT to perform sampling and testing at the minimum frequency schedule in the MFTP for Section 00710 aggregate.

(a) Quality Control Compliance - Evaluate Aggregates for compliance according to the following:

(1) Gradation - Analyze gradation statistically according to Section 00165. A stockpile contains specification Aggregate when the Pay Factor (PF) for each sieve size calculated according to 00165.40 is equal to or greater than 1.00. Each required sample represents a subplot.

When the results from Table 00165-2 yield a Pay Factor of less than 1.00 for any sieve size, the material is non-specification. The Engineer will reject any stockpile of aggregate containing non-specification material unless the non-specification material is removed from the stockpile. Do not add additional material to such a stockpile until enough non-specification material is removed so that the PF for each sieve size is equal to or greater than 1.00.

(2) Other Tests - Stop production, make appropriate operational adjustments, and remove all failing material from the stockpile whenever a quality control test result, other than sieve analysis, does not meet Specifications. Document operational adjustments made and notify the Engineer prior to resuming production.

(3) Preproduced Aggregate - Compliance of Aggregates produced and stockpiled before the award of this Contract is determined by either of the following:

- Continuing production records meeting the requirements of 00712.10 and 00712.15.
- Sampling according to AASHTO R 90 and testing the entire stockpile at the minimum frequency schedule in the MFTP. Furnish Material meeting the requirements of 00712.10 and 00712.15.

(b) Materials on Hand - Payment for stockpiled materials on hand may be allowed as described in 00195.60 subject to meeting the requirements of 00712.10 and 00712.15.

00712.16 Acceptance of Aggregate - The Contractors quality control tests are used for acceptance of Aggregates if verified by the Agency's quality assurance program. The Agency will perform Aggregate production quality assurance according to Section 00165, the MFTP, and the ODOT Quality Assurance Program.

Equipment

00712.20 Equipment - Provide a pressure distributor, hauling vehicles, a minimum of two chip spreaders, compactors, power brooms, and other necessary Equipment to insure efficient operation and construction to meet specified results. Provide Equipment in sufficient number and capacities as will provide coordinated and uniform progress of the work.

Provide two-way radio communication between the asphalt distributor and both chip spreaders.

00712.21 Asphalt Distributor - Provide an asphalt distributor designed, equipped, maintained and operated so the Emulsified Asphalt material may be applied uniformly at even heat. Provide a distributor capable of applying the asphalt on variable surface widths up to 16 feet at readily determined and controlled rates from 0.05 - 2.00 gallons per square yard, and with uniform pressure. Do not exceed 0.02 gallons per square yard variation from any specified rate. Provide distributor Equipment that includes a tachometer, pressure gages, accurate volume measuring devices, and a thermometer for measuring temperature of tank contents. Provide distributors equipped with a positive power unit for the asphalt pump and full circulation spray bars adjustable both laterally and vertically. Set the bar height for triple lap coverage.

00712.22 Chip Spreaders - Provide self-propelled chip spreaders equipped with a mechanical device that will spread the Aggregate at a uniform rate across the full width of the chip spreaders. Provide chip spreaders equipped with an aggregate segregator assembly. Chip spreaders without an aggregate segregator assembly may be allowed if approved by the Engineer. Provide chip spreaders of adequate width to provide full coverage of the specified Panel and without placing joints in the travel lanes.

Insert Project Name Here

00712.23 Compactors - Provide self-propelled pneumatic-tired or steel-wheeled rollers in good condition and capable of operating at speeds compatible with the chip seal operation. A minimum of two pneumatic-tired rollers and one steel-wheeled roller is required.

(a) Pneumatic-tired Rollers - Provide self-propelled, tandem or multiple axle, multiple wheel type pneumatic-tired rollers with smooth-tread pneumatic tires of equal size. Provide tires staggered on the axles at such spacings and overlaps to provide uniform compacting pressure for the full compacting width of the roller. Provide a minimum load per tire of 2,800 pounds, with tire inflation pressures of 45 to 90 psi.

(b) Steel-wheeled Rollers - Provide steel-wheeled rollers with a gross static weight of at least 8 Tons.

00712.24 Power Brooms - Provide pickup or non-pickup type power brooms equipped with a positive means to control vertical pressure.

Labor

00712.30 Quality Control Personnel - Provide a technician having CAgT technical certification.

Construction

00712.40 Season and Weather Limitations - Do not apply Emulsified Asphalt when the Pavement temperature is below 70 °F nor if the humidity is higher than 75 percent. Complete the application of the Emulsified Asphalt and the Aggregate three hours before sunset. Remove by milling, or other methods approved by the Engineer, and replace at no additional cost to the Agency, any chip seals damaged by weather during the first 24 hours after application. The placing of dry key Emulsified Asphalt chip seals will not be allowed before June 1 or after August 31.

00712.41 Rate of Progress and Scheduling - Do not apply more chip seal in any one Day than can be broomed the following morning unless approved by the Engineer. Provide a Traffic Control Plan for approval by the Engineer if operations exceed 3 centerline miles or 6 lane miles per Day.

00712.42 Preparation of Underlying Surfaces - Immediately before applying the Emulsified Asphalt, clean and dry the surface to be treated in a manner approved by the Engineer.

00712.43 Sequence of Operations - Construct the dry key Emulsified Asphalt chip seal with a single spread of Emulsified Asphalt followed immediately with a single spread of coarse or medium sized Aggregate as designated in 00712.10(a), followed immediately with a single spread of dry key Aggregate and initial rolling, unless otherwise directed by the Engineer.

00712.44 Application Rates - Apply the Emulsified Asphalt and spread the Aggregates within the following ranges of rates for the specified chip seal design. The exact application and spread rate is determined by the Engineer.

Emulsified Asphalt

Aggregate

Insert Project Name Here

Chip Seal Design	Application Rate (Gallon/Sq. Yd.)	Spread Rate (Cu. Yd./Sq. Yd.)
Dry Key	—	0.004 - 0.009
Medium	0.40 - 0.70	0.007 - 0.012
Coarse	0.45 - 0.80	0.009 - 0.015

00712.45 Applying Emulsified Asphalt - Apply Emulsified Asphalt at the rates specified in 00712.44 and according to the following:

- Apply the Emulsified Asphalt working toward the Aggregate stockpile at all times unless otherwise approved by the Engineer.
- Leave a minimum of 200 gallons of Emulsified Asphalt in the distributor tank at all times.
- Do not apply Emulsified Asphalt to more than one-half the width of the travel way at one time with the remaining width remaining open to traffic. Do not close the open lane until traffic controlled by pilot car is operating on the new chip seal. Apply the chip seal, weather permitting, to both sides of the travel way so the work is squared up three hours before sunset.
- Do not apply Emulsified Asphalt a greater distance than can be immediately covered by aggregates before the emulsion breaks.
- Place building paper over the treated surface at the beginning of each spread to ensure that the nozzles are operating properly before the uncovered surface is reached. Remove and dispose of building paper in a manner satisfactory to the Engineer.
- If requested by the Engineer, demonstrate that the distribution of the Emulsified Asphalt does not vary between the individual nozzles by more than 15 percent transversely from the average and no more than 10 percent longitudinally from the specified rate of application.
- Apply the Emulsified Asphalt at a temperature between 140 °F and 185 °F as recommended by the manufacturer.

00712.46 Hauling and Spreading Aggregates - Spread Aggregates at the rates specified in 00712.44.

Do not operate hauling and spreading Equipment on uncovered Emulsified Asphalt. During the first hour after application of the Emulsified Asphalt and Aggregate, operate at speeds no more than 10 mph and after the first hour, not more than 15 mph until otherwise permitted by the Engineer. Carefully operate hauling Equipment at all times in a prudent manner and at moderate speeds that will not damage the new chip seal or create a hazard to the traveling public. Route hauling Equipment and pilot lines as uniformly as possible over the full width of the new surface in place.

Calibrate the gate opening, gear selection, and engine RPM for each of the two required chip spreaders for the various sizes of Aggregate to be used. Following calibration, verify the rate of application in a means acceptable to the Engineer.

Immediately following the application of the Emulsified Asphalt, cover the surface with coarse or medium sized Aggregate followed by placement of the dry key Aggregate unless otherwise authorized by the Engineer. Maintain the rate of spread of this Aggregate within 10 percent of specified rate. Remove or repair, by methods approved by the Engineer, Emulsified

Insert Project Name Here

Asphalt that has set or "broke" before being covered with both spreads of Aggregate, at no additional cost to the Agency.

Furnish Aggregates surface damp at the time of application. Excess free water (water not adhering to the Aggregate surface) on the Aggregate will not be permitted.

Do not operate the chip spreader at speeds that cause the Aggregates to roll over after striking the emulsion covered surface.

Provide coverage without gaps or overlapping adjacent coverages. Do not construct longitudinal joints within the travel lanes.

Construct neat transverse cut off of Aggregates and remove any excess Aggregates from the surface prior to resuming operations.

00712.47 Shaping and Compacting - After the Aggregates have been placed on the Emulsified Asphalt, spread or remove all piles, ridges, or uneven distribution to ensure against rough spots in the final surface.

Compact the surface with a minimum of two coverages with a pneumatic-tired roller and one coverage with a steel-wheeled roller immediately behind the second chip spreader. Continue compacting until the material is interlocked, firm, and partially bound with the underlying Emulsified Asphalt. The sequence of roller coverages may be adjusted at the discretion of the Engineer.

Operate rollers at speeds such that the rollers do not pick up Aggregates from the surface. Do not exceed rolling speeds of 5 mph.

In the event Aggregates begin to pick up under traffic or from the rolling operation, immediately cover and roll the area with additional quantities of Aggregate.

Maintenance

00712.60 Power Brooming - Following the application of the chip seal, carefully broom the entire surface to remove loose Aggregate. Discontinue the operation if brooming damages the chip seal. Use a minimum of two power brooms.

(Fill in the blanks for the designated brooming hours below as recommended by the Project Manager. Verify that the brooming hours are within the lane restrictions in 00220.40(e)(1).)

Between the hours of _____ p.m. of the Day of and _____ a.m. of the Day following the application of the dry key Emulsified Asphalt chip seal, carefully broom the entire surface, unless brooming damages the chip seal, to remove loose Aggregate that could damage vehicles. The time period for brooming may be adjusted by the Engineer.

Subsequent brooming the following two Days may be directed by the Engineer to ensure that the surface is free of loose Aggregate that could cause vehicle damage.

In curbed areas, use a pick-up type power broom. On Bridges, sidewalks, and other areas off the Roadway, remove all loose Aggregates to the satisfaction of the Engineer.

Insert Project Name Here

Measurement

00712.80 Measurement - The quantities of Aggregate will be measured on the volume basis in the hauling vehicle.

(Fill in the quantities in the blanks below. Always include "Dry Key". Select either "Medium" or "Coarse", and delete the one that does not apply. Include either metric or English quantities as appropriate. Be sure quantities add up to the total Pay Item quantity.)

The estimated quantities of Aggregates are:

Type	Cubic Yard
Dry Key	
Medium	
Coarse	

The quantities of Emulsified Asphalt will be measured on the weight basis.

(Use the following paragraph when approaches are paid for separately.)

The quantities of dry key Emulsified Asphalt chip seal of connections to public roads and streets, on approaches to private properties, guardrail flares, and mailbox turnouts will be measured on the unit basis.

(Use the following paragraph when the number and location of connections, approaches, guardrail flares, and mailbox turnouts are not shown on the plans. Fill in the blank with the number of approaches and list them below the paragraph.)

There are approximately ____ connections, approaches, guardrail flares, and mailbox turnouts located within the limits of the Project as follows:

-
-
-

Payment

(Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

00712.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
----------	---------------------

Insert Project Name Here

- (a) Aggregate in Dry Key Emulsified Asphalt Chip seal.....Cubic Yard
- (b) Asphalt in Dry Key Emulsified Asphalt Chip sealTon

(Include Pay Item (c) when approaches are paid for separately.)

- (c) Extra for Dry Key Emulsified Asphalt Chip seal Approaches .Each

(Use the following paragraph when approaches are paid for separately.)

Item (c) applies to the extra costs of placing the asphalt and Aggregates in dry key Emulsified Asphalt chip seals on connections, approaches, guardrail flares, and mailbox turnouts. Payment will be in addition to payment made for the Materials used in the Work.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for preparing the road surface, placing the materials in final position, or brooming.

(Use the following paragraph when approaches are incidental.)

No separate or additional payment will be made for dry key Emulsified Asphalt chip seal of connections, approaches, guardrail flares, or mailbox turnouts.

SP00715 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00715 - MULTIPLE APPLICATION EMULSIFIED ASPHALT SURFACE TREATMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00715 of the Standard Specifications modified as follows:

00715.00 Scope - Replace the paragraph that begins "The surface treatment ..." with the following paragraph:

The surface treatment design is designated on the Plans or in the Special Provisions.

(Use the following paragraphs when surface treatment is NOT designated on the plans. Delete those that do not apply. Remove "(s)" or parentheses as appropriate.)

Add the following to the end of this subsection:

Insert Project Name Here

Provide the following surface treatment(s) on this Project:

Fine Double Chip Seal
Medium Double Chip Seal
Type E-9 Oil Mat
Type E-11 Oil Mat

00715.10(a) Fractured Faces - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregates consisting of broken stone, crushed Gravel, or a combination of both. Crush Aggregate such that at least 90 percent by weight of the total Aggregate retained on the No. 8 and larger sieves is fractured on two faces, as determined according to AASHTO T 335.

00715.10(c) Unit Weight of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Furnish Aggregate with a minimum unit weight of 90 pounds per cubic foot according to AASHTO T 19.

00715.10(d) Soundness - Replace this subsection, except for the subsection number and title, with the following:

Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

00715.10(e) Durability - Replace the paragraph that begins "Provide Aggregates ..." with the following paragraph:

Furnish Aggregates meeting the following durability requirements:

00715.10(f) Harmful Substances - Replace the paragraph that begins "Provide Aggregates ..." with the following paragraph:

Furnish Aggregates meeting the following harmful substances requirements:

00715.10(g) Taking Aggregates from Agency Stockpiles - Replace this subsection, except for the subsection number and title, with the following:

When it is specified that Aggregates are to be taken from Agency-controlled stockpiles, take the material in an orderly manner. Do not contaminate the materials. Salvage all material possible from the area that the material is taken. Shape unused portions of a stockpile to Neat Lines. The Contractor will be charged for materials wasted through negligence or used without authority.

00715.10(h) Stockpiling Contractor Furnished Aggregates on Agency Property - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Aggregates may be temporarily stockpiled at approved sites on Agency property provided the areas used are as small as practicable. Restore the site to its original condition after the materials have been removed. Any contamination during storage or from reloading operations is cause for rejection.

00715.11 Emulsified Asphalt - Add the following paragraph to this subsection:

(Choose the correct Polymer-Modified or Non-Polymer-Modified emulsified asphalt. It will be specified in the pavement design report. Delete the one that does not apply. Remove the parentheses.)

Provide (Polymer-Modified)(Non-Polymer-Modified) Emulsified Asphalt for this Project.

00715.11(c) Acceptance of Emulsified Asphalt - Replace this subsection, except for the subsection number and title, with the following:

Provide Emulsified Asphalt according to the requirement of ODOT's publication *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT Pavement Services Engineer. The applicable Specifications are those contained in the current publication on the date the Project is advertised. The materials may be conditionally accepted at the source or point of loading for transport to the Project.

Excessive delay in the use of the Emulsified Asphalt or excessive pumping of the Emulsified Asphalt may significantly reduce the viscosity and may make the material unsuitable for surface treatment use. For this reason, limit pumping between the bulk storage tank, hauling transportation, field storage tanks and distributor to an absolute minimum to maintain proper viscosity. Final acceptance of Emulsified Asphalt is at the point of application.

Obtain Emulsified Asphalt samples according to AASHTO R 66 and Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Non-polymer-modified Emulsified Asphalt is tested within 30 Calendar Days from the date it is sampled. Polymer-modified Emulsified Asphalt is tested within 14 Calendar Days from the date it is sampled.

00715.15(a)(3) Preproduced Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Compliance of Aggregates produced and stockpiled before the Award of this Contract is determined by Section 00165

00715.16 Acceptance of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

The Contractor's quality control tests are used for acceptance of Aggregates if verified by the Quality Assurance Program. The Agency will perform Aggregate production quality assurance according to the following:

(a) ODOT Administered Projects - Quality assurance testing on ODOT administered projects is performed according to Section 00165.

Insert Project Name Here

(b) Projects Administered by Other Agencies - The quantity of quality assurance testing on projects administered by other Agencies is at the discretion of the Agency or as designated in the Special Provisions.

00715.21 Asphalt Distributor - Replace this subsection, except for the subsection number and title, with the following:

Provide an asphalt distributor designed, equipped, maintained and operated so the Emulsified Asphalt Material is applied uniformly at even heat. Provide a distributor capable of applying the asphalt on variable surface widths up to 16 feet, at readily determined and controlled rates from 0.05 - 2.0 gallons per square yard, and with uniform pressure. Do not vary any specified rate by more than 0.02 gallons per square yard. Provide distributor Equipment that includes a tachometer, pressure gauges, accurate volume measuring devices and a thermometer for measuring temperature of tank contents. Provide distributors equipped with a positive power unit for the asphalt pump, and full circulation spray bars adjustable both laterally and vertically. Set the bar height for triple lap coverage.

00715.23(a) Pneumatic-tired Rollers - Replace this subsection, except for the subsection number and title, with the following:

Provide self-propelled, tandem or multiple axle, multiple wheel type pneumatic-tired rollers with smooth-tread pneumatic tires of equal size. Stagger the tires on the axles at such spacings and overlaps that will provide uniform compacting pressure for the full compacting width of the roller. The minimum load per tire is 2,800 pounds, with tire inflation pressures of 45 psi to 90 psi.

00715.40 Season and Weather Limitations - Replace the title of this subsection with "Weather Limitations".

(Use the following sentence to change hours. Check with the Project Manager for the number of hours that emulsified asphalt and aggregate can be placed before sunset. It may range from 2 - 4 hours, depending on elevation, work in shaded areas, and other conditions.)

In the sentence that begins "Complete the application of...", replace the words "3 hours" with the words "_____ hours".

(Use the following sentence for Region 3 Projects. Use the previous subsection number and title if above hours are not changed.)

In the sentence that begins "The placing of multiple...", replace "July 1" with "June 15".

(Use the following sentence for Region 4 and 5 Projects. Use the previous subsection number and title if above hours are not changed.)

In the sentence that begins "The placing of multiple...", replace "July 1" with "June 1".

00715.42(a) Type E-9 and E-11 Oil Mats - Replace the bullet that begins "Complete first and second ..." with the following bullet:

Insert Project Name Here

- Complete first and second Course (and third Course for Type E-11) of the oil mat throughout the entire section (including the dry key) that the oil mat is to be applied. Square up these Courses 3 hours prior to sunset each Day.

(Use the following sentence to change hours. Check with the Project Manager for the number of hours that courses can be squared up before sunset. It may range from 2 - 4 hours, depending on elevation, work in shaded areas, and other conditions.)

Throughout this subsection, replace the words "3 hours" with the words " _____ hours".

(Use the following subsection .43 to change hours. Check with the Project Manager for the number of hours that courses can be squared up before sunset. It may range from 2 - 4 hours, depending on elevation, work in shaded areas, and other conditions.)

00715.43 Applying Emulsified Asphalt - In the third bullet, replace the words "3 hours" with the words " _____ hours".

00715.44 Hauling and Spreading Aggregates - Replace the paragraph that begins "Aggregates shall ..." with the following paragraph:

Furnish surface damp Aggregates at the time of application. Excess free water (water not adhering to the Aggregate surface) on the Aggregate is not allowed.

Replace the paragraph that begins "Do not operate the ..." with the following paragraph:

Do not operate the chip spreader at speeds that cause the chips to roll over after striking the emulsion covered surface.

00715.45 Shaping and Compacting - Replace the paragraph that begins "Compact the surface with ..." with the following paragraph:

Compact the surface with a minimum of four complete Coverages immediately behind the chip spreader. Perform additional Coverages as directed by the Engineer until the Material is interlocked, firm, and partially bound with the underlying Emulsified Asphalt. The sequence of rollers is as directed by the Engineer.

00715.60 Establishment - Replace the paragraph that begins "Perform the above operations ..." with the following paragraph:

Perform the above operations under traffic and at frequencies that the Engineer determines as being necessary to develop and establish the Course to uniform firmness and stability throughout.

00715.70 Surface Tolerance - Provide a finished surface, after brooming, that does not vary by more than 1/2 inch either transverse or perpendicular to centerline when tested with a 12-foot straightedge. Provide and operate the straightedge under the observation of the Engineer.

00715.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00718 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26)

Last updated: 03-03-26)

SECTION 00718 - HYDRATED LIME SLURRY IN COLD-IN-PLACE RECYCLING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00718 is not a Standard Specification and is included in this Project by Special Provision.

Description

00718.00 Scope - This Work consists of producing hydrated lime slurry at the job site and incorporating the hydrated lime slurry into milled RAP.

Materials

00718.10 Lime - Use high calcium hydrated lime slurry in RAP meeting the requirements of the hydrated lime specification ASTM C 1097 or AASHTO M 303. If granular quicklime is used to manufacture the hydrated lime slurry, use 3/8" - 0 material meeting the requirements of ASTM C 977.

00718.11 Water - Furnish water meeting the requirements of 00340.10.

Equipment

00718.20 Lime Slurry Plant - Use mixing Equipment specifically designed for production of hydrated lime slurries. Equip plants with scales and meters to accurately proportion lime and water within 0.5 percent by weight.

00718.21 Lime Metering - Introduce the hydrated lime slurry at the mill head as specified by the Engineer by weight of the RAP material. Calculate the weight of the RAP material by pounds per cubic foot for volume of cut. Use a metering device to accurately measure the amount of hydrated lime slurry required to within ± 10 percent.

00718.22 Lime Feed Tank - Use agitators or similar Equipment to keep the hydrated lime slurry in suspension when held in the lime slurry feed transport tank.

Insert Project Name Here

Keep the hydrated lime slurry in suspension during transport using similar agitator Equipment.

Construction

00718.40 Incorporation of Lime and Water - Produce hydrated lime slurry with the required amount of water to provide a uniform pumpable consistency and that is uniformly incorporated into the RAP at the specified percentage.

Apply hydrated lime at the rate of 1.5 percent by weight of the RAP material.

00718.41 Acceptance - Acceptance of hydrated lime is as follows:

(a) **Chemical Composition** - Provide chemical certificates of compliance at the Engineers request.

(b) **Solids Content** - Provide batch logs and solids content for each mixed load.

Measurement

00718.80 Measurement - The quantity of lime will be measured on the weight basis and is limited to the dry weight of dry lime used to prepare lime slurry incorporated in the Work at the rate and in the quantity specified or directed.

Payment

00718.90 Payment - The accepted quantities of dry lime used to prepare lime slurry will be paid for at the Contract unit price, per Ton, for the item "Hydrated Lime in CIR".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for lime that is lost, displaced, used in reworking, used in restoration work, or that is used contrary to the Specifications or for water used in the work.

SP00719 (Special Provisions for the 2024 Book)

**(Bidding on or after: 06-01-26
Last updated: 03-03-26)**

SECTION 00719 - PRE-RECYCLE LIME TREATMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Section 00719 is not a Standard Specification and is included in this Project by Special Provision.

Description

00719.00 Scope - This Work consists of applying dry quicklime to the existing Pavement surface and slacking with water at the recycling Equipment at locations shown or specified.

Materials

00719.10 Lime - Furnish 3/8" - No. 8 granular quicklime in dry form meeting the requirements of 02090.10.

Store the lime in a manner that keeps it dry and free from moisture absorption.

00719.11 Water - Furnish water meeting the requirements of 00340.10.

Equipment

00719.20 Equipment - Provide a lime spreading vehicle and a separate lime watering truck in addition to the Equipment required for the recycling process. Do not use blade graders. Ensure the Equipment uniformly distributes the lime. Discontinue use and remove Equipment that results in excessive loss or displacement of the lime.

Construction

00719.40 Weather Limitations of Lime Treatment - Do not perform lime treatment work during freezing weather, during windy conditions, or during other weather conditions that are detrimental to the Work.

00719.41 Incorporation of Lime and Water - Apply quicklime in dry form to the existing Pavement immediately ahead of the recycling operation at a uniform rate of 1.5% by weight of material and a distance established by the Engineer. Before being recycled, slack the lime with water at a rate determined by the Engineer.

When applying quicklime in the dry form, take all precautions necessary to prevent injury to persons and livestock. Immediately pick up, bury or slack with water any quicklime that is spilled or deposited at places other than on areas designated to be treated.

Replace quicklime that is lost or displaced by blowing, washing, or other causes at no additional cost to the Agency.

Except for Equipment that is used for watering and for applying the lime, no other Equipment is permitted to pass over the spread lime until it is recycled.

Measurement

00719.80 Measurement - The quantities of quicklime will be measured on the weight basis and is limited to the dry weight of quicklime lime incorporated in the Work at the rate and in the quantity specified or directed.

Payment

00719.90 Payment - The accepted quantities of quicklime will be paid for at the Contract unit price, per Ton, for the item "Lime for Treated Recycle".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for quicklime that is lost, displaced, used in reworking, used in restoration work, or that is used contrary to the Specifications or for water used in the Work.

SP00720 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-03-26

***This Section requires SP00705
and SP00730. Requires SP00710
or SP00715 if a chip seal
is required over the CIR.)***

SECTION 00720 - COLD IN-PLACE RECYCLED ASPHALT CONCRETE PAVEMENT (CIR)

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00720 is not a Standard Specification and is included in this Project by Special Provision.

Description

00720.00 Scope - This Work consists of constructing Cold In-place Recycled Asphalt Concrete Pavement (CIR) using Class I and Class II Recycling Treatments in reasonably close conformity to the lines, grades, thicknesses, and Cross Sections shown or established.

00720.01 Abbreviations:

CIR - Cold In-Place Recycled Asphalt Concrete Pavement

00720.02 Definitions:

Insert Project Name Here

Cold In-place Recycled Asphalt Concrete Pavement - CIR is a mixture of RAP, that has been removed and mixed with a Recycling Agent and water, then relaid and compacted in a continuous operation.

Class I Recycling Treatment - Class I Recycling Treatment is performed on a uniform Pavement, previously designed and built to Specifications. The CIR Mixture produced under Class I is based on a rational mix design method.

Class II Recycling Treatment - Class II Recycling Treatment is performed on either a Pavement with significant maintenance patches over a uniform Pavement or a Pavement with minimal design used in the original construction. The CIR Mixture produced under Class II is less uniform than for Class I and is based on either a rational mix design method or mix design guidelines.

Mixture - Cold in-place recycled asphalt concrete after all Materials are combined and mixed.

Panel - The width of CIR Material being removed and placed by the recycling train or single processing unit in a single Pass.

Recycling Agent - Material added to RAP to soften and rejuvenate existing asphalt Material.

00720.05 Prepaving Conference - Provide supervisory personnel of the Contractor and any Subcontractor who are to be involved in the recycle and paving work to meet with the Engineer, at a time mutually agreed upon, to discuss methods of accomplishing all phases of the recycle and paving work.

Materials

00720.11 Recycling Agent and Water - Furnish Recycling Agent and water meeting the following requirements:

(a) **Recycling Agent** - Either CMS-2RA or HFMS-2RA that has been manufactured from new Materials and meets the requirements of 00745.11.

(b) **Water** - Water according to 00340.10.

(Use one of the following 00720.12 subsections. Check with Designer on which one to use. Delete the one that does not apply.)

00720.12 Reclaimed Asphalt Pavement (RAP) - Recycling Train - Furnish recycled Material removed from the existing asphalt Pavement using a Recycling Train that has a maximum size of 1 1/2 inches prior to entering the mixer unless otherwise directed. Separate any recycled Material larger than 1 1/2 inches by screening or by other means, broken down by mechanical means to pass a 1 1/2-inch sieve and uniformly reincorporated with the balance of the recycled Material.

00720.12 Reclaimed Asphalt Pavement (RAP) - Single Processing Unit - Furnish recycled Material removed from the existing asphalt Pavement using a Single Processing Unit that has a maximum size of 2 inches. Incidental oversize may be allowed if it is not detrimental to the Mixture or wearing surface. If the gradation is determined to be detrimental, take such action necessary to correct the oversize problem. These actions may include

reducing the milling speed, adjusting the crusher, changing screen size (when screens are used), or other such measures as may be necessary. Failure to provide an acceptable product will cause a rejection of any unsuitable Equipment.

[End Options]

00720.13 Job Mix Formula (JMF) - Furnish a CIR Mixture that consists of RAP from the existing Pavement, Recycling Agent, and water combined in the proportions designated by the Engineer. Variability in the composition of the RAP Material may require changes in the proportions of the constituents, as directed. Normally, the Recycling Agent content is between 0.1% and 1.8%, by weight, and water between 1.0% and 3.0% by weight.

00720.15 Process Control - Process control sampling and testing is performed by the Engineer.

00720.16 Acceptance of Mixture - The CIR Mixture will be accepted visually on the road following initial rolling. Correct any Mixture not acceptably mixed or that ravel as follows:

Reprocess or replace any area showing an excess or a deficiency of Recycling Agent. If raveling occurs, provide immediate traffic control. Furnish additional fog coat, Aggregate cover Material, and rolling as directed.

Provide traffic control for rerolling, reprocessing, or replacement according to the Engineer. If the Engineer determines the excesses, deficiencies, or raveling are not due to the Contractor's operations, the Work will be paid for under the appropriate Pay items listed in the Schedule of Items. If the Engineer determines the excesses, deficiencies, or raveling are due to the Contractor's operations, the corrective work is at no additional cost to the Agency.

Equipment

00720.23 Asphalt Concrete Pavers - Provide pavers that comply with the following:

(a) Power and Support - Self-contained, self-propelled, supported on tracks or wheels, that do not contact the Mixture being placed.

(b) Augers and Screed - Equipped with augers and a screed or strike-off assembly, heated if necessary, that:

- Provide extensions used on travel lanes, with the same auguring, screeding, and heating Equipment as the rest of the paver.
- Can spread and finish CIR to a uniform texture, in the specified widths, thicknesses, lines, grades, and Cross Sections.
- Will not segregate, tear, shove, or gouge the CIR.

(c) Control System - Equipped with a paver control system that:

- Controls CIR placement to specified Slope and grade.
- Maintains the paver screed in proper position.

Insert Project Name Here

- Provide specified results through mechanical sensors and sensor-directed devices actuated from independent line and grade control references.

00720.24 Compactors - Provide specified self-propelled rollers capable of reversing without backlash, as follows:

(a) Steel-Wheeled Rollers - Provide steel-wheeled rollers that have:

- A gross static weight of at least 8 Tons.
- A static weight on the drive wheel of at least 250 pounds per inch of width.

If used for finish rolling, provide steel-wheeled rollers that have:

- A gross static weight of at least 6 Tons.
- No drive wheel static weight requirement.

(b) Vibratory Rollers - Provide vibratory rollers that are:

- Equipped with amplitude and frequency controls.
- Specifically designed to compact asphalt concrete.
- Capable of at least 2,000 vibrations per minute.

If used for Pavement thickness less than 1 1/2 inches provide vibratory rollers that:

- Have a gross static weight of at least 8 Tons.
- Have a static weight on the drive wheel of at least 250 pounds per inch of width.
- Not be operated in vibratory mode.

If used for finish rolling, provide vibratory rollers that:

- Have a gross static weight of at least 6 Tons.
- Not be operated in the vibratory mode.

(c) Pneumatic-tired Rollers - Provide pneumatic-tired rollers that:

- Are tandem, or multiple axle, multiple wheel type.
- Have smooth-tread, pneumatic tires of equal size.
- Have tires staggered on the axles, spaced and overlapped to provide uniform compacting pressure for the full compacting width.
- Have a minimum total load of 2,800 pounds per tire with tire inflation pressure of 45 psi to 90 psi.

(Use one of the following 00720.26 subsections. Check with Designer for correct one. Delete the one that does not apply.)

[Begin Recycling Train Option Subsection .26]

00720.26 Equipment - Recycling Train - Recycle the existing Pavement using a recycling train consisting of the following major components:

(a) Planing Machine or Grinder - Remove the existing Pavement by a self-propelled planing machine having a minimum 12-foot-wide rotary cutter and capable of removing the existing Pavement to a depth of 4 inches in a single Pass.

Provide a unit capable of accurately establishing profile grades within a tolerance of 1/4 inch by reference from either the existing Pavement or from independent grade control, and have a positive means for controlling cross slope elevations. Provide Equipment that incorporates a totally enclosed cutting drum with replaceable cutting teeth and has an effective means for removing excess Material from the surface and for preventing dust from escaping into the air. Do not use a heating device to soften the Pavement.

Equip the unit to discharge water into the mixing chamber, with fully variable control and meter capable of measuring the rate of feed within 5 gallons per minute.

(b) Crusher - Provide a portable type crusher capable of reducing the oversized RAP Materials to the specified size.

(c) Pug Mill Mixer - Mix the CIR Mixture in a pug mill type plant capable of providing a mix of RAP, Recycling Agent, and water to uniform proportions.

Equip the pug mill with a liner to prevent build-up of Materials during the mixing operation.

Equip mixing plants with a positive control linking the RAP, Recycling Agent, and water feed in a manner that will maintain a constant ratio of each constituent. Equip the plant with facilities so that the Contractor can verify and calibrate the RAP, Recycling Agent, and water quantities by a method acceptable to the Engineer.

Measure the RAP by weight. The Recycling Agent and water may be proportioned by either weight or volume. Provide Equipment capable of feeding and maintaining a constant rate of RAP feed within a tolerance of plus or minus 5% by weight or the designated amount and a constant rate of Recycling Agent and water feeds within $\pm 0.2\%$ by weight of the designated amounts.

Equip the mixing plant with positive displacement pumps and a computerized metering system that can accurately meter the amount of Recycling Agent and water. Provide pumps having an interlocked belt weighing system that measures the quantity of RAP Material entering the mixing plant. Design the interlock so that Recycling Agent and water cannot be added until RAP Material enters the mixer. Equip overrides of the interlock system with short duration timers to prevent their continuous use. Use overrides only during start-up periods.

Provide readouts for the belt weighing device and computerized metering system that indicate the quantity, in Tons, of RAP, water, and Recycling Agent being fed into the mixer at any given time. Provide totalizer readouts to allow determination of accumulative quantities of each constituent.

[End Recycling Train Option Subsection .26]

[Begin Single Processing Unit Option Subsection .26]

00720.26 Equipment - Single Processing Unit - Process the existing Pavement according to the following:

(a) Planing Machine - Remove the existing Pavement by a self-propelled planing machine having a minimum 12-foot-wide rotary cutter and capable of removing the existing Pavement to a depth of 4 inches in a single Pass.

Provide a unit capable of accurately establishing profile grades within a tolerance of 1/4 inch by reference from either the existing Pavement or from independent grade control, and have a positive means for controlling cross slope elevations. Provide Equipment that incorporates a totally enclosed cutting drum with replaceable cutting teeth and has an effective means for removing excess material from the surface and for preventing dust from escaping into the air. The use of a heating device to soften the Pavement will not be permitted.

Provide a planing machine capable of adding Recycling Agent and water to the RAP in amounts that produce a uniform Mixture.

Use positive displacement pumps that can accurately meter the planned amount of Recycling Agent and water into the pulverized asphalt concrete. Provide pumps that are interlocked to the movement of the machinery used to apply the Recycling Agent and water to provide that no Recycling Agent or water can be added when the machinery is not moving.

Provide positive readout capabilities to the Recycling Agent and water feeds so that the amount of Recycling Agent and water in Tons incorporated into at any given time can be read directly. Provide totalizer readouts to allow determination of accumulative quantities of water and Recycling Agent used in the Mixture.

(b) Recycling Agent Storage and Heating Tanks - Equip storage tanks with accurate volume measuring devices or manufacturer's calibration charts for each storage tank and a thermometer for measuring the temperature of tank's contents.

Use a parallel piping filter system with at least one filter per line between the storage tanks and the liquid asphalt mixing device or recycling Equipment. Provide filters capable of eliminating solid or semi-solid particles from the Recycling Agent liquid.

Equip each filtering line with on/off valves and changeable filter elements.

Alternately route the Recycling Agent through each filter line for a period of 2 to 4 hours, and alternate filters changed on the same frequency unless otherwise directed.

Reject loads of Recycling Agent that break prematurely in the storage tanks or haul vehicles or that cause frequent plugging of the filters.

[End Single Processing Unit Option Subsection .26]

Construction

00720.40 Season and Weather Limitations - Do not begin in-place recycling of existing asphalt concrete Pavement until the Pavement surface temperature is 70 °F and rising. The construction of CIR is not allowed before May 15 or after August 1, except the Engineer may approve a start-up prior to the Pavement surface temperature reaching 70 °F under the following conditions:

- The Engineer receives a written request for an early start.
- The Contractor assumes all financial responsibility for correction of raveling problems with the CIR Mixture during the early start period. This includes, but is not limited to the cost of complete recycling, additional fog and cover Aggregate Material, rollers, pilot cars, and flaggers.

Stop CIR work at the end of each Day when the temperature of the Mixture behind the paver drops below 90 °F or 3 hours before sunset, whichever occurs first.

Reprocess or repair by other methods all Pavement that is damaged by rain after placement, at no additional cost to the Agency.

If recycling and placement operations are not completed by August 1, operations are not allowed to resume until May 15 of the following year.

00720.41 Rate of Progress and Scheduling - Plan and schedule the recycle operation in such a manner that the Materials are removed, mixed, replaced, and the area open to traffic immediately after initial compaction is completed.

Completely backfill all recycled areas with reprocessed and compacted asphalt concrete Materials so the area is open to two-way traffic during all hours of darkness.

00720.42 Preparation of Underlying Surfaces - Perform the following to underlying surfaces:

(a) Panel Recycling (less than 12 feet wide) with Aggregate Shoulders - Blade existing Aggregates in Shoulder areas away from milling operation so that Shoulder Aggregates are not mixed with Pavement millings.

(b) All Projects:

(1) Removing Fines - Minimize the amount of fines on the milled surface that can be detrimental to a proper bond of the tack coat. If excess fines are on the milled surface, remove by brooming or other method acceptable to the Engineer.

(2) Tack - Just prior to windrowing the recycled Pavement Mixture, apply tack coat according to Section 00730 to the entire profiled area including the vertical edges. Apply the tack at the rates established by the Engineer.

00720.43 Heating Recycling Agent and Water - Furnish Recycling Agent with a temperature prior to entry into the Mixture not less than 125 °F nor more than 185 °F.

Furnish water with a temperature just prior to entry into the Mixture not less than 100 °F.

00720.44 Mixing - Utilize and operate all the various required components of the asphalt concrete mixer in a manner to assure compliance with this Section.

Measure and introduce RAP, Recycling Agent, and water into the mixer in the amounts specified in the JMF and as designated. Continue mixing until the Recycling Agent and water have been distributed throughout the RAP to form a uniformly coated Mixture.

00720.46 Control of Line, Grade, and Milling Depth - Use a floating beam device of adequate length and sensitivity to provide adequate line and grade reference control on either or both sides of the paver.

Perform milling at the depth shown unless otherwise directed. Replace all areas of Pavement with deficient asphalt coating caused by excessive milling depth at no additional cost to the Agency.

00720.48 Spreading and Placing - Except for unavoidable delay or breakdown, recycle and place recycled Pavement by the paving machine at a rate sufficient to provide continuous operation of the paving machine. If paving operations result in excessive stopping of the paving machine suspend the recycling and paving operations until the synchronization of the rate of recycle with the capacity of the paving machines can be achieved.

Lay the Mixture on an approved surface, spread, and strike off to established grade and elevation. Use the specified asphalt pavers to distribute the Mixture.

Deposit the CIR Mixture in a windrow, then pick the Mixture up and place it in the asphalt paver.

Use self supporting loading Equipment that does not exert any vertical load on the paving machine or cause vibrations or other motions that could have a detrimental effect on the riding quality of the completed Pavement. Provide loading Equipment that picks up substantially all of the Material deposited on the road and place it directly into the receiving hopper of the paving machine.

In areas where Patching, irregularities, or unavoidable obstacles make the use of specified Equipment impracticable, the Mixture may be spread with special hopper Equipment with adjustable strike-off or by other approved Equipment or means, provided the surface finish is within a tolerance of 1/4 inch.

00720.49 Compaction - Compact the CIR as follows:

(a) General - Immediately after the CIR has been spread, struck off, and surface irregularities and other defects remedied, roll it uniformly until compacted as specified.

(b) Rolling - Compact CIR with rollers according to 00720.24. Provide sufficient rollers of types appropriate to compact the Mixture while it is in a workable condition. Operate rollers at a uniform speed not more than 3 mph with the drive roll or wheels nearest the paver.

Begin rolling at the sides and proceed longitudinally, parallel to the road centerline, gradually progressing to the center, unless otherwise directed. On superelevated curves, begin rolling at the low side and progress to the high side. When paving in echelon, or

when abutting a previously paved lane, roll the longitudinal joint first, followed by the regular rolling pattern.

Do not make sharp turns or park rollers on the CIR. Stop each pass at least 5 feet longitudinally from preceding stops. Do not displace the line and grade of edges. Prevent CIR from sticking to the wheels and spotting or defacing the CIR by wetting them with a minimum of water or other approved Material.

(1) Breakdown Rolling - Use vibratory, steel-wheeled rollers. Make at least three complete roller Coverages.

(2) Intermediate Rolling - Use a self-propelled, pneumatic-tired roller following the placement of fog coat and Aggregate cover Material. Make at least two complete roller Coverages with the pneumatic-tired roller immediately following application of Aggregate cover Material.

(3) Finish Rolling - Use nonvibratory, tandem-wheeled steel rollers, and continue until roller marks are eliminated.

00720.50 Fog Coat and Aggregate Cover Material - After the breakdown rolling but before the intermediate rolling begins, apply a fog coat and Aggregate cover Material according to Section 00705 and the following:

- Place Aggregate cover Material at a rate of approximately 0.001 to 0.003 cubic yards per square yard immediately before the intermediate roller Coverage.
- Remove all piles, ridges, or uneven distribution of Aggregate cover Material by spreading or removing with hand tools or mechanical means before the final roller Coverage.

(Use the following subsection .51 if a chip seal is required over the CIR. Delete "(00710)" or "(00715)" and delete all parentheses.)

00720.51 Chip Seal - After the CIR has been placed and has cured at least 14 Calendar Days, chip seal the surface according to Section (00710)(00715).

Maintenance

00720.60 Surface Repair - Correct any displacement of the mat regardless of thickness occurring as a result of the roller reversing or changing direction, or from other causes. Moisten steel roller wheels with water or other approved Material to the least extent necessary to prevent pickup of Mixture.

When the rolling causes undue tearing, displacement, cracking, or shoving, make changes in compaction Equipment or rolling procedures in order to alleviate the problem.

00720.62 Joints:

(a) Drop-offs - Prior to any suspension of operations at the end of each shift, complete the full width of the area to be paved, including outside Shoulders, to the same elevation with no longitudinal drop-offs.

If unable to complete the Pavement without longitudinal drop-offs do the following:

- Construct and maintain a wedge of asphalt concrete within the specified time constraints at a Slope of 1V:10H or flatter along the exposed longitudinal joint. Longitudinal joints 1 inch or less will not require a wedge.
- Remove and dispose of the wedge before continuing paving operations.
- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency.

Where allowable abrupt or sloped drop-offs occur within or at the edge of the paved surface, provide suitable warning signs as required under Section 00222.

(b) Finishing and Details - Take special care at longitudinal joints to provide positive bond and to provide density and finish to new Mixture equal in all respects to the Mixture against where it is placed.

00720.66 Cure - Allow the CIR to cure at least 14 Days (3 Days when lime slurry is used) after laydown before placing EAC or ACP Lift.

Finishing and Cleaning Up

00720.70 Pavement Smoothness:

(a) Single Course CIR Construction - Provide a CIR top surface that when tested with a 12-foot straightedge parallel to and perpendicular to the centerline, as directed does not vary by more than 1/4 inch.

(b) Multiple Course CIR and EAC or HMA Construction - Test the top surface of the CIR Course where the EAC or ACP wearing Course is placed according to 00720.70(a) above.

Test the EAC or ACP wearing surface with the rolling straightedge in the designated wheel path of a 0.1-mile strip of each travel lane per mile, where directed, and on each transverse joint throughout the Project. Operate the rolling straightedge parallel to the centerline. Provide a surface that does not vary more than 0.015 foot.

Also test the EAC or ACP wearing surface with a 12-foot straightedge placed perpendicular to the centerline at least once within the above-mentioned 0.1-mile strip. Provide a surface that does not vary by more than 1/4 inch.

If the 0.1-mile testing strip meets the Specifications, no further testing of the mile represented by the testing strip is required, except at the transverse joints. If any part of the testing strip does not meet the Specifications, test both wheel paths of the entire mile.

Perform Pavement smoothness testing within 24 hours of paving and after corrections of Pavement roughness.

00720.75 Correction of Pavement Roughness - Correct the surface roughness to the required tolerances without damaging the Pavement. Use one of the following methods as approved:

- Patch low lying areas with hot mix asphalt.
- Blade high areas to remove excess Material.
- Reroll high areas to compact excess Material.
- Remove and replace the wearing surface Lift.
- Diamond grind high areas to remove excess Material.
- Other method acceptable to the Engineer.

Complete correction of all surface roughness within 14 Calendar Days following notification unless otherwise directed.

00720.78 Shoulder Restoration - Restore the Aggregate Shoulder areas to their original condition in all areas where the Aggregate was dislodged, moved, or rutted due to milling and recycle work. The restoration work includes blading and Leveling existing Aggregate Materials as directed.

Measurement

00720.80 Measurement - The quantities of CIR will be measured on the area basis, based on the paved widths and milled depths shown and the horizontal length along the centerline of the recycled Pavement.

No allowance will be made for recycled Pavement that is in excess of the shown paved width and milled depth unless otherwise directed.

No measurement will be made for depths deviating from the Plan depths, unless directed to mill a depth of $\pm 1/4$ inch from the thickness shown on the Plans. In areas where directed to construct CIR to a thickness other than $\pm 1/4$ -inch from the specified thickness, the areas will be adjusted by converting, $\pm 1/4$ -inch increments, to the equivalent number of square yards of nominal thickness on a proportionate volume basis above or below the specified tolerance limits.

The quantity of Recycling Agent in the CIR Mixture will be measured on the weight basis.

Water used in the Mixture will be measured according to 00340.80.

Fog coat and Aggregate cover Material will be measured according to 00705.80.

Payment

00720.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Cold In-Place Recycled Asphalt Concrete Pavement	Square Yard

Insert Project Name Here

(b) Recycling Agent in CIRTon

Item (a) includes removing, pulverizing the Existing Surfacing, mixing the Materials, and placing, compacting, and finishing the Work as specified.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Water used in the CIR Mixture will be paid for according to 00340.90.

Fog coat and Aggregate cover Material will be paid for according to 00705.90.

No separate or additional payment will be made for blading, brooming, or Shoulder restoration work.

SP00721 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26

Last updated: 03-03-26

***This Section requires SP00705,
SP00710 and SP00730.)***

SECTION 00721 - COLD RECYCLED EMULSIFIED ASPHALT CONCRETE PAVEMENT (CRP)

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00721 is not a Standard Specification and is included in this Project by Special Provision.

Description

00721.00 Scope - This Work consists of constructing Cold Recycled Emulsified Asphalt Concrete Pavement (CRP) to the lines, grades, thicknesses, and Cross Sections shown or established.

00721.01 Abbreviations:

CRP - Cold Recycled Emulsified Asphalt Concrete Pavement

00721.02 Definitions:

Cold Recycled Emulsified Asphalt Concrete Pavement - CRP is a mixture of pulverized RAP, recycling agent, and hydrated lime slurry.

00721.05 Prepaving Conference - Meet with the Engineer, at a time mutually agreed upon, to discuss methods of accomplishing all phases of CRP work. Provide all supervisory personnel of the Contractor and any Subcontractor who are to be involved in CRP Work at the meeting.

Materials

00721.10 Lime - Furnish granular quicklime meeting the requirements of 02090.10.

00721.11 Recycling Agent and Water - Furnish recycling agent and water meeting the following requirements:

(a) Recycling Agent - Either CMS-2RA or HFMS-2RA recycling agent.

Furnish recycling agent meeting the requirements of ODOT's publication *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT's Pavement Services Engineer. The applicable Specifications are those contained in the current publication on the date the Project is advertised. The Materials may be conditionally accepted at the source or point of loading for transport to the Project.

Excessive delay in the use of the recycling agent or excessive pumping of the recycling agent may significantly reduce the viscosity and may make the Material unsuitable for CRP use. Keep pumping to an absolute minimum between the bulk storage tank, hauling transportation, field storage tanks, and mixing plant. Final acceptance of Emulsified Asphalt is at the point of application.

Obtain samples according to AASHTO T 40 at the frequency in the MFTP. Test samples at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Test recycling agent within 30 Calendar Days from the Day the sample was taken.

(b) Water - Water according to 00340.10.

00721.12 Reclaimed Asphalt Pavement (RAP) - Furnish reclaimed Material removed from asphalt pavement with a maximum size of 1 1/2 inches prior to entering the mixer unless otherwise directed. Remove all recycled Material larger than 1 1/2 inches by screening or by other means. Uniformly reincorporate RAP broken down by mechanical means to pass a 1 1/2-inch sieve with the balance of the Material.

00721.13 Job Mix Formula (JMF) - The Engineer will provide the JMF for the CRP. Produce CRP that consists of RAP, recycling agent, dry quicklime, and water combined in the proportions designated by the Engineer. Variability in the composition of the RAP Material may require changes in the proportions of the constituents as directed. Furnish the recycling agent content between 0.1% and 2.0%, by weight and water between 1.0% and 3.0% by weight. Furnish dry quicklime content at 1.5% by weight of dry RAP Material.

00721.16 Acceptance of Mixture - The CRP will be accepted visually following initial rolling. Correct any mixture not acceptably mixed or that ravel as follows:

Insert Project Name Here

Replace any area showing excess or deficiency of recycling agent. If raveling occurs, provide immediate traffic control. Furnish additional CRP, fog coat, Aggregate cover Material, and rolling as directed.

If the Engineer determines the excesses, deficiencies, or raveling are not due to the Contractor's operations, the Work will be paid for under the appropriate Pay items listed in the Schedule of Items. If the Engineer determines the excesses, deficiencies, or raveling are due to the Contractor's operations, the corrective Work is at no additional cost to the Agency.

The Engineer may perform testing at any time to verify the specified RAP size, recycling agent content, and lime content are being furnished. Immediately take corrective action when the Engineer's testing determines specified requirements are not being met.

Equipment

00721.20 CRP Mixing Plant - Produce the CRP at a plant capable of providing a mix of RAP, lime slurry, water and recycling agent at uniform proportions and consistency as designated.

Provide mixing plants with:

- A scalping screen of the appropriate size to keep oversize RAP from entering the mixture.
- A mechanical system for reducing oversize RAP Material to the proper size.
- A twin shaft pugmill for mixing the CRP.
- Positive controls linking the RAP, lime slurry, and recycling agent feed so that constant ratios of recycling agent to RAP and hydrated lime slurry to RAP are maintained.
- Totalizers for RAP, recycling agent and lime.
- A metering device that can determine the percent recycling agent and percent dry quicklime in the mixture at any time the plant is in operation.
- An adjustable recycling agent spray bar.
- A system for mixing dry quicklime and water in the specified proportions to create a hydrated lime slurry prior to mixing with RAP. Provide a system equipped with scales or meters to proportion quicklime and water within $\pm 0.5\%$.
- A storage facility for dry quicklime on calibrated load cells capable of determining the amount of dry quicklime incorporated with any selected time period.

Provide Equipment capable of feeding and maintaining a constant rate of RAP within a tolerance of $\pm 5\%$ by weight of the designated amount, feeding a constant rate of recycling agent within $\pm 0.5\%$ by weight of the designated amount, and feeding a constant rate of hydrated lime slurry within $\pm 5\%$ of the designated amount.

Calibrate meters and weighing devices at the mixing plant according to ODOT TM 322 prior to beginning production of CRP.

00721.22 Hauling Equipment - Provide hauling vehicles in good operating condition with tight, clean, metal beds and a cover. Equip beds of hauling vehicles with a positive system to

Insert Project Name Here

prevent materials from leaking onto the surfaces where the hauling vehicle travels. If leakage occurs, remove any spilled material and repair any damage according to 00170.82.

Coat the beds with a minimum amount of approved Material to prevent the mixture from adhering to the beds. Do not use diesel oil. Drain excess coating material before loading by raising the truck bed, opening belly dump gates, or operating the conveyor belt, as appropriate.

Do not use vehicles that cause segregation or delay operations.

00721.23 Asphalt Concrete Pavers - Provide pavers that comply with the following:

(a) Power and Support - Self-contained, self-propelled, supported on tracks or wheels that do not contact the mixture being placed.

(b) Augers and Screed - Equipped with augers and screed or strike-off assembly, heated if necessary, that:

- Can spread and finish CRP to a uniform texture, in the specified widths, thicknesses, lines, grades, and Cross Sections.
- Will not segregate, tear, shove, or gouge the CRP.
- Produce a finished surface to specified evenness and texture.

(c) Control System - Equipped with a paver control system that:

- Controls CRP placement to specified slope and grade.
- Maintains the paver screed in proper position.
- Provides specified results through mechanical sensors and sensor-directed devices actuated from independent line and grade control references.

00721.24 Compactors - Provide specified self-propelled rollers capable of reversing without backlash, as follows:

(a) Steel-Wheeled Rollers - Provide steel-wheeled rollers that have:

- A gross static weight of at least 12 Tons for breakdown rolling.
- A gross static weight of at least 6 Tons for finish rolling.

(b) Pneumatic-tired Rollers - Provide pneumatic-tired rollers that:

- Be tandem, or multiple axle, multiple wheel type.
- Have smooth-tread, pneumatic tires of equal size.
- Have tires staggered on the axles, spaced and overlapped to provide uniform compacting pressure for the full compacting width.
- Have a gross weight of at least 25 Tons.
- Capable of tire inflation pressures of 45 psi to 90 psi.

Construction

Insert Project Name Here

00721.40 Season and Weather Limitations - Do not begin placement of Cold Recycled Emulsified Asphalt Concrete Pavement until the Pavement surface temperature is 60 °F and rising. The construction of CRP is not allowed before May 15 or after August 31.

Stop placement of CRP 3 hours before sunset.

Reprocess or repair by other methods all CRP that is damaged by rain or adverse weather conditions after placement, at no additional cost to the Agency.

00721.41 Rate of Progress and Scheduling - Plan and schedule the CRP operation in such a manner that the Materials are mixed, placed, and the area open to traffic as early as practical after initial compaction is completed.

00721.42 Preparation of Underlying Surfaces - Clean all existing and new Bases, Surfacing, and Pavements in a manner acceptable to the Engineer.

Bring the existing surface to uniformity by Patching irregular or depressed surfaces and potholes with CRP or HMAC thoroughly compacted to conform with the surrounding surface. Prepare individual potholes for Patching by cutting the edges vertically to the depth of the deepest portion of the hole.

Apply a tack coat to the existing surface according to Section 00730 prior to placing CRP.

00721.43 Mixing:

(a) General - Mix the RAP, recycling agent, and hydrated lime slurry until a uniform consistency is obtained. Use the temperature of the recycling agent recommended by the Supplier.

Be aware that both Equipment and process for mixing dry quicklime with water and for mixing hydrated lime slurry with RAP may be patented. See 00170.04.

(b) Production of Hydrated Lime Slurry - Produce the hydrated lime slurry by mixing the specified amount of dry quicklime with the required amount of water to furnish a uniform pumpable consistency that is uniformly incorporated into the RAP.

Apply dry quicklime at the rate of 1.5% by weight of dry RAP Material.

00721.44 Control of Line and Grade - Use a floating beam device of adequate length and sensitivity to provide adequate line and grade reference control on either or both sides of the paver. Where this method is impractical, the Engineer may approve manual adjustment for grade control of the paver.

00721.45 Hauling, Depositing, and Placing:

(a) Hauling - Deliver the mixture to the paving machine at a rate that provides continuous operation of the paving machine, except for unavoidable delay or breakdown. If excessive stopping of the paving machine occurs during paving operations, the Engineer may suspend paving operations until the mixture delivery rate matches the paving machine operation.

If rain or cold air temperatures are encountered any time between loading and placement:

- Suspend mixing operations.
- Cover the mixture in transit.
- Do not place mixture in transit until conditions improve, unless placed at the Contractor's risk according to 00721.40.
- Take action to prevent recycling agent run-off from entering drainage channels or facilities.

CRP is rejected before placing if one or more of the following is found:

- Segregating or separating.
- Solidifying or crusting.

Dispose of rejected loads at no additional cost to the Agency.

(b) Depositing - Deposit CRP in windrows from the hauling vehicles so segregation is prevented. Alternate methods of depositing may be used if allowed by the Engineer.

Provide pick-up Equipment that can:

- Pick up substantially all of the CRP deposited on the Roadway.
- Be self-supporting, not exerting any vertical load on the paving machine, nor causing vibrations or other motions that could have a harmful effect on the riding quality of the completed Pavement.

(c) Placing - Place CRP on dry, prepared surfaces with pavers meeting the requirements of 00721.23. Spread and finish to established widths, thickness, line, grade and cross-section.

When approved, CRP may be spread with other Equipment and means where irregularities or obstacles make the use of specified Equipment impractical.

00721.46 Compaction - Compact the CRP as follows:

(a) General - Immediately after the CRP has been spread, struck off, and surface irregularities and other defects remedied, roll it uniformly until compacted as specified.

(b) Rolling - Compact CRP with rollers according to 00721.24. Provide sufficient rollers of types appropriate to compact the mixture while it is in a workable condition. Operate rollers at a uniform speed not more than 53 mph, with the drive roll or wheels nearest the paver.

Begin rolling at the sides and proceed longitudinally, parallel to the road centerline, gradually progressing to the center, unless otherwise directed. On superelevated curves, begin rolling at the low side and progress to the high side. When paving in echelon, or when abutting a previously paved lane, roll the longitudinal joint first, followed by the regular rolling pattern.

Do not make sharp turns or park rollers on the CRP. Stop each Pass at least 5 feet longitudinally from preceding stops. Do not displace the line and grade of edges. Prevent CRP from sticking to the wheels and spotting or defacing the CRP by wetting them with a minimum of water or other approved Material.

(1) Breakdown Rolling - Use steel-wheeled rollers. Make at least three complete roller Coverages.

(2) Intermediate Rolling - Use a self-propelled, pneumatic-tired roller following the placement of fog coat and Aggregate cover Material. Make at least two complete roller Coverages with the pneumatic-tired roller immediately following application of Aggregate cover Material.

(3) Finish Rolling - Use steel-wheeled rollers and continue until roller marks are eliminated.

00721.47 Fog Coat and Aggregate Cover Material - After the breakdown rolling but before the intermediate rolling begins, apply a fog coat and fine size Aggregate cover Material according to Section 00705 and the following:

- Apply fog coat emulsion at a rate of approximately 0.08 to 0.12 gallons per square yard. The exact rate is determined by the Engineer.
- Place Aggregate cover Material at a rate of approximately 0.001 to 0.003 cubic yards per square yard immediately before the intermediate roller Coverage. The exact rate is determined by the Engineer.
- Remove all piles, ridges, or uneven distribution of Aggregate cover Material by spreading or removing with hand tools or mechanical means before the final roller Coverage.

00721.48 Longitudinal Joints - Bond, compact, and finish the new CRP at longitudinal joints equal to the CRP against where it is placed.

(a) Location - Place CRP in Panel widths to hold the number of longitudinal joints to a minimum. Do not construct longitudinal joints within the area or width of a travel lane. On Median lanes and Shoulder areas, construct joints only at lane lines or at points of change in the transverse slopes as shown or directed.

(b) Drop-offs - Complete the full width of the area to be paved, including outside Shoulders, to the same elevation with no longitudinal drop-offs by the end of each shift.

If unable to complete the Pavement without longitudinal drop-offs do the following:

- Construct and maintain a wedge of asphalt concrete within the specified time constraints at a Slope of 1V:10H or flatter along the exposed longitudinal joint. Longitudinal joints 1 inch or less will not require a wedge.
- Remove and dispose of the wedge before continuing paving operations.
- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency.

Where allowable abrupt or sloped drop-offs occur within or at the edge of the paved surface, provide suitable warning signs as required under Section 00222.

00721.49 Transverse Joints:

(a) Travel Lanes - Construct transverse joints on the travel lane portion of all specified Pavement Courses, except Leveling Courses, as follows:

(1) Temporary End Panel - Maintain Pavement depth, line and grade at least 5 feet beyond the selected transverse joint location, and from that point, wedge down on the appropriate slope until the top of the Course being laid meets the underlying surface assuming a Pavement Course thickness of 2 inches as follows:

- For wedges under traffic for less than 24 hours, construct an 8 feet long wedge (1V:50H taper rate).
- For wedges under traffic for 24 hours or longer, construct a 25 feet long wedge (1V:160H taper rate).
- Construct, maintain, remove and dispose of the temporary wedge at no additional cost to the Agency. CRP for the temporary wedge will be paid for at the bid item price.

When the Pavement Course thickness is different than the above 2-inch example, use the appropriate taper rate to compute the length of the wedge. The wedge length plus the 5 feet or longer Panel form the "temporary end Panel".

(2) Vertical Face - After the mixture has reached the required density:

- Furnish a smooth, vertical face the full depth of the Course being laid at the location selected for the joint by sawing, cutting or other approved method.
- Remove the CRP Material from the joint to the end of the Panel. If removed before resuming paving beyond the joint, reconstruct the temporary end Panel immediately by placing a bond-breaker of paper, dust, or other suitable Material against the vertical face and on the surface to be occupied by the temporary end Panel. Construct a full-depth Panel at least 5 feet long, beginning at the sawed or cut joint, and taper it on a 1V:50H Slope to zero thickness.

(3) Excess CRP - After completing a temporary end Panel as specified, dispose of unused, remaining CRP as directed. Payment will be made for the entire load of CRP, but is limited to only one load per joint per Panel.

(4) Resume Paving - When permanent paving resumes, remove the temporary end Panel and any bond-breakers. Clean the surface of all debris and apply a tack coat to the vertical edge and the surface to be paved.

(5) Joint Requirements - Compact both sides of the joint to the specified density. Conform the joint surface to the specified surface tolerances, tested with a straightedge placed across the joint.

Insert Project Name Here

(b) Abutting Bridge Ends - Compact the CRP abutting Bridge ends, and other rigid type Structures, in the transverse or diagonal direction, as well as longitudinally, as directed.

Maintenance

00721.60 Correction of Defects - Correct all defects in Material and work, as directed, at no additional cost to the Agency. Defects include segregation of materials and fouled surfaces preventing full bond with the seal coat.

(a) Roller Damage Surface Repair - Correct all displacements of any Course at once, with rakes and addition of fresh mixture when required, regardless of thickness.

(b) Other Defects - Remove, replace with fresh CRP, and compact to conform to the surrounding area all CRP that:

- Is loose, broken, or mixed with dirt.
- Shows visually too much or too little asphalt.
- Is defective in any way.

Remove and replace the CRP that contains defects, excesses, or deficiencies prior to placing the seal coat at no additional cost to the Agency.

00721.61 Brooming - Remove loose fog coat cover Aggregate by carefully brooming the entire surface as directed by the Engineer, unless brooming damages the new CRP Pavement.

Subsequent brooming the following two Days may be directed by the Engineer to ensure that the surface is free of loose Aggregate that could cause vehicle damage.

On Bridges, sidewalks and other areas off the Roadway, remove all loose Aggregates to the satisfaction of the Engineer.

00721.62 Curing - After each lift of CRP has been placed, allow the CRP to cure a minimum of 72 hours, or as directed, before placing the next lift of CRP.

Finishing and Cleaning Up

00721.70 Pavement Smoothness - Test the top surface of CRP with a 12-foot straightedge parallel to and perpendicular to the centerline, as directed. Furnish a Pavement surface that does not vary by more than 1/4 inch. Perform Pavement smoothness testing within 24 hours of paving and after corrections of Pavement roughness.

00721.71 Correction of Pavement Roughness - Correct the surface roughness to the required tolerances without damaging the Pavement. Use one of the following methods as approved:

- Patch low lying areas with HMA.
- Blade high areas to remove excess Material.
- Reroll high areas to compact excess Material.

Insert Project Name Here

- Remove and replace the wearing surface lift.
- Diamond grind high areas to remove excess Material.
- Other method acceptable to the Engineer.

Complete correction of all surface roughness within 14 Calendar Days following notification unless otherwise directed.

00721.72 Emulsified Asphalt Chip Seal - After the CRP has been placed and has cured for at least 14 Calendar Days, apply a single application Emulsified Asphalt chip seal according to Section 00710.

Measurement

00721.80 Measurement - The quantities of CRP, recycling agent, and dry quicklime will be measured on the weight basis.

Measurement of quicklime is limited to the weight of dry quicklime used to produce hydrated lime slurry at the rate specified or directed.

Fog coat and Aggregate cover Material will be measured according to 00705.80.

Emulsified asphalt chip seal will be measured according to 00710.80.

Payment

(Delete the "(s)" or parentheses from the word "item(s)" as appropriate.)

00721.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item

Unit of Measurement

- | | |
|---|-----|
| (a) Cold Recycled Emulsified Asphalt Pavement | Ton |
| (b) Recycling Agent in CRP | Ton |
| (c) Lime in CRP | Ton |

(Use the following paragraph when Pay Item (a) is included in the Pay Item list above.)

Item (a) includes hauling, screening, and crushing RAP Material, water, and processing necessary for producing hydrated lime slurry, mixing the Material, and placing, compacting, and finishing the Work as specified.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Fog coat and Aggregate cover Material will be paid for according to 00705.90.

Insert Project Name Here

Emulsified asphalt chip seal will be paid for according to 00710.90.

No separate or additional payment will be made for brooming or for Pavement tapers at approaches and connections.

SP00725 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP00730, SP00745)

SECTION 00725 - HOT IN-PLACE RECYCLED ASPHALT CONCRETE PAVEMENT (HIR)

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00725 is not a Standard Specification and is included in this Project by Special Provision.

Description

00725.00 Scope - This Work consists of constructing Hot In-place Recycled Asphalt Concrete Pavement (HIR) in reasonably close conformity to the lines, grades, thicknesses, and Cross Sections shown or established.

00725.01 Abbreviations:

HIR - Hot In-place Recycled Asphalt Concrete Pavement.

00725.02 Definitions:

Hot In-place Recycled Asphalt Concrete Pavement - HIR is a Mixture of RAP, that has been heated, mixed in place with new asphalt concrete Mixture (when specified) and Recycling Agent, then relaid and compacted in a continuous operation.

Mixture - Hot in-place recycled asphalt concrete after all Materials are combined and mixed.

Panel - The width of HIR Material being removed and placed by the recycling train.

Recycling Agent - Material added to RAP to soften and rejuvenate existing asphalt Material.

00725.05 Prepaving Conference - Meet with the Engineer, at a time mutually agreed upon, to discuss methods of accomplishing all phases of the recycle and paving Work. Provide all

supervisory personnel of the Contractor and any Subcontractor who are to be involved in the recycle and paving Work at the meeting.

Materials

00725.11 Recycling Agent - Furnish RA 1, RA 5, RA 25, RA 75, RA 250, or RA 500 Recycling Agent that has been manufactured from new Material and meets the requirements of 00745.11.

00725.12 Asphalt Concrete Mixture - Furnish new asphalt concrete Mixture meeting the requirements of Section 00745.

00725.13 Job Mix Formula (JMF) - Furnish an HIR Mixture that consists of RAP from the existing Pavement, new asphalt concrete Mixture (when specified) and Recycling Agent combined in the proportions designated by the Engineer. Variability in the composition of the RAP Material may require changes in the proportions of the constituents, as directed. Furnish the Recycling Agent content between 0.2% and 1.0% by weight of mix.

00725.15 Process Control - Process control sampling and testing is performed by the Engineer.

00725.16 Acceptance of Mixture - The HIR Mixture will be accepted visually on the road following initial rolling. Correct any Mixture that is not acceptable as follows:

- Reprocess or replace any area showing an excess or a deficiency of asphalt with new asphalt concrete Pavement.
- If raveling occurs, provide immediate traffic control and additional rolling.

Provide traffic control for rerolling, reprocessing, or replacement according to the Engineer. If the Engineer determines the excesses, deficiencies, or raveling are not due to the Contractor's operations, the Work will be paid for under the appropriate bid items listed in the Schedule of Items. If the Engineer determines the excesses, deficiencies, or raveling are due to the Contractor's operations, the corrective Work is at no additional cost to the Agency.

Equipment

00725.23 Asphalt Concrete Pavers - Provide pavers that comply with the following:

(a) Power and Support - Self-contained, self-propelled, supported on tracks or wheels, that do not contact the Mixture being placed.

(b) Augers and Screed - Equipped with augers and screed or strike-off assembly, heated if necessary, that:

- Provide extensions used on travel lanes, with the same augering, screeding, and heating Equipment as the rest of the paver.
- Can spread and finish HIR to a uniform texture in the specified widths, thicknesses, lines, grades, and Cross Sections.
- Will not segregate, tear, shove, or gouge the HIR.

(c) Control System - Equipped with a paver control system that:

- Controls HIR placement to specified Slope and grade.
- Maintains the paver screed in proper position.

Provide specified results through mechanical sensors and sensor-directed devices actuated from independent line and grade control references.

(d) Illumination - Provide adequate lighting to illuminate the paver and the road in front of and behind the paver during the period from 30 minutes after sunset to 30 minutes before sunrise. Shield lighting from adjacent traffic as necessary. Provide a minimum light level of 10-foot candles as measured on the road surface at a distance of 16 feet from the edge of the paver.

00725.24 Compactors - Provide specified self-propelled rollers capable of reversing without backlash, as follows:

(a) Steel-Wheeled Rollers - Provide steel-wheeled rollers that have:

- A gross static weight of at least 8 Tons.
- A static weight on the drive wheel of at least 250 pounds per inch of width.

If used for finish rolling, provide rollers that have:

- A gross static weight of at least 6 Tons.
- No drive wheel static mass requirement.

(b) Vibratory Rollers - Provide vibratory rollers that are:

- Equipped with amplitude and frequency controls.
- Specifically designed to compact asphalt concrete.
- Capable of at least 2000 vibrations per minute.

If vibratory rollers are used for Pavement thickness less than 1 1/2 inches, provide rollers that:

- Have a gross static weight of at least 8 Tons.
- Have a static weight on the drive wheel of at least 250 pounds per inch of width.
- Not be operated in vibratory mode.

If vibratory rollers are used for finish rolling, provide rollers that:

- Have a gross static weight of at least 6 Tons.
- Not be operated in the vibratory mode.

(c) Pneumatic-tired Rollers - Provide pneumatic-tired rollers that:

- Be tandem, or multiple axle, multiple wheel type.

Insert Project Name Here

- Have smooth-tread, pneumatic tires of equal size.
- Have tires staggered on the axles, spaced and overlapped to provide uniform compacting pressure for the full compacting width.
- Have a minimum total load of 2,800 pounds per tire with tire inflation pressure of 45 psi and 90 psi.
- Be fully skirted to reduce tire heat loss and Mixture pick up.

00725.26 Heating and Scarifying Equipment:

(a) General - Indicate at the preconstruction conference the type of Equipment intended for use. Provide Equipment that is in good operating condition in sufficient time for evaluation prior to its use. Any Equipment the Engineer determines to be unsuitable for the purpose intended is rejected.

Prior to performing hot recycling Work on the Project, provide a written statement to the Engineer that contains the following:

- A current air contaminate discharge permit number for the plant being used.
- The expiration date of the permit.
- A copy of the statement advising DEQ of the location of the Project and when operations are intended to commence.

The name and address of the air pollution authority having jurisdiction over the area may be obtained from the Engineer.

(b) Equipment - Provide HIR Equipment that performs the following:

(1) Heater Scarification - Heat the existing asphalt surface from 4 inches to 8 inches wider than the width to be processed. Provide the temperature of the scarified Material such as not to unduly harden the asphalt cement, and generally not be over 290 °F, but capable of heating the asphalt mix so that the temperature behind the screed is a minimum of 230 °F before compaction.

No open flame directed on or at the Pavement surface is allowed.

Establish the number of heating units to be used. Provide multiple heaters, if used, in tandem.

Set the scarifying system to produce a fully recycled Mixture without lumps. Equip the heater scarifier with a milling head or mechanical device to loosen the heated Pavement to be reprocessed.

(2) Addition of Recycling Agent - Provide a means to add Recycling Agent homogeneously to the heated and scarified Mixture as follows:

- Positive feed and shut-off of the agent, linked to the movement of the machine.
- Control of the quantity of agent to ± 0.05 gallons per square yard of surface scarified, within an agent application range of from 0.1% to 2.0%, by weight of total Mixture.

Insert Project Name Here

- Measurement of the volume of agent used by means of a metering device capable of recording accumulated liters to an accuracy of $\pm 2\%$.
- Proportional interlinking of the agent application rates to the machine's Mixture processing rate.
- Heating of the agent to within $\pm 25^\circ\text{F}$ of the application temperature established by the Engineer.

(3) Addition of New Asphalt Concrete Mixture - Provide a means to add new asphalt concrete Mixture into the heated and scarified Mixture as follows:

- A hopper to receive the new Mixture directly from the hauling vehicle.
- Positive feed and shut-off of the Mixture, linked to the movement of the machine.
- Control of the new Mixture feed system to provide adequate proportional interlinking to insure that HIR meets the JMF.

(4) Mixing - Provide a means to uniformly mix the scarified mix (RAP), the new asphalt concrete Mixture (when specified), and the Recycling Agent in a chamber or mixing unit so that a homogeneous Mixture is produced.

Provide a means to convey the recycled mix directly to the hopper of the asphalt concrete paver.

Construction

00725.41 Test Strip - At the beginning of the hot recycling operations, construct a test strip on the Project of at least 500 feet but not more than 1,000 feet in length using the Equipment and methods to be used for the hot recycling Work on the Project. Do not perform any other hot recycling Work until the test strip is evaluated and approved.

00725.42 Cleaning Existing Surface - Clean the existing paved surface to be recycled of all dirt, oils, and other objectionables by brooming, flushing with water, or other approved methods prior to beginning heater-scarification operations.

00725.43 Heating and Scarifying - Evenly heat, scarify, and rework the Pavement surface to the widths and depths shown. Control heating to assure uniform heat penetration without causing differential softening of the surfaces. Charring of the asphalt will not be permitted. Uniformly apply the Recycling Agent to the scarified Material prior to remixing and Leveling unless otherwise approved. The rate of application is as determined by the Engineer based on laboratory tests on Pavement samples.

Furnish a heated and scarified Material at a temperature in a range between 230°F and 290°F as measured immediately behind the scarifier. The Engineer will select the temperature within these limitations. Stay within the above range and do not vary the Mixture from the selected temperature by more than 23°F .

Do not burn or scorch trees, shrubs, or other items located adjacent to the Pavement. Be responsible for protecting the adjacent landscape from heat damage. The protection may consist of individual shielding, water spray, or other approved methods.

When a Pass is made adjacent to a previously placed mat, extend the longitudinal joint at least 52 inches horizontally into the previously placed mat, unless otherwise directed. Other approved methods may be used that insure a tight joint between the mats.

00725.44 Mixing and Relaying - Automatically feed the scarified and reclaimed Material into a mixing unit. Add new asphalt concrete Mixture and the Recycling Agent to the reclaimed Material at the mixer unit at the specified rate. Thoroughly mix the combined Material then automatically feed it into the asphalt concrete paver. Spread and strike off the Material to the required thickness, grade, and cross-section at a minimum temperature of 230 °F.

00725.49 Compaction - Compact the HIR as follows:

(a) General - Immediately after the HIR has been spread, struck off, and surface irregularities and other defects remedied, roll it uniformly until compacted as specified. Complete all rolling before the Mixture temperature drops below 135 °F unless the Engineer determines that a higher minimum temperature is required for proper compaction.

(b) Rolling - Compact HIR with rollers according to 00725.24. Provide sufficient rollers of types appropriate to compact the Mixture while it is in a workable condition. Operate rollers at a uniform speed not more than 3 mph, with the drive roll or wheels nearest the paver.

Begin rolling at the sides and proceed longitudinally, parallel to the road centerline, gradually progressing to the center, unless otherwise directed. On superelevated curves, begin rolling at the low side and progress to the high side. When paving in echelon, or when abutting a previously paved lane, roll the longitudinal joint first, followed by the regular rolling pattern.

Do not make sharp turns or park rollers on the HIR. Stop each Pass at least 5 feet longitudinally from preceding stops. Do not displace the line and grade of edges. Prevent HIR from sticking to the wheels and spotting or defacing the HIR by wetting them with a minimum of water or other approved Material.

(1) Breakdown Rolling - Use vibratory, steel-wheeled rollers. Make at least three complete roller Coverages.

(2) Intermediate Rolling - Use self-propelled, pneumatic-tired rollers. Make at least two complete roller Coverages with the pneumatic-tired roller immediately.

(3) Finish Rolling - Use nonvibratory, tandem-wheeled steel rollers, and continue until roller marks are eliminated.

Maintenance

00725.60 Surface Repair - At locations where heater scarification operations begin or end, ensure that the transition between the scarified and unscarified surface is smooth and has no irregularities .

Insert Project Name Here

Repair all irregularities that result from the heater scarification operations with a Leveling Course of hot mix asphalt concrete or as directed. Repair defects at no additional cost to the Agency.

Finishing and Cleaning Up

00725.70 Pavement Smoothness:

(a) Single Course CRP Construction - Test the top surface of HIR with a 12-foot straightedge parallel to and perpendicular to the centerline, as directed. Provide a Pavement surface that does not vary by more than 1/4 inch.

(b) Multiple Course CRP and EAC or ACP Construction - Test the top surface of the HIR Course where the EAC or ACP wearing Course is placed according to 00725.70(a) above.

Test the EAC or ACP wearing surface with the rolling straightedge in the designated wheel path of a 0.1-mile strip of each travel lane per mile where directed, and on each transverse joint throughout the Project. Operate the rolling straightedge parallel to the centerline. Provide a surface that does not vary more than 0.015 foot.

Also test the EAC or ACP wearing surface with a 12-foot straightedge placed perpendicular to the centerline at least once within the above mentioned 0.1-mile strip. Provide a surface that does not vary by more than 1/4 inch.

If the 0.01-mile testing strip meets the Specifications, no further testing of the mile represented by the testing strip is required, except at the transverse joints. If any part of the testing strip does not meet the Specifications, test both wheel paths of the entire mile.

Perform Pavement smoothness testing within 24 hours of paving and after corrections of Pavement roughness.

Measurement

00725.80 Measurement - The quantities of HIR will be measured on the area basis based of the finished surface of the completed Pavement within the Neat Lines shown or established.

The quantities of Recycling Agent in the HIR Mixture will be measured on the weight basis.

New asphalt concrete Mixture will be measured according to 00745.80.

Payment

00725.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Hot In-place Recycled Asphalt Concrete Pavement	Square Yard
(b) _____ Recycling Agent in HIR	Ton

Insert Project Name Here

In item (b), the type of recycling agent is inserted in the blank.

Payment will be payment in full furnishing and placing for all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

New asphalt concrete Mixture will be paid for according to 00745.90.

No separate or additional payment will be made for preparing the existing road surface that receives the HIR.

SP00730 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00730 - EMULSIFIED ASPHALT TACK COAT

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00730 of the Standard Specifications modified as follows:

00730.11 Emulsified Asphalt - Replace the paragraph that begins “Excessive delay in the ...” with the following paragraph:

Excessive delay in the use of the Emulsified Asphalt or excessive pumping of the Emulsified Asphalt may significantly reduce the viscosity and may make the material unsuitable for tack coat use. For this reason limit pumping between the bulk storage tank, hauling transportation, field storage tanks and distributor to an absolute minimum to maintain proper viscosity. Final acceptance of Emulsified Asphalt is at the point of application.

Replace the paragraph that begins “Obtain samples according ...” with the following paragraph:

Obtain samples according to AASHTO R 66 prior to dilution with water, if allowed, according to Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency. Emulsified Asphalt is tested within 30 Calendar Days from the date it is sampled.

(Use one of the following two options. Delete the one that does not apply.)

[Option 1]

Replace the sentence that begins “Furnish CSS-1, CSS-1h...” with the following sentence:

Insert Project Name Here

Furnish CSS-1, CSS-1h, CMS-2, CMS-2S, CMS-2h, CRS-1, CRS-2, HFRS-2, HFMS-2 or HPTC as selected by the Contractor.

Replace the paragraph that begins “Dilution of the tack coat ...” with the following paragraph:

Except for HPTC, dilution of the tack coat material may be allowed to a maximum 1:1 ratio. Determine the proportion of water to be added to the Emulsified Asphalt. Do not dilute the Emulsified Asphalt until the Engineer approves the dilution ratio. Add the water to the Emulsified Asphalt and mix according to the asphalt Supplier. For HPTC, dilution of the tack coat material is allowed only by the asphalt Supplier at a ratio meeting the requirements of ODOT's publication *Standard Specifications for Asphalt Materials*.

[End Option 1]

[Option 2 – Use this option when only HPTC is required.]

Replace the sentence that begins “Furnish CSS-1, CSS-1h...” with the following sentence:

Furnish HPTC.

Replace the paragraph that begins “Dilution of the tack coat material may be allowed...” with the following sentence:

Dilution of the tack coat material is allowed only by the asphalt Supplier at a ratio meeting the requirements of ODOT's publication *Standard Specifications for Asphalt Materials*.

[End Option 2]

00730.22 Asphalt Distributor - Replace this subsection, except for the subsection number and title, with the following:

Provide an asphalt distributor designed, equipped, maintained and operated so the Emulsified Asphalt Material may be applied uniformly at even heat. Provide a distributor capable of applying the asphalt on variable surface widths up to 16 feet, at readily determined and controlled rates from 0.05 to 2.0 gallons per square yard, and with uniform pressure. Do not vary any specified rate by more than 0.02 gallons per square yard. Provide distributor Equipment that includes a tachometer, pressure gauges, accurate volume measuring devices and a thermometer for measuring temperature of tank contents. Provide distributors equipped with a positive power unit for the asphalt pump, and full circulation spray bars adjustable both laterally and vertically. Set the bar height for triple lap coverage.

00730.41 Traffic Control - Replace this subsection, except for the subsection number and title, with the following:

Do not apply the tack to more than one-half the width of the travel way at one time. Allow the remaining width to remain open to traffic. Do not close the open lane until traffic controlled by pilot car is operating on the new surface.

00730.42 Preparation of Underlying Surfaces - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Immediately before applying the tack coat, provide a clean and dry surface to be tacked. Clean all loose material by brooming, flushing with water or other approved methods.

00730.44 Applying Tack Coat - Replace the paragraph that begins "Apply the Emulsified Asphalt ..." with the following paragraph:

Apply the Emulsified Asphalt with a pressure distributor according to 00730.22, unless otherwise allowed. Apply the Emulsified Asphalt to the prepared surface at a rate between 0.05 and 0.20 gallons per square yard as directed and with the Emulsified Asphalt temperature between 140 °F and 185 °F as recommended by the manufacturer. Application rates for tack coat diluted according to 00730.11 are increased as necessary to provide the same amount of residual asphalt as the application rates specified above.

(Use the following subsection .80 on projects that have more than 10 tons of tack coat.)

00730.80 Measurement - Replace this subsection, except for the subsection number and title, with the following:

The quantities of Emulsified Asphalt used as tack will be measured on the weight basis.

00730.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing, mixing with water, and placing the Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following subsection .90 on projects that have less than 10 tons of tack coat. Obtain quantity from the Designer.)

Replace this subsection, except for the subsection number and title, with the following:

No separate or additional payment will be made for Emulsified Asphalt tack coat. Approximately _____ Tons of Emulsified Asphalt in tack coat is required on this Project.

SP00735 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-23-26

This Section requires SP00705 when emulsified asphalt fog coat is required.

Requires SP00710 or SP00715 when chip seal is required.)

SECTION 00735 - EMULSIFIED ASPHALT CONCRETE PAVEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All

Insert Project Name Here

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00735 of the Standard Specifications modified as follows:

00735.05 Precrushing and Prepaving Conferences - Replace this subsection, except for the subsection number and title, with the following:

(a) Precrushing Conference - Meet with the Engineer at a mutually agreed time, to discuss methods of accomplishing all phases of the crushing Work, including supervisory personnel of the Contractor and any Subcontractors who are involved in Aggregate crushing of EAC Aggregates. This includes the Crusher Supervisor and the Contractor's CAgT.

(b) Prepaving Conference - Meet with the Engineer at a mutually agreed time to discuss methods of accomplishing all phases of the paving Work, and including supervisory personnel of the Contractor, including the CAT-I and any Subcontractors who are involved in the paving Work.

00735.10(a) General - Replace the paragraph that begins "Scalp the Rock ..." with the following paragraph:

Scalp the Rock material used to produce Aggregates on a 3/4-inch sieve covering the entire screen deck (after it has passed through the primary crusher if quarry Rock is used). The material remaining may be accepted for use by visual inspection. The Engineer may perform verification testing of the gradation. Furnish Material meeting the following:

00735.10(b) Soundness - Replace this subsection, except for the subsection number and title, with the following:

Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

00735.10(c) Durability - Replace the paragraph that begins "Provide EAC ..." with the following paragraph:

Furnish EAC Aggregates meeting the following durability requirements:

00735.10(e) Harmful Substances - Replace the paragraph that begins "Provide EAC ..." with the following paragraph:

Furnish EAC Aggregates meeting the following harmful substances requirements:

00735.10(f) Grading - Replace the paragraph that begins "Perform sieve analysis ..." with the following paragraph:

Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Provide grading of EAC Aggregate according to the following:

Replace the paragraph that begins "If the Aggregates ..." with the following paragraph:

Insert Project Name Here

If the Aggregates are produced in two or more separate sizes, meet the above grading requirements for the gradation of the blended sizes.

00735.11 Emulsified Asphalt - Replace the paragraph that begins "Obtain Emulsified Asphalt ..." with the following paragraph:

Obtain Emulsified Asphalt samples according to AASHTO R 66 and Section 00165. Samples are tested at the ODOT Materials Laboratory, or other laboratory as designated by the Agency, within 30 Calendar Days from the Day the sample was taken.

00735.13 Job Mix Formula - Replace the paragraph that begins "Provide a mixture ..." with the following paragraph:

Furnish a mixture comprised of Aggregate and Emulsified Asphalt in the proportions established in the job mix formula (JMF). Furnish an Emulsified Asphalt content between 5.0 and 8.0 percent, by weight, of the total Aggregate. Vary the proportions of materials as directed.

Replace the paragraph that begins "The CMDT shall ..." with the following paragraph:

The CMDT has the responsibility to prepare, sign and submit a JMF and samples to the Engineer for each mixture required at least 10 Calendar Days prior to anticipated use in EAC, and according to the latest copy of the ODOT *Contractor Mix Design Guidelines for Asphalt Concrete*.

00735.15(c) Preproduced Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Compliance of Aggregates produced and stockpiled before the Award of this Contract is determined by either of the following methods:

- Continuing production records meeting the requirements of 00735.10, 00735.14, and 00735.15.
- Sampling according to AASHTO R 90 and Section 00165 and meeting the requirements of 00735.10, 00735.14, and 00735.15.

00735.16 Acceptance of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

The Contractor's quality control tests are used for acceptance of EAC Aggregates if verified by the Quality Assurance Program. The Agency will perform Aggregate production quality assurance according to the following.

(a) ODOT Administered Projects - Quality assurance testing on ODOT administered projects is performed according to Section 00165.

(b) Projects Administered by Other Agencies - The quantity of quality assurance testing on projects administered by other Agencies is at the discretion of the Agency or as designated in the Special Provisions.

Insert Project Name Here

00735.17(b) Laboratory Requirements - Replace this subsection, except for the subsection number and title, with the following:

Provide and maintain an ODOT certified laboratory at the plant site provided with the necessary Equipment and supplies for performing Contractor quality control testing.

Provide an on-site laboratory and operational prior to the beginning of EAC production. Provide laboratory Equipment meeting the requirements of the test methods identified in the Specifications.

Calibrate all testing Equipment according to the required test methods. The Engineer may inspect measuring and testing devices to confirm both calibration and condition.

00735.17(c) Plant Calibration - Replace this subsection, except for the subsection number and title, with the following:

Calibrate the plant according to ODOT TM 322. Witness and document the plant calibration by a CAT-I. Do not begin production until calibration tests indicate that the specified proportions can be obtained.

00735.18 Acceptance of EAC Mixture - Replace this subsection, except for the subsection number and title, with the following:

The Contractor's quality control tests are used for acceptance of EAC mixture if verified by the Quality Assurance Program. The Agency will perform EAC mixture production quality assurance according to the following:

(a) ODOT Administered Projects - Quality assurance testing on ODOT administered projects is performed according to Section 00165.

(b) Projects Administered by Other Agencies - The amount of quality assurance testing on projects administered by other Agencies is at the discretion of the Agency or as designated in the Special Provisions.

00735.21 Hauling Equipment - Replace the paragraph that begins "Provide hauling vehicles ..." with the following paragraph:

Provide hauling vehicles in good operating condition with tight, clean, metal beds and a cover. Equip beds of hauling vehicles with a positive system to prevent Materials from leaking onto the surfaces that the hauling vehicle travels over. If leakage occurs, remove any spilled material and repair any damage according to 00170.85.

Replace the paragraph that begins "Provide hauling vehicles ..." with the following paragraph:

Coat the beds with a minimum amount of asphalt release agent from the QPL. Do not use diesel oil. Drain excess coating material before loading by raising the truck bed, opening belly dump gates, or operating the conveyor belt, as appropriate.

00735.22(a) Power and Support - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Self-contained, self-propelled, supported on tracks or wheels, that does not contact the mixture being placed.

00735.22(b) Augers and Screed - Replace the paragraph that begins "Equipped with augers ..." with the following paragraph:

Equipped with augers and a screed or strike-off assembly, heated if necessary, that:

00735.22(c) Control System - Replace the paragraph that begins "Equipped with ..." with the following paragraph:

Equipped with a paver control system that:

00735.40 Season and Weather Limitations - Replace the title of this subsection with "Weather Limitations".

Replace the paragraph that begins "Place EAC from May 1 to August 31..." with the following paragraph:

Place EAC from May 1 to August 31, inclusive, when the Pavement temperature is 60 °F or above. Limitations for EAC will not supersede limitations for Emulsified Asphalt chip seals on the Project.

00735.42 Preparation of Underlying Surfaces - Add the following paragraph to the end of this subsection:

Remove existing pavement markers, recessed markers, and pavement legends before paving. Remove pavement lines, bars, and pavement legends as shown or directed and according to 00225.45.

00735.43(b) Moisture - Replace the paragraph that begins "At the time..." with the following paragraph:

At the time it is mixed with the Emulsified Asphalt, furnish Aggregate with a moisture content adequate to allow distribution of the emulsion, but not so great that moisture or emulsion runs from the mixture. Provide special processing necessary to attain an acceptable moisture content at no additional cost to the Agency.

00735.43(b)(2) Moisture Problems - Replace this subsection, except for the subsection number and title, with the following:

If there are unresolved moisture problems, the maximum allowable moisture is the saturated surface dry (SSD) moisture content for the Aggregate submitted for the JMF, as determined by AASHTO T 84 and AASHTO T 85.

00735.44 Control of Grade - Replace the paragraph that begins "Where this method ..." with the following paragraph:

Where this method is impractical, manual control of grade for the paver is allowed when approved.

Insert Project Name Here

00735.45(a) Hauling - Replace the paragraph that begins "The EAC will be ..." with the following paragraph:

The EAC is rejected before placing if it is found to be:

Replace the paragraph that begins "No more EAC ..." with the following paragraph:

No more EAC is accepted until corrective action has been taken.

00735.45(b) Depositing - Replace the bullet that begins "Be self-supporting ..." with the following bullet:

- Be self-supporting, not exert any vertical load on the paving machine, or cause vibrations or other motions that could have a detrimental effect on the riding quality of the completed Pavement.

(Use the following two paragraphs on projects that allow alternate methods of depositing EAC on the road. Obtain the methods from the Designer.)

Add the following to the end of this subsection:

The following alternate methods of depositing EAC may be used:

-

00735.46(b) Rolling - Replace the paragraph that begins "Compact the EAC ..." with the following paragraph:

Compact the EAC with rollers meeting the requirements of 00735.23. Provide sufficient rollers of type and weight to compact the mixture while it is in a workable condition. Operate rollers at a uniform speed not more than 3 mph, with the drive roll or wheels nearest the paver.

00735.48 Longitudinal Joints - Replace the paragraph that begins "Bond, compact and ..." with the following paragraph:

Bond, compact and finish the new EAC at longitudinal joints equal to the EAC against where it is placed.

00735.48(a) Location - Replace the paragraph that begins "Place EAC in Panel ..." with the following paragraph:

Place EAC in Panel widths that hold the number of longitudinal joints to a minimum. Offset the longitudinal joints in one Panel by at least 6 inches from the longitudinal joints in the Panel immediately below.

00735.48(b) Drop-Offs - Replace the bullet that begins "Construct, maintain, remove ..." with the following bullet:

- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency. EAC for the temporary wedge is paid for at the Contract unit price.

00735.49(a)(2) Temporary End Panel - Replace the bullet that begins "For wedges that will be under traffic for less than ..." with the following bullet:

- For wedges that are under traffic for less than 24 hours, construct the wedge length is 8 feet (1V:50H taper rate).

Replace the bullet that begins "For wedges that will be under traffic for 24 hours ..." with the following bullet:

- For wedges that are under traffic for 24 hours or longer, construct the wedge length is 25 feet (1V:160H taper rate).

00735.49(a)(4) Excess EAC - Replace this subsection, except for the subsection number and title, with the following:

After completing a temporary end Panel as specified, dispose of the unused remainder of EAC as directed. Payment is made for the entire load of EAC, but is limited to one load only per joint per Panel.

00735.60 Correction of Defects - Replace the paragraph that begins "Correct all defects ..." with the following paragraph:

Correct all defects in Material and Work, as directed, at no additional cost to the Agency. Defects include segregation of Materials, non-uniform texture and fouled surfaces preventing full bond between successive spreads of mixture. No adjustment in Contract Time is made for corrective work.

00735.70 Pavement Smoothness - Replace this subsection, except for the subsection number and title, with the following:

Provide a 12-foot straightedge or a 12-foot rolling straightedge and test as specified. Additional testing may be required. Mark areas not meeting the surface tolerance.

Perform Pavement smoothness testing immediately after initial brooming of choke Aggregate.

(a) Single Course Construction - Test with the 12-foot straightedge parallel to and perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(b) Multiple Course Construction - Test the surface of the Course where the wearing Course is placed according to 00735.70(a).

Test the wearing Course of EAC with the rolling straightedge in the designated wheel path of a 0.1-mile strip of each travel lane per mile, where directed, and on each transverse joint throughout the Project. Operate the rolling straightedge parallel to the centerline. Do not vary the surface by more than 0.015 foot.

Insert Project Name Here

Also test the wearing Course of EAC with a 12-foot straightedge placed perpendicular to the centerline at least once within the above-mentioned 0.1-mile strip. Do not vary the surface by more than 1/4 inch.

If the 0.1-mile testing strip meets the Specifications, no further testing of the mile represented by the testing strip is required, except at the transverse joints. If any part of the testing strip does not meet the Specifications, test both wheel paths of the entire mile.

00735.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00738 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00738 - SAFETY EDGE

(Follow all instructions. If there are no instructions above a subsection, paragraph, sentence, or bullet, then include it in the project. The specifications may be modified to include project specific specifications, but all additions, deletions, or modifications must be sent to the ODOT Technical Resource and State Specifications Engineer for review and approval.)

Comply with Section 00738 of the Standard Specifications modified as follows:

00738.20 Safety Edge Device - Replace the paragraph that begins "Attach a device ..." with the following paragraph:

Attach a device to the asphalt concrete paver screed that confines the asphalt concrete at the end gate and extrudes the asphalt concrete in a wedge shape onto the Roadway Shoulder. Provide a safety edge device that compacts a wedge between the ratios 1:1 1/2 and 1:2, providing a uniform texture and shape; adjusts to varying paving thicknesses; and allows for transitions for cross roads, driveways, and obstructions. Brief stops of the paving machine to adjust the safety edge device at transitions are allowed. A single plate strike off is not allowed.

00738.47 Test Section - Replace this subsection, except for the subsection number and title, with the following:

At the beginning of the paving operation, construct one initial test strip of asphalt Pavement at least 0.1 mile but not more than 0.2 mile in length, at the specified paving width. Safety edge is evaluated for wedge ratio, compaction, texture, and shape, to the satisfaction of the Engineer.

The initial test strip is waived if the safety edge device is manufactured by a company listed in the Special Provisions, or the device has been proven to the satisfaction of the Engineer.

SP00740 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00730 when emulsified asphalt tack coat is required.)

SECTION 00740 - COMMERCIAL ASPHALT CONCRETE PAVEMENT (CACP)

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00740 of the Standard Specifications modified as follows:

00740.12 Asphalt Cement - Replace this subsection, except for the subsection number and title, with the following:

Use PG 64-22 or PG 64-28 unless otherwise specified in the Contract Documents or approved. Furnish asphalt cement according to ODOT's publication *Standard Specifications for Asphalt Materials*. Copies of the publication are available from the ODOT Pavement Services Engineer. The applicable Specifications are those contained in the current publication on the date the Project is advertised.

00740.14 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

All Materials are accepted by visual inspection by the Engineer.

00740.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00743 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-22-26

Requires SP00610)

SECTION 00743 - POROUS ASPHALT CONCRETE (PAC)

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All

Insert Project Name Here

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00743 of the Standard Specifications modified as follows:

00743.10(a) New Coarse and Fine Aggregates - Replace the paragraph that begins "No natural or ..." with the following paragraph:

No natural or uncrushed blend Sand is allowed in PAC.

00743.10(a)(1) Soundness - Replace the paragraph that begins "Provide Coarse ..." with the following paragraph:

Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

00743.10(a)(2) Durability - Replace the paragraph that begins "Provide Aggregate ..." with the following paragraph:

Furnish Aggregate not exceeding the following maximum values:

00743.10(a)(3) Fractured Faces - Replace the paragraph that begins "Provide crushed ..." with the following paragraph:

Furnish crushed Aggregate with not less than the minimum number of fractured faces as determined by AASHTO T 355 as follows:

00743.10(b) Reclaimed Asphalt Pavement - Replace this subsection, except for the subsection number and title, with the following:

Reclaimed asphalt Pavement (RAP) Material used in the production of new PAC is optional. No more than 30 percent RAP Material is allowed in the new PAC Pavement. Use RAP Aggregates in the PAC that are no larger than the specified maximum allowable Aggregate size before entering the cold feed. Blend the RAP Material with new Aggregate to provide a mixture according to the JMF within the tolerances specified.

00743.11(a) Asphalt Cement - Replace this subsection, except for the subsection number and title, with the following:

Use the grade of asphalt that is specified in the Contract Documents. A polymer modified asphalt cement is required in the Wearing Course. Provide asphalt cement according to ODOT's publication *Standard Specifications for Asphalt Materials*. The applicable Specifications are those contained in the current publication on the date the Project is advertised.

00743.13 Job Mix Formula Requirements - Replace the paragraph that begins "Do not begin production ..." with the following paragraph:

Do not begin production of PAC for use on the Project until the JMF is reviewed by the Engineer and written consent is provided to proceed. The JMF proposed for use on the

Insert Project Name Here

Project is evaluated based on the criteria identified in 00743.13(b) and the latest ODOT *Contractor Mix Design Guidelines for Asphalt Concrete*. For all mixes, complete TSR testing at least once per calendar year. A new JMF is required if the asphalt cement grade or source, any additives, or the source of the Aggregate change during production.

00743.13(b) Job Mix Formula Requirements - Replace the paragraph that begins "* Run the TSR for open ..." with the following paragraph:

* Run the TSR for open graded mixtures on a surrogate dense graded mixture. If a dense graded JMF has been prepared for the same material sources in the last year, the results for the most recent TSR may be applied to the porous asphalt mixture. If not, prepare the TSR test samples for a dense graded mix using the equivalent top size stone and materials from the same sources, that represents the porous asphalt mixture.

00743.14 Tolerances and Limits - Replace the paragraph that begins "When a JMF tolerance ..." with the following paragraph:

When a JMF tolerance applies to a constituent, full tolerance is given even if it exceeds the control points established in 00743.12(b).

00743.17 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

If the average for each mix gradation constituent and asphalt content is within the Specification limits, the Material is accepted. If the average asphalt content or one or more gradation constituents is not within the Specification limits, the Material that is not within the Specification limits is accepted according to 00150.25.

00743.40 Season and Temperature Limitations - Replace the title of this subsection with "Temperature Limitations".

00743.42 Preparation of Underlying Surfaces - Replace this subsection, except for the subsection number and title, with the following:

Provide all Bases and foundations where the Pavement is to be constructed meeting the applicable Specifications and be approved before beginning paving operations. Recondition existing Bases and foundations according to Section 00610. Trim broken or ragged edges to firm material when directed.

Ensure the Pavement surface is dry before the preparation Work and paving.

00743.44(c) Placing - Replace the paragraph that begins "Uncompacted mixture behind ..." with the following paragraph:

Uncompacted mixture behind the paver with temperatures below the minimum specified in 00743.43 is rejected unless otherwise allowed by the Engineer.

00743.45 Longitudinal Joints - Replace the paragraph that begins "At longitudinal joints ..." with the following paragraph:

Insert Project Name Here

At longitudinal joints, bond, compact and finish the PAC equal to the Pavement against where it is placed.

00743.45(a) Location - Replace the paragraph that begins "Place the PAC ..." with the following paragraph:

Place the PAC in Panel widths that hold the number of longitudinal joints to a minimum. Offset the longitudinal joints in one Panel by at least 6 inches from the longitudinal joints in the Panel immediately below.

00743.70 Pavement Smoothness - Replace the paragraph that begins "Provide a 12-foot ..." with the following paragraph:

Provide a 12-foot straightedge and test as specified. Additional testing may be required. Mark areas not meeting the surface tolerance.

00743.70(a) Travel Lanes - Replace this subsection, except for the subsection number and title, with the following:

Test Wearing Course with the 12-foot straightedge in travel lanes parallel to and perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

00743.90 Payment - Replace the paragraph that begins "The types of PAC ..." with the following paragraph:

The types of PAC "1/2-inch PAC", "3/8-inch PAC", "3/4-inch ATPB" is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00744 (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-26

Last updated: 09-01-26

Requires SP00730 when emulsified asphalt tack coat is required.

Requires SP00738 when Safety Edge is shown in the typical sections of the plans.)

SECTION 00744 - ASPHALT CONCRETE PAVEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Comply with Section 00744 of the Standard Specifications modified as follows:

00744.10(a) New Coarse and Fine Aggregates - Replace the paragraph that begins "Testing of Aggregates ..." with the following paragraph:

Testing of Aggregates for soundness, durability, and harmful substances is at the discretion and expense of the Agency.

00744.10(a)(1) Soundness - Replace the paragraph that begins "Provide Coarse ..." with the following paragraph:

Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

00744.10(a)(2) Durability - Replace the paragraph that begins "Provide Aggregate ..." with the following paragraph:

Furnish Aggregate not exceeding the following maximum values:

00744.10(a)(3) Fractured Faces - Replace the paragraph that begins "Provide crushed Aggregate ..." with the following paragraph:

Furnish crushed Aggregate with not less than the minimum number of fractured faces as determined by AASHTO T 335 as follows:

00744.10(b) Reclaimed Asphalt Pavement - Replace this subsection, except for the subsection number and title, with the following:

RAP Material used in the production of new ACP is optional. No more than 30 percent RAP Material is allowed in the new ACP Pavement. Use RAP Aggregates in the ACP that are no larger than the specified maximum allowable Aggregate size before entering the cold feed. Blend the RAP Material with new Aggregate to provide a mixture according to the JMF within the tolerances specified.

00744.10(c)(5) Establishing Mix Design Inputs - Replace the paragraph that begins "Blend the RAS ..." with the following paragraph:

Blend the RAS or RAM with new Aggregate to provide a mixture according to the JMF within the tolerances specified.

00744.11(a) Asphalt Cement - Replace this subsection, except for the subsection number and title, with the following:

Furnish asphalt cement according to ODOT's publication *Standard Specifications for Asphalt Materials*. The applicable Specifications are those contained in the current publication on the date the Project is advertised. Use the grade of asphalt that is specified in the Special Provisions.

(Fill in the blank with the required grade of asphalt used on the project.)

Insert Project Name Here

Provide _____ grade asphalt cement for this Project.

00744.13 Job Mix Formula Requirements - Replace the paragraph that begins "Develop the JMF ..." with the following paragraph:

Develop the JMF according to the ODOT *Contractor Mix Design Guidelines for Asphalt Concrete*; or verify according to the ODOT mix design verification process. Submit the proposed JMF and supporting data to the Engineer for review and approval at least 10 Calendar Days before anticipated use. Perform a new TSR if the source of the asphalt cement changes.

00744.14 Tolerances and Limits - Replace the paragraph that begins "Develop the JMF ..." with the following paragraph:

When a JMF tolerance applies to a constituent, full tolerance is given even if it exceeds the control points established in 00744.12(b). Full tolerance is given for RAP, RAS, or RAM content even if it exceeds the limits established in 00744.10.

(Use the following subsection .16 on projects that are bid and awarded by ODOT. The following subsection is not intended for use on projects that are not bid and awarded by ODOT.)

00744.16 Sampling and Testing - Replace this subsection, except for the subsection number and title, with the following:

For each 1,000 Tons of placement, have a CAT I perform a minimum of one of each of the following test methods as modified in the MFTP:

- Asphalt Content - AASHTO T 308 with ODOT TM 323 determined Calibration Factor
- Gradation - AASHTO T 30
- Mix Moisture - AASHTO T 329
- Maximum Specific Gravity - AASHTO T 209
- Field Compacted Gyratory Specimens - ODOT TM 326

When less than 1,000 Tons of mix is placed in a Day, perform a minimum of one series of tests per Day. Provide test results to the Engineer by the middle of the following work shift. The Engineer may waive the requirement for any of AASHTO T 308, AASHTO T 30, AASHTO T 329, and ODOT TM 326 on a daily basis. The Engineer may waive the requirement for AASHTO T 209 when less than 500 Tons of ACP is placed in a single work shift.

Provide samples or split samples to the Engineer when requested.

(Use the following subsection .17 on projects that are bid and awarded by ODOT. The following subsection is not intended for use on projects that are not bid and awarded by ODOT.)

00744.17 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

If the test result for each mix gradation constituent, asphalt content, and density measurement is within the Specification limits, the Material is accepted. If the asphalt content, one or more gradation constituents, or the density measurement are not within the specification limits, the Material that is not within the Specification limits is accepted according to 00150.25.

00744.23 Pavers - Replace the bullet that begins "Self-contained, self-propelled ..." with the following bullet:

- Self-contained, self-propelled, supported on tracks or wheels, that does not contact the mixture being placed.

Replace the bullet that begins "Equipped with augers ..." with the following bullet:

- Equipped with augers and a screed or strike-off assembly, heated if necessary, that:

Replace the bullet that begins "Equipped with a paver ..." with the following bullet:

- Equipped with a paver control system that:

(Use the following subsection .41 on projects that are bid and awarded by ODOT. The following subsection is not intended for use on projects that are not bid and awarded by ODOT.)

00744.41 Mixing Temperature - Replace the paragraph that begins "Establish the allowable ..." with the following paragraph:

Establish the allowable mixing and placement temperature ranges by the JMF. Measure the mixture temperature at the discharge of the mixer. Measure the placement temperature behind the paver. The allowable production temperatures may be adjusted based on the asphalt cement Supplier's recommendation if approved by the Engineer. The maximum mixture temperature and the minimum placement temperature is as follows:

Replace the table with the following:

Type	Temperature, °F	
	Maximum at Mixer	Minimum Behind Paver
HMAC	350	240
WMAC	350	215

00744.42 Tack Coat - Replace the paragraph that begins "Treat all paved surfaces ..." with the following paragraph:

Treat all paved surfaces on and against where ACP is to be placed with an asphalt tack coat according to Section 00730. Before applying the tack coat, clean and dry the surface to be tacked.

Replace the paragraph that begins "Treat all waterproofing membranes ..." with the following paragraph:

Insert Project Name Here

Treat all waterproofing membranes on and against where ACP is to be placed with an asphalt tack coat meeting the requirements of 00744.11(a) or as recommended by the membrane manufacturer.

00744.43(a) Hauling - Replace the paragraph that begins "ACP will be ..." with the following paragraph:

ACP is rejected before placing if one or more of the following occurs:

00744.44 Longitudinal Joints - Replace the paragraph that begins "At longitudinal joints ..." with the following paragraph:

At longitudinal joints, bond, compact and finish the new ACP equal to the ACP against where it is placed.

00744.44(a) Location - Replace the paragraph that begins "Place the ACP ..." with the following paragraph:

Place the ACP in Panel widths that hold the number of longitudinal joints to a minimum. Offset the longitudinal joints in one Panel by at least 6 inches from the longitudinal joints in the Panel immediately below.

00744.44(b) Drop-Offs - Replace the bullet that begins "Construct, maintain, remove ..." with the following bullet:

- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency. ACP for the temporary wedge is paid for at the Contract unit price.

00744.45(a)(1) Temporary End Panel - Replace the bullet that begins "For wedges that will be under traffic for less ..." with the following bullet:

- For wedges that are under traffic for less than 24 hours, construct an 8-foot-long wedge (1V:50H taper rate).

Replace the bullet that begins "For wedges that will be under traffic for 24 ..." with the following bullet:

- For wedges that are under traffic for 24 hours or longer, construct a 25-foot-long wedge (1V:160H taper rate).

Replace the bullet that begins "Construct, maintain, remove ..." with the following bullet:

- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency. ACP for the temporary wedge is paid for at the Contract unit price.

00744.45(a)(3) Excess Asphalt Concrete Pavement - Replace this subsection, except for the subsection number and title, with the following:

After completing a temporary end Panel as specified, dispose of unused, remaining ACP as directed. Payment is made for the entire load of ACP, but is limited to only one load for each joint of each Panel.

00744.45(a)(5) Joint Requirements - Replace this subsection, except for the subsection number and title, with the following:

Compact both sides of the joint to the specified density. Test the joint surface according to 00744.70 with a straightedge placed across the joint.

(Use the following subsection .49 on projects that are bid and awarded by ODOT. The following subsection is not intended for use on projects that are not bid and awarded by ODOT.)

00744.49 Compaction - Replace the paragraph that begins "Determine compliance with..." with the following paragraph:

Determine compliance with density Specifications by random testing of the compacted surface with calibrated nuclear gauges. Determine the density by averaging QC tests performed by a CDT with the nuclear gauge operated in the backscatter mode according to AASHTO T 335 at one random location for each 100 Tons of asphalt concrete placed, but take no less than three tests each shift. Do not locate the center of a density test less than 1 foot from the Panel edge. Calculate MAMD according to ODOT TM 305. The Engineer may waive compaction testing requirements when less than 500 Tons of ACP is placed in a single work shift.

Replace the bullet that begins "**Thin Pavements** - Leveling ..." with the following bullet:

- **Thin Pavements** - Leveling, patches, or where the nominal compacted thickness of a Course of ACP is less than 2 inches.

(Use the following lead-in paragraph and one of the following two options when traffic restrictions are required. Obtain information from the pavement designer. Delete the option that does not apply.)

Add the following subsection:

[Option 1 - Use this .51 when paving through the top base course is required.]

00744.51 Opening Sections to Traffic - Schedule work so that, during the same shift, the surfaces being paved are paved full width and length through the top Base Course before opening to traffic. Traffic will be allowed on the top Base Course up to ____ Calendar Days.

Before beginning wearing Course paving operations, make repairs to the existing surface as directed. Payment for the repairs will be made according to 00195.20.

[Option 2 - Use this .51 when paving through the wearing course is required.]

00744.51 Opening Sections to Traffic - Schedule work so that, during the same shift, the surfaces being paved are paved full width and length through the wearing Course before opening to traffic.

00744.70 Pavement Smoothness - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Provide a 12-foot straightedge. Test with a 12-foot straightedge parallel to and perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch. Mark areas not meeting the surface tolerance.

00744.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of ACP incorporated into the Project, whether or not recycled Materials are used, will be paid for at the Contract unit price, per Ton, for the item "Level _____, _____ ACP Mixture _____".

The following is inserted in the blanks:

- The level of ACP "1", "2", "3" is inserted in the first blank.
- The type of ACP "3/4 inch", "1/2 inch", "3/8 inch", is inserted in the second blank.
- The words "in Leveling", "in Temporary", or "in Leveling and Temporary" is inserted in the third blank when applicable.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Asphalt cement, mineral filler, lime, and anti-stripping or other additives
- Sawing, cleaning, and filling joints on bridge deck overlays

SP00745 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-23-26

Requires SP00610 when reconditioning existing roadway

Requires SP00730 when emulsified asphalt tack coat is required.

This Section requires SP00738 when Safety Edge is shown in the typical sections of the plans.)

SECTION 00745 - ASPHALT CONCRETE PAVEMENT - STATISTICAL ACCEPTANCE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00745 of the Standard Specifications modified as follows:

(Use the following subsection .02 when one of the following definitions is required.)

00745.02 Definitions -

(Use the following three paragraphs when separate subplot definitions are required by the Pavement design report.)

Replace the sentence that begins “**Sublot Size** - A subplot is...” with the following paragraphs:

Sublot Size - Except for compaction, a subplot is 1000 Tons. The final subplot for a JMF may be increased up to a maximum of 1,500 Tons, if the production total does not reach the random number for the subplot.

A compaction subplot is 200 Tons. The final compaction subplot for a JMF may be increased up to a maximum of 400 Tons, if the production total does not reach the random number for the subplot.

(Add the following definition when IRI Pavement smoothness specifications are required by the Pavement design report.)

Add the following definition:

Localized Roughness - An area that exceeds 160.0 inches per mile in a continuous International Roughness Index (IRI) evaluation over a 25.0-foot base length.

(Add the following definition when a 10,000 Ton Lot Size is required by the Pavement design report.)

Replace the definition “**Lot Size**” with the following definition:

Lot Size - A lot consists of up to 10,000 Tons of ACP, with a maximum of 20,000 Tons for the final lot per JMF. The following circumstances will require a different lot:

- A new JMF is used. A JMF adjusted according to 00745.16 is not considered a new JMF
- The method for measuring compaction is changed
- A new compaction specification limit is required according to 00745.49(b)(3)
- A change from one test procedure for measuring asphalt content to another test procedure for measuring asphalt content occurs.

The Engineer may allow Material for irregular areas not completed during the main paving operations, such as driveways or guardrail flares, to be evaluated as a separate lot.

00745.10 Aggregate - Replace the paragraph that begins "When requested by the Engineer ..." with the following paragraph:

When requested by the Engineer, meet with the Engineer at a mutually agreed upon time to discuss accomplishing all phases of the crushing Work, including supervisory personnel of the Contractor and any Subcontractors who are to be involved in ACP Aggregate crushing.

00745.10(a) New Coarse and Fine Aggregates - Replace the paragraph that begins "Provide and stockpile ..." with the following paragraph:

Furnish and stockpile new Aggregates according to the following requirements:

00745.10(a)(1)a. Separated Sizes - Replace the paragraph that begins "Advise the Engineer ..." with the following paragraph:

Advise the Engineer of the separated sizes of Coarse and Fine Aggregate that are used and the proposed targets for each individual sieve size for each stockpile. A minimum of one Coarse Aggregate and one Fine Aggregate stockpile is required. If the Contractor proposes to produce Coarse and Fine Aggregates in separated sizes other than those specified, request the proposed size changes in writing, and state the proposed target value and specified tolerance for each of the individual sieve sizes of the proposed Materials.

00745.10(a)(1)b. Scalping - Replace the paragraph that begins "Scalp the Rock ..." with the following paragraph:

Scalp the Rock on a 3/4-inch sieve screen deck. For quarry Rock, scalp the Rock after it has passed through the primary crusher. The Material remaining may be accepted for use by visual inspection. The Engineer may perform verification testing of the gradation. Meet the following Material requirements:

00745.10(a)(1)c. Soundness - Replace this subsection, except for the subsection number and title, with the following:

Furnish Coarse and Fine Aggregate with a weighted loss not exceeding 12 percent when subjected to five cycles of the soundness test using sodium sulfate solution according to AASHTO T 104.

00745.10(a)(1)d. Durability - Replace the paragraph that begins "Provide Aggregate ..." with the following paragraph:

Furnish Aggregate not exceeding the following maximum values:

00745.10(a)(1)e. Fractured Faces - Replace the paragraph that begins "Provide crushed Aggregate ..." with the following paragraph:

Furnish crushed Aggregate with not less than the minimum number of fractured faces as determined by AASHTO T 335 as follows:

00745.10(a)(2) Coarse Aggregate - Replace the paragraph that begins "Provide Coarse Aggregate ..." with the following paragraph:

Furnish Coarse Aggregate meeting the following:

00745.10(a)(3) Fine Aggregate - Replace the paragraph that begins "Provide Fine Aggregate ..." with the following paragraph:

Furnish Fine Aggregate meeting the following:

00745.10(a)(3)e. Blend Sand - Replace the paragraph that begins "No natural or uncrushed ..." with the following paragraph:

No natural or uncrushed blend Sand is allowed in Level 4 ACP. Blend Sand is allowed for Levels 1, 2, and 3 mixes. For these mixes, establish the target gradation and produce all Material within the following tolerances (T):

00745.10(b) Reclaimed Asphalt Pavement - Replace the paragraph that begins "RAP Material used ..." with the following paragraph:

RAP Material used in the production of new ACP is optional. No more than 30 percent RAP is allowed in Level 1, Level 2, and Level 3 ACP. No more than 30 percent RAP is allowed in Level 4 Base Courses. No more than 20 percent RAP is allowed in Level 4 wearing Courses.

00745.10(d) Reclaimed Asphalt Pavement and Recycled Asphalt Shingle Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Blend the RAP, RAS, or RAM Material with new Aggregate to provide a mixture according to the JMF within the tolerances specified. Have a CAT-I perform sampling and testing of RAP and RAS Aggregates according to Section 00165.

00745.11(a) Asphalt Cement - Replace the paragraph that begins "Use the grade of ..." with the following paragraph:

Use the grade of asphalt specified in the Contract Documents. Furnish asphalt cement according to ODOT's publication *Standard Specifications for Asphalt Materials*. The applicable Specifications are those contained in the current publication on the date the Project is advertised.

00745.11(b) Asphalt Cement Additives - Replace the paragraph and bullets that begins "Use standard recognized ..." with the following paragraph and bullets:

Use standard recognized asphalt cement additive products that are of known value for the intended purpose and approved for use on the basis of laboratory tests and capable of being thoroughly mixed. Do not use asphalt cement additives that have deleterious effects on the asphalt material. Do not use silicones as an additive. When required by the JMF add asphalt cement admixtures to aid in the mixing.

(Use the following lead-in paragraph and subsection .11(d) when latex polymer treatment of Aggregate is listed as an option in the Pavement design report.)

Add the following subsection:

00745.11(d) Aggregate Treatment - Latex Polymer - A latex polymer Aggregate treatment Material may be used to treat new crushed Aggregates instead of lime if Tensile Strength Ratio test results on the mixture with the latex polymer treatment at the JMF meet the minimum criteria in 00745.13(a).

(1) General:

- a. Provide a system to automatically meter the latex emulsion at the proper rate and apply the emulsion uniformly to the Aggregate prior to the addition of the asphalt

Insert Project Name Here

cement. Follow manufacturer's recommendations to set up, adjust, and calibrate the Equipment.

b. Demonstrate to the Engineer's satisfaction that the required application rate of latex solids is being met. If it is not, take corrective action. Document and notify the Engineer of the corrective action.

(2) Material - Use latex polymer emulsion concentrate meeting the following:

	Minimum	Maximum	Test Method
Solids Percent	65.0	—	ASTM D 1417
pH	9.0	11.0	ASTM D 1417
Brookfield Viscosity Spindle 3, 20 RPM, cPs	500	3000	ASTM D 1417

Provide a quality compliance certificate for the polymer latex emulsion concentrate to the Engineer according to 00165.35.

(3) Application Rate - Apply the latex emulsion to achieve a minimum of 0.75 pounds of latex solids per Ton of new Aggregate (0.0375%) for dense graded mixtures and a minimum of 0.50 pounds of latex solids per Ton of Aggregate (0.025%) for open-graded mixtures. Higher application rates may be required to meet minimum TSR limits. Determine application rate during mix design testing.

(4) Treatment During ACP Production:

a. Adjust Aggregate moisture content to meet the manufacturer's recommendation for emulsion application. Apply the latex emulsion at the minimum rate specified above or at a higher rate if TSR testing indicates a higher rate is required.

b. Apply the latex emulsion to the Aggregate just prior to entry into dryer drum. Mix Aggregate with the emulsion in a pugmill or in the dryer drum prior to application of asphalt cement. Heat Aggregates to at least 250 °F after treatment and prior to addition of asphalt cement.

(Use the following lead-in paragraph and subsection .11(e) when a liquid anti-stripping additive is listed as an option in the pavement design report.)

Add the following subsection:

00745.11(e) Liquid Anti-Stripping Additive - An asphalt cement liquid anti-stripping additive (LASA) may be used instead of lime treatment of Aggregate.

(1) General - For LASA to be considered for use, meet the following criteria:

- Be designated as an asphalt anti-strip additive, with test results posted on the Warm Mix Asphalt Technologies category on the *AASHTO Product Evaluation and Audit Solutions (APEAS)* website.

- APEAS test results indicate an increase of 10 percent or greater in TSR (AASHTO T 283) performed on durable Aggregate, not limestone.
- Be approved for use by another State DOT as an anti-stripping additive.

If a product meets these criteria, it may be used in the JMF development according to the *ODOT Contractor Mix Design Guidelines for Asphalt Concrete*. The standard addition rate of LASA for the JMF is the rate used in the APEAS testing. If no rate is published, the minimum rate is 0.5% of the virgin binder. If the APEAS published rates are 0.5% of total binder or higher, the minimum rate may be reduced to 0.5% of the virgin binder.

Approval of the JMF is also dependent on Hamburg wheel-track testing results conducted at the ODOT Central Materials Laboratory. When tested according to AASHTO T 324 for 20,000 passes at a test temperature of 50 °C the minimum requirements are:

Rut depth (Level 4 wearing Course).....5mm max.
Rut depth (All others).....7mm max.
Stripping inflection point (All levels).....none

(2) Addition to Asphalt Cement - Blend the LASA at the asphalt terminal prior to delivery to the mixing plant. Use LASA compatible with the asphalt cement. Comply with all asphalt cement requirements for the blended product. Do not change the LASA addition rate without prior approval from the Engineer.

(3) Field Testing During Production - At the Agency's discretion, production mixture may be tested at the Central Materials Laboratory. Failure to meet the criteria listed above may require a change in addition rate, a change of approved LASA, or lime-treatment of Aggregate to continue production.

00745.13 Job Mix Formula Requirements - Replace the paragraph that begins "Do not begin production of ACP for use..." with the following paragraph:

Do not begin production of ACP for use on the Project until the JMF is reviewed by the Engineer and written consent is provided to proceed. The JMF proposed for use on the Project is evaluated based on the criteria identified in 00745.13(a) and 00745.13(b) and the latest *ODOT Contractor Mix Design Guidelines for Asphalt Concrete*. A new JMF is required if the asphalt cement source or grade, any additives, or the source of the Aggregate change during production. A change in the source of asphalt cement requires a new passing TSR.

Replace the paragraph that begins "A separate JMF..." with the following paragraph:

A separate JMF is issued for WMAC. Do not use RAS in WMAC mixes with minimum compaction temperatures less than 260 °F.

00745.13(b) Performance Test - Replace this subsection, except for the subsection number and title, with the following:

For Level 3 wearing Course mixes and all Level 4 mixes, include the results of performance testing as outlined in the latest *ODOT Contractor Mix Design Guidelines for Asphalt Concrete* in the mix design submittal.

Insert Project Name Here

00745.14 Tolerances and Limits - Replace the paragraph that begins "When a JMF tolerance..." with the following paragraph:

When a JMF tolerance applies to a constituent, full tolerance is given even if it exceeds the control points established in 00745.12(b). Full tolerance is given for RAP content even if it exceeds the limits established in 00745.10(b). Full tolerance is given for RAS or RAM content even if it exceeds the limits established in 00745.10(c).

(Use the following sentences when required by the Pavement design report.)

Replace the line "**Asphalt Cement - AASHTO...**" with the following line:

Asphalt Cement - AASHTO T 308 (Ignition)
and ODOT TM 323 JMF $\pm$ 0.35%

00745.16(a)(2) Laboratory Requirements - Replace this subsection, except for the subsection number and title, with the following:

Provide and maintain an ODOT certified quality control laboratory. Provide the laboratory with the necessary Equipment and supplies for performing Contractor quality control testing. Calibrate all testing Equipment according to the required test methods. The Engineer may inspect measuring and testing devices to confirm both calibration and condition.

Ensure the laboratory is operational before beginning the ACP production and be equipped with a telephone or cellular telephone, if either service is available. Provide laboratory Equipment meeting the requirements of the applicable test methods identified in the Specifications and selected for use on the Project.

00745.16(b)(1)a. General - Replace the paragraph that begins "Before beginning production..." with the following paragraph:

Before beginning production and placement of WMAC, perform mix design verification (MDV) tests on the HMAC as required at start-up according to 00745.16(b)(1)(c). Ensure two consecutive MDV test results from testing of HMAC are within the limits of 00745.16(b)(1)(a). The Engineer may waive ODOT TM 306 for HMAC production required before WMAC production for one shift.

Replace the paragraph that begins "The running averages..." with the following paragraph:

Provide running averages of four MDV results within the limits given below:

00745.16(b)(1)b. Reconciliation of Laboratory and In-place Properties - Replace this subsection, except for the subsection number and title, with the following:

Have a CDT provide the results from the initial control strip to the CAT-II for evaluation and comparison with the MDV results at the completion of the control strip. If the MDV and density test results are contradictory, inform the Engineer and initiate an investigation. The CAT-II is responsible for recommending a plan to the Engineer for resolving the discrepancy based on the results of the investigation. Submit results of investigation and plan no later than the end of two shifts after investigation has been initiated.

00745.16(b)(1)c. Mix Design Verification Requirements at Start-Up - Replace the paragraph that begins "Use the initial MDV ..." with the following paragraph:

Use the initial MDV sample as the first random QC subplot test. Subsequent MDV samples required due to failure of start-up criteria is used for a subplot QC test if the sample is taken within 100 Tons of the scheduled random QC sample location. If not, perform the MDV testing separate from, and not included in, the random QC testing program. Complete all required MDV testing at no additional cost to the Agency.

00745.16(b)(1)c.3. Replace the paragraph that begins "If the Va and VMA ..." with the following paragraph:

If the Va and VMA mix properties are out of tolerance in 00745.16(b)(1)(a), then make mix adjustments within the requirements of 00745.16(b)(1)(d) and immediately obtain another sample and perform MDV testing. Two adjustments are given. If any of the test results for Va and VMA are not within the limits of 00745.16(b)(1)(a) after second adjustment, then stop production and go to step "4".

00745.16(b)(1)c.4. Replace the paragraph that begins "Have the CAT-II ..." with the following paragraph:

Have the CAT-II submit the revised JMF targets and production and plant adjustments to the Engineer. Obtain the approval of the Engineer before restarting production. Production is restarted with MDV testing according to this Subsection.

00745.16(b)(1)f. Request for Job Mix Formula Target Adjustment - Replace this subsection, except for the subsection number and title, with the following:

A request for an adjustment to the JMF targets may be made to the Engineer by the Contractor's CAT-II. The requested change is reviewed and documented by the Engineer. If acceptable, a revised JMF is allowed. Document the subplot test when the adjusted targets are in effect. When making adjustments for gradation do not exceed the tolerances specified for the original JMF limits. Keep AC content adjustments for HMAC within 0.5 percent of the original JMF. Keep AC content adjustments for WMAC within 0.3 percent of the original JMF. The JMF asphalt content may only be adjusted if the production VMA meets the requirements of 00745.16(b)(1)(a). Keep adjustments for RAP or RAM within 5 percent of the original JMF blend percentage, but do not exceed the requirements of 00745.10(b) or 00745.10(c). Adjusting proportions of the combined RAP and RAS is not allowed during production of the mixture. Keep adjustments for RAS content within 1 percent of the original JMF, but do not exceed the requirements of 00745.10(c). A gradation adjustment is required if the VMA is outside of the 00745.16(b)(1)(a) limits. Regardless of these tolerances, keep the adjusted JMF within the mixture specification control points of 00745.12. If a redesign of the mixture becomes necessary, submit a new JMF according to the Specifications.

00745.16(b)(3) Mix Design Verification for Warm Mix Asphalt Concrete - Replace this subsection, except for the subsection number and title, with the following:

Perform MDV testing on WMAC according to 00745.16(b)(1)(a). Continued production and placement of WMAC is allowed at the discretion of the Engineer.

Insert Project Name Here

00745.16(c) Quality Assurance and Acceptance - Replace this subsection, except for the subsection number and title, with the following:

The Agency will provide quality assurance according to Section 00165. When QA testing is performed, the Contractor's quality control results is used for acceptance if they are within acceptable limits of the QA test results as defined in the Quality Assurance Program.

00745.17(a) Within Specification Limits - Replace this subsection, except for the subsection number and title, with the following:

If all subplot sample test results are within Specification limits for all constituents, including compaction, the Material is accepted and the Contract unit price is paid for the Material represented by that test.

00745.17(b) Outside Specification Limits - Replace this subsection, except for the subsection number and title, with the following:

If a subplot sample test result for any constituent is outside the specification limit the Engineer will have the backup sample tested.

(1) Backup Within Specifications - If the backup sample test results for all constituents are within specification, the Material is accepted and the full Contract unit price is paid for the Material represented by that test.

(2) Backup Out of Specifications - If the backup sample test results are out of specification, the Contractor may choose to accept the price adjustment calculated according to 00745.95 or may choose to sample the in-place Material for further testing according to 00745.17(b)(3). The price adjustments is computed using all original test results as well as all backup test results. If there are less than three tests, average the two tests and use the average as a third test result. The maximum composite pay factor (CPF) is 1.0.

(3) In-Place Samples - If the Contractor chooses to sample the in-place Material, sample from a minimum of three random locations from the area represented by the lot in question under the observation of the Engineer. If the in-place sample test results are within specification, the Material is accepted and paid for at the full Contract unit price. If the in-place sample test results are not within specification, the Material is accepted and paid for at an adjusted price according to 00745.95. The maximum CPF is 1.0. Perform sampling and testing of in-place Material at no additional cost to the Agency.

Replace the paragraph that begins "Provide hauling vehicles ..." with the following paragraph:

Coat the beds with a minimum amount of asphalt release agent from the QPL. Do not use diesel oil. Drain excess coating material before loading by raising the truck bed, opening belly dump gates, or operating the conveyor belt, as appropriate.

00745.23 Pavers - Replace the bullet that begins "Self-contained, self-propelled ..." with the following bullet:

- Self-contained, self-propelled, supported on tracks or wheels, and does not contact the mixture being placed.

Replace the bullet that begins "Equipped with augers ..." with the following bullet:

- Equipped with augers and a screed, heated when necessary, that:

Replace the bullet that begins "Equipped with a paver ..." with the following bullet:

- Equipped with a paver control system that:

00745.24(b) Vibratory Rollers - Replace the paragraph that begins "If vibratory rollers..." with the following paragraph:

If vibratory rollers are used for finish rolling, provide rollers that:

Replace the bullet that begins "Not be operated ..." with the following bullet:

- Are not operated in the vibratory mode.

00745.24(c) Pneumatic-tired Rollers - Replace the paragraph that begins "Pneumatic-tired rollers..." with the following paragraph:

Pneumatic-tired rollers that:

Replace the bullet that begins "Be tandem ..." with the following bullet:

- Are tandem, or multiple axle, multiple wheel type.

Replace the bullet that begins "Be fully skirted ..." with the following bullet:

- Are fully skirted to reduce tire heat loss and mixture pick up.

00745.42 Preparation of Underlying Surfaces - Replace the paragraph that begins "All Bases and foundations..." with the following paragraph:

Prepare all Bases and foundations where the Pavement is to be constructed meeting the applicable Specifications. Obtain approval before the start of paving. Recondition existing Bases and foundations according to Section 00610. Trim broken or ragged edges to firm material when directed.

Replace the paragraph that begins "Treat all paved..." with the following paragraph:

Treat all paved surfaces on and against where ACP is to be placed with an asphalt tack coat, according to Section 00730.

Replace the paragraph that begins "Treat all waterproofing..." with the following paragraph:

Treat all waterproofing membranes on and against where ACP is to be placed with an asphalt tack coat meeting the requirements of 00745.11(a) or as recommended by the membrane manufacturer.

00745.43(b) Heating Temperatures - Replace the paragraph that begins "Establish the allowable..." with the following paragraph:

Establish the allowable mixing and placement temperature ranges by the JMF. Measure the mixture temperature at the discharge of the mixer. Measure the placement temperature behind the paver. The allowable production temperatures may be adjusted based on the asphalt cement Supplier's recommendation if approved by the Engineer. The maximum mixture temperature of the ACP and the minimum placement temperature is as follows:

00745.44 Asphalt Concrete Pavement Storage - Replace the paragraph that begins "Temporary storing..." with the following paragraph:

Temporary storing or holding of ACP in storage silos is allowed if the Contractor complies with the following:

00745.44(d) Heated Silos - Replace this subsection, except for the subsection number and title, with the following:

Store ACP in heated, insulated silos no more than 72 hours only if an atmosphere is maintained in the silo at all times that prevents damage to the mixture or asphalt properties.

00745.45 Control of Line and Grade - Replace this subsection, except for the subsection number and title, with the following:

Use a floating beam device of adequate length and sensitivity to control the grade of the paver. Where this method is impracticable, manual control of grade is allowed when approved.

00745.46(a) Hauling - Replace the paragraph that begins "ACP will be..." with the following paragraph:

ACP is rejected before placing if one or more of the following occurs:

00745.46(b) Depositing - Replace the paragraph that begins "When ACP is windrowed..." with the following paragraph:

When ACP is windrowed, provide pick-up Equipment that:

Replace the bullet that begins "Pick up substantially ..." with the following bullet:

- Picks up substantially all of the ACP deposited on the Roadway.

Replace the bullet that begins "Be self-supporting, not ..." with the following bullet:

- Be self-supporting, not exerting any vertical load on the paving machine, or causing vibrations or other motions that could have a harmful effect on the riding quality of the completed Pavement.

(Use the following two paragraphs when required by the Pavement design report.)

Replace the paragraph that begins "Deposit ACP from..." with the following paragraph:

Insert Project Name Here

Deposit ACP from the hauling vehicles so segregation is prevented. Do not deliver the ACP directly into the paving machine for wearing Courses where the continuous length of the Panel is greater than 500 feet. Deliver the ACP to the paving machine by either a windrow pick-up machine or an end-dump transfer machine.

00745.46(c) Placing - Replace the paragraph that begins "Do not intermingle..." with the following paragraph:

Do not intermingle ACP produced from more than one JMF. Use a single JMF for each Base Course Panel placed during a working shift. Use a single JMF for the wearing Course, except for adjustments in the JMF according to 00745.16(b)(1).

00745.47 Longitudinal Joints - Replace the paragraph that begins "At longitudinal joints..." with the following paragraph:

At longitudinal joints, bond, compact and finish the new ACP equal to the ACP against where it is placed.

00745.47(a) Location - Replace the paragraph that begins "Place the ACP..." with the following paragraph:

Place the ACP in Panel widths that hold the number of longitudinal joints to a minimum. Offset the longitudinal joints in one Panel by at least 6 inches from the longitudinal joints in the Panel immediately below.

00745.47(a)(2) Wearing Course - Replace this subsection, except for the subsection number and title, with the following:

Construct longitudinal joints six inches from permanent lane markings, or as shown or directed.

00745.47(b) Drop-Offs - Replace the bullet that begins "Construct, maintain, remove, ..." with the following bullet:

- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency. ACP for the temporary wedge is paid for at the Contract unit price.

00745.48(a)(1) Temporary End Panel - Replace the bullet that begins "For wedges that will be under traffic for less ..." with the following bullet:

- For wedges that are under traffic for less than 24 hours, construct an 8-foot-long wedge (1V:50H taper rate).

Replace the bullet that begins "For wedges that will be under traffic for 24 ..." with the following bullet:

- For wedges that are under traffic for 24 hours or longer, construct a 25-foot-long wedge (1V:160H taper rate).

Replace the bullet that begins "Construct, maintain, remove, ..." with the following bullet:

Insert Project Name Here

- Construct, maintain, remove, and dispose of the temporary wedge at no additional cost to the Agency. ACP for the temporary wedge is paid for at the Contract unit price.

00745.48(a)(3) Excess Asphalt Concrete Pavement - Replace this subsection, except for the subsection number and title, with the following:

After completing a temporary end Panel as specified, dispose of unused, remaining ACP as directed. Payment is made for the entire load of ACP, but is limited to only one load for each joint of each Panel.

00745.48(a)(5) Joint Requirements - Replace this subsection, except for the subsection number and title, with the following:

Compact both sides of the joint to the specified density. Test the joint surface according to 00745.70 with a straightedge placed across the joint.

00745.48(c) Bridge Deck Overlays - Replace the paragraph that begins "Saw cut the wearing Course of Pavement ..." with the following paragraph:

Sawcut the wearing or base Course of Pavement directly over the joints in bridge decks, bridge end joints and end Panel end joints as soon as practical but within 48 hours of paving each stage of the wearing or base Course, unless otherwise directed. Saw the cut 3/8 inch wide, $\pm$ 1/8 inch, by 1/2 inch less than the thickness of the Panel of Pavement depth or 1 1/2 inches deep, whichever is less.

00745.49(a)(2) Rolling - Replace the paragraph that begins "Provide sufficient rollers ..." with the following paragraph:

Provide sufficient rollers of the types appropriate to compact the mixture while it is still within the specified temperature. Do not use equipment that crushes the Aggregate. Do not displace the line and grade of edges. Moisten steel roller wheels with a minimum amount of water, or other approved material, necessary to prevent the ACP from sticking to them and spotting or defacing the ACP.

Replace the paragraph that begins "Operate rollers at ..." with the following paragraph:

Operate rollers at a slow, uniform speed recommended by the manufacturer. Operate drive rolls or wheels nearest to the paver unless otherwise approved. Operate pneumatic rollers no faster than 3 mph. Operate vibratory rollers at frequencies of at least 2,000 vibrations per minute.

00745.49(b)(1) General - Replace the paragraph that begins "Compliance with the density ..." with the following paragraph:

Determine compliance with the density Specifications for ACP by random testing of the compacted road surface with calibrated nuclear gauges. Use the MAMD method of compaction measurement.

Replace the paragraph that begins "A pneumatic tired roller ..." with the following paragraph:

Insert Project Name Here

A pneumatic tired roller is not required for Level 1 and Level 2 ACP. Have at least one available pneumatic tired roller according to 00745.24(c) on the Project and in good operating condition for Level 3 and Level 4 ACP.

(Use the following two paragraphs when required by the Pavement design report.)

Replace the paragraph that begins “Have the CDT notify the Engineer...” with the following paragraph:

Have the CDT notify the Engineer and CAT-II when a density test is less than 90.0 percent or exceeds 95.9 percent of MAMD. Initiate an investigation to determine if the results indicate that a problem with the mix is developing. Electronically submit the results and recommendations of the CAT-II’s investigation to the Engineer within two shifts of the density test. An adjustment to the JMF will not be allowed unless MDV testing supports a required change.

(Use one of the following Options)

00745.49(b)(2) Random Testing -

(Option 1)

Replace the paragraph that begins “Determine the density of each subplot by averaging...” with the following paragraphs:

Determine the density of each subplot by averaging five QC tests performed at random locations with the nuclear gauge operated in the backscatter mode. Lots and sublots are as defined in 00745.02. In addition, perform at least one density test each Day of production. The additional testing may be waived by the Engineer.

(Option 2 - Use the following subsection three paragraphs when blind random density testing and separate subplot definitions are required by the Pavement design report. Delete the two paragraphs above.)

Replace the paragraph that begins “Determine the density of each subplot by averaging...” with the following paragraphs:

Correspond lots and compaction sublots with those defined in 00745.02. Provide one density test location for each compaction subplot. Notify the Engineer when rolling operations are completed in a compaction subplot and it is ready for test location identification. The Engineer will use stratified random numbers to locate the QC tests according to ODOT TM 400 Annex. ODOT TM 400 Annex is available from the Engineer. The Engineer will mark where the QC tests are to be performed.

Allow 30 minutes for the Engineer to locate the final test locations after completion of finish rolling and any additional time required for testing, prior to opening the travel lane to traffic. Have the CDT locate and document the test locations not identified within this time frame.

(Use one of the following Options)

00745.49(b)(2)(b) Core Correlation of Nuclear Gauge Readings -

Insert Project Name Here

(Option 1)

Replace the paragraph that begins “Apply correlation factors ...” with the following paragraphs:

Apply correlation factors to all nuclear gauge readings for the Lift where the core correlation was performed.

Replace the paragraph that begins “Both the Engineer and the Contractor ...” with the following paragraphs:

Both the Engineer and the Contractor may request additional core correlation of nuclear gauge readings. Core correlations requested by the Contractor or that are required due to a change in Aggregate or asphalt cement source is at no additional cost to the Agency. The party requesting the core correlation pays the costs of coring and lab testing of the cores. The party performing nuclear gauge testing pays the costs of the nuclear gauge testing.

(Option 2 - Use the following four paragraphs when core correlation specifications are required by the Pavement design report.)

Replace this subsection, except for the subsection number and title, with the following:

For each Lift on the Project that contains more than 2,500 Tons of ACP, correlate each nuclear gauge that is used on that Lift. Perform core correlations and determine core correlation factors according to AASHTO T 355 and ODOT TM 327. Provide bulk specific gravity values to the Engineer within 24 hours of coring. If an Aggregate source or the asphalt cement source changes, new core correlations are required.

Apply correlation factors to all nuclear gauge readings for the Lift where the core correlation was performed.

Both the Engineer and the Contractor may request additional core correlation of nuclear gauge readings. Core correlations requested by the Contractor or that are required due to a change in Aggregate or asphalt cement source is at no additional cost to the Agency.

00745.49(b)(3) Moving Average Maximum Density Method - Replace the paragraph that begins “* If any part of the ...” with the following paragraph:

* If any part of the width of a Lift at a station requires 91.0 percent, then the entire width of that Lift at that station is 91.0 percent

(Use the following subsection .49(b)(4) when separate subplot definitions are required by the Pavement design report.)

00745.49(b)(4) Test Results - In the paragraph that begins “Provide density results...” replace the word “sublots” with the words “compaction sublots”.

00745.49(c) Thin Pavement - Replace the paragraph that begins “Compaction to a specified ...” with the following paragraph:

Insert Project Name Here

Compaction to a specified density will not be required for Leveling, patches, or where the nominal compacted thickness of a Course of ACP is less than 2 inches.

(Use the following two paragraphs when required by the Pavement design report.)

Replace the paragraph that begins "Perform breakdown and intermediate rolling..." with the following paragraph:

Use ODOT TM 301 "Establishing Roller Patterns for Thin Lifts of ACP" to establish the rolling pattern for compaction. Use the roller pattern from ODOT TM 301 or four Coverages, whichever is greater. Complete additional Coverages as directed.

(Use the following lead-in paragraph and one of the following two options when traffic restrictions are required. Obtain information from the Pavement designer. Delete the option that does not apply.)

Add the following subsection:

[Option 1 - Use this .51 when paving through the top base course is required.]

00745.51 Opening Sections to Traffic - Schedule Work so that, during the same shift, the surfaces being paved are paved full width and length through the top Base Course before opening to traffic. Traffic is allowed on the top Base Course up to ____ Calendar Days.

Before beginning wearing Course paving operations, make repairs to the existing surface as directed. Payment for the repairs will be made according to 00195.20.

[Option 2 Use this .51 when paving through the wearing course is required.]

00745.51 Opening Sections to Traffic - Schedule Work so that, during the same shift, the surfaces being paved are paved full width and length through the wearing Course before opening to traffic.

(Use one of the following options)

00745.70 Pavement Smoothness -

[Option 1]

Replace this subsection, except for the subsection number and title, with the following:

Provide a 12-foot straightedge and, when required a 12-foot rolling straightedge, and test as specified. Additional testing may be required. Mark areas not meeting the surface tolerance.

(a) Level 1 and Level 2 ACP - Test with the 12-foot straightedge in travel lanes parallel to and perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(b) Level 3 and Level 4 ACP:

(1) Single Course Construction - Test with the 12-foot straightedge in travel lanes parallel to and perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(2) Multiple Course Construction - Test the surface of the Course where the wearing Course is placed according to 00745.70(a).

Test the wearing surface with the rolling straightedge in the designated wheel path of a 0.1-mile strip of each travel lane per mile, where directed, and on each transverse joint throughout the Project. Operate the rolling straightedge parallel to the centerline. Do not vary the surface by more than 0.015 foot.

Also test the wearing surface with a 12-foot straightedge placed perpendicular to the centerline at least once within the above-mentioned 0.1-mile strip. Do not vary by more than 1/4 inch.

If the 0.1-mile testing strip meets the Specifications, no further testing of the mile represented by the testing strip is required, except at the transverse joints. If any part of the testing strip does not meet the Specifications, test both wheel paths of the entire mile.

(c) Utility Appurtenances - If the Contractor constructs or adjusts Utility appurtenances, manhole covers, and valve boxes, the tolerances of 00745.70(a) and 00745.70(b) apply. If the Utility appurtenances are adjusted by others, these tolerances do not apply.

(d) Shoulders and Paved Medians - Test the Base and wearing Course with the 12-foot straightedge parallel to and perpendicular to the centerline for Shoulders and paved Medians where permanent traffic barriers are located. Do not vary the Pavement surface by more than 1/4 inch.

[Option 2 - Use the following when IRI pavement smoothness specifications are required by the Pavement design report.]

Replace this subsection, except for the subsection number and title, with the following:

Construct the Pavement wearing surface of Traffic Lanes to a profile that does not deviate from longitudinal and transverse smoothness more than the specified limits of 00745.73.

Perform profiling and straightedge testing under the supervision of the Engineer with Equipment furnished and operated by the Contractor at no additional cost to the Agency, according to ODOT TM 772. Complete all required smoothness testing no later than 14 Calendar Days following final completion of all Traffic Lane paving on the Project, or by October 15 of each calendar year for multiple year projects, whichever is earlier. The Contractor accepts the risk that the smoothness may be affected by exposure to traffic between the date the Traffic Lanes are paved and the date the smoothness testing is completed. If the Contractor elects to perform smoothness measurements on a Day other than the Day the Pavement is placed, additional traffic control required for smoothness measurement, and not required for other Work, is at no additional cost to the Agency.

(Use the following lead-in paragraph and subsection .72 when IRI Pavement smoothness specifications are required by the Pavement design report.)

Add the following subsection:

00745.72 Smoothness Testing Equipment - Furnish all Equipment and supplies for determining smoothness.

(a) Straightedge - Provide one 12-foot straightedge.

(b) Profiler - Provide a profiling device meeting the requirements of ODOT TM 772 and certified according to ODOT TM 769.

Provide competent and experienced operator(s) for the Equipment, certified with the profiler according to ODOT TM 769. Before beginning smoothness measurements, meet with the profiler operator and the Engineer at a mutually agreed upon time to discuss all aspects of smoothness measurement on the Project.

(Use the following lead-in paragraph and subsection .73 when IRI Pavement smoothness specifications are required by the Pavement design report.)

Add the following subsection:

00745.73 Smoothness Testing and Surface Tolerances - Test according to the following:

(a) General - Test the Base Course with a 12-foot straightedge as directed. Test the wearing Course with the profiler meeting the requirements of 00745.72(b). Compute the IRI from the profile data according to the procedures described in ODOT TM 772. Price adjustment for smoothness will be made according to 00745.96.

Before performing any smoothness measurements on the Project, verify calibration of the profiler according to the manufacturer's recommendations and ODOT TM 772.

(b) Surface Test:

(1) Transverse - Test the Base Course with the 12-foot straightedge perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(2) Longitudinal - Test all Base or wearing Course sections of Pavement that are not required to be profiled according to 00745.73(c) with the 12-foot straightedge parallel to the centerline and lane dividers, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(c) Wearing Course Surface Test:

(1) Transverse - Test with the 12-foot straightedge perpendicular to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(2) Longitudinal - Perform testing as follows:

a. Quality Control - Run the profiling device over each Traffic Lane for the full length of the Project.

In the presence of the Engineer and according to ODOT TM 772, obtain profiles on the Pavement surface in the right and left wheel path of the Traffic Lane along a line parallel to permanent longitudinal Pavement markings, at 3-foot and 9-foot offsets from the left edge of the Traffic Lane. Take the profile on transition areas of entrance and exit ramps, as close to the right and left wheel path of the through Traffic Lane as practical. Submit data files to the Engineer at the completion of each shift that profiling has taken place. For the Pavement sections tested, provide the raw data files and provide electronic copies of the profile data in PPF and manufacturer proprietary formats, as required by the Engineer.

Analyze profiles according to 00745.73(d), and give the results to the Engineer no later than 24 hours following completion of required smoothness. Provide results consisting of a table showing areas of Localized Roughness in each wheel path, and the left wheel path IRI, right wheel path IRI, and mean IRI (average of left and right wheel path IRI) at 0.10-mile intervals.

b. Quality Assurance - At the discretion of the Engineer, the Agency may perform Quality Assurance of Profiles on projects according to ODOT TM 772.

(3) Transverse Joints - Test with the 12-foot straightedge parallel to the centerline, as directed. Do not vary the Pavement surface by more than 1/4 inch.

(d) Determination of the International Roughness Index:

(1) General - Determine the IRI in 0.10-mile segments and partial segments of the wearing Course. Begin segments 50 feet into the Project and run consecutively in the direction of travel. A segment ends as a partial segment and a new segment begins when the segment sequence is interrupted by stage construction or by profiled areas excluded from the smoothness requirements. Minimize the number of partial segments.

The following areas of Pavement are excluded from IRI smoothness requirements and are not profiled:

- Profiles extending beyond the Project ends.
- Bridge decks, Bridge end panels, and Pavement within 50 feet of Bridge end panels.
- First and last 50 feet of the ACP paving limits of the Project.
- The 50 feet before and after No Work Areas within the Project limits.
- Ramps and auxiliary lanes that are less than 2500 feet in length.
- First 800 feet of entry ramps and the last 800 feet of exit ramps.
- The 25 feet before and after Utility appurtenances in the Traffic Lane.
- Continuous portions of Traffic Lanes with less than 0.05 mile between excluded areas.
- Portions of the Project with posted speed limits less than 45 mph.

Locate ACP IRI profiling excluded areas prior to smoothness measurement. Meet the straightedge requirements of 00745.73(b)(2) for areas excluded from longitudinal profile measurement.

(2) Method of Analysis - Determine the IRI for each wheel path and areas of Localized Roughness for each wheel path according to ODOT TM 772. Submit the results to the Engineer for review.

(e) Shoulders and Paved Medians - Test the Base and wearing Course with the 12-foot straightedge parallel to and perpendicular to the centerline for Shoulders and paved Medians, as directed by the Engineer. Do not vary the Pavement surface by more than 1/4 inch.

(Use the following subsection .75 when IRI Pavement smoothness specifications are required by the Pavement design report.)

00745.75 Correction of Pavement Roughness - Replace this subsection, except for the subsection number and title, with the following:

If testing described in 00745.73 shows that the Pavement does not conform to the prescribed limits, the following applies:

(a) General - The Contractor is responsible for locating areas that require corrective work.

(b) Base Course - If the requirements of 00745.73(b) are not met, correct according to one of the following and retest:

(1) Cold Plane Removal - Profile grind with Equipment meeting the requirements of 00620.20 to a maximum depth of 0.4 inch.

(2) Grinder - Profile grind with abrasive grinder(s), equipped with a cutting head comprised of multiple diamond blades to a maximum depth of 0.4 inch.

(c) Wearing Course - After locating each area of Localized Roughness and the 0.10-mile segments that have an average IRI value greater than 95.0 inches per mile, meet with the Engineer at a mutually agreed upon time and drive the Project together. During the drive-through, evaluate each area of Localized Roughness between 160.0 and 189.9 inches per mile and partial segments with an average IRI value greater than 95.0 inches per mile to determine if corrective Work is required. All 0.10-mile segments with an IRI value more than 95.0 inches per mile and all areas of Localized Roughness equal to or greater than 190.0 inches per mile require corrective action. Disagreements are resolved by the Engineer.

Correct all areas of Localized Roughness, segments and partial segments identified for corrective work, and any transverse joint and excluded areas that exceed the requirements of 00745.73, by one of the methods listed below and to the specified limits:

(1) Remove and Replace - Remove and replace the wearing surface lift.

(2) Grind - Profile grind with abrasive grinder(s) equipped with a cutting head comprised of multiple diamond blades to a maximum depth of 0.3 inch and apply an emulsion fog seal according to Section 00705, or as directed. Half or full lane width corrective grinding is required for areas requiring correction in one or both wheel paths

Insert Project Name Here

as shown by the Localized Roughness, respectively. Perform corrective grinding in such a manner that the shedding of water is not interrupted across the travel lanes due to the grinding.

Following corrective work, the Engineer will re-evaluate all corrected areas for acceptance. The Engineer may require retesting per ODOT TM 772 and 00745.73. Further corrective Work may be required. Perform all corrective Work and retesting, including traffic control, at no additional cost to the Agency.

(d) Time Limit - Complete correction of all surface roughness prior to application of permanent Pavement markings within 14 Calendar Days following notification, unless otherwise directed.

(Obtain the specific gravity for the Project from the Designer and fill in the blank.)

00745.80 Measurement - Add the following paragraph to the beginning of this subsection:

The quantities of ACP shown in the Contract Schedule of Items were computed on the basis of Aggregates having a specific gravity of _____.

(Use the following two paragraphs when no separate measurement is made for the liquid asphalt. Do NOT use on NHS projects or on Projects that have more than 150 Tons of liquid asphalt. When used, be sure to also include the boilerplate language under subsection .90.)

Replace the paragraph that begins "The quantities of ACP..." with the following paragraph:

The quantities of ACP will be measured on the weight basis. No separate measurement will be made for asphalt cement used in the mixture. No deduction will be made for lime or any other additive used in the mixture.

(Use the following two paragraphs when core correlation specifications are required by the Pavement design report.)

Add the following paragraph to the end of this subsection:

The quantities of core correlation of nuclear gauge readings will be measured on the unit basis for each core correlation test that is completed and accepted according to ODOT TM 327. Core correlations that are requested by the Contractor or that are required due to a change in Aggregate or asphalt cement source will not be measured.

00745.90 Payment - Replace the paragraph and bullets that begins "In item (a)..." with the following paragraph and bullets:

In item (a), the following is inserted in the blanks:

- The level of ACP "1", "2", "3", "4" is inserted in the first blank.
- The type of ACP "3/4 inch", "1/2 inch", "3/8 inch" is inserted in the second blank.
- The words "Lime Treated" is inserted in the third blank when applicable.

Insert Project Name Here

- The words "in Leveling", "in Temporary", or "in Leveling and Temporary" is inserted in the fourth blank when applicable.

Replace the paragraph that begins "In item (b), the..." with the following paragraph:

In item (b), the performance graded asphalt binder is inserted in the first blank. The level and type of ACP is inserted in the second blank. This item applies to all asphalt used in ACP, including residual asphalt in RAP, RAS, or combined RAP and RAS. Substituted asphalt cement described in 00745.11(a) will be paid for under the asphalt specified in the Contract Schedule of Items.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate or additional ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Reconditioning existing Roadway
- Leveling Work
- Lime
- QC testing
- Sawing, cleaning, and filling joints on bridge deck overlays

(Use the following paragraph and Pay Item when core correlation specifications are required by the Pavement design report. The Pavement designer will estimate the quantity of core correlations on the basis of one core correlation for each paving lift over 2,500 Tons. If the Project is a multi-year Project, add correlations for each lift to be paved each subsequent year.)

Add the following Pay Item to the Pay Item list:

(c) Core Correlation of Nuclear Gauge Readings.....Each

(Use the following two paragraphs when core correlation specifications are required by the Pavement design report.)

Add the following paragraph after the paragraph that begins "In item (b)...":

Item (c) includes developing core correlation factors for all gauges to be correlated for the lift where the core correlation was performed, according to the procedure in ODOT TM 327.

(Use the following paragraph and bullet when latex polymer treatment of Aggregate is listed as an option in the Pavement design report.)

Insert Project Name Here

In the paragraph that begins "No separate or additional payment...", add the following bullet to the end of the bullet list:

- Aggregate treatment - latex polymer

(Use the following two paragraphs when no separate payment will be made for the liquid asphalt. Do NOT use on NHS projects or on Projects that have more than 150 Tons of liquid asphalt. When used, be sure to also include the boilerplate language under subsection .80.)

Add the following paragraph to the end of this subsection:

No separate or additional payment will be made for asphalt cement used in the mixture.

(Use the following two paragraphs when no separate payment will be made for the liquid anti-stripping asphalt cement additives.)

In the paragraph that begins "No separate or additional payment...", add the following bullet to the end of the bullet list:

- liquid anti-stripping asphalt cement additives

(Use the following subsection .95 when separate subplot definitions is required by the Pavement design report.)

00745.95 Price Adjustments - Add the following two paragraphs after the bullet that begins "The adjusted target..."

If the Pay Factor (PF) for compaction is 1.00 or greater as calculated in 00165.40, use that compaction PF for the lot. If the PF for compaction is below 1.00, re-calculate the PF for compaction using a lower specification limit (LSL) of 91.5. The compaction PF re-calculated using a LSL of 91.5 will not exceed 1.00. The minimum PF of 1.00 described in 00165.40(d)(8) does not apply when re-calculating the compaction PF.

A completed lot with a CPF of between 0.95 and 1.00 will be accepted, subject to a price adjustment according to 00150.25. The basis of adjustment will be the CPF as calculated in 00165.40.

[End subplot definitions language]

(Use the following lead-in paragraph and subsection .96 when IRI Pavement smoothness specifications are required by the Pavement design report.)

Add the following subsection:

00745.96 Smoothness Price Adjustment - No separate or additional payment will be made for smoothness testing.

(a) General - A price adjustment based on the results of the IRI will be made for each 0.10-mile segment or partial segment of Traffic Lane ACP requiring IRI measurement

Insert Project Name Here

according to 00745.73. The price adjustment will be based on the IRI values determined according to ODOT TM 772 for each 0.10-mile segment and partial segment. Partial segments less than 0.10 mile in length shall be evaluated with the IRI price adjustment value multiplied by the ratio of the partial segment length to 0.10 mile.

A smoothness price adjustment will be made for all segments, or partial segments based on the average IRI value and the following equations:

(Use one of the following options as required by the Pavement design report. Only use one option and delete the one that does not apply.)

[Option 1 - Schedule 1 IRI smoothness price adjustment.]

Schedule 1

Averaged IRI (inches/mile)	Equation
≤ 35.00	Y = \$500.00
35.01 - 60.00	$Y = (- \$20.00 \times X) + \$1,200.00$
60.01 - 65.00	Y = \$0.00
65.01 - 95.00	$Y = (- \$20.00 \times X) + \$1,300.00$
> 95.00	Corrective Action

Y = The price adjustment for the segment or partial segment

X = The averaged IRI value for the segment or partial segment

[End Option 1]

[Option 2 - Schedule 2 IRI smoothness price adjustment.]

Schedule 2

Averaged IRI (inches/mile)	Equation
≤ 50.00	Y = \$300.00
50.01 – 65.0	$Y = (- \$20.00 \times X) + \$1,300.00$
65.01 – 80.00	Y = \$0.00
80.01 – 95.00	$Y = (- \$20.00 \times X) + \$1,600.00$
> 95.00	Corrective Action

Y = The price adjustment for the segment or partial segment

X = The averaged IRI value for the segment or partial segment

[End Option 2]

Any positive smoothness price adjustment due to the Contractor will be made on the next monthly progress estimate following the satisfactory completion of all corrective Work and the submission of all test data for all Traffic Lane paving on the Project.

00745.96(b) applies when corrective action is taken by the Contractor, or the Engineer elects to not correct identified Areas of Localized Roughness according to 00745.75(c).

(b) Adjustments for Sections Requiring Corrective Work or with Areas of Localized Roughness - Segments or partial segments where corrective Work is performed according to 00745.75(c) are subject to the price adjustments described in 00745.96(a) except that no positive price adjustment (bonus) is due to the Contractor. If a segment or partial segment containing corrective Work is retested according to ODOT TM 772 and 00745.73, the retested average IRI value will be used for payment, except that no positive price adjustment will be made for a segment or partial segment containing corrective work.

No segment or partial segment containing an area of Localized Roughness with a value of 160.0 inches per mile or greater is eligible for positive price adjustment, even if corrective action is not required by the Engineer.

Segments or partial segments containing corrective Work with an IRI value of more than 95.0 inches per mile are subject to additional corrective action and retesting according to 00745.75(c). The Engineer may waive corrective action in partial segments with the application of a smoothness price adjustment based on an IRI value of 95.0 inches per mile.

SP00746 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00746 - CRACK SEALING FLEXIBLE PAVEMENTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00746 of the Standard Specifications modified as follows:

00746.10 Sealants - Replace the paragraph that begins "Furnish all sealant ..." with the following paragraph:

Furnish all sealant Materials for crack repair of flexible Pavements that is approved by the Engineer before being incorporated into the Work. Before beginning Work, provide a complete written statement of the origin, composition and manufacturer of Materials that are to be used.

00746.20 Equipment - Replace this subsection, except for the subsection number and title, with the following:

Use proper sealing Equipment for the specific Material listed according to the manufacturer's recommendations. Provide a melting kettle of the double boiler, indirect heating type, using oil as a heat-transfer medium for the Equipment for sealing compounds. Provide an effective kettle, mechanically operated agitator equipped with a positive, thermostatic temperature control.

Insert Project Name Here

00746.42 Installation Procedure - Replace the paragraph that begins "The face of ..." with the following paragraph:

Ensure the face of the crack is surface dry. Wait until the ambient and Pavement temperatures are both be at least 45 °F and rising at the time of application of the sealant.

00746.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00748 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP00350, SP00745 & SP02320
Requires SP00620 when cold plane pavement removal is required.
Requires SP00641 when Subbase Aggregate is required.
Requires SP00735 when EAC is required.
Requires SP02630 when base aggregate is required)

SECTION 00748 - ASPHALT CONCRETE PAVEMENT REPAIR

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00748 of the Standard Specifications modified as follows:

00748.10 Materials - Replace the Material that begins "Aggregate Base..." with the following Material:

Aggregate Base.....02630.10

00748.16 Acceptance of Material - Replace this subsection, except for the subsection number and title, with the following:

All Material is accepted by visual inspection by the Engineer. The Engineer may perform tests to verify that the Materials meet the appropriate Specifications.

00748.90 Payment - Replace the paragraph that begins "The depth ..." with the following paragraph:

The depth is inserted in the blank.

Insert Project Name Here

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00749 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00759

Requires SP00730 when emulsified asphalt tack coat is required.

Requires SP02630 when base aggregate is required)

SECTION 00749 - MISCELLANEOUS ASPHALT CONCRETE STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00749 of the Standard Specifications modified as follows:

00749.00 Scope - Replace the paragraph that begins "This Work consists of ..." with the following paragraph:

This Work consists of furnishing and placing asphalt concrete in road approaches, street connections, driveways, guardrail flares, mailbox turnouts, raised traffic islands, sidewalks, footpaths, gutters, ditch linings, spillways, dikes, and other miscellaneous or minor items of asphalt concrete except asphalt curbs as shown, specified, or directed. These items in this Section are collectively referred to as "Structures". See Section 00480 for asphalt curbs.

00749.13 Asphalt Concrete - Replace this subsection, except for the subsection number and title, with the following:

Unless another class is shown, furnish Level 2, 1/2-inch ACP according to Sections 00744 and 00745, as applicable. When conditions justify, the mixture may be varied, if approved. Acceptance is based on testing the Engineer deems appropriate. Statistical analysis will not apply.

00749.14 Concrete - Delete this subsection.

00749.42 Foundations - Replace the bullet that begins "Use new Aggregate ..." with the following bullet:

- Use new Aggregate Base Materials meeting the requirements of 00749.11.

00749.43 Foundation Preparation - Replace the paragraph that begins "Bring areas ..." with the following paragraph:

Bring areas where Structures are to be constructed to established grade, and make firm, dry and free of Unsuitable Material before placing asphalt concrete.

00749.45 Compacting Asphalt Concrete - Replace the bullet that begins "Along curbs and walls ..." with the following bullet:

- Along curbs and walls, on walks, irregular areas, and other areas not practically accessible to rollers meeting the requirements of 00744.24 or 00745.24, compact the mixture with small, self-propelled rollers, mechanical tampers, hot hand tampers, or hand rollers. On depressed areas a trench roller may be used, or cleated compression strips may be used under the roller to transmit compression to the depressed area.

00749.46 Pavement Smoothness - Replace the paragraph that begins "Bring areas ..." with the following paragraph:

Test top surfaces with a 12-foot straightedge provided and operated by the Contractor under the Engineer's direction. Do not vary the surface by more than 1/4 inch from the straightedge except at grade changes.

(Use the following subsection .47 when asphalt islands or asphalt traffic separators are included on the Project.)

00749.47 Concrete - Replace this subsection with the following subsection:

00749.47 Concrete Curbs - Construct concrete curbs associated with asphalt islands and traffic separators, as shown and according to Section 00759.

Add the following subsection:

00749.48 Tactile Surfaces Indicators - Construct tactile surface indicators according to Section 00765 to the slopes, lines, grades, and dimensions as shown or established.

00749.80 Measurement - Replace the paragraph beginning "Work performed under ..." with the following:

Work performed under this Section will be measured by one of the methods described in 00749.81 and 00749.82. Street connections that occur at the beginning or end of the Project, or that have a line designation, Typical Section and profile, and are not noted on the Plans as being Pay Items will not be measured for payment.

00749.90 Payment - Add the following sentence to the end of this subsection:

Tactile surface indicators will be paid for according to Section 00765.

(Use the following subsection .91 when "extra for asphalt islands" Pay Item is included in the Schedule of Items.)

00749.91 Method "A" - Weight and Extras Basis - Replace the paragraph beginning "Item (e) includes..." with the following:

Insert Project Name Here

Item (e) includes raised traffic islands and raised traffic separators. Concrete curbs necessary for the islands will be paid according to 00759.90.

(Use the following subsection .92 when “asphalt islands” Pay Item is included in the Schedule of Items.)

00749.92 Method “B” - Complete in Place Basis - Replace the paragraph beginning “Item (c) includes...” with the following:

Item (c) includes raised traffic islands and raised traffic separators. Concrete curbs necessary for the islands will be paid according to 00759.90.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, including asphalt concrete and asphalt tack coat, and for providing all Equipment, labor, and Incidentals necessary to complete the respective Structures in place as specified.

SP00754 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

**Requires SP02001, SP02050, SP02080,
SP02440, SP02510, SP02530)**

SECTION 00754 - PLAIN CONCRETE PAVEMENT REPAIR

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00754 is not a Standard Specification and is included in this Project by Special Provision.

Description

00754.00 Scope - This Work consists of sawcutting and removing existing concrete Pavement and constructing new plain portland concrete Pavement repairs as shown and specified.

00754.01 Abbreviations:

SSD - Saturated Surface-Dry
SSFC - Stationary Side Form Construction

Insert Project Name Here

00754.02 Areas of Work - Locations of the areas for repair are as shown. Additional areas of repair may be required as determined by the Engineer.

00754.04 Prepaving Conference - Meet with the Engineer, at a time mutually agreed upon, to discuss methods of accomplishing all phases of the concrete paving Work. Provide all supervisory personnel of the Contractor and any Subcontractor who are to be involved in the concrete paving Work at the meeting.

Materials

00754.10 Materials - Furnish Materials meeting the following requirements:

Resin Bonded Anchors.....	00535
Bar Reinforcement	02510
Concrete Materials	02001
Curing Materials	02050
Epoxy and Nonepoxy Bonding Agents	02070
Epoxy and Nonepoxy Grouts	02080
Galvanizing.....	02530.70
Portland Cement Concrete Repair Materials.....	02015
Poured Joint Fillers.....	02440.30
Preformed Expansion Joint Filler	02440.10

00754.11 Classes of Concrete - If the time frame designated for opening traffic is less than 72 hours after concrete placement, furnish Class HES4000 - 1 1/2 concrete designed to attain a minimum average compressive strength of 3,000 psi prior to allowing traffic on the concrete. Otherwise furnish Class 4000 - 1 1/2 paving concrete.

00754.13 Concrete Mix Designs - Prepare and submit either new mix designs or current mix designs for each class of concrete required according to Section 02001.

00754.15 Quality Control - Provide quality control according to Section 00165, Section 02001, and the following:

(a) Concrete Mixture - If the results of any test are outside of the specification limits, stop the placement of the load. Correct the load or reject it and do not incorporate it into the Work. Test subsequent loads before any further concrete placement. Correct the subsequent loads if any of the tests are still outside the specification limits. If the load cannot be corrected, reject it and do not incorporate it into the Work. Testing of subsequent loads may return to the specified frequency when the test results from two consecutive loads are shown to meet the specification limits.

(b) Records - Deliver all batch tickets, water-cement ration calculations, and all other records required to the Engineer upon availability but no later than the morning of the next Day.

00754.16 Acceptance of Concrete:

(a) General - Acceptance of concrete is based on the results of the Contractor's quality control testing according to Section 00165 and the MFTP.

(b) Aggregate - Acceptance is based on the Contractor's quality control testing, if verified by the Agency according to Section 00165 and the MFTP.

(1) Aggregate Gradation - A stockpile contains specification aggregate gradation when the quality level for each sieve size calculated according to 00165.40 is equal to or greater than the quality level in Table 00165-2 for a PF of 1.00. Each required sample represents a subplot. When the quality level in Table 00165 2 yields a PF of less than 1.00 for any constituent, the material is non specification.

(2) Non-specification Aggregate Gradation - Stockpiled aggregates that contain non-specification aggregate gradation is rejected by the Engineer unless non-specification material is removed from the stockpile. Do not add additional material to the stockpile until enough non-specification material is removed so that the quality level for each constituent is equal to or greater than the quality level in Table 00165 2 for a 1.00 PF.

(c) Plastic Concrete - Acceptance of the plastic concrete is based on the tests performed by the Contractor's QCT, according to the tolerances and limits of Section 02001.

(d) Hardened Concrete - Cast and cure the test cylinders according to AASHTO R 100 in single use plastic molds and test at 28 Days according to AASHTO T 22.

(1) General - For all classes of concrete, acceptance of hardened concrete is based on an analysis of compressive strength tests of cylinders cast by the QCT. Test cylinders at an ODOT certified laboratory.

(2) Actual Strength Test Value - The ASTV at 28 Days is the average compressive strength of the three cylinders tested.

(3) Sampling and Testing - Sample and test according to Section 00165 and the MFTP.

(4) Acceptance - Furnish Material with an ASTV that exceed the f'_c (specified strength) for the mix design. If a set of cylinders has an ASTV less than f'_c , the Engineer will review the results to determine if the concrete represented by the cylinders requires removal. In any case, concrete that has an ASTV of less than 85 percent of the specified strength requires removal unless otherwise authorized, in writing, by the Engineer. The cost of removal, replacement, and all related work is the Contractor's responsibility, subject, if the concrete is allowed to remain in place, to a price adjustment according to 00150.25.

If an ASTV falls below the f'_c , the Contractor may submit a written plan within 3 Days of the test for review by the Engineer. Provide a plan that outlines a proposed alternate method of evaluating compressive strength. Provide evidence that a reasonable f'_{cr} (over design) was maintained and that there is credible evidence (besides low strength) that warrants consideration of this option. If the Engineer determines that the compressive strength test results are suspect from definable external factors, the Engineer may allow an alternate method of acceptance.

Insert Project Name Here

00754.17 Spall Repair Material - For spall repair, furnish a PCC repair material meeting the requirements of Section 02015 except do not use products that contain magnesium phosphate. Use either "Rapid Setting" or "Very Rapid Setting" material.

00754.18 Bond Breaker - Furnish one of the following bond breakers:

- Non-woven geotextile meeting the property requirements listed in Table 02320-4.
- Liquid curing compound evenly applied as a bond breaker in two applications, at a rate of 1 gallon per 130 to 165 square feet for each application, over the entire surface area.

Equipment

00754.20 Batch Plant - Provide batch plants according to 02001.40.

00754.21 Mixers - Provide mixers according to 02001.40.

For Projects requiring Class HES concrete, mobile mixers may be used if the mixers conform to the following:

- The mixer is self-propelled and carries sufficient unmixed dry bulk cement, Sand, Coarse Aggregate, admixtures, and water to produce a minimum of 6 cubic yards of concrete on site.
- The mixer provides positive measurement of cement being introduced into the mix by meter or counter.
- The mixer provides positive control of the flow of water into the mixing chamber. Water flow is readily adjustable to provide for minor variations in Aggregate moisture.
- Each mixer is calibrated to automatically proportion and blend all components according to the mix design on a continuous or intermittent basis as required by the placing operation.

Perform a calibration and yield test on each mixer prior to the first placement to accurately proportion the specified mix. Use a written calibration procedure from the mixer manufacturer, a procedure provided by the Engineer or other written procedure acceptable to the Engineer. The calibration process may be witnessed by the Engineer. Provide the Engineer with information about the scheduled date, time and place for the calibration. Perform a new calibration when the source of materials changes, when the mixer undergoes a major repair, or when requested by the Engineer.

00754.22 Hauling Equipment - Use truck mixers to transport concrete. Provide hauling Equipment according to AASHTO M 157.12 or AASHTO M 157.11.6.

00754.23 Paving Equipment - Provide paving Equipment according to the following:

- Able to vibrate, consolidate, and finish the slab to proper grade and Cross Section for the full width and depth of the concrete being placed.
- Capable of meeting the smoothness requirements.
- Approved by the Engineer.

Insert Project Name Here

00754.24 Concrete Saws - Provide power driven concrete saws for sawing joints, adequate in number of units and power to complete the sawing at the required rate. Also provide a standby saw on the Project Site.

00754.25 Smoothness Testing Equipment - Provide one 12-foot straightedge.

00754.26 Concrete Drills - Provide a drilling system consisting of drilling Equipment and drilling supports that:

- Is capable of drilling holes of the required diameter and depth.
- Can produce holes parallel to the Pavement surface and parallel to each other within a tolerance of $\pm 1/8$ inch.
- Can provide hole alignments at mid-depth of PCC Pavement.

Labor

00754.30 Quality Control Personnel - In addition to the certified technicians required in 02001.50 provide and designate an individual to be present at the placement site at all times during concrete placements and who is authorized and responsible for acceptance and rejection of materials.

Construction

00754.40 Weather Limitations - Coordinate all operations involved in repairing the Pavement so the Work will result in a finished Pavement according to the Specifications regardless of the daily or seasonal variations in weather, temperature and humidity under when the Work is permitted to proceed.

Do not place PCC during periods of rain. Do not place PCC on frozen bases. Stop placement when descending air temperature falls below 35 °F. Do not begin placement until the air temperature is 35 °F in the shade and rising and is forecast to remain above 35 °F.

Protect the Pavement from weather damage. Protect unhardened PCC from precipitation with protective material. When PCC is placed during cold weather and the air temperature is forecast to drop below 33 °F, prevent the concrete from freezing for a minimum of 7 Days after placement.

Remove and replace weather-damaged Pavement at no additional cost to the Agency.

00754.41 Preparation:

(a) Removal of Existing Pavement - Remove full panels of existing concrete Pavement full depth as shown or directed. A vertical full depth sawcut is required along all longitudinal joints and at transverse locations. Cut concrete through tie bars and dowels. Remove concrete Pavement with Equipment approved by the Engineer in a manner that does not damage remaining Pavement or connections and allows for specified connections. Repair damage to the existing Pavement due to the Contractor's operations, at no additional cost to the Agency, by extending the full depth repair to the satisfaction of the Engineer.

(b) Concrete Pavement Base Repair - Use material similar to existing base material or use commercial concrete. If concrete is used, place a bond breaker between the new concrete Base and the new concrete Pavement. If the repair is a nominal 2 inches deep or less, the repair may be accomplished by pouring the patch monolithically with the new concrete Pavement, without a bond breaker. PCC repair material may be substituted for Commercial Grade Concrete.

Compact unbound Granular Materials used in the Base repair as directed. Allow concrete or substitutes to cure sufficiently to support necessary construction activities without yielding prior to continuing those activities. No further testing of Pavement Base material is required.

(c) Spall Repair Area - Sawcut the existing concrete Pavement to a nominal depth of 2 inches. Remove existing concrete within the perimeter of the sawcut to a depth of 2.0 inches, or to sound concrete as determined by the Engineer. If jack hammers are used for removing Pavement, provide jack hammers that do not weigh more than 30 pounds, and chipping hammers that do not weigh more than 15 pounds. Do not operate hammers at an angle greater than 45 degrees measured from the surface of the Pavement. Repair any existing Pavement that is to remain that has been damaged at no additional cost to the Agency.

(d) Preparation of Existing Concrete - Before placement of concrete, blow clean the existing concrete surfaces within the pour area with compressed air and dampen the area to be paved with a light application of water. If the area becomes dry before new concrete is placed, blow clean and dampen the area again.

00754.43 Placing Dowel Bars and Tie Bars:

(a) Dowel Bars - Furnish smooth, round, epoxy coated dowel bars. Coat with plastic, heavy oil, or other approved material that will neither bond with nor be harmful to the PCC. Use a framework to place dowels that is continuous across the entire lane width, holds the dowels parallel with each other, holds the dowels parallel with the surface of the Pavement, and holds the dowels parallel to the Roadway centerline. For dowels placed across an expansion joint, use a dowel bar basket or other system of support that leaves no permanent incompressible members in place within the joint. Provide a maximum alignment tolerance of 5 degrees or 3/16 inch in the length of the dowel. Place dowels within 3/8 inch of the center of the slab vertically.

Place dowel bars for joint contact at existing concrete Pavement surfaces by drilling the existing concrete section and then inserting the dowel bars and grouting them in place. Drill the holes large and deep enough to insert the dowel bars with adequate epoxy or non-epoxy grout. Adjust hole locations to avoid damaging any existing reinforcement when drilling the holes. Blow the dowel bar holes clean with compressed air before grouting. Center the bar in the hole for the full length of embedment before grouting. Pump the grout into the hole around the bar so the back of the hole is filled first. Do not allow blocking or shimming to impede the flow of the grout into the hole. If dams are needed, place them at the front of the holes to confine the grout. Place the dams to permit the escape of air without leaking grout. Do not remove dams until grout has cured in the hole.

(b) Tie Bars - Furnish epoxy coated tie bars and place them for contact-type longitudinal joints by one of the following methods:

- By drilling the hardened concrete section and then inserting the tie bars as resin-bonded anchors in accordance with construction and testing procedures in Section 00535.
- By inserting the tie bars into the plastic slipformed concrete before vibrating and finishing the concrete. The tie bars may be bent before insertion. Replace any loose tie bars by drilling and grouting, as described above, at no additional cost to the Agency.
- By using threaded mechanical splice couplers from the QPL. Submit splices for approval before using. Furnish rebar splices that are:
 - Accompanied by manufacturer's quality compliance certificate according to 00165.35.
 - Installed according to manufacturer's recommendations.

00754.44 Handling, Measuring, and Batching Materials - Provide the plant site, layout, Equipment and provisions for transporting material adequate to assure a continuous supply of Material to the Project Site.

(a) Aggregates - Stockpile and remove the Aggregate from stockpiles in a manner that holds segregation to a minimum.

Do not use Aggregates that become segregated, mixed with earth or foreign material, or contain lumps of hardened material. Thaw frozen Aggregates or Aggregates containing frozen lumps before use.

(b) Batching - Separately weigh into the hoppers the Fine Aggregate, each separated size of Coarse Aggregate, cement and fly ash in the respective proportions set by the mix design. Provide a device to indicate positively that the full amount of cement and fly ash was discharged into the batch box or container. Measure water and admixtures either by volume or by weight.

Conduct batching so that the individual weights of each Material required are within the following tolerances:

Aggregates	± 2%
Cement	- 1% to + 4%
Fly Ash	- 1% to + 4%

00754.45 Mixing Concrete:

(a) General - Mix the concrete in a batch plant mixer, truck mixer, or mobile mixer and the following:

- Charge the batch into the receiving drum so some water enters before the solids and continues to flow uniformly for a portion of the mixing time.
- Keep the skip and the throats of drums free of accumulations.
- Mix the concrete only in the quantity required for immediate use.
- Do not intermix batches.

- Do not retemper concrete by adding water or by other means.

(b) Batch Plant Mixers - The mixing time for batch plant mixers is at least 60 seconds unless the Contractor's CCT documents meeting "Concrete Uniformity", according to AASHTO M 157, Annex A1 for concrete produced at the batch plant mixer set up for this Project, to the satisfaction of the Engineer. The mixing time may then be reduced to the extent the test permits but not less than 45 seconds.

(c) Truck Mixers - The mixing time for truck mixers is 70 to 100 revolutions at a mixing speed recommended by the manufacturer of the truck mixer.

00754.46 Placing Concrete:

(a) General - Perform the strike-off, consolidation, final floating and surface finishing according to the following:

- Vibrate throughout the concrete until it is uniformly consolidated. Do not segregate.
- Strike off the concrete with templates or screeds designed and manipulated to shape the concrete to the specified Cross Section between the forms, carrying a slight excess of concrete in front of the leading edge of templates or screeds at all times.
- Following the vibrating and strike-off operations, float the concrete. Include transverse floating or other smoothing and finishing actions as necessary. Check and correct the surface according to 00754.49. Keep the surface free from laitance, soupy mortar, marks or irregularities.
- Finish the surface according to 00754.49.

Correct all damage to the Subgrade or Base due to the Contractor's operations, at no additional cost to the Agency, to the satisfaction of the Engineer.

(b) One Lift - Place the concrete in final position in one Lift so a minimum of finishing is necessary to provide a dense, homogenous Pavement conforming to true grades and Cross Sections.

(c) Provision for Joints and Other Devices - While placing concrete, make provision for constructing joints, placing dowels, tie bars, and other devices, as shown and directed, and according to 00754.43 and 00754.48.

(d) Reject Concrete Material - Reject concrete if it:

- Is not in place within 90 minutes after being mixed.
- Has begun to take an initial set before placement.

(e) Hand Operated Equipment - Use shovels to hand spread and distribute the concrete. Do not use rakes. Do not foul the concrete with foreign matter, or disturb joint devices during such operations. Provide hand operated mechanical vibrators satisfactory to the Engineer. Use the vibrators to consolidate the concrete Pavement at least 6 feet each side of construction and expansion joints and all other areas as directed.

(f) Illumination - During hours of darkness, adequately illuminate Work areas at no additional cost to the Agency.

00754.48 Joints:

(a) General - Construct joints of the kinds shown and where shown or directed. Furnish joint types in the concrete Pavement that are contraction, construction or expansion and that are transverse or longitudinal, as shown or directed. Extend all joints and joint filler to Pavement edges or to each other.

Provide joints that do not vary from specified or indicated line by more than 1/4 inch. Provide tops of joint filler, when required, slightly, but not more than 1/8 inch, below and paralleling finished Pavement grade and Cross Section. Protect top edges of filler from damage by paving operations.

Construct all joints that contain preformed filler before the final floating and surface finishing of the concrete, unless otherwise directed.

(b) Longitudinal Joints - If the Contractor elects to pour the entire width of Pavement at one time, construct the longitudinal joint as shown. Furnish longitudinal joints of the contact type or weakened plane type as shown:

(1) Longitudinal Contact Joints - Construct longitudinal contact joints when concrete is placed against hardened concrete regardless of age, between strips of Pavement or between a strip of Pavement and a concrete gutter.

(2) Longitudinal Weakened Plane Joints - Construct weakened plane joints by sawing to the depths and maximum width shown. Saw longitudinal weakened plane joints at the earliest possible time following placement of the concrete to prevent uncontrolled cracking without damaging the Pavement or joint. Saws may be single or tandem, as the Contractor elects, and be controlled by guides to true line. Restore curing agents broken or damaged by the sawing operations.

(c) Construction Joints - Construct construction joints when there is an interruption of 30 minutes in the concrete placing operations.

Furnish new concrete placed against the joint that conforms closely to the proportions and consistency of the previously placed concrete except vibrate and consolidate it to a greater degree and with more care than normal. Unless otherwise shown, do not construct construction joints within 10 feet of a transverse expansion or contraction joint. If sufficient concrete has not been mixed at the time of interruption to form a slab at least 10 feet long, remove the concrete back to the last joint and dispose of as directed.

(d) Transverse Contraction Joints - Form transverse contraction joints by sawing to the required dimensions shown on the Plans. Saw transverse contraction joints at the earliest possible time following placement of the concrete to prevent uncontrolled cracking without damaging the Pavement or joint. Repair any damage to the curing material during the sawing operations immediately after the sawing is completed.

(e) Sealing Sawed Joints - Fill sawed longitudinal weakened plane joints and transverse contraction joints with poured joint filler. Thoroughly clean joints at the time of sealing.

Ensure the curing period for joints is complete before allowing construction Equipment and vehicles on the Pavement.

00754.49 Surface Finishing - After the concrete has been given a preliminary finish, check the surface of the fresh concrete in the longitudinal and transverse direction with a 12-foot straightedge. Correct surface deviations more than allowed by 00754.56(a). Lap each successive check with the previous check path by at least half the length of the straightedge.

(a) Textured Finish - Upon completion of the machine floating, straightedge testing, edge tooling and, if necessary, hand floating, and before initial set of the surface concrete, give the surface of the concrete a textured finish.

Accomplish the textured finish with a steel-tine tool with 1/8-inch tines that will mark the finished concrete to a depth of 1/8 inch to 3/16 inch. Randomly space the markings from 1/2 inch to 1 1/4 inches as approved. Avoid overlaps of the texturing. Construct markings either perpendicular or parallel to the Roadway centerline to match the adjacent concrete Pavement textured finish.

With approval of the Engineer, an astroturf or broom finish may be used in place of tining on roads to receive an overlay.

(b) Transverse Profile - Match the surface of the fresh concrete in the transverse direction to the surface of the existing concrete at the ends of the patch. Taper into existing Pavement ruts in the first and last 10 to 20 feet to provide a transverse surface finish for the remainder of the patch meeting the requirements of this section.

00754.52 Edge Tooling and Filling - Tool edges at longitudinal joints and construction joints of new Pavement and clean joints of previously placed concrete to remove laitance and mortar resulting from finishing operations, and to provide clean rounded edges without ridges on the surface. Perform tooling of edges at construction joints so that no more than a 1/8-inch radius is produced.

Fill all areas of minor honeycomb or other minor defect in composition of the concrete along the exposed sides of concrete with a stiff mortar of cement and Fine Aggregate, and apply to the moistened concrete to the satisfaction of the Engineer. Remove and replace areas showing serious defects in composition of the concrete with specified quality concrete for full panel width between longitudinal joints or edges, and for a length not less than a full panel length. Low spots exceeding 1/4 inch in depth, if in hardened concrete, may be filled with an epoxy grout, provided the filling is neat and blends inconspicuously with adjoining concrete. Prepare the area according to the grout manufacturer's recommendations.

00754.53 Curing Concrete - Immediately after the final floating, surface finishing and edging have been completed, and while the concrete surface is still moist, cover and cure the entire exposed surface of the newly placed concrete for at least 72 hours. If the Specifications require opening the lanes to traffic in less than 72 hours, remove curing covers just prior to opening to traffic. Use one of the following provisions:

(a) Liquid Membrane-Forming Compounds - Apply liquid membrane-forming compound uniformly to the concrete by pressure-spray methods at a rate of at least 1 gallon per 150 square feet. Mix the liquid membrane-forming compound thoroughly

before and during use. Liquid membrane-forming compounds are not allowed when an asphalt concrete layer is placed on the new concrete.

(b) Other Coverings - Apply clear or white polyethylene film or insulated curing blankets as a waterproof and moisture-proof covering. Place the film or blankets beyond the edge of the repaired areas and weight to hold in position. Do not mar the concrete with the covering.

00754.54 Longitudinal Pavement Cracks - Remove and replace all patches that show longitudinal cracking or do not bond at no additional cost to the Agency.

00754.55 Spall Repair - In spalled areas, remove the existing Pavement according to 00754.41(c). The repair limits extend beyond the spalled area a minimum of 3.0 inches. Use only rectangular or square repair shapes. Prepare the repair area according to 00754.41(d) and the PCC repair material manufacturer's recommendations, then apply a coat of epoxy grout or bonding agent to all vertical surfaces and place PCC repair material before grout dries. When a spall repair is placed directly against an adjacent longitudinal joint, place a bond breaker between the existing concrete and the area to be patched. Mix and place PCC repair material according to the manufacturer's recommendation. Use shovels to hand spread and distribute the concrete. Do not use rakes. Do not contaminate the concrete with foreign matter. Cure PCC repair material according to the manufacturer's recommendation.

00754.56 Surface Tolerance, Testing, and Correction - Provide the surface of finished Pavement that does not deviate from longitudinal and transverse smoothness more than the limits identified below. Perform straightedge testing under the supervision of the Engineer as soon as the hardness of the concrete permits.

(a) Straightedge Testing and Tolerance - Test Pavement surface longitudinal and transverse smoothness with a 12-foot straightedge. The extent of the testing is determined by the Engineer. Provide the Pavement surface that does not deviate from the straightedge at any point by more than 1/8 inch, except the transverse surface at the patch ends may vary as required in 00754.49(b).

(b) Correcting Deficiencies - Correct all segments that exceed the requirements of 00754.56(a) by one of the following methods:

(1) Remove the non-specification concrete Pavement as determined by the Engineer and replace with Specification concrete Pavement.

(2) Profile with an abrasive grinder equipped with a cutting head comprised of multiple diamond blades.

Retest according to 00754.56(a). Perform all corrective Work at no additional cost to the Agency, including traffic control.

Maintenance

00754.60 Protection of Concrete - Repair or replace any part of the Pavement damaged by traffic or damaged from any other causes before its official acceptance, according

to 00170.80. Do not operate construction Equipment or allow Public Traffic on newly placed concrete until all of the following requirements are met:

- (a) The Contractor complies with 00150.60.
- (b) The concrete attains a compressive strength of at least 3,000 psi as determined by testing at least two cylinders cured according to AASHTO R 100 (field cure) and tested according to AASHTO T 22.
- (c) Approval is given by the Engineer before opening to traffic.
- (d) The surface of the concrete is protected from scarring or abrasion and kept free of stones, loose mortar and other matter apt to be deleterious to the concrete in the paths of Equipment.

00754.61 Protection of Shoulders - A portion of the shoulder adjacent to the proposed patch, may be removed as necessary to ensure proper forming at the edge or the patch. Prior to opening to traffic, replace the disturbed shoulder area with material types and thickness similar to the existing shoulder, compacted, and restored to the existing line and grade. Include all cost of the shoulder replacement in the price bid for Concrete Pavement Repair.

Measurement

00754.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(a) **Concrete Pavement Repair** - Concrete Pavement repair will be measured on the area basis and is determined by measuring the width and length of each separately constructed Panel of Pavement. The width is the measured edge-to-edge width on the surface of the Pavement, perpendicular to centerline. The length is the measurement from end to end of Pavement along the center line of the Roadway, including the length of the bar lap splices.

The measurement of extra thickness of Pavement, as shown or as ordered, is determined by conversion on a proportionate volume basis to an equivalent number of square yards of specified thickness Pavement.

(b) **Spall Repair** - Spall repair will be measured on the area basis and is determined by measuring the width and length of each separate repair. The width is the measured edge-to-edge width on the surface of the Pavement. The length is the measurement from end-to-end of Pavement along the center line of the Roadway.

The measurement of extra thickness beyond the depth shown in the Plans or as ordered by the Engineer, is determined by conversion on a proportionate volume basis to an equivalent number of square yards of the specified thickness.

(c) **Concrete Pavement Base Repair** - Concrete Pavement base repair will be measured on the area basis and is determined by measuring the width and length of each separate repair. The width is the measured edge-to-edge width on the surface of the Pavement, perpendicular to centerline. The length is the measurement from end-to-end of the repair along the center line of the Roadway.

Insert Project Name Here

Payment

00754.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Plain Concrete Pavement Repair.....	Square Yard
(b) Concrete Pavement Spall Repair.....	Square Yard
(c) Concrete Pavement Base Repair	Square Yard

Item (a) includes removing concrete Pavement, preparing the Base, and preparing the cut edges. Item (a) also includes Base repair, Leveling, or backfilling, up to 2 inches deep.

Item (b) includes removing concrete.

Item (c) includes Base repair, Leveling, and related backfilling of Subbases or Subgrade greater than 2 inches.

Sawcutting will be paid for according to Section 00310.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00755 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP02001, SP02050, SP02510, & SP02530
Requires SP02080 when grout is required.
Requires SP02440 when preformed expansion joint filler is required)

SECTION 00755 - CONTINUOUSLY REINFORCED CONCRETE PAVEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00755 of the Standard Specifications modified as follows:

00755.04 Aggregate Production and Prepaving Conference - Replace this subsection, except for the subsection number and title, with the following:

(a) Aggregate Production Conference - Meet with the Engineer, at a mutually agreed time, to discuss methods of accomplishing Aggregate production and include supervisory personnel of the Contractor and any Subcontractors or Suppliers who are to be involved in the Aggregate production Work.

(b) Prepaving Conference - Meet with the Engineer, at a mutually agreed time, to discuss methods of accomplishing all phases of the paving Work and include supervisory personnel of the Contractor and any Subcontractors who are to be involved in the concrete paving Work.

(Use the following subsection when the class of concrete is different than 4000 – 1 ½". Fill in the blank with the class of concrete.)

00755.11 Classes of Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish Class _____ paving concrete.

00755.16(a) General - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of concrete is based on the results of the Contractor's quality control testing according to Section 00165.

00755.16(b) Aggregate - Replace the paragraph that begins "Acceptance is based ..." with the following paragraph:

Acceptance is based on the Contractor's quality control testing, if verified by the Agency according to Section 00165.

00755.16(b)(2) Non-specification Aggregate Gradation - Replace this subsection, except for the subsection number and title, with the following:

Stockpiled Aggregates that contain non-specification Aggregate gradation is rejected by the Engineer unless non-specification material is removed from the stockpile. Do not add additional material to the stockpile until enough non-specification material is removed so that the quality level for each constituent is equal to or greater than the quality level in Table 00165-2 for a 1.00 PF.

00755.16(c) Plastic Concrete - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of the plastic concrete is based on the tests performed by the Contractor's QCT, according to the tolerances and limits of Section 02001.

00755.16(d) Hardened Concrete - Replace the paragraph that begins "Acceptance is based ..." with the following paragraph:

Acceptance of hardened concrete is based on statistical analysis, according to Section 00165, of the compressive strength tests of the cylinders cast by the QCT. Test the cylinders at an ODOT certified laboratory.

00755.16(d)(1) Random Sampling and Testing - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Obtain samples from each subplot on a random basis. Cast a minimum of 3 cylinders. Cast and cure the test specimens according to AASHTO R 100 in 6-inch x 12-inch single-use plastic molds and test at 28 Days according to AASHTO T 22.

00755.16(d)(2) Lots - Replace this subsection, except for the subsection number and title, with the following:

A lot is the total quantity of concrete produced for each mix design with the same Specification limits of all constituents in each stage. Slipformed and non-slipformed concrete is sampled and evaluated as separate lots.

In lots with less than three sublots, the valid individual cylinders each are considered a subplot and statistically evaluated. Obtain at least one set of cylinders for each lot.

00755.16(d)(3) Sublot Strength Test Value - Replace this subsection, except for the subsection number and title, with the following:

The average of the 28-Day compressive strength tests of the three cylinders will constitute the SSTV.

Any cylinders in a subplot showing definite evidence (other than low strength) of improper sampling, molding, curing or testing is discarded, and the average of the strengths of the remaining cylinders will constitute the SSTV. If all three cylinders comprising a subplot are discarded, the lot is evaluated on the basis of the reduced number of sublots.

If the compressive strength of the lowest strength cylinder in a subplot is lower than the average strength of the remaining cylinders in that subplot by more than 10 percent, that cylinder strength is discarded and the average of the remaining cylinders will comprise the SSTV.

00755.16(d)(4) Quality Level Analysis - Replace this subsection, except for the subsection number and title, with the following:

Statistically analyze the SSTV's and determine the PF for each lot of concrete, except that there is no USL, and the LSL will equal the specified design strength.

00755.22 Hauling Equipment - Replace this subsection, except for the subsection number and title, with the following:

Transport concrete in non-agitating Equipment. Truck mixers may be used to transport concrete only as allowed in 00755.45. When allowed, provide hauling Equipment meeting AASHTO M 157.12 or AASHTO M 157.11.6.

00755.23 Paving Equipment - Replace the paragraph that begins "Provide self-propelled ..." with the following paragraph:

Provide self-propelled paving machines according to the following:

00755.25(b) Inertial Profiler - Replace the paragraph that begins "Provide competent and ..." with the following paragraph:

Insert Project Name Here

Provide competent and experienced operator(s) for the Equipment, certified with the profiler according to ODOT TM 769. Meet with the profiler operator and the Engineer at a mutually agreed upon time prior to beginning smoothness measurements to discuss all aspects of smoothness measurement on the Project.

00755.30 Quality Control Personnel - Replace the bullet that begins "Provide and designate ..." with the following bullet:

- Provide and designate an individual who is present at the placement site at all times during concrete placements, and who is authorized and responsible for acceptance and rejection of materials.

Replace the bullet that begins "Reject loads ..." with the following bullet:

- Reject loads that arrive at the Project Site without a batch ticket.

00755.40 Weather Limitations - Replace the paragraph that begins "Coordinate all operations involved..." with the following paragraph:

Coordinate all operations involved in constructing the Pavement so the Work will result in a finished Pavement according to the Specifications regardless of the variations in weather, temperature and humidity when the Work is allowed to proceed.

00755.41(a) Condition - Replace the paragraph that begins "Coordinate all operations involved..." with the following paragraph:

Before paving operations begin, bring the Base where the Pavement is to be constructed to a finished condition required by the Specifications.

00755.41(b) Area - Replace this subsection, except for the subsection number and title, with the following:

Bring the full width and length of the area where the tracks of the paving Equipment are to operate to the density and surface tolerance required of the Base material.

00755.42 Construction Widths - Replace the paragraph that begins "If the Contractor proposes ..." with the following paragraph:

If the Contractor proposes a method of placement other than that shown or specified, it will be at no additional cost to the Agency. Any changes require Engineer's approval.

00755.43(a) General - Replace the paragraph that begins "The reinforcement shall ..." with the following paragraph:

Furnish reinforcement that is straight, clean, and free of scale or other matter that would interfere with its bonding to the concrete.

00755.43(c) Support Devices - Replace the paragraph and bullets that begins "Support devices used ..." with the following paragraph and bullets:

Use support devices to hold reinforcement in proper position in the concrete that:

Insert Project Name Here

- Holds the reinforcement within 1/2 inch of the position shown.
- Consists of transverse bar assemblies.

00755.43(d)(3) - Replace this subsection, except for the subsection number and title, with the following:

By using threaded mechanical splice couplers from the QPL. Submit splices for approval before using. Accompany rebar splices with manufacturer's quality compliance certificates according to 00165.35 and install according to manufacturer's recommendations

00755.43(e) Dowel Bars - Replace the paragraph that begins "Provide smooth..." with the following paragraph:

Furnish smooth, round, epoxy coated dowel bars. Coat dowel bars with a lubricant or bond-breaking compound approved by the Engineer.

Replace the paragraph that begins "Maximum alignment..." with the following paragraph:

Place dowels with a maximum alignment tolerance of 5 degrees or 3/16 inch in the length of the dowel. Place dowels within 3/8 inch of the center of the slab vertically.

00755.44 Handling, Measuring, and Batching Materials - Replace the paragraph that begins "The plant site ..." with the following paragraph:

Provide the plant site, layout, Equipment and provisions for transporting Material adequate to assure a continuous supply of Material to the Project Site.

00755.46(b) One Lift - Replace this subsection, except for the subsection number and title, with the following:

Place the concrete in final position by the slipform method in one Lift, so a minimum of finishing is necessary to provide a dense, homogenous Pavement conforming to true grade and Cross Section, except when 00755.50 applies.

00755.46(d) Continuous Forward Motion - Replace this subsection, except for the subsection number and title, with the following:

Coordinate all operations of mixing, delivering and spreading concrete to provide uniform progress. Operate the slipform paver with as nearly continuous forward movement as possible. Hold stopping and starting the paver to an absolute minimum. If, for any reason, it is necessary to stop the forward motion of the paver immediately stop the vibratory and tamping elements. Apply no external force to the paver.

00755.46(g) Protect Surface - Replace this subsection, except for the subsection number and title, with the following:

Equip supports of the slipform paver, and other Equipment that ride on previously placed Pavement to meet the requirements of 00755.60, to prevent marring, edge breaking or chipping of the previously placed Pavement.

Insert Project Name Here

When concrete is placed adjacent to an existing Pavement, equip that part of the Equipment that is supported on the existing Pavement with protective pads on crawler tracks or use rubber-tired wheels. Offset the track or wheels to run a sufficient distance from the edge of the Pavement to avoid breaking the Pavement edge.

00755.46(h) Hand Operated Equipment - Replace this subsection, except for the subsection number and title, with the following:

Use shovels, not rakes, to hand spread and distribute the concrete. Do not foul the concrete with foreign matter, or disturb joint devices during such operations. Provide hand operated mechanical vibrators satisfactory to the Engineer. Use these vibrators to consolidate the concrete Pavement at least 6 feet each side of construction and expansion joints and any other areas as directed.

00755.47 Test Strip - Replace the paragraph that begins "At the beginning ..." with the following paragraph:

At the beginning of paving operations, construct one initial test strip of concrete Pavement at least 0.1 mile, but not more than 0.2 mile in length at the specified paving width. Use the same Equipment for the remainder of the paving. Do not perform further paving until the test strip is evaluated according to 00755.55. An additional test strip is required when:

00755.48(a) General - Replace this subsection, except for the subsection number and title, with the following:

Construct joints of the kinds shown and where shown or directed. Joint types in the concrete Pavement are either contraction, construction or expansion and orientated transverse or longitudinal, as shown or directed. Extend all joints and joint filler to Pavement edges or to each other.

Construct all joints at right angles to the surface of the Pavement. Do not vary joints from specified or indicated line by more than 1/4 inch. When required, construct the tops of joint filler slightly below, but not more than 1/8 inch, and paralleling finished Pavement grade and Cross Section. Protect top edges of filler from damage by paving operations.

All joints that contain preformed filler are to be constructed before the final floating and surface finishing of the concrete, unless otherwise directed.

00755.48(b) Longitudinal Joints - Replace the paragraph that begins "Longitudinal joints ..." with the following paragraph:

Construct longitudinal joints as the contact type or weakened plane type as shown.

00755.48(c) Construction Joints - Replace the paragraph that begins "The new concrete ..." with the following paragraph:

Furnish new concrete placed against the construction joint conforming closely to the proportions and consistency of the previously placed concrete except vibrate and consolidate it to a greater degree and with more care than normal.

00755.48(c)(1) Continuously Reinforced Pavement - Replace the paragraph that begins "Furnish a self-supported ..." with the following paragraph:

Furnish a self-supported working platform at each construction joint. Provide a working platform that is at least 4 feet wide and long enough to span the entire width of the Pavement Panel being constructed. Construct and support the platform so it does not rest upon or touch the reinforcing steel. Have the workers use this platform when working in the area around construction joints and do not walk on the reinforcing steel. Remove any debris or spilled concrete at and beyond the joint, and support the reinforcement in proper position.

00755.48(d) Terminal Expansion Joints - Replace the paragraph that begins "The concrete in sleeper ..." with the following paragraph:

Furnish concrete in sleeper slabs meeting the requirements of 00755.11. Furnish steel reinforcement meeting the requirements of Section 02510.

00755.49 Surface Finishing - Replace the paragraph that begins "After the concrete has ..." with the following paragraph:

After the concrete has been given a preliminary finish by the finishing devices in the slipform paving Equipment, check the surface of the fresh concrete in the longitudinal and transverse direction with a 12-foot straightedge. Correct surface deviations more than allowed by 00755.55(a). Lap each successive check with the previous check path by at least half the length of the straightedge. This longitudinal checking and correction on areas to be profiled for IRI smoothness is waived if it is successfully demonstrated that a Pavement surface is otherwise produced according to 00755.55(b)(1)(a).

00755.50(b) Optional SSFC - Replace the bullet that begins "Short sections ..." with the following bullet:

- Short sections of Pavement that are necessary to facilitate traffic movement.

00755.51 Modification of Strike-off, Consolidation, Final Floating, and Surface Finishing - Replace the paragraph that begins "Where the width of ..." with the following paragraph:

Where the width of Pavement is narrow, tapering, or of irregular pattern not lending itself to being constructed by prescribed machine methods, the Contractor is allowed to perform the strike-off, consolidation, final floating and surface finishing with Equipment, tools, means, labor and methods other than those specified, provided the Work meets with the approval of the Engineer and the following requirements:

00755.53(b) Other Coverings - Replace this subsection, except for the subsection number and title, with the following:

Apply the covering to damp concrete as soon as it can be placed without marring the surface. Place the membrane in contact with the surface, extend beyond the sides or edges of the slabs or forms, and weight down as required to hold it in position as a waterproof and moisture-proof covering. Lap covering sufficiently to maintain tightness equivalent to the sheeting and use:

Insert Project Name Here

- Clear or white polyethylene film.
- Waterproof paper with transverse laps at least 18 inches, and cement longitudinal seams.
- Cotton or jute mates that are saturated with water and kept fully wetted during the curing period.

00755.54 Longitudinal Pavement Cracks - Replace this subsection, except for the subsection number and title, with the following:

Within 28 Days after concrete placement and before opening the Pavement to Public Traffic, the Engineer will perform a Pavement crack survey. Clean the Pavement before the crack survey. Pavement with uncontrolled longitudinal cracks that are visible without magnification are considered unacceptable and be repaired or removed as determined by the Engineer. Perform all remedial Work at no additional cost to the Agency.

00755.55 Surface Tolerance, Testing, and Correction - Replace the paragraph that begins "The surface of finished ..." with the following paragraph:

Do not deviate the surface of finished Pavement from longitudinal and transverse smoothness more than the prescribed limits. Perform straightedge testing and IRI profile testing under the supervision of the Engineer with Equipment provided and operated by the Contractor as soon as the hardness of the concrete permits.

00755.55(a) Straightedge Testing and Tolerance - Replace the paragraph that begins "Test the longitudinal ..." with the following paragraph:

Test the longitudinal and transverse smoothness of the Pavement surface with a 12-foot straightedge. The extent of the testing is as the Engineer determines necessary or expedient. Do not deviate the Pavement surface from the straightedge at any point by more than 1/8 inch for all areas that are constructed by the prescribed machine methods and for all Traffic Lanes and ramps. Ensure other areas do not deviate by more than 1/4 inch. Longitudinal 12-foot straightedge testing is not required for Pavement accepted under 00755.55(b).

00755.55(a)(1) Transverse Joints - Replace the paragraph that begins "Test with the..." with the following paragraph:

Test transverse joints with the 12-foot straightedge parallel to the centerline, as directed. Ensure the Pavement surface does not vary by more than 1/8 inch.

00755.55(b)(1)a. Daily Surface Test - Replace the paragraph that begins "The Pavement shall..." with the following paragraph:

Acceptable Pavement requires an average IRI of 65.0 inches, or less. If the average 0.1-mile IRI exceeds 95.0 inches per mile for any segment of Pavement constructed in any Day's production, discontinue paving operations and construct one or more test strips as described in 00755.47. The test strip may be comprised of Pavement placed during the shift, but in no case be less than 0.1 mile in length.

00755.55(b)(1)b. Quality Control Surface Test - Replace the paragraph that begins "In the presence of ..." with the following paragraph:

Insert Project Name Here

In the presence of the Engineer and according to ODOT TM 772 obtain profiles on the Pavement surface in the right and left wheel path of the Traffic Lane along a line parallel to longitudinal pavement markings, at 3 feet and 9 feet offsets from the left edge of the Traffic Lane. Take the profile on transition areas of entrance and exit ramps, as close to the right and left wheel path of the through Traffic Lane as practical. Submit data files to the Engineer at the completion of each shift where profiling has taken place. For the Pavement sections tested, provide the raw data files and electronic copies of the profile data in PPF and manufacturer proprietary formats, as required by the Engineer.

00755.55(c)(1) General - Replace the paragraph that begins "Locate IRI profiling ..." with the following paragraph:

Locate IRI profiling excluded areas prior to smoothness measurement. Meet the straightedge requirements of 00755.55(a) for areas excluded from longitudinal profile measurement.

00755.55(d) Shoulders and Paved Medians - Replace this subsection, except for the subsection number and title, with the following:

Test the Pavement with the 12-foot straightedge parallel to and perpendicular to the centerline for Shoulders and paved Medians, as directed by the Engineer. Ensure the Pavement surface does not vary by more than 1/4 inch.

00755.55(e) Correcting Deficiencies - Replace the paragraph that begins "Should testing described ..." with the following paragraph:

Should testing described in 00755.49, 00755.51, and 00755.55 show the Pavement does not conform to the prescribed limits of deviation, the following apply:

00755.55(e)(2) Failure to Meet IRI Smoothness Requirements - Replace the paragraph that begins "If testing described ..." with the following paragraph:

If testing described in 00755.55(b) shows that the Pavement does not conform to the prescribed limits, the Contractor is responsible for locating areas that require corrective work. All segments with an IRI value more than 95.0 inches per mile and areas of Localized Roughness are subject to corrective action. Disagreements are resolved by the Engineer.

00755.56 Pavement Thickness - Replace the paragraph that begins "Construct the Pavement ..." with the following paragraph:

Construct the Pavement to the thickness shown. Pavement not so constructed is subject to replacement according to 00755.57, or to payment at adjusted prices according to 00755.93.

00755.56(a) Sticking Measurements - Replace the paragraph that begins "Divide the Panel ..." with the following paragraph:

Divide the Panel into units and partial units equivalent to a maximum of 200 lane feet. Normally, unit lengths are 200 feet for one lane, 100 feet for two lanes, 70 feet for three lanes and as appropriate for transition areas. When directed, take one sticking measurement at a randomly selected location in each unit and partial unit. Record measurements to the nearest 0.1 inch. Take the measurements:

Replace the paragraph that begins "If a sticking ..." with the following paragraph:

If a sticking is not obtained for a unit or a partial unit, or is not available to represent the area of Pavement remaining after the limits of Pavement over 1.0 inch deficient is determined, the measurement is assumed to be the same as the preceding or following sticking measurement, that is nearest in distance.

00755.56(c) Coring Requirements - Replace the paragraph that begins "Perform required coring ..." with the following paragraph:

Perform required coring, or coring requested by the Engineer according to AASHTO T 24 and repair core holes as directed, at no additional cost to the Agency. Cores are measured by the Engineer according to AASHTO T 148 and the measurements reported to the nearest 0.1 inch. Core measurements will replace sticking measurements.

00755.56(d) Thickness Over 1.0 Inch Deficient - Replace this subsection, except for the subsection number and title, with the following:

If a sticking measurement shows Pavement over 1.0 inch deficient, obtain a core at the sticking measurement site. If this core, or a core determined by 00755.56(c)(1), shows Pavement over 1.0 inch deficient, obtain additional cores. Take these additional cores at the same distance from the centerline and at 25-foot intervals each direction from the first core until a core in each direction shows Pavement 1.0 inch deficient or less. These two core locations are considered the limits of the Pavement more than 1.0 inch deficient. The Pavement Panel between these two cores will represent the area of Pavement subject to removal and replacement under 00755.57 or no payment under 00755.93.

When it is suspected by the Engineer that the Pavement in the adjacent travel lanes in the Panel may be more than 1.0 inch deficient for a greater distance than determined by the above procedure, core the Pavement in the adjacent travel lanes in the nearest wheel track (3 feet from the nearest edge) opposite both limit cores. If these cores are more than 1.0 inch deficient, utilize the above procedure to determine the limits.

00755.57 Deficient Pavement - Replace the paragraph that begins "Remove and replace ..." with the following paragraph:

Remove and replace Pavement deficient in thickness by more than 1.0 inch, according to 00755.56(d), at no additional cost to the Agency. If allowed by the Engineer, the Pavement may be left in place without payment. Replace Pavement to the specified design, quality and thickness as follows:

00755.60 Protection of Concrete - Replace the paragraph that begins "The maturity method ..." with the following paragraph:

The maturity method, AASHTO T 325, may be used to estimate concrete strength for opening Pavement to construction traffic. Install at least two maturity thermocouples for each Day's placement in areas where the maturity method is used for early opening. Install the thermocouples near the Day's final placement for areas being evaluated for early opening.

Insert Project Name Here

Replace the paragraph that begins "(b) The concrete attains a compressive..." with the following paragraph:

(b) The concrete attains a compressive strength of at least 70 percent of the specified 28 Day strength as determined by testing at least three cylinders cured according to AASHTO R 100 (field cure) and tested according to AASHTO T 22.

(Use the following subsection .80 when terminal expansion joints are required.)

00755.80 Measurement - Replace the paragraph that begins "The quantities of terminal anchors..." with the following paragraph:

The quantities of terminal anchors, terminal expansion joints, and terminal expansion joint sleeper slab will be measured on the length basis, along the centerline of each anchor and joint as constructed.

00755.90 Payment - Replace the paragraph that begins "In items (b) and (d)..." with the following paragraph:

In items (b) and (d), the thickness of the Pavement is inserted in the blank when more than one thickness is required under the Contract.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraphs when pay items (g), or (h) are required. Delete what does not apply.)

Add the following pay item to the pay item list:

(h) Terminal Expansion Joint Sleeper Slab..... Foot

Replace the paragraph that begins "Item (g)..." with the following paragraph:
Item (g) includes the dowelled expansion joint.

Add the following paragraph to the end of this subsection:

Item (h) includes excavation for the terminal expansion joint sleeper slab.

SP00756 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-23-26

Requires SP02001, SP02050, SP02510 & SP02530

Requires SP02080 when grout is required.

Requires SP02440 when preformed expansion joint filler is required)

SECTION 00756 - PLAIN CONCRETE PAVEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00756 of the Standard Specifications modified as follows:

00756.04 Aggregate Production and Prepaving Conference - Replace this subsection, except for the subsection number and title, with the following:

(a) Aggregate Production Conference - Meet with the Engineer, at a mutually agreed time, to discuss methods of accomplishing Aggregate production, and include supervisory personnel of the Contractor and any Subcontractors or Suppliers who are to be involved in the Aggregate production Work.

(b) Prepaving Conference - Meet with the Engineer, at a mutually agreed time, to discuss methods of accomplishing all phases of the paving Work, and include supervisory personnel of the Contractor and any Subcontractors who are to be involved in the concrete paving Work.

00756.16 Acceptance of Concrete Replace this subsection, except for the subsection number and title, with the following:

(a) General - Acceptance of concrete is based on the results of the Contractor's quality control testing according to Section 00165.

(b) Aggregate - Acceptance of Aggregate is based on the Contractor's quality control testing, if verified by the Agency according to Section 00165.

(1) Aggregate Gradation - A stockpile contains specification Aggregate gradation when the quality level for each sieve size calculated according to 00165.40 is equal to or greater than the quality level specified in Table 00165-2 for a PF of 1.00. Each required sample represents a subplot. When the quality level specified in Table 00165-2 yields a PF of less than 1.00 for any constituent, the material is non-specification.

(2) Non-specification Aggregate Gradation - Stockpiled Aggregates that contain non-specification Aggregate gradation is rejected by the Engineer unless non-specification material is removed from the stockpile. Do not add additional material to the stockpile until enough non-specification material is removed so that the quality level for each constituent is equal to or greater than the quality level in Table 00165-2 for a 1.00 PF.

(c) Plastic Concrete - Acceptance of the plastic concrete is based on the tests performed by the Contractor's QCT, according to the tolerances and limits of Section 02001.

(d) Hardened Concrete - Cast and cure the test specimens according to AASHTO R 100 in 6-inch x 12 inch single-use plastic molds and test at 28 Days according to AASHTO T 22.

(1) General - For all classes of concrete, acceptance of hardened concrete is based on an analysis of compressive strength tests of cylinders cast by the QCT. Test the cylinders at an ODOT certified laboratory.

(2) Sampling and Testing - Provide sampling and testing according to Section 00165.

(3) Acceptance - The ASTV is required to exceed the f'_c (specified strength) for the mix design. If a set of cylinders has an ASTV less than f'_c , the Engineer will review the results to determine if the concrete represented by the cylinders is to be removed. In any case, remove concrete that has an ASTV of less than 85 percent of the specified strength unless otherwise authorized, in writing, by the Engineer. Be responsible for the cost of removal, replacement and all related Work, subject to a price adjustment according to 00150.25, if the concrete is allowed to remain in place.

If an ASTV falls below the f'_c , the Contractor may submit a written plan within 3 Days of the test for review by the Engineer. Outline a proposed alternate method of evaluating compressive strength and provide evidence that a reasonable f'_{cr} (over-design) was maintained and that there is credible evidence (besides low strength) that warrants consideration of this option. If the Engineer determines that the compressive strength test results are suspect from definable external factors, the Engineer may allow an alternate method of acceptance.

00756.22 Hauling Equipment - Replace this subsection, except for the subsection number and title, with the following:

Transport concrete in non-agitating Equipment. Truck mixers may be used to transport concrete only as allowed in 00756.45. When allowed, provide hauling Equipment according to AASHTO M 157.12 or AASHTO M 157.11.6.

00756.23 Paving Equipment - Replace the paragraph that begins "Provide self-propelled ..." with the following paragraph:

Provide self-propelled paving machines according to the following:

00756.23(a) Placer/Spreader - Replace this subsection, except for the subsection number and title, with the following:

Provide a placer/spreader that:

- Receives the concrete mixture in its hopper on the Shoulder area.
- Delivers the concrete mixture to the slipform paver and uniformly spread at the proper thickness for the full width of the area being paved.
- Does not segregate the concrete mixture or displace the reinforcing steel.

00756.23(c) Paving Machine - Replace this subsection, except for the subsection number and title, with the following:

If a paving machine riding on stationary side forms is used, provide Equipment meeting the following:

- A self-propelled, screening type machine used for initial strike-off and consolidation of PCC that rides on and is guided by steel side forms or the edge of contiguous PCC Pavement. Provide a machine designed and operated to strike-off, consolidate and compact the PCC to prescribed line, grade and Cross Section. Make provisions to prevent chipping or marring previously placed PCC.
- Vibratory Equipment of the surface pan type or internal type with immersed tube or multiple spuds. Provide a vibrator capable of full slab width vibration to the concrete. Provide vibration rates not less than 3,500 cycles per minute for surface vibrators and not less than 7,000 cycles per minute for internal vibrators and as necessary for proper consolidation and compaction.
- A self-propelled floating and finishing machine that rides on and is guided by steel side forms or the edge of contiguous PCC Pavement. Provide floating action to the PCC surface by means of screeds, floats, rollers or combinations of them. Provide screed type machines that have at least two oscillating type transverse screeds and that have sufficient wheel base length, weight, float surface and adjustments to true up the PCC surface to accurate Cross Section and grade without dragging, marking or defacing the surface.

00756.25(b) Inertial Profiler - Replace the paragraph that begins "Provide competent and ..." with the following paragraph:

Provide competent and experienced operator(s) for the Equipment, certified with the profiler according to ODOT TM 769. Meet with the Engineer and the profile operator at a mutually agreed upon time prior to beginning smoothness measurements to discuss all aspects of smoothness measurement on the Project.

00756.30 Quality Control Personnel - Replace the bullet that begins "Provide and designate ..." with the following bullet:

- Provide and designate an individual who is present at the placement site at all times during concrete placements, and who is authorized and responsible for acceptance and rejection of Materials.

Replace the bullet that begins "Reject loads ..." with the following bullet:

- Reject loads that arrive at the Project Site without a batch ticket.

00756.40 Weather Limitations - Replace the paragraph that begins "Coordinate all operations involved..." with the following paragraph:

Coordinate all operations involved in constructing the Pavement so the Work will result in a finished Pavement according to the Specifications regardless of the variations in weather, temperature and humidity when the Work is allowed to proceed.

Replace the paragraph that begins "Do not place PCC during ..." with the following paragraph:

Do not place PCC during periods of rain. Do not place PCC on frozen Bases, or when descending air temperature falls below 35 °F. Do not resume placement until ascending air temperature reaches 35 °F. Measure air temperature in the shade and away from artificial heat.

00756.41 Preparation of Base - Replace the paragraph that begins "The base shall ..." with the following paragraph:

Provide a moist base before placing the concrete. When the Base is a treated Base the surface, provide a clean surface free of all loose material. Place concrete on existing and new treated Base only when the surface temperature is less than 90 °F. If water is used for cooling, remove all excess water standing in pools or flowing on the surface before placing concrete.

Replace the paragraph that begins "Manholes, inlets and ..." with the following paragraph:

Ensure manholes, inlets and other such Structures are completed, adjusted, cured and otherwise prepared, as applicable, and ready to have concrete placed in contact with them. Prepare manhole frames and other independent metal Structures in the Pavement area with an approved bond-preventing agent.

00756.42 Construction Widths - Replace the paragraph that begins "If the Contractor proposes ..." with the following paragraph:

If the Contractor proposes a method of placement other than that shown or specified, it will be at no additional cost to the Agency. Any changes require the Engineer's approval.

00756.43(a) Dowel Bars - Replace this subsection, except for the subsection number and title, with the following:

Provide smooth, round, epoxy coated dowel bars. Coat dowel bars with a lubricant or bond breaking compound approved by the Engineer. Use a framework to place dowels that is continuous across the entire lane width, holds the dowels parallel with each other, holds the dowels parallel with the surface of the Pavement, and holds the dowels parallel to the Roadway centerline. For dowels placed across an expansion joint, use a dowel bar basket or other system of support that leaves no permanent incompressible members in place within the joint. Place dowels with a maximum alignment tolerance of 5 degrees or 3/16 inch in the length of the dowel. Place dowels within 3/8 inch of the center of the slab vertically.

Place dowel bars for joint contact at existing concrete Pavement surfaces by drilling the existing concrete section and then inserting the dowel bars and grouting them in place. Drill the holes large and deep enough to insert the dowel bars with adequate epoxy or non-epoxy grout. Adjust hole locations to avoid damaging any existing reinforcement when drilling the holes. Blow the dowel bar holes clean with compressed air before grouting. Center the bar in the hole for the full length of embedment before grouting. Pump the grout into the hole around the bar so the back of the hole is filled first. Do not allow blocking or shimming to impede the flow of the grout into the hole. If dams are needed, place them at the front of the holes to confine the grout. Place the dams to permit the escape of air without leaking grout. Do not remove dams until grout has cured in the hole.

00756.43(b) Tie Bars - Replace the bullet that begins "By using threaded mechanical ..." with the following bullet:

- By using threaded mechanical splice couplers from the QPL. Submit splices for approval before using. Accompany rebar splices with a manufacturer's quality compliance certificate according to 00165.35.

Delete the bullet that begins "Accompanied by...".

Replace the bullet that begins "Installed according ..." with the following bullet:

- Install rebar splices according to manufacturer's recommendations.

00756.44 Handling, Measuring, and Batching Materials - Replace the paragraph that begins "The plant site, layout ..." with the following paragraph:

Provide the plant site, layout, Equipment and provisions for transporting Material that is adequate to assure a continuous supply of Material to the Project Site.

00756.46 Placing Concrete - Replace the bullet that begins "By using threaded mechanical ..." with the following bullet:

- In short sections of Pavement that are necessary to facilitate traffic movement.

00756.46(b) One Lift - Replace this subsection, except for the subsection number and title, with the following:

Place the concrete in final position by the slipform method in one Lift, so a minimum of finishing is necessary to provide a dense, homogenous Pavement conforming to true grade and Cross Section.

00756.46(e) Stationary Side Form Method - Replace this subsection, except for the subsection number and title, with the following:

Place the PCC between stationary side forms by means that will prevent segregation of constituents of the PCC, displacement or deformation of the forms or Base, forming of piles, and unequal consolidation.

Spread and distribute the PCC with a mechanical concrete spreader that will fill all corners and spaces with PCC and leave it at such height that after consolidation and finishing it is at specified grade and Cross Section. Spread and vibrate the PCC against and along the forms, and in the vicinity of joints comprising load transfer devices, with care to avoid displacement of the forms or devices.

Use shovels or muckrakes, not rakes, for hand spreading and distributing. Do not foul the PCC with foreign matter.

After being placed, strike-off, vibrate and consolidate the PCC with Equipment conforming to the requirements of 00756.23. If more than one machine is required to properly handle production, the vibrating of PCC precedes or accompanies the first or leading machine only.

Insert Project Name Here

Perform the operations above within 15 minutes after the PCC is placed. Provide continuous operations until the surface has been worked the equivalent of not less than two Passes of a single screed machine. In each Pass of the machine, maintain a roll of PCC ahead of the screed for the entire width of Pavement being placed. Furnish a surface of uniform texture, true to grade and Cross Section following the strike-off, vibrating and consolidating.

Provide Equipment in good mechanical condition at all times and be adjusted for wear at the direction of the Engineer. Keep forms and other controls of line and grade clean and true to line and grade.

00756.46(h) Protect Surface - Replace this subsection, except for the subsection number and title, with the following:

Equip supports of the slipform paver, and other Equipment that ride on previously placed Pavement to meet the requirements of 00756.60, to prevent marring, edge breaking, or chipping of the previously placed Pavement.

When concrete is placed adjacent to an existing Pavement, equip that part of the Equipment that is supported on the existing Pavement with protective pads on crawler tracks or use rubber-tired wheels. Offset the track or wheels to run a sufficient distance from the edge of the Pavement to avoid breaking the Pavement edge.

00756.46(i) Hand Operated Equipment - Replace this subsection, except for the subsection number and title, with the following:

Use shovels and muckrakes, not rakes, for hand spreading and distributing. Do not foul the concrete with foreign matter, or disturb joint devices during such operations. Provide hand operated mechanical vibrators satisfactory to the Engineer. Use these vibrators to consolidate the concrete Pavement at least 6 feet on each side of construction and expansion joints and any other areas as directed.

00756.47 Test Strip - Replace the paragraph that begins "At the beginning ..." with the following paragraph:

At the beginning of paving operations, construct one initial test strip of concrete Pavement at least 0.1 mile long at the specified paving width. Do not perform further paving until the test strip is evaluated according to 00756.55. An additional test strip is required when:

00756.48(a) General - Replace this subsection, except for the subsection number and title, with the following:

Construct joints of the kinds shown and where shown or directed. Joint types in the concrete Pavement are contraction, construction or expansion. Construct transverse or longitudinal joints, as shown or directed. Extend all joints and joint filler to Pavement edges or to each other.

Do not vary joints from specified or indicated line by more than 1/4 inch. When required, construct the tops of joint filler, slightly below, but not more than 1/8 inch, and paralleling finished Pavement grade and Cross Section. Protect top edges of filler from damage by paving operations.

Insert Project Name Here

All joints that contain preformed filler are to be constructed before the final floating and surface finishing of the concrete, unless otherwise directed.

00756.48(b) Longitudinal Joints - Replace the paragraph that begins "If the Contractor elects ..." with the following paragraph:

If the Contractor elects to pour the entire width of Pavement at one time, construct the longitudinal joint as shown. Construct longitudinal joints of the contact type or weakened plane type as shown:

00756.48(c) Construction Joints - Replace the paragraph that begins "The new concrete ..." with the following paragraph:

Furnish new concrete placed against the construction joint closely conforming to the proportions and consistency of the previously placed concrete except vibrate and consolidate it to a greater degree and with more care than normal. Unless otherwise shown, do not construct construction joints within 10 feet of a transverse expansion or contraction joint. If sufficient concrete has not been mixed at the time of interruption to form a slab at least 10 feet long, remove the concrete back to the last joint and dispose of as directed.

00756.49 Surface Finishing - Replace the paragraph that begins "After the concrete has ..." with the following paragraph:

After the concrete has been given a preliminary finish by the finishing devices in the slipform paving Equipment, check the surface of the fresh concrete in the longitudinal and transverse direction with a 12-foot straightedge. Correct surface deviations more than allowed by 00756.55(a). Lap each successive check with the previous check path by at least half the length of the straightedge. This longitudinal checking and correction on areas to be profiled for IRI smoothness is waived if it is successfully demonstrated that a Pavement surface is otherwise produced according to 00756.55(b)(1)(a).

Replace the paragraph that begins "Following hand floating ..." with the following paragraph:

Following hand floating, use a 12-foot proof (grout) rod to check the surface of the Pavement. For each Pass of the proof rod in the longitudinal direction, over the entire surface of the Pavement placement, overlap the previous Pass by half of its width. Check the transverse direction as required. Use of a proof rod on areas to be graphically profiled is waived if it is successfully demonstrated that required Pavement profile surface is otherwise produced according to 00756.55(b)(1)(a).

00756.51 Modification of Strike-off, Consolidation, Final Floating, and Surface Finishing - Replace the paragraph that begins "Where the width ..." with the following paragraph:

Where the width of Pavement is narrow, tapering or of irregular pattern, not lending itself to being constructed by prescribed machine methods, the Contractor is allowed to perform the strike off, consolidation, final floating, and surface finishing with Equipment, tools, means, labor and methods other than those specified, provided the Work meets with the approval of the Engineer and the following requirements:

00756.53(b) Other Coverings - Replace this subsection, except for the subsection number and title, with the following:

Apply the covering to damp concrete as soon as it can be placed without marring the surface. Place the membrane in contact with the surface, extend beyond the sides or edges of the slabs or forms, and weight down as required to hold it in position as a waterproof and moisture-proof covering. Lap covering sufficiently to maintain tightness equivalent to the sheeting and use:

- Clear or white polyethylene film.
- Waterproof paper with transverse laps at least 18 inches, and cement longitudinal seams.
- Cotton or jute mats that are saturated with water and kept fully wetted during the curing period.

00756.54 Pavement Cracks - Replace this subsection, except for the subsection number and title, with the following:

Within 28 Days after concrete placement and before opening the Pavement to Public Traffic, the Engineer will perform a Pavement crack survey. Clean the Pavement before the crack survey. Pavement with uncontrolled longitudinal or transverse cracks that are visible without magnification are considered unacceptable and be repaired or removed as determined by the Engineer. Perform all remedial Work at no additional cost to the Agency.

00756.55 Surface Tolerance, Testing, and Correction - Replace the paragraph that begins "The surface of finished ..." with the following paragraph:

Ensure the surface of finished Pavement does not deviate from longitudinal and transverse smoothness more than the prescribed limits. Perform straightedge testing and IRI profile testing under the supervision of the Engineer with Equipment furnished and operated by the Contractor as soon as the hardness of the concrete permits.

00746.55(a) Straightedge Testing and Tolerance - Replace this subsection, except for the subsection number and title, with the following:

Test the longitudinal and transverse smoothness of the Pavement surface with a 12-foot straightedge. The extent of the testing is as the Engineer determines necessary or expedient. Do not deviate the Pavement surface from the straightedge at any point by more than 1/8 inch for all areas that are constructed by the prescribed machine methods and for all Traffic Lanes and ramps. Do not deviate other areas by more than 1/4 inch. Longitudinal 12-foot straightedge testing is not required for Pavement accepted under 00756.55(b).

(1) Transverse Joints - Test with the 12-foot straightedge parallel to the centerline, as directed. Do not vary the Pavement surface by more than 1/8 inch.

00756.55(b)(1)a. Daily Surface Test - Replace the paragraph that begins "The pavement shall..." with the following paragraph:

Acceptable Pavement requires an average IRI of 65.0 inches, or less. If the average 0.1-mile IRI exceeds 95.0 inches per mile for any segment of Pavement constructed in any Day's

production, discontinue paving operations and construct one or more test strips as described in 00756.47. The test strip may be comprised of Pavement placed during the shift, but in no case is it allowed to be less than 0.1 mile in length.

00756.55(b)(1)b. Quality Control Surface Test - Replace the paragraph that begins "In the presence of ..." with the following paragraph:

In the presence of the Engineer and according to ODOT TM 772 obtain profiles on the Pavement surface in the right and left wheel path of the Traffic Lane along a line parallel to longitudinal Pavement markings, at 3 feet and 9 feet offsets from the left edge of the Traffic Lane. Take the profile on transition areas of entrance and exit ramps, as close to the right and left wheel path of the through Traffic Lane as practical. Submit data files to the Engineer at the completion of each shift when profiling has taken place. For the Pavement sections tested, provide the raw data files and electronic copies of the profile data in PPF and manufacturer proprietary formats, as required by the Engineer.

00756.55(c)(1) General - Replace the paragraph that begins "In the presence of ..." with the following paragraph:

Locate IRI profiling excluded areas prior to smoothness measurement. Meet the straightedge requirements of 00756.55(a) for areas excluded from longitudinal profile measurement.

00756.55(d) Shoulders and Paved Medians - Replace this subsection, except for the subsection number and title, with the following:

Test the Pavement with the 12-foot straightedge parallel to and perpendicular to the centerline for Shoulders and paved Medians, as directed by the Engineer. Do not vary the Pavement surface by more than 1/4 inch.

00756.55(e) Correcting Deficiencies - Replace the paragraph that begins "Should testing described ..." with the following paragraph:

Should testing described in 00756.49, 00756.51, and 00756.55 show the Pavement does not conform to the prescribed limits of deviation, the following applies:

00756.55(e)(2) Failure to Meet IRI Smoothness Requirements - Replace the paragraph that begins "If testing described ..." with the following paragraph:

If testing described in 00756.55(b) shows that the Pavement does not conform to the prescribed limits, the Contractor is responsible for locating areas that require corrective work. All segments with an IRI value more than 95.0 inches per mile and areas of Localized Roughness are subject to corrective action. Disagreements are resolved by the Engineer.

00756.56 Pavement Thickness - Replace the paragraph that begins "Construct the Pavement ..." with the following paragraph:

Construct the Pavement to the thickness shown. Pavement not so constructed is subject to replacement according to 00756.57, or to payment at adjusted prices according to 00756.93.

00756.56(a) Sticking Measurements - Replace the paragraph that begins "Divide the Panel ..." with the following paragraph:

Insert Project Name Here

Divide the Panel into units and partial units equivalent to a maximum of 200 lane feet. Normally, unit lengths are 200 feet for one lane, 100 feet for two lanes, 70 feet for three lanes and as appropriate for transition areas. When directed, take one sticking measurement at a randomly selected location in each unit and partial unit. Record measurements to the nearest 0.1 inch. Take the measurements:

Replace the paragraph that begins "If a sticking ..." with the following paragraph:

If a sticking is not obtained for a unit or a partial unit, or is not available to represent the area of Pavement remaining after the limits of Pavement over 1.0 inch deficient is determined, the measurement is assumed to be the same as the preceding or following sticking measurement, that is nearest in distance.

00756.56(c) Coring Requirements - Replace the paragraph that begins "Perform required coring ..." with the following paragraph:

Perform required coring, or coring requested by the Engineer according to AASHTO T 24 and repair core holes as directed, at no additional cost to the Agency. Cores are measured by the Engineer according to AASHTO T 148 and the measurements reported to the nearest 0.1 inch. Core measurements will replace survey methods.

00756.56(d) Thickness Over 1.0 Inch Deficient - Replace this subsection, except for the subsection number and title, with the following:

If a depth measurement determined according to 00756.56(a) shows Pavement over 1.0 inch deficient, obtain a core at the depth measurement site. If this core, or a core determined by 00756.56(c), shows Pavement over 1.0 inch deficient, obtain additional cores. Take these additional cores at the same distance from the centerline and at 25-foot intervals each direction from the first core until a core in each direction shows Pavement 1.0 inch deficient or less. These two core locations are considered the limits of the Pavement more than 1.0 inch deficient. The Pavement Panel between these two cores will represent the area of Pavement subject to removal and replacement under 00756.57 or no payment under 00756.93.

When it is suspected by the Engineer that the Pavement in the adjacent travel lanes in the Panel may be more than 1.0 inch deficient for a greater distance than determined by the above procedure, core the Pavement in the adjacent travel lanes in the nearest wheel track (3 feet from the nearest edge) opposite both limit cores. If these cores are more than 1.0 inch deficient, utilize the above procedure to determine the limits.

00756.57 Deficient Pavement - Replace the paragraph that begins "Remove and replace ..." with the following paragraph:

Remove and replace Pavement deficient in thickness by more than 1.0 inch, according to 00756.56(d), at no additional cost to the Agency. If allowed by the Engineer, the Pavement may be left in place without payment. Replace Pavement with the specified design, quality and thickness as follows:

(Use the following subsection .58 when flexible to rigid pavement transitions are required)

Insert Project Name Here

Add the following subsection:

00756.58 Flexible to Rigid Pavement Transition Systems - Furnish the concrete in Pavement transition systems according to 00756.11. Furnish steel meeting the requirements for standard Pavement reinforcement as shown.

Vibrate the concrete in Pavement transition systems until it is consolidated and the excavations are filled. Construct Pavement transition systems at least 24 hours before paving operations.

00756.60 Protection of Concrete - Replace the paragraph that begins "(b) The concrete attains a compressive..." with the following paragraph:

(b) The concrete attains a compressive strength of at least 70 percent of the specified 28-Day strength as determined by testing at least three cylinders cured according to AASHTO R 100 (field cure) and tested according to AASHTO T 22.

Replace the paragraph that begins "The maturity method ..." with the following paragraph:

The maturity method, AASHTO T 325, may be used to estimate concrete strength for opening Pavement to construction traffic. Install at least two maturity thermocouples for each Day's placement in areas where the maturity method is used for early opening. Install the thermocouples near the Day's final placement for areas being evaluated for early opening.

(Use the following subsection .80 when flexible to rigid pavement transitions are required)

00756.80 Measurement - Add the following to the end of this subsection:

The quantities of flexible to rigid Pavement transition systems will be measured on the area basis.

00756.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following three paragraphs when flexible to rigid pavement transitions are required)

Add the following Pay Item to the Pay Item list:

(c) Flexible to Rigid Pavement TransitionsSquare Yard

Item (c) includes the transition panel, excavation, and dowelled expansion joint. ACP will be paid for according to 00744.90, or 00745.90, as applicable.

Insert Project Name Here

SP00758 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02001, SP02050, SP02080,
SP02440 and SP02510)

SECTION 00758 - REINFORCED CONCRETE PAVEMENT REPAIR

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00758 is not a Standard Specification and is included in this Project by Special Provision.

Description

00758.00 Scope - This Work consists of sawcutting and removing existing concrete Pavement and constructing new reinforced and continuously reinforced Portland cement concrete Pavement repairs as shown and specified.

00758.01 Abbreviations:

HES - High Early Strength

00758.04 Pre-placement Conference - Hold a pre-placement conference with all supervisory personnel who are to be involved in the concrete Pavement repair Work at a mutually agreed time. Ensure the Engineer, concrete Supplier and other Subcontractors are represented. Discuss methods of accomplishing all phases of the concrete Pavement repair Work.

Materials

00758.10 Materials - Furnish Materials meeting the following requirements:

Bonding Agents	02070
Concrete	02001
Curing Materials	02050
Grouts.....	02080
Hot Poured Joint Filler	02440.30
Portland Cement Concrete Repair Material	02015
Preformed Joint Fillers for Concrete.....	02440.10
Reinforcement	02510
Resin Bonded Anchor Systems.....	00535
Synthetic Macro Fiber Reinforcing	02045.20

00758.11 Classes of Concrete -

(Use one of the following two options as instructed. Delete the option that does not apply.)

[Option 1 - Use the following paragraph when HES concrete is NOT required.]

Furnish Class 4000 - 1 1/2 paving concrete.

[Option 2 - Use the following paragraph when the timeframe designated for opening traffic is less than 72 hours after concrete placement and HES concrete is required.]

Furnish Class HES4000 - 1 1/2 concrete designed to attain a minimum average compressive strength of 2,500 psi prior to allowing traffic on the concrete.

00758.13 Concrete Mix Designs - Prepare and submit either new mix designs or current mix designs for each class of concrete required according to Section 02001.

(Use the following HES language when HES concrete is required under subsection .11.)

[Begin HES language]

Provide HES mix designs that contain fiber reinforcement according to 02045.20. Introduce and mix the fibers in a way that will achieve uniform distribution.

Provide HES mix designs with a Strength-Maturity Relationship established per AASHTO T 276 and AASHTO T 325 during the mix design phase. Take a minimum of seven early age readings at 1, 2, 3, 4, 5, 6, and 24 hours. Each reading requires averaging the two maturity cylinders and breaking three compressive strength specimens. Submit the required concrete maturity data outlined in the "Reports" sections 11.1.1 through 11.1.10 of AASHTO T 276 and 11.1.1 through 11.1.5 of AASHTO T 325 for approval by the Engineer.

HES mix designs may use Type III Cement from the QPL or Cement that complies with the definition of hydraulic cement or blended hydraulic cement according to ASTM C219.

[End HES language]

00758.15 Quality Control - Provide quality control according to Section 00165, 00758.30, Section 02001, and the following:

(a) Concrete Mixture -

- Sample and test according to the MFTP.
- For all reinforced concrete Pavement repair, provide personnel according to 00758.30 to sample and test the mix for temperature, air content, slump, water-cementitious ratio, density and yield, from the first load of each placement,

whenever there is a visible change in the slump of the concrete, and when a set of cylinders is obtained.

- If the results of any test are outside of the specification limits, stop the placement of the load. Correct the load or reject it and do not incorporate it into the work. Test subsequent loads before any further concrete placement. Correct the subsequent loads if any of the tests are still outside the specification limits. If the load cannot be corrected, reject it and do not incorporate it into the work. Testing of subsequent loads may return to the specified frequency when the test results from two consecutive loads are shown to meet the specification limits.

(b) Records - Deliver all batch tickets, water-cement ratio calculations, and all other records according to the MFTP.

00758.16 Acceptance of Concrete:

(a) General - Acceptance of concrete is based on the results of the Contractor's quality control testing according to Section 00165.

(b) Aggregate - Acceptance is based on the Contractor's quality control testing, if verified by the Agency according to Section 00165.

(1) Aggregate Gradation - A stockpile contains specification aggregate gradation when the quality level for each sieve size calculated according to 00165.40 is equal to or greater than the quality level in Table 00165-2 for a PF of 1.00. Each required sample represents a subplot. When the quality level in Table 00165-2 yields a PF of less than 1.00 for any constituent, the material is non-specification.

(2) Non-specification Aggregate Gradation - Stockpiled aggregates that contain non-specification aggregate gradation is rejected by the Engineer unless non-specification material is removed from the stockpile. Do not add additional Material to the stockpile until enough non-specification Material is removed so that the quality level for each constituent is equal to or greater than the quality level in Table 00165-2 for a 1.00 PF.

(c) Plastic Concrete - Acceptance of the plastic concrete is based on the tests performed by the Contractor's QCT, according to the tolerances and limits of Section 02001.

(d) Hardened Concrete - Cast and cure the test cylinders according to AASHTO R 100 in single use plastic molds and test at 28 Days according to AASHTO T 22.

(1) General - For all classes of concrete, acceptance of hardened concrete is based on an analysis of compressive strength tests of cylinders cast by the QCT. Test cylinders at an ODOT certified laboratory.

(2) Actual Strength Test Value (ASTV) - The ASTV at 28 Days is the average compressive strength of the three cylinders tested.

(3) Sampling and Testing - Sample and test according to Section 00165 and the MFTP.

(4) Acceptance - Furnish Material with an ASTV that meets or exceeds the f'_c (specified strength) for the mix design. If a set of cylinders has an ASTV less than f'_c , the Engineer will review the results to determine if the concrete represented by the cylinders requires removal. In any case, concrete that has an ASTV of less than 85 percent of the specified strength requires removal unless otherwise authorized, in writing, by the Engineer. The cost of removal, replacement, and all related Work is the Contractor's responsibility, subject, if the concrete is allowed to remain in place, to a price adjustment according to 00150.25.

If an ASTV falls below the f'_c , the Contractor may submit a written plan within 3 Days of the test for review by the Engineer. Provide a plan that outlines a proposed alternate method of evaluating compressive strength. Provide evidence that a reasonable f'_c (over design) was maintained and that there is credible evidence (besides low strength) that warrants consideration of this option. If the Engineer determines that the compressive strength test results are suspect from definable external factors, the Engineer may allow an alternate method of acceptance.

(Use the following subsection .17 when spall repair is required.)

00758.17 Spall Repair Material - For spall repair, furnish a PCC repair Material meeting the requirements of Section 02015 except do not use products that contain magnesium phosphate.

(Use the following subsection .18 when bond breaker is required.)

00758.18 Bond Breaker - Furnish a bond breaker complying with one of the following:

- Non-woven geotextile meeting the property requirements listed in Table 02320-4.
- Liquid curing compound evenly applied as a bond breaker in two applications, at a rate of 1 gallon per 130 to 165 square feet for each application, over the entire surface area.

Equipment

00758.20 Batch Plant - Provide batch plants according to 02001.40.

00758.21 Mixers - Provide mixers according to 02001.40.

When Class HES concrete is required, mobile mixers may be used if the mixers conform to the following:

- The mixer is self-propelled and carries sufficient unmixed dry bulk cement, Sand, Coarse Aggregate, admixtures, and water to produce a minimum of 6 cubic yards of concrete on site.
- The mixer provides positive measurement of cement being introduced into the mix by meter or counter.
- The mixer provides positive control of the flow of water into the mixing chamber. Water flow is readily adjustable to provide for minor variations in aggregate moisture.
- Each mixer is calibrated to automatically proportion and blend all components according to the mix design on a continuous or intermittent basis as required by the placing operation.

Insert Project Name Here

Perform a calibration and yield test on each mixer prior to the first placement to accurately proportion the specified mix. Use a written calibration procedure from the mixer manufacturer, a procedure provided by the agency or other written procedure acceptable to the Agency. The calibration process may be witnessed by the Engineer. Provide the Engineer with information about the scheduled date, time and place for the calibration. Perform a new calibration when the source of Materials changes, when the mixer undergoes a major repair, or when requested by the Engineer.

00758.22 Hauling Equipment - Use truck mixers to transport concrete. Hauling equipment according to 02001.40.

00758.23 Paving Equipment - Provide paving Equipment according to the following:

- Able to vibrate, consolidate, and finish the slab to proper grade and Cross Section for the full width and depth of the concrete being placed.
- Capable of meeting the smoothness requirements.
- Approved by the Engineer.

00758.24 Concrete Saws - Provide power driven concrete saws for sawing joints, adequate in number of units and power to complete the sawing at the required rate. Also provide a standby saw on the Project Site. For sawing repair areas, provide specialized power driven concrete saws capable of sawing corners of the repair area through the bottom of the existing concrete Pavement section without cutting into adjacent concrete that is to remain in place. As an alternative to the specialized saw, provide a core drill for drilling corners of area to be removed.

00758.25 Smoothness Testing Equipment - Provide one 12-foot straightedge.

00758.26 Concrete Drills - Provide a drilling system consisting of drilling equipment and drilling supports that:

- Is capable of drilling holes of the required diameter and depth
- For dowels and tie bars, can produce holes parallel to the Pavement surface and parallel to the longitudinal joint within a tolerance of $\pm 1/8$ inch
- For dowels and tie bars, can provide hole alignments at mid-depth of PCC Pavement

Labor

00758.30 Quality Control Personnel - In addition to the certified technicians required in 02001.50, provide and designate an individual to be present at the placement site at all times during concrete placements and who is authorized and responsible for acceptance and rejection of Materials.

Construction

00758.40 Weather Limitations - Coordinate all operations involved in repairing the Pavement so the Work will result in a finished Pavement according to the Specifications

Insert Project Name Here

regardless of the daily or seasonal variations in weather, temperature and humidity under when the Work is permitted to proceed.

Do not place PCC during periods of rain. Do not place PCC on frozen Bases. Stop placement when descending air temperature falls below 35 °F. Do not begin placement until the air temperature is 35 °F in the shade and rising and is forecast to remain above 35 °F.

Protect the Pavement from weather damage. Protect unhardened PCC from precipitation with protective material. When PCC is placed during cold weather and the air temperature is forecast to drop below 33 °F, prevent the concrete from freezing for a minimum of 7 Days after placement.

Remove and replace weather-damaged Pavement at no additional cost to the Agency.

(Use the following subsections (a) through (f) as instructed. Use all subsections that do not have instructions. Do not change the alpha characters before the subsections.)

00758.41 Preparation:

(a) Removal of Existing Pavement - Remove existing reinforced concrete Pavement full depth as shown or directed. Cut the reinforced concrete full depth with a concrete saw prior to removal. Remove concrete Pavement with Equipment approved by the Engineer in a manner that does not damage remaining Pavement and allows for specified connections. Saw corners of the repair area through the bottom of the existing concrete Pavement section without cutting into adjacent concrete that is to remain in place by using either a specialized saw or by coring only within the concrete to be removed. Rounded corners of the repair area due to the coring operation may remain in place. Repair damage to the existing Pavement due to the Contractor's operations, at no additional cost to the Agency, by extending the full depth repair to the satisfaction of the Engineer.

(Use the following subsection (b) when removal of terminal expansion joint steel w-beam flange and web is required.)

(b) Removal of Terminal Expansion Joint Steel W-Beam Flange and Web - Remove the existing terminal expansion joint steel W-beam top flange and web as shown or as directed. Cut the steel web to facilitate removal. Cut the steel web so that no more than 1/4 inch remains above the existing sleeper slab. Perform the removal in a manner that does not damage remaining Pavement and sleeper slab. Repair any damage to the existing Pavement or sleeper slab due to the Contractor's operations, at no additional cost to the Agency, to the satisfaction of the Engineer.

(c) Preparation of Base - Remove loose or damaged base material completely, leaving no loose base material. Compact and level base material to the satisfaction of the Engineer.

(d) Reinforced Bar Lap Area - After the existing Pavement is removed, install resin bonded anchors according to Section 00535 and as shown.

(Use the following subsection (e) when spall repair is required.)

(e) Spall Repair Areas - Sawcut the existing concrete Pavement to a nominal depth of 2 inches. Remove existing concrete within the perimeter of the sawcut to a depth of 2 inches or to sound concrete as determined by the Engineer. If jack hammers are used for removing Pavement, provide jackhammers that do not weigh more than 30 pounds, and if chipping hammers are used for removing Pavement, provide chipping hammers that do not weigh more than 15 pounds. Do not operate hammers at an angle greater than 45 degrees measured from the surface of the Pavement. Repair damage to the existing Pavement due to the Contractor's operations, at no additional cost to the Agency by extending the repair to the satisfaction of the Engineer.

(f) Preparation of Existing Concrete - After Pavement in repair areas is removed, sandblast all vertical surfaces of adjoining concrete. Before placement of concrete, blow clean the area with compressed air, dampen the area to be paved with a light application of water, and apply a coat of epoxy grout or bonding agent to all vertical surfaces. If grouted surfaces become dry before new concrete is placed, prepare the existing concrete again as specified.

00758.43 Placing Reinforcement:

(a) General - Place reinforcement as shown and specified. Lap splices according to Section 00530. The Contractor's Equipment hauling reinforcement to the site will not be permitted on the Subgrade or the Base Material.

Use reinforcement that is straight, clean, and free of scale or other matter that would interfere with its bonding to the concrete.

Place the reinforcement on support devices that maintain it in specified position during concrete placement.

(b) Deformed Bar Reinforcement - Tie or clip at every other transverse bar intersection, as a minimum, in a manner that does not allow for displacement. Tie or clip every lap splice as shown.

(c) Support Devices - Furnish support devices used to hold reinforcement in proper position in the concrete that:

- Hold the reinforcement within 1/2 inch of the vertical position shown.
- Not displace more than 3 cubic inches of concrete when embedded in the slab.

Obtain approval of the proposed support devices before use. If concrete placement operations displace the reinforcement, stop production and place additional support devices.

(d) Tie Bars - Place tie bars required for joint contact at existing concrete Pavement by one of the following methods:

- (1)** Drill the hardened concrete section and then insert the tie bars as resin-bonded anchors according to Section 00535.

(2) Insert the tie bars into the plastic concrete before vibrating and finishing the concrete. The tie bars may be bent before insertion. Replace any loose tie bars according to 00758.43(d)(1) at no additional cost to the Agency.

(3) Use threaded mechanical splice couplers from the QPL, or approved equal. Submit splices for approval before using. Furnish rebar splices that are:

- Accompanied by manufacturer's quality compliance certificate according to 00165.35.
- Installed according to manufacturer's recommendations.

Tie bars are not required along the longitudinal joint for repairs less than 15 feet in length.

(e) Dowel Bars - Furnish smooth, round, epoxy coated dowel bars. Lubricate dowel bars with bond-breaking compound approved by the Engineer. Place dowels in supporting framework or support devices that hold dowels parallel with each other, parallel with the surface of the Pavement, and parallel with the centerline of the Roadway. Obtain approval of the proposed method of support prior to use. Place dowels with a maximum alignment tolerance of 5 degrees or 3/16 inch in the length of the dowel and within 3/8 inch of the center of the slab vertically.

Furnish dowel bar caps on the lubricated end of each dowel bar used in an expansion joint. Furnish dowel caps filled with a soft compressible Material with enough range of movement to allow complete closure of the expansion joint.

At existing concrete Pavement surfaces drill the existing concrete, insert and grout the dowel bars in place. Drill the holes large and deep enough to insert the dowel bars with adequate grout. Adjust hole locations to avoid damaging any existing reinforcement when drilling the holes. Blow the holes clean with compressed air before grouting. Center the bar in the hole for the full length of embedment before grouting. Pump the grout into the hole around the bar so the back of the hole is filled first. Do not allow blocking or shimming to impede the flow of the grout into the hole. If dams are needed, place them at the front of the holes to confine the grout. Place the dams to permit the escape of air without leaking grout. Do not remove dams until grout has cured in the hole.

00758.44 Handling, Measuring, and Batching Materials - Provide the plant site, layout, Equipment and provisions for transporting Material that is adequate to assure a continuous supply of Material to the Project Site.

(a) Aggregates - Stockpile and remove the Aggregate from stockpiles in a manner that holds segregation to a minimum.

Do not use Aggregates that become segregated, mixed with earth or foreign material, or contain lumps of hardened Material. Thaw frozen Aggregates or Aggregates containing frozen lumps before use.

(b) Batching - Batch Materials according to 02001.40.

Insert Project Name Here

00758.45 Mixing Concrete - Mix Materials according to 02001.40. For Projects requiring HES concrete, mobile mixers may be used.

00758.46 Placing Concrete:

(a) General - Perform the strike-off, consolidation, final floating and surface finishing according to the following:

- Vibrate throughout the concrete until it is uniformly consolidated. Do not segregate.
- Strike off the concrete with templates or screeds designed and manipulated to shape the concrete to the specified Cross Section between the forms, carrying a slight excess of concrete in front of the leading edge of templates or screeds at all times.
- Following the vibrating and strike-off operations, float the concrete. Include transverse floating or other smoothing and finishing actions as necessary. Check and correct the surface according to 00758.49. Keep the surface free from laitance, soupy mortar, marks or irregularities.
- Finish the surface according to 00758.49.

Correct all damage to the Subgrade or Base due to the Contractor's operations, at no additional cost to the Agency, to the satisfaction of the Engineer.

(b) One Lift - Place the concrete in final position in one lift so a minimum of finishing is necessary to provide a dense, homogenous Pavement conforming to true grades and Cross Sections.

(c) Provision for Joints and Other Devices - While placing concrete, make provision for constructing joints, placing dowels, tie bars, and other devices, as shown and directed, and according to 00758.43 and 00758.48.

(d) Reject Concrete Material - Reject concrete if it:

- Is not in place within 90 minutes after being mixed.
- Has begun to take an initial set before placement.

(e) Hand Operated Equipment - Use shovels to hand spread and distribute the concrete. Do not use rakes. Do not foul the concrete with foreign matter, or disturb joint devices during such operations. Provide hand operated mechanical vibrators satisfactory to the Engineer. Use the vibrators to consolidate the concrete Pavement at least 6 feet each side of construction and expansion joints and all other areas as directed.

(f) Illumination - During hours of darkness, adequately illuminate Work areas at no additional cost to the Agency.

00758.48 Joints:

(a) General - Furnish and construct contraction, expansion, or construction joints transverse or longitudinal as shown or directed. Extend all joints and joint filler to Pavement edges or to each other as applicable.

Construct all joints at right angles to the surface of the Pavement. Provide joints that do not vary from the specified or indicated line by more than 1/4 inch. Provide the tops of joint filler, when required, slightly, but not more than 1/8 inch, below and paralleling finished Pavement grade and Cross Section. Protect top edges of filler from damage by paving operations.

Construct all joints that contain preformed filler before the final floating and surface finishing of the concrete, unless otherwise directed.

(b) Longitudinal Joints - Construct contact type or weakened plane type longitudinal joints as shown.

(1) Longitudinal Contact Joints - Construct longitudinal contact joints when concrete is placed against hardened concrete, between strips of Pavement, or between a strip of Pavement and a concrete gutter.

(2) Longitudinal Weakened Plane Joints - Construct weakened plane joints by sawing to the depths and maximum width shown. To prevent uncontrolled cracking, saw longitudinal weakened plane joints at the earliest possible time following placement of the concrete without damaging the Pavement or joint. Saws may be single or tandem, as the Contractor elects, and be controlled by guides to true line. Restore curing agents broken or damaged by the sawing operations.

(c) Construction Joints - Construct construction joints when there is an interruption of 45 minutes in the concrete placing operations, or 10 minutes for Class HES concrete. Place construction joints no closer than 10 feet from the end of a repair or from an adjacent construction joint.

Furnish new concrete placed against construction joints that conform to the proportions and consistency of the previously placed concrete.

(1) Continuously Reinforced Concrete Pavement - Provide a self-supported working platform at each construction joint that is at least 4 feet wide and long enough to span the entire width of the Pavement Panel being constructed. Construct and support the platform so it does not rest upon or touch the reinforcing steel. Have the workers use this platform when working in the area around the construction joints. Do not walk on the reinforcing steel. Remove all debris and spilled concrete at and beyond the joint. Support the reinforcement as shown.

(2) Other Pavements - Unless otherwise shown, do not construct construction joints within 10 feet of a transverse joint. If sufficient concrete has not been mixed at the time of interruption to form a slab at least 10 feet long, remove the concrete back to the last joint and dispose of as directed.

00758.49 Surface Finishing - After the concrete has been given a preliminary finish, check the surface of the fresh concrete in the longitudinal and transverse direction with a 12-foot straightedge. Correct surface deviations more than allowed by 00758.56(a). Lap each successive check with the previous check path by at least half the length of the straightedge.

(a) Textured Finish - Upon completion of the machine floating, straightedge testing, edge tooling and, if necessary, hand floating, and before initial set of the surface concrete, give the surface of the concrete a textured finish.

Accomplish the textured finish with a steel-tine tool with 1/8-inch tines that will mark the finished concrete to a depth of 1/8 inch to 3/16 inch. Randomly space the markings from 1/2 inch to 1 1/4 inches as approved. Avoid overlaps of the texturing. Construct markings either perpendicular or parallel to the Roadway centerline to match the adjacent concrete Pavement textured finish.

With approval of the Engineer, an artificial turf or broom finish may be on roads to receive an overlay.

(b) Transverse Profile - Match the surface of the fresh concrete in the transverse direction to the surface of the existing concrete at the ends of the patch. Taper into existing Pavement ruts in the first and last 10 to 20 feet to provide a transverse surface finish for the remainder of the patch meeting the requirements of this section.

00758.52 Edge Tooling and Filling - Tool edges at transverse joints and longitudinal joints of new Pavement and clean joints of previously placed concrete to remove laitance and mortar resulting from finishing operations, and to provide clean rounded edges without ridges on the surface. Perform tooling of edges at construction joints to produce an edge radius that is less than or equal to 1/8 inch.

Fill all areas of minor honeycomb or other minor defect in composition of the concrete along the exposed sides of concrete with a stiff mortar of cement and Fine Aggregate, and apply to the moistened concrete to the satisfaction of the Engineer. Remove and replace areas showing serious defects in composition of the concrete with specified quality concrete for full panel width between longitudinal joints or edges, and for a length not less than 10 feet. Low spots exceeding 1/4 inch in depth, if in hardened concrete, may be filled with an epoxy grout, provided the filling is neat and blends inconspicuously with adjoining concrete. Prepare the area according to the grout manufacturer's recommendations.

00758.53 Curing Concrete - Immediately after the final floating, surface finishing and edging have been completed, and while the concrete surface is still moist, cover and cure the entire exposed surface of the newly placed concrete for at least 72 hours. If the Specifications require opening the lanes to traffic in less than 72 hours, remove curing covers just prior to opening to traffic. Use one of the following provisions:

(a) Liquid Membrane-Forming Compounds - Apply liquid membrane-forming compound uniformly to the concrete by pressure-spray methods at a rate of at least 1 gallon per 150 square feet. Mix the liquid membrane-forming compound thoroughly before and during use.

Liquid membrane-forming compounds are not allowed when asphalt concrete Pavement is to be placed on the new concrete.

(b) Other Coverings - Apply clear or white polyethylene film or insulated curing blankets as a waterproof and moisture-proof covering. Place the film or blankets beyond the edge of the repaired areas and weight to hold in position. Do not mar the concrete with the covering.

(Use the following paragraph when HES concrete is required under subsection .11.)

For class HES concrete using a cement other than portland cement, cure the concrete as recommended by the cement manufacturer. Obtain authorization for the method of curing before starting construction.

00758.54 Longitudinal Pavement Cracks - Remove and replace all patches that show longitudinal cracking or do not bond at no additional cost to the Agency.

(Use the following subsection .55 when spall repair is required.)

00758.55 Spall Repair - In spalled areas, remove the existing Pavement according to 00758.41(e). Prepare the repair area according to 00758.41(f) and the PCC repair Material manufacturer's recommendations. Mix and place PCC patching Material according to the manufacturer's recommendation. Use shovels to hand spread and distribute the concrete. Do not use rakes. Do not contaminate the concrete with foreign matter.

00758.56 Surface Tolerance, Testing, and Correction - Provide the surface of finished Pavement that does not deviate from longitudinal and transverse smoothness more than the limits identified below. Perform straightedge testing under the supervision of the Engineer as soon as the hardness of the concrete permits.

(a) Straightedge Testing and Tolerance - Test Pavement surface longitudinal and transverse smoothness with a 12-foot straightedge. The extent of the testing is determined by the Engineer. Provide a Pavement surface that does not deviate from the straightedge at any point by more than 1/8 inch, except the transverse surface at the patch ends may vary as required in 00758.49(b).

(b) Correcting Deficiencies - Correct all segments that exceed the requirements of 00758.56(a) by one of the following methods:

(1) Remove the non-specification concrete Pavement as determined by the Engineer and replace with Specification concrete Pavement.

(2) Profile with an abrasive grinder equipped with a cutting head comprised of multiple diamond blades. Take care not to unnecessarily sacrifice concrete cover over the reinforcing steel.

Retest according to 00758.56(a). Perform all corrective Work at no additional cost to the Agency, including traffic control.

Maintenance

00758.60 Protection of Concrete - Repair or replace any part of the Pavement damaged by traffic or damaged from any other causes before its official acceptance, according to 00170.80. Do not operate construction Equipment or allow Public Traffic on newly placed concrete until all of the following requirements are met:

(a) The Contractor complies with 00150.60.

(b) The concrete attains a compressive strength of at least 2,500 psi as determined by testing at least two cylinders cured according to AASHTO R 100 (field cure) and tested according to AASHTO T 22.

(Use the following paragraph when HES concrete is required under subsection .11.)

For HES concrete, the concrete attains a compressive strength of at least 2,500 psi according to the Strength-Maturity Relationship established during the mix design. Place a minimum of two probes in the last portion of each repair section according to section 10 of AASHTO T 325.

(c) Approval is given by the Engineer before opening to traffic.

(d) The surface of the concrete is protected from scarring or abrasion and kept free of stones, loose mortar and other matter apt to be deleterious to the concrete in the paths of Equipment.

If a repair at a single location cannot be completed in one shift, the unfinished Work may be temporarily backfilled with rapid setting Controlled Low Strength Materials (CLSM). Limit the length of the temporary backfill to 10 feet and construct the backfill to prevent the corners from breaking under traffic. Do not open to traffic until the compressive strength of the CLSM is 100 psi, and do not allow traffic on temporarily backfilled Material for a total duration of more than 16 hours. Monitor the location while open to traffic and immediately backfill any potholes with cold patch.

00758.61 Protection of Shoulders - A portion of the Shoulder adjacent to the proposed patch may be removed as necessary to ensure proper forming at the edge of the patch. Prior to opening to traffic, replace the disturbed Shoulder area with Material types and thickness similar to the existing Shoulder. Compact and restore Shoulders to match the existing line and grade.

Measurement

00758.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

(a) **Pavement Repair** - Reinforced concrete and continuously reinforced concrete Pavement repair will be measured on the area basis and is determined by measuring the width and length of each separate repair. The width is the measured edge-to-edge width of the repair on the surface of the Pavement perpendicular to the centerline of the Roadway. The length is the measured length from end-to-end of the repair parallel to the centerline of the Roadway, including the length of the bar lap splices.

The measurement of extra thickness of Pavement, as shown or as ordered, is determined by conversion on a proportionate volume basis to an equivalent number of square yards of specified thickness Pavement.

(Use the following subsection (b) when spall repair is required.)

(b) **Spall Repair** - Spall repair will be measured on the area basis and is determined by measuring the width and length of each separate repair. The width is the measured

edge-to-edge width of the repair on the surface of the Pavement perpendicular to the centerline of the Roadway. The length is the measured length from end-to-end of the repair parallel to the centerline of the Roadway.

The measurement of extra thickness of Pavement, as shown or as ordered, is determined by conversion on a proportionate volume basis to an equivalent number of square yards of specified thickness Pavement.

(c) Pavement Repair at Joints - Pavement repairs at joints will be measured on the length basis.

Payment

00758.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Continuously Reinforced Concrete Pavement Repair.....	Square Yard
(b) Reinforced Concrete Pavement Repair	Square Yard
(c) Spall Repair.....	Square Yard
(d) Extra for Expansion Joint Repair.....	Foot
(e) Extra for Terminal Expansion Joint Repair.....	Foot
(f) Extra for Terminal Expansion Joint Repair (Steel Beam).....	Foot

Items (a) and (b) include:

- Removing concrete Pavement;
- Preparing the cut edges;
- Resin bonded anchors; and
- Replacement of disturbed Shoulder according to 00758.61.

Item (c) includes removing concrete.

Items (d), (e), and (f) include all additional costs for removing existing joints, removing all or portions of existing steel beams, and placing dowel bars and associated expansion joint Material.

Sawcutting will be paid for according to Section 00310.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for intermediate bar lap splices or CLSM necessary to accommodate staging or to reopen the Roadway to traffic.

Insert Project Name Here

SP00759 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
Requires SP00440, SP02001, & SP02510.
Requires SP00641 when aggregate is required.
Requires SP00755 when reinforcement,
dowels or tie bars are required.
Requires SP00756 when bus pads are required.
Requires SP00765 when tactile surface indicators are required
Requires SP02440 when preformed expansion joint filler is required
Requires SP02630 when base aggregate is required)

SECTION 00759 - MISCELLANEOUS PORTLAND CEMENT CONCRETE STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00759 of the Standard Specifications modified as follows:

00759.02 Definitions - Delete this subsection.

00759.03 Required Submittals - Replace the title of this subsection with "**Submittals**"

Replace the paragraph that begins "Material ordered or Work ..." with the following paragraph:

Material ordered or Work performed before the Engineer reviews and returns the documents is at the Contractor's risk.

00759.03(d) Corrective Action Plan - Replace the paragraph that begins "At least 21 Calendar Days ..." with the following paragraph:

At least 21 Calendar Days before concrete Structures Work is scheduled to begin, submit a corrective action plan. Address procedures to correct deficient Structures through minor corrective action or replacement according to 00759.55(a) in the corrective action plan, and include:

Replace the bullet that begins "List of minor ..." with the following bullet:

- List of minor corrective actions that are used to correct deficiencies, according to 00759.50 and 00759.55.

00759.11 Aggregate Base - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish Aggregate Base Materials for Base, foundation courses, Leveling courses, or bedding meeting the requirements of 00640.10 or dense graded Base Aggregate in 00641.10 as appropriate and included in the Special Provisions.

00759.12 Curb Ramp Treatment - Delete this subsection.

00759.21 Concrete Extruding Machine - Replace this subsection, except for the subsection number and title, with the following:

Provide concrete extruding machines that operate under sufficient restraint to forward motion to produce a well consolidated mass of concrete.

00759.22(a) Qualified Smart Levels - Replace this subsection, except for the subsection number and title, with the following:

Measure Slopes with the use of a 24-inch SmartTool level model 92379 or model 92500, and a 6-inch SmartTool level model 92346 or 92510.

00759.23 Concrete Resurfacing Equipment - Replace this subsection, except for the subsection number and title, with the following:

Provide power-operated scarifying Equipment capable of uniformly removing and preparing the existing surface to depths required. For concrete grinding operations, provide 12 segment grinders, fine-toothed scarifying Equipment, or other approved grinding Equipment.

00759.42 Foundations - Replace this subsection with the following subsection:

00759.42 Aggregate Base - Before placing concrete, prepare underlying Aggregate Base surfaces according to Section 00641.

00759.43 Foundation Preparation - Replace the paragraph that begins "Bring areas ..." with the following paragraph:

Bring areas where Structures are to be constructed to established line, and make firm, dry and free of all Unsuitable Material before placing concrete. Provide clean and moist existing concrete surfaces at the time of placing new concrete.

00759.45 Reinforcement, Dowels, and Tie Bars - Replace the paragraph that begins "Provide dowels ..." with the following paragraph:

Furnish dowels with "slip sleeves" and place as load transfer devices where shown. Place dowels without "slip sleeves" as fastenings or ties between new and existing underlying concrete when shown.

00759.48 Expansion Joints - Replace the bullet that begins "Not less than ..." with the following bullet:

- Not less than 1/2 inch wide, except where abutting or underlying concrete joints are larger, then match those joints' width.

Replace the bullet that begins "Which completely ..." with the following bullet:

Insert Project Name Here

- That completely separate the concrete segments.

00759.48(a) Curbs, Islands, and Traffic Separators - Replace the paragraph that begins "Provide expansion ..." with the following paragraph:

Construct expansion joints:

00759.48(b) Driveways, Walks, Monolithic Curbs and Sidewalks, and Surfacing - Replace this subsection, except for the subsection number and title, with the following:

Do not construct expansion joints within the curb ramp, and between separate concrete pours on the same Project.

Construct expansion joints:

- Between driveways and concrete Pavement.
- Transversely in walks opposite expansion joints in adjoining curbs and elsewhere so the distance between joints does not exceed 45 feet.
- Transversely in walks at a distance of 16 feet to 8 feet from ends of walks that abut curbs.
- Around poles, posts, boxes, and other fixtures that protrude through or against the Structures.

00759.48(c) Stairs - Replace this subsection, except for the subsection number and title, with the following:

Construct expansion joints for stairs at the top and bottom landings as shown.

00759.49(c) Requirements - Replace this subsection, except for the subsection number and title, with the following:

Construct contraction joints that:

- Are not less than 1/8 inch or more than 1/4 inch wide.
- Have a depth of one-third the thickness of the concrete.
- Have clean, unfilled grooves (if preformed expansion joint filler is not used).

00759.50(a) General - Replace the paragraph that begins "The top and face..." with the following paragraph:

Construct the top and face of Structures true and straight, free from humps, sags, or other irregularities. Do not vary the surface by more than 1/4 inch from the edge of 12-foot-long straightedge laid on the top or face of the Structure, except in curves. Provide and operate the straightedge as directed. Unless otherwise shown or directed, tool edges to 1/4-inch radius.

Replace the paragraph that begins "Install truncated domes..." with the following paragraph:

Construct tactile surface indicators according to Section 00765 to the slopes, lines, grades, and dimensions as shown or established.

00759.50(c) Driveways, Walks, and Surfacing - Replace the paragraph that begins “The 24-inch smart ...” with the following paragraph:

The 24-inch smart level is used to measure driveway and sidewalk cross slopes on the pedestrian access route.

00759.50(d) Curb Ramps - Replace the paragraph that begins “The 6-inch smart ...” with the following paragraph:

Use the 6-inch smart level to measure the curb running Slope. Use the 6-inch smart level to measure Slopes on portions of the curb ramp, gutter pan, or adjacent surfaces that cannot accommodate a 24-inch smart level. All other curb ramp locations will use a 24-inch smart level to measure Slopes.

(Use the following subsection .50(f) when historic dates and names are required.)

Add the following subsection:

00759.50(f) Historic Dates and Names - Preserve or re-stamp historic dates and street names in existing sidewalk corners into the new concrete. Do not install historic date and street name stamps in the Pedestrian Accessible Route.

Stamp the dates or street names exactly as they existed in the sidewalk corner. This includes misspelled words and names that are no longer used for the street name. Restamp the original date with a slash and the current year into the new corner curb. Do not preserve or re-stamp Contractors’ names. Provide a set of stamping tools to complete the Work.

(Use the following sentence when stamping tools are available from PBOT.)

A set of stamping tools is available for loan through the Portland Bureau of Transportation construction office on a first come, first served basis.

(Use the following subsection .50(g) when horse rings are required.)

Add the following subsection:

00759.50(g) Horse Rings - Notify the Engineer when existing horse rings are discovered. Do not begin concrete pour until the Engineer provides notification of the action plan for reinstallation of the horse ring(s). If historic horse rings are encountered during curb removal, salvage and reinstall horse ring assembly as close to the existing location as directed by the Engineer. Do not install metal horse rings on ramp runs, on curb ramp flares, on curb returns adjacent to curb ramps, or in the Pedestrian Accessible Route.

00759.51 Curing - Add the following paragraph to the end of this subsection:

Insert Project Name Here

Concrete Structures may be opened to Public Traffic before 7 Calendar Days if the concrete has reached a minimum compressive strength of 2,000 psi as verified by the rebound number determined according to ASTM C805. Test at locations as directed.

(Use the following subsection .52 when historical marker installation is required.)

Add the following subsection:

00759.52 Historical Marker Installation - Install salvaged historical markers in concrete surfacing as shown or as directed, flush with the adjacent concrete surface. Ensure the historical marker is free of all laitance, dirt, dust, grease, efflorescence, curing agents, paint, or other foreign material after installation. Do not install historical markers in the Pedestrian Accessible Route.

00759.53 Welding - Replace this subsection, except for the subsection number and title, with the following:

Conform welding, welder qualifications, prequalification of weld details and inspection of welds to AWS D1.1. Submit all welding procedure specifications to the Engineer for approval.

00759.54(b) Accuracy of Punched Holes - Replace this subsection, except for the subsection number and title, with the following:

Locate all holes punched full size so accurately that when multiple anchor plates are stacked with the edges even, a cylindrical pin 1/8 inch smaller in diameter than the nominal size of the punched hole may be entered perpendicular to the face of the plate without drifting in each of the connecting holes in the same plane. Non-conforming pieces are rejected.

00759.55(a)(2)a. Keyway - Replace this subsection, except for the subsection number and title, with the following:

Sawcut a keyway at the boundaries of repair areas that are not already defined by panel control joints. Sawcut the keyway 1/8 inch wide and 1/4 inch deeper than the edge of the repair area. Bevel inside edge of keyway at a 45-degree angle.

00759.55(a)(2)d. Resurface - Replace this subsection, except for the subsection number and title, with the following:

Furnish concrete resurfacer from the QPL according to 02015.60; refer to QPL remarks to select an appropriate material based on allowable installation depths. Furnish resurfacer in a color that closely matches the color of surrounding concrete surfaces. Mask boundaries of the repair area. Use hand tools to work resurfacer into keyways and match existing grade at boundaries. Apply a light broom-finish to achieve non-slip surface.

00759.55(b) Acceptance of Structures - Replace this subsection, except for the subsection number and title, with the following:

Once the corrective work or replacement has been completed, acceptance is based on the Engineer's inspection and approval of the Structure.

Insert Project Name Here

00759.80 Measurement - Replace the bullet that begins “**Each Basis...**” with the following bullet:

- **Each Basis** - Measurement will be by actual count.

00759.90 Payment - Delete Pay Items (k), (l) and (m) from the Pay Item list.

Replace the paragraph that begins "In item (a) the type ..." with the following paragraph:

In item (a) the type of curb is inserted in the blank, if appropriate. Item (a) includes the curb runs constructed adjacent to the curb ramps.

Replace the paragraph that begins "In item (g)..." with the following paragraph:

In item (g), the specified thickness, or type, of concrete Surfacing is inserted in the blank, if appropriate.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following pay item (p) when Historical Marker Installation is required.)

Add the following Pay Item to the Pay Item list:

(p) Historical Marker Installation.....Each

Delete the paragraph that begins “Item (k) includes...”.

Delete the paragraph that begins “Item (l) includes...”.

Delete the paragraph that begins “Item (m) includes...”.

(Use the following two paragraphs when snow curb returns are included on the Project.)

Add the following sentence to the end of the paragraph that begins “In item (a)...”:

Item (a) includes snow curb returns constructed at the curb ramps.

(Use the following two paragraphs when pay item (p) is included in the Pay Item list.)

Add the following paragraph after the paragraph that begins “Item (m) includes...”:

Item (p) includes the installation or reinstallation of historical markers within concrete walk as shown.

Insert Project Name Here

Add the following paragraph before the paragraph that begins "No separate or additional payment...":

Tactile surface indicators will be paid for according to Section 00765.

In the paragraph that begins "No separate or additional payment...", add the following bullet to the end of the bullet list:

- The additional Work required to construct a curb ramp or replace an existing curb ramp, including any corrective action.

(Use the following two bullets when pay item (p) is included in the Pay Item list.)

- Stamping dates and street names into new concrete
- For salvaging and reinstalling horse rings

(Use the following two paragraphs when earthwork is included as separate Pay Items but the earthwork Pay Items and estimated quantities do not include all or a portion of the Work in this Section. The use of this language requires notation (contact the Senior Standards Engineer) in the Plans to describe the earthwork pay limits relative to SP00330 and requires the State Specification Engineer and RE approval. Consider issuing a LOC.)

Replace the paragraph that begins "When earthwork is included as separate Pay ..." with the following paragraph:

When earthwork is included as separate Pay Items under Section 00330, payment will be made according to 00330.90 through 00330.94 as appropriate and only for locations where earthwork quantities are shown. No separate or additional payment will be made for earthwork under Section 00330 where earthwork quantities are not shown.

SP00760 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP01040 when weed control is required)

SECTION 00760 - UNIT PAVERS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00760 is not a Standard Specification and is included in this Project by Special Provision.

Description

00760.00 Scope - This Work consists of furnishing and installing masonry unit pavers at locations shown or directed.

Materials

00760.10 Unit Paving Material - Furnish pavers and related Material meeting the following requirements:

(Obtain the Type, Color, Size, and Aggregate Base information from the Designer. Delete items that are not included in the Project.)

- **Paving Unit Type** - _____
- **Unit Color** - _____ Provide sample color for approval
- **Unit Size** - _____
- **Unit Strength** - 8,000 psi with a maximum of 5 percent absorption (ASTM C 936)
- **Joint Sand** - Fine PCC Aggregate according to 02690.30(g)
- **Leveling Bed** - Fine PCC Aggregate according to 02690.30(g)
- **Aggregate Base** - _____
- **Weed Control** - Pre-emergent herbicide according to 01040.21

Submit proposed equivalent products to the Engineer for consideration. See 00120.16 and 00180.31.

Construction

00760.40 General - Install pavers according to the manufacturer's instructions.

00760.41 Aggregate Base - Place and compact Aggregate to 95 percent density.

00760.42 Sand Base - Place a minimum depth 1 inch leveling bed. Screed to grade and saturate with water to ensure a firm and smooth grade.

00760.43 Weed Control - Apply granular pre-emergent herbicide over the prepared leveling bed according to the manufacturer's instructions.

00760.44 Unit Pavers - Lay out rows so they are straight and parallel to the surrounding lines. Cut pavers with a masonry saw where necessary to fit pattern to edges.

00760.45 Joint Sand and Compaction - After placing pavers, sweep joint sand into the joints. Use a vibrating mechanical tamper to compact.

Insert Project Name Here

00760.46 Surface Tolerance - Do not deviate the longitudinal and transverse surface grades by more than 1/4 inch in 12 feet.

00760.47 Clean Up - Remove excess Sand and broken paving material from the site when complete.

Measurement

00760.80 Measurement - The quantities of unit pavers will be measured on the area basis.

Payment

00760.90 Payment - The accepted quantities of unit pavers will be paid for at the Contract unit price, per square foot for the item "Unit Pavers".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for Base preparation.

SP00765 (Special Provisions for the 2024 Book)

(Bidding on or after: 06-01-26
Last updated: 03-03-26)

SECTION 00765 - TACTILE SURFACE INDICATORS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00765 is not a Standard Specification and is included in this Project by Special Provision.

Description

00765.00 Scope - This Work consists of furnishing, placing, and installation of tactile surface indicators, systems, or devices on pedestrian facilities according to the slopes, lines, grades, and dimensions shown or established in Section 00749 or Section 00759 as applicable.

Material

00765.10 Tactile Surface Treatment - Furnish truncated dome detectable warning surfaces for curb ramps, shared use paths, transit stops, rail crossings and accessible route

Insert Project Name Here

islands as shown from the QPL. Furnish truncated dome detectable warning surfaces that are safety yellow in color on or along State Highways.

For temporary installations furnish approved securement mechanisms or surface adhesives to withstand the duration of the temporary installation.

00765.11 Detectable Guide Strips - Furnish surface applied or liquid applied detectable guide strips. Use only adhesives recommended or supplied by the manufacturer. Furnish slip-resistant detectable guide strips from the following list of pre-approved products:

Manufacturer	Material
Vanguard ADA Systems 18122 SR9 Suite F Snohomish, WA 98296 Phone: (360) 668-5700	Liquid Applied GuideStrip / TWSI Color: Blue

00765.12 Tactile Warning Devices - Furnish tactile warning devices as shown or specified.

Labor

00765.30 Personnel Qualifications - Use supervisory personnel who have an active ODOT ADA Certification for Contractors to directly supervise the curb ramp treatment Work. Provide onsite supervisory personnel that are ODOT ADA Certified during the construction and installation of the curb ramp treatment.

Construction

00765.40 Substrate Preparation - Bring areas where the tactile surface indicators are to be installed to the established slopes, lines, grades and dimensions, and make free of all Unsuitable Material or voids before installing, applying adhesives, or securing to the underlying substrate. Clean existing surfaces of debris and voids prior to installation.

00765.41 General - During installation do not allow the top and face of the tactile surface indicators to have lips, humps, sags or other irregularities.

Install manufacturer securement mechanism, or adhesives recommended or supplied by the manufacturer for permanent installations.

(a) Truncated Dome Warning Surface - Install detectable truncated dome warning surfaces as shown. Place according to the manufacturer's recommendations. Install abutting truncated dome panels with no more than 1/4-inch spacing. Install anchors along cut edges of truncated dome panels according to manufacturer's recommendations. Seal all cut tiles according to the manufacture instructions or as directed with a flush edge free from vertical discontinuities.

Install surface applied detectable truncated dome warning surfaces on clean and dry concrete surfaces.

After placement of wet set detectable truncated dome warning surface panel, remove uncured concrete from the surface of the panel.

(b) Detectable Guide Strip - Install detectable guide strips as shown. Place according to the manufacturer's recommendation. Place abutting panels within 1/4-inch of each other and install anchors, as specified by manufacturers, along cut edge. Miter adjacent panels at locations where detectable guide strips change direction. Install detectable guide strips on clean and dry concrete surfaces.

(c) Tactile Warning Device - Install tactile warning devices as shown. Place according to the manufacturer's recommendation.

00765.42 Liquid-Applied - Protect liquid applied detectable truncated dome warning surfaces and detectable guide strips after placing and finishing according to manufacturer's instructions.

Measurement

00765.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

- (a) Area Basis** - Measurement will be the finished surface, limited to the Neat Lines shown or directed.
- (b) Length Basis** - Measurement will be along the centerline of the device from end to end as shown or directed.

Payment

00765.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

- (a) Truncated Domes on New Surfaces, _____ Square Foot
- (b) Truncated Domes on Existing Surfaces, _____ Square Foot
- (c) Detectable Guide Strip, Blue..... Square Foot
- (d) Tactile Warning Device Foot

In items (a) and (b), the type of installation “curb ramp”, “rail crossing” or “transit stop” is inserted in the blank.

Item (a) includes installation of truncated domes on a new concrete or asphalt surface. Installation of truncated domes is not considered complete until Work that they are a part of is also complete and accepted according to Section 00749 or Section 00759, as applicable.

Item (b) includes installation of truncated domes on an existing concrete or asphalt surface.

Item (c) includes installation of blue detectable guide strips on concrete or asphalt surface. Installation of detectable guide strips is not considered complete until Work that they are a part of is also complete and accepted according to Section 00749 or Section 00759, as applicable.

Item (d) includes installation of tactile warning device on concrete or asphalt surface.

Payment will be payment in full for furnishing and installation of all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for any repair or replacement of tactile surface indicators associated with repair or replacement Work in other Sections.

SP00810 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
*Requires SP00641, SP02110 & SP02820.
Requires SP00594 when weatherized guardrail and
painting of transitions and terminals are required.
SP00744 when asphalt concrete mixture is required)*

SECTION 00810 - METAL GUARDRAIL

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

[NOTE: Except for extra length guardrail posts, do not separately pay for new guardrail posts under this Section. New posts are included in the appropriate guardrail Pay Item. Replacing existing guardrail posts is covered in Section 00812.]

Comply with Section 00810 of the Standard Specifications modified as follows:

00810.00 Scope - Replace the paragraph that begins "Metal guardrail and metal ..." with the following paragraph:

Metal guardrail and metal Median barrier is referred to in this Section as "guardrail". The types of guardrail are shown.

(Use the following two paragraphs when there is no earthwork on the Project and grading at guardrail terminals are required to be constructed.)

Add the following paragraph to the end of this subsection:

This Work includes constructing grading at guardrail terminals at locations shown.

(Use the following subsection .10 when weatherized guardrail is required or when only recycled plastic guardrail blocks will be allowed. Delete "(s)" or parentheses as applicable.)

00810.10 Materials - Add the following paragraph(s) to the end of this subsection:

(Use the following paragraph when weatherized guardrail is required.)

Insert Project Name Here

Furnish "weatherized" Class IV metal rail meeting the requirements of AASHTO M 180.

(Use the following paragraph when only recycled plastic guardrail blocks may be used.)

Furnish recycled plastic guardrail blocks. Wood guardrail blocks are not allowed.

(Use the following subsection .11 when weatherized guardrail is required.)

00810.11 Posts - Replace this subsection with the following subsection:

00810.11 Wood Posts - Furnish wood guardrail posts meeting the requirements of 00810.10.

00810.12 Median Barrier on Bridges - Replace this subsection, except for the subsection number and title, with the following:

Furnish metal Median barrier on bridge decks comprised of metal beam rail, metal posts, and hardware meeting the requirements of 00810.10.

At expansion joints on bridge decks, construct special dimension slots in the rail member for post bolt and rail joint bolts as shown.

00810.14 Condition of Materials - Replace this subsection, except for the subsection number and title, with the following:

All Materials are subject to inspection of condition at the latest practical time available before or during incorporation of Materials in the Work.

(Use the following subsection .15 when it has been determined that wood posts and blocks may be salvaged without meeting the preservative treatment requirement. Obtain information from the Designer and concurrence from the Technical Resource.)

00810.15 Salvaged Material - Replace the paragraph that begins "Material salvaged as part..." with the following paragraph:

Materials salvaged as part of removal work on the Project may be reused in new construction if the Engineer determines that the Materials meet the requirements of 0810.10, except for preservative treatment requirements, and conform to the following:

(Use the following subsection .15(a) when only a certain portion of the existing guardrail posts can be salvaged and reused on the Project. Check with the roadway designer and fill in the blank with the estimated percentage of existing posts that may be reused.)

00810.15(a) Wood Posts - Replace this subsection, except for the subsection number and title, with the following:

Use only structurally sound and treated wood posts, free from damage that would affect their strength and durability. Do not incorporate into the Work any post damaged to the extent that untreated wood is exposed.

Insert Project Name Here

It is estimated that ____ % of the existing wood guardrail posts may be reused and incorporated into new guardrail work.

00810.15(b) Metal Beam Rail Members - Replace this subsection, except for the subsection number and title, with the following:

Furnish metal beam rail members unpainted, straight and free of breaks, kinks, dents, damage to galvanized coating, or any other damage that would affect the integrity of the member. If paint is removed from metal beam rail members salvaged from the Project, remove the paint at a location outside of the Highway Right-of-Way, and in a manner that will not damage the galvanizing. Repair minor damage to galvanizing according to 00810.43.

(Use the following lead-in paragraph and subsection .16 when there is no earthwork on the Project and grading at guardrail terminals are required to be constructed.)

Add the following subsection:

00810.16 Grading at Guardrail Terminal Materials:

(a) Embankment - Furnish embankment Materials meeting the applicable parts of Section 00330.

(b) Aggregate - Furnish either 1" - 0 or 3/4" - 0 size crushed Aggregate that is clean, hard, durable, and reasonably well-graded from the maximum size to dust.

(c) Asphalt Concrete Mixture - Furnish asphalt concrete mixture meeting the requirements of 00744.10 through 00744.14.

Acceptance of grading at guardrail terminal Materials will be visual by the Engineer.

(Use the following lead-in paragraph and subsection .17 when weatherized guardrail and painting of guardrail transitions and terminals are required. Include 00594.10 and 00594.90(a) in SP00594.)

Add the following subsection:

00810.17 Painted Guardrail - Paint all galvanized metal guardrail transition and guardrail terminal Materials according to Section 00594.

00810.40 Timing and Coordination of Work - Replace the paragraph that begins "Do not leave posts ..." with the following paragraph:

Do not leave posts installed for guardrail and Median barrier exposed to traffic for more than 24 hours before installing the rail members, rail end pieces and anchors and tightening all bolts. Install replacement rail according to 00310.40(a).

(Use the following subsection .41 when there is any possibility that hand dug guardrail posts are required. Obtain information from the Utility Coordinator or the Designer. If in doubt add this language and a quantity of 4 in the Schedule of Items.)

Insert Project Name Here

00810.41 Excavation and Backfill - Add the following paragraph to the end of this subsection:

Hand dig guardrail post holes or use other non-invasive methods when posts are located within 24 inches surrounding the outside dimension of all sides of underground utilities as shown or directed.

00810.43 Erection of Rails and Other Components - Replace the paragraph that begins "Normally, all fabrication ..." with the following paragraph:

Fabricate metal beam rail members and other components in the shop or by the manufacturer. Limit field cutting, drilling and other field fabrication to the minimum and perform in a manner that will not impair the appearance or structural quality of the material. Burning new holes in metal beam rail members is not allowed.

Replace the paragraph that begins "Draw tight all ..." with the following paragraph:

Draw tight all bolts. Furnish bolts of sufficient length to extend slightly beyond the nuts.

(Use the following lead-in paragraph and subsection .44 when grading at guardrail terminals are required and there is no earthwork on the Project.)

Add the following subsection:

00810.44 Grading at Guardrail Terminals:

(a) Earthwork - Perform earthwork according to the applicable parts of Section 00330.

(b) Aggregate - Place Aggregate in two or more layers of nearly equal thickness. The maximum compacted thickness of any one layer shall not exceed 6 inches. Compact each layer of Material by rollers conforming in general to 00641.24.

Shape and maintain the surface of each layer during the compaction operation to produce a uniform texture and firmly keyed Aggregates.

Continue the compactive effort until there is no reaction or yielding observed under the compactor.

(c) Asphalt Concrete Mixture - Place asphalt concrete mixture according to 00744.40 through 00744.49.

(Use the following subsection .80 when grading at guardrail terminals are required and there is no earthwork on the Project.)

00810.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of Materials for all the grading at guardrail terminals are:

(Provide estimated quantities. Delete what does not apply.)

Material

Amount

Insert Project Name Here

Embankment ____ cu. yd.
Excavation ____ cu. yd.
Aggregate Base ____ cu. yd.
Asphalt Concrete Mixture ____ Ton

00810.90 Payment - Replace the paragraph that begins "In item (a), the ..." with the following paragraph:

In item (a), the type of guardrail is inserted in the blank. Item (a) includes all posts including steel, base plates, and base plate concrete anchors.

Replace the paragraph that begins "Items (a), (b), and (k) include ..." with the following paragraph:

Items (a), (b), and (k) include constructing the respective items except for:

- End pieces
- Anchors
- Transitions
- Extra costs involved in constructing guardrail connections to existing Bridges
- Terminals
- Guardrail height conversions

Replace the paragraph that begins "In item (c), the ..." with the following paragraph:

In item (c), the type of anchor is inserted in the blank.

Replace the paragraph that begins "In item (d), the ..." with the following paragraph:

In item (d), the type of guardrail end piece is inserted in the blank.

Replace the paragraph that begins "In item (g) the ..." with the following paragraph:

In item (g), the type of terminal is inserted in the blank. Item (g) includes guardrail terminals, posts, anchors, rails, guards, end pieces, struts, Soil tubes, and all necessary appurtenances and hardware.

Replace the paragraph that begins "In item (h) the ..." with the following paragraph:

In item (h), the length of post is inserted in the blank. Item (h) includes installing 8 foot long or longer posts instead of standard 6-foot-long posts. The extra costs for the longer posts are costs that are not covered and included in the unit price for one or more of the other listed Pay Items.

Replace the paragraph that begins "In item (k), the ..." with the following paragraph:

In item (k), the type of guardrail is inserted in the blank. Item (k) includes all posts including steel, base plates, and base plate concrete anchors.

Insert Project Name Here

Replace the paragraph that begins "In item (l), the ..." with the following paragraph:

In Item (l), the type of guardrail is inserted in the blank. Item (l) includes posts, rails, and all necessary appurtenances and hardware to construct the guardrail height conversion.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and providing all Equipment, labor and Incidentals necessary to complete the Work, as specified.

(Use the following paragraph and Pay Items when grading at guardrail terminals are required and there is no earthwork on the Project or short radius guardrail systems are required. Delete Pay Items not included in the Schedule of Items. Do not change the alpha characters next to the Pay Items.)

Add the following Pay Item to the Pay Item list:

Pay Item	Unit of Measurement
(m) Short Radius Guardrail System	Each
(n) Construct Grading at Guardrail Terminals	Each

(Use the following two paragraphs when a short radius guardrail system is required.)

Add the following paragraph after the paragraph that begins "In Item (l), the type...":

Item (m) includes all posts including steel, rail elements, cable, eye bolts terminal connectors, connection plates, anchor bolts, and all necessary appurtenances and hardware except the guardrail anchor and Type B end section.

(Use the following two paragraphs when grading at guardrail terminals are required and there is no earthwork on the Project.)

Add the following paragraph after the paragraph that begins "In Item (l), the type...":

Item (n) includes excavation and embankment work, Aggregate, and asphalt concrete mix.

(Use the following two paragraphs when weatherized guardrail and painting of guardrail transitions and terminals are required.)

Add the following paragraph to the end of this subsection:

No separate or additional payment will be made for painting galvanized metal guardrail Material.

SP00811 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00811 - CABLE BARRIER

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00811 of the Standard Specifications modified as follows:

00811.10 Cable Barrier - Replace this subsection, except for the subsection number and title, with the following:

Furnish cable barrier from the QPL. Furnish all cable barriers on the Project from the same manufacturer regardless of the number of runs of cable barrier required and regardless of the types of cable barrier required.

00811.40 Cable Barrier – Replace the paragraph that begins "Keep a tension log ..." with the following paragraph:

Keep a tension log and give it to the Engineer upon completion of installation. The tension log includes the time, date, location, ambient temperature, and the final tension readings, and is signed by the person performing the tension readings. Provide a copy of the manufacturer's recommended tension chart along with the tension log.

00811.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00812 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-22-26

Requires SP00810)

SECTION 00812 - ADJUSTING AND REPAIRING GUARDRAIL

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00812 of the Standard Specifications modified as follows:

Insert Project Name Here

00812.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate or additional ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Hardware
- Adjusting terminal ends
- Replacement metal beam rails, posts, and blocks that are damaged by Contractor Equipment or operation

SP00813 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02190)

SECTION 00813 - STEEL BACKED TIMBER GUARDRAIL

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00813 is not a Standard Specification and is included in this Project by Special Provision.

Description

00813.00 Scope - This Work consists of constructing steel backed timber guardrail to the lines and grades shown and established.

00813.02 Submittals - For areas where horizontal and vertical alignments vary from the Supplemental Drawings, provide unstamped Working Drawings that show detailed connections at post installations according to 00150.35.

Materials

00813.10 Materials:

(a) Timber - Furnish rough sawn lumber for timber rail, posts, and blocks of Douglas fir, Hem-fir, or Southern Yellow Pine having a stress grade of at least 1,500 psi and meeting the requirements of AASHTO M 168 and the following:

(1) Grading:

- **Douglas Fir** - Meet the requirements of either paragraph 80.11 of the current WWPA Grading Rules, or paragraph 131-b of the current WCLIB Grading Rules.
- **Hem-fir** - Meet the requirements of either paragraph 80.10 of the current WWPA Grading Rules, or paragraph 131-a of the current WCLIB Grading Rules.
- **Southern Yellow Pine** - Meet the requirements of section 402 of the current Southern Pine Inspection Bureau (SPIB) Grading Rules.

(2) Preservative Treatment - Treat timber rail, posts, and blocks, after boring all through holes, according to Section 02190.

(b) Steel Rail and Plates - Furnish steel rail, steel splice plates, steel bearing plates, and steel plate washers meeting the requirements of AASHTO M 270, Grade 50W (ASTM A709, Grade 50W). Galvanize them according to AASHTO M 111 (ASTM A123).

(c) Fasteners and Hardware - Furnish bolts, nuts, washers, lag screws, and nails meeting the requirements of ASTM A307. Galvanize them according to AASHTO M 232.

(d) Coatings - Furnish white primer and white top coat paints from one of the following manufacturers:

Primer	Sherwin-Williams	A-100 Exterior Oil Stain Blocking Primer
Top Coat	Sherwin-Williams	A-100 Exterior Latex Satin
Primer	Glidden	Stain Stomper Exterior Primer Sealer 2110-1200N
Top Coat	Glidden	FORTIS 350 Exterior Satin Paint 2402
Primer	Miller Paint	Pure Paint Primer
Top Coat	Miller Paint	Acri-Lite Satin 7400 Series

Use the same manufacturer's paint for the primer and the top coat.

Acceptance of Material is according to 00165.35.

Construction

00813.40 General - Coordinate construction of steel backed timber guardrail to hold disturbance of Bases, Surfacing, and Pavements to a minimum.

In areas of new installations, do not leave posts exposed to traffic for more than 24 hours before installing the steel and timber rail elements and anchors.

In areas where existing guardrail is removed and replaced with new steel backed timber guardrail, either install the new steel backed guardrail the same working shift the existing

Insert Project Name Here

guardrail is removed or protect the area with temporary precast concrete barrier with appropriate end treatment until the new steel backed timber guardrail is installed.

00813.41 Excavation and Backfill - Excavate to the lines, grades, and depths shown or established. Make cuts through Pavement with knife-edge cutters or rotary drills. Make cuts below the Pavement with augers or other methods that will not disturb abutting areas. Do not damage existing Bases and Pavements. Remove water and Unsuitable Material that would impair stability of the backfill, from areas to be backfilled.

In areas of Aggregate and paved surface areas, backfill with like Materials to the same thickness and density as the adjacent materials. In other areas, backfill with granular backfill Materials meeting the requirements of 00330.14. Place all backfill in layers not exceeding 6 inches and compact each layer to a firm, dense condition.

Remove, replace, repair, or restore adjoining areas that become misshapen or disturbed during excavating and backfilling operations. Dispose of excess materials according to 00330.41(a)(4).

00813.42 Installation of Posts and Anchors - Place posts and anchors as shown. Set posts in excavated holes or drive them in place. If posts are driven through the Bases, Surfacing, or Pavement, repair all damage. Remove and replace posts or anchors damaged during installation with new components. Set all posts to the line, grade, and spacing shown and within a tolerance of $\pm 1/2$ inch.

00813.43 Installation of Steel and Timber Rails - Install steel and timber rails as shown. Field cut timber elements as shown. Coat all field cuts with 3 brush coats of a wood field preservative from the QPL. Do not field cut steel elements.

00813.44 Coating - After installation, apply coatings to the entire exposed steel backed timber guardrail assembly according the manufacturer's recommendations.

- For timber treated, except ACZA, apply coating as follows:
 - Prime with one coat of oil based primer.
 - Finish with two coats of acrylic latex paint.
- For ACZA treated timber, do the following:
 - Prepare a test section to determine the number of coats required.
 - At a minimum:
 - Prime with two coats of oil based primer.
 - Finish with two coats of acrylic latex paint.

Measurement

00813.80 Measurement -

(Use the following paragraph when Pay Item (a) is included in the Pay Item list below.)

Insert Project Name Here

The quantities of steel backed timber guardrail will be measured on the length basis from end of rail at terminal anchor to end of rail at terminal anchor.

(Use the following paragraph when Pay Item (b) is included in the Pay Item list below.)

The quantities of steel backed terminal concrete anchors will be measured on the unit basis.

Payment

(Delete the "(s)" or parentheses from the word "item(s)", as appropriate.)

00813.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Steel Backed Timber Guardrail	Foot
(b) Steel Backed Terminal Anchors	Each

Payment will be payment in full for furnishing and placing all Materials, and providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00815 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26
Requires SP00440)**

SECTION 00815 - BOLLARDS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00815 of the Standard Specifications modified as follows

00815.11 Posts and Sleeves - Replace this subsection, except for the subsection number and title, with the following:

Use Schedule 40 steel pipe for the posts and either Schedule 40 or Schedule 80 steel pipe for the sleeves, as shown. Use steel pipe according to ASTM A53, Type E, Grade A.

00815.12 Plates, Shapes, Fasteners, and Hardware - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Use plates and shapes according to ASTM A36. Use fasteners and hardware according to ASTM A449.

00815.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00820 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-16-26

Requires SP02001 & SP02510

Requires SP02080 when Portland cement grout is required.

Requires SP02210 when concrete coating is required.

Requires SP02440 when preformed expansion joint filler is required

Requires SP02630 when base aggregate is required

Requires SP02690 when PCC Aggregate is required.)

SECTION 00820 - CONCRETE BARRIER

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00820 of the Standard Specifications modified as follows:

00820.11(a) Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish concrete meeting the requirements of Section 00440, except modify Aggregates as follows:

(1) Fine Aggregate - Furnish Fine Aggregate meeting the test requirements of 02690.30(c) and 02690.30(d) with test results less than 1 year old.

(2) Coarse Aggregate - Furnish Coarse Aggregate meeting the test requirements of 02690.20(b) and 02690.20(c) with test results less than 1 year old.

00820.11(b) Hardware - Replace this subsection, except for the subsection number and title, with the following:

Furnish pins, bolts, and dowels according to ASTM A449 and hot-dip galvanized according to AASHTO M 232 (ASTM A153).

00820.12(b) Barrier Used on Previous Projects - Replace this subsection, except for the subsection number and title, with the following:

Precast concrete barriers used on previous projects may be reused in permanent installations, provided they meet all the requirements of this Section. Prior to delivery to the Project Site provide documentation required by 00165.10(b) and barriers:

- Are restored to like-new condition, without visible cracks, chips, spalls or corroded loops.
- Present a surface of uniform texture and appearance.
- Are free of markings, except as required by 00820.11(e).

Apply two coats of a water-based coating Material meeting the requirements of 02210.30 after installation in final position.

00820.41 Line and Grade - Replace this subsection, except for the subsection number and title, with the following:

Place precast barrier sections on the Pavement surface. Ensure new Pavement surfaces placed as a part of this Project meet the appropriate smoothness requirement prior to placing the barrier. If corrective work is required for existing surfaces to receive concrete barrier, it is paid according to 00195.20.

Place the barrier sections so that the joints offset no more than 1/4 inch transversely and no more than 1/2 inch vertically.

Construct the top and face of finished barriers true and straight. Construct the top surface of the barriers to uniform width and free from humps, sags, or other irregularities. When a 12-foot straightedge is laid on the top or face of the barrier, do not vary the surface does more than 1/4 inch from the edge of the straightedge, except at grade breaks or curves. To compensate for variations in the Roadway grade and cross Slope, adjust the height of the barrier at no additional cost to the Agency.

00820.43(a)(2) Latex Paint Cure - Replace the paragraph that begins "Barriers cured in this ..." with the following paragraph:

Barriers cured in this manner are considered to have met the surface finishing requirements of 00820.45 except that additional coats may be necessary to provide uniform coverage and appearance to correct construction damage.

00820.43(b)(2) Steam Cure - Replace the paragraph that begins "Steam curing can be ..." with the following paragraph:

Steam curing can be substituted for water curing if done under a suitable enclosure constructed to contain live steam and to minimize moisture and heat loss. Steam cure at 100 percent relative humidity to prevent loss of moisture and to provide excess moisture for proper hydration of cement. Do not apply the steam directly to the concrete.

00820.45 Surface Finishing - Replace the paragraph that begins "After stripping forms ..." with the following paragraph:

Insert Project Name Here

After stripping forms and while the concrete is still green, remove all fins and form marks, and repair all rock pockets and holes having a surface opening over 3/8 inch in diameter with portland cement grout meeting the requirements of 02080.40. Prevent grout from drying prematurely. Additional finishing after precast concrete barrier is set in its permanent position may be required to present a surface of uniform texture and appearance.

00820.49(a) Test Section - Replace this subsection, except for the subsection number and title, with the following:

Cast a test section at least 25 foot long that:

- Is placed off the final barrier location site
- Has the same section and reinforcement as detailed
- Includes one typical contraction or expansion joint.
- Is removed and disposed of at no additional cost to the Agency

00820.49(b) Prior Performance - Replace the paragraph that begins "Identify at least two ..." with the following paragraph:

Identify at least two recent projects where the Contractor installed slipformed single-slope concrete barrier. For each project, provide the name and phone number of a person the Engineer may contact to determine the success of the installation. The Engineer will determine whether to allow slipforming on the current project.

00820.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate or additional ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Excavating and backfilling buried ends of concrete barrier
- Securing concrete barrier to the Roadway by means of grout or keyways
- Moving, stockpiling, handling, and pinning removed and reinstalled concrete barrier.

SP00822 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-27-26)**

SECTION 00822 - GLARE SHIELDS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple

text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00822 is not a Standard Specification and is included in this Project by Special Provision.

Description

00822.00 Scope - This Work consists of furnishing and installing glare shields on concrete median barrier.

Materials

00822.10 Materials - The Contractor has the option of providing modular glare shields or individual glare shields as specified.

- Furnish glare shields from the QPL.
- Furnish steel base plate brackets fabricated from ASTM A304 stainless steel or merchant quality mild carbon steel. Furnish mild carbon steel brackets that are hot-dip galvanized after fabrication according to AASHTO M 111 (ASTM A123).
- Furnish bolts, nuts, inserts, washers and other necessary assembly hardware made from ASTM A304 stainless steel or mild carbon steel. Equip exposed hardware with vandal resistant lock nuts or similar. Furnish mechanical inserts, if used, suitable for dynamic application. Galvanize carbon steel assembly hardware according to AASHTO M 111 (ASTM A123).

Furnish base plate brackets and necessary assembly hardware installed in a continuous run of all the same material.

Construction

00822.40 Construction - Install the glare shields according to the following:

- Recess inserts at least 1/4 inch below the concrete barrier surface.
- Install all glare shield blades vertical and true to line.
- Place glare shields according to the manufacturer's recommendation.
- Install so that the angle of light coming through from the other side does not exceed 22°.
- Firmly attach the base plate anchor bolts to the concrete barrier to withstand a 1,000 pounds vertical pull and to prevent horizontal and rotational displacement. Space modular unit anchor bolts as recommended by the manufacturer.
- Furnish modular or single element glare shields that are installed in a continuous run from the same manufacture and of like appearance throughout the entire installation.

Measurement

Insert Project Name Here

00822.80 Measurement - The quantities of glare shields will be measured on the length basis, along the line and grade of each run.

Payment

00822.90 Payment - The accepted quantities of glare shields will be paid for at the Contract unit price, per foot, for the item "_____ Inch Glare Shields".

The length of the blades is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00830 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26
Requires SP00440)**

SECTION 00830 - IMPACT ATTENUATORS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00830 of the Standard Specifications modified as follows:

00830.02 Required Submittals – Replace the title of this subsection with "**Submittals**"

00830.90 Payment - Replace the paragraph that begins "The type of impact ..." with the following paragraph:

The type of impact attenuator is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

SP00840 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00840 - DELINEATORS AND MILEPOST MARKER POSTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00840 of the Standard Specifications modified as follows:

00840.11(a) General - Replace the paragraph that begins "* As defined in U.S...." with the following paragraph:

* As defined in U.S. Department of Commerce Commercial Standard 1CS 150-48, furnish rail steel products rolled from standard tee-section steel rails. Do not substitute other materials, such as those known by the terms "rerolled", "rail steel equivalent", and "rail steel quality".

00840.11(b) Multiple Punching - Replace this subsection, except for the subsection number and title, with the following:

Milepost marker posts with holes in addition to those called for on the Plans are acceptable provided that the critical net width of the section measured on the frontal plane projection of the post is not less than 2 1/2 inches.

00840.11(d) Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of milepost marker posts is according to 00165.35. Accompany each shipment of support posts with a quality compliance certificate.

(Use the following subsection .42 when backside delineators are required. Obtain information from Designer. List locations by station or by mile points.)

00840.42 Target Members for Delineator Posts - Add the following paragraph to the end of this subsection:

Install delineators with backside target member and reflective sheeting as shown on the _____ highway from _____ to _____.

00840.90 Payment - Replace the paragraph that begins "In item (a) the...." with the following paragraph:

In item (a), the type of delineator is inserted in the blank regardless of the color or number of reflectors and targets.

Replace the paragraph that begins "Payment will be payment...." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SECTION 00842 - FACILITY IDENTIFICATION MARKERS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00842 of the Standard Specifications modified as follows:

00842.10(a)(2) Type S2 Markers - Replace the paragraph that begins "Furnish white markers ..." with the following paragraph:

Furnish white markers made of aluminum alloy meeting the requirements of ASTM B209 approximately half-hard temper, suitable for enameling by continuous roller or other acceptable method. Fabricate from aluminum sheet having a nominal thickness of 0.050 inch, subject to standard manufacturer's tolerances and free of burrs, irregularities, and turned edges. When resting on a plane surface, ensure the markers do not show warp, twist, or variation from the surface in excess of 1/4 inch. Finish the markers as follows:

00842.10(b)(2) Type 2 Drainage Markers - Replace the paragraph that begins "Furnish white markers ..." with the following paragraph:

Furnish white markers made of aluminum alloy meeting the requirements of ASTM B209 approximately half-hard temper, suitable for enameling by continuous roller or other acceptable method. Fabricate the aluminum sheet having a nominal thickness of 0.050 inch, subject to standard manufacturer's tolerances and free of burrs, irregularities, and turned edges. When resting on a plane surface, ensure the markers do not show warp, twist, or variation from the surface in excess of 1/4 inch. Finish the markers as follows:

(Use the following subsection .40(a) when stormwater control field facility markers are required. Fill in the table with appropriate information. Obtain information from the designer. Add or delete rows in the table as necessary to list all applicable field markers, Delete example purple text.)

00842.40(a) Stormwater Control Field Facility Markers - Add the following to the end of this subsection:

Install field markers as indicated in Table 00842-1.

Table 00842-1

Insert Project Name Here

Facility Station	HWY/MP	DFI Number	Type S1 Marker Red (Beginning of Facility)	Type S1 Marker Green (End of Facility)	Type S2 Marker Begin	Type S2 Marker End	Type S3 Marker
Sta. "L" ##+### RT/LT	I-5/00.00	D#####	X		X		
Sta. "L" ##+### RT/LT	I-5/00.00	D#####		X		X	

00842.90 Payment - Replace the paragraph that begins "In item (a), ..." with the following paragraph:

In item (a), the type of facility field marker is inserted in the blank.

Replace the paragraph that begins "In item (b), ..." with the following paragraph:

In item (b), the type of culvert drainage marker is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00850 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

(When this Section is used on a Project and when it has a completion date of September 15 or later, contact the Scheduler to determine if a separate completion date for striping is required. If a separate completion date is required, include an interim completion date in 00180.50(h).)

SECTION 00850 - COMMON PROVISIONS FOR PAVEMENT MARKINGS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00850 of the Standard Specifications modified as follows:

00850.11 Flexible Bituminous Adhesive - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

At least 2 weeks before using, submit for Agency testing and approval a 15-pound brick sample of flexible bituminous adhesive for each manufacturer lot number, including previously tested and approved lot numbers that are over 1 year old, that are used on the Project. All previously rejected lot number samples will not be retested. Agency testing and approval is only for acceptance of use of the adhesive.

(Use the following subsection .30 only with approval from the ODOT Pavement Marking Manager and when the Project meets ALL of the following requirements:

- Only surface applied markings (no groove installed markings or tape), AND*
- Less than 2000' of 4" longitudinal markings, AND*
- Fewer than 7 legends, AND*
- Less than 400 square feet of bars.)*

00850.30 Manufacturer's Representative - Replace this subsection, except for the subsection number and title, with the following:

For Sections referencing 00850.30, the services of a manufacturer's representative are not required. Place Pavement markings only when the Pavement is ready for the Pavement marking material according to the manufacturer's installation instructions.

00850.44 Alignment Layout – Replace the paragraph that begins "Place control points for lines every ..." with the following paragraph:

Place control points for lines every 40 feet on tangent and every 25 feet on a curve. Place layout transition details at the start of pavement markings, where pavement markings transition into a different pavement marking, and at the end of pavement markings. Using these control points and layout transition details, layout a continuous narrow guideline for each line, along one edge of, or uniformly offset from the intended permanent line location. Do not proceed with installation until the guidelines are approved by the Engineer.

00850.45 Installation - Replace the sentence that begins "Apply pavement marking ..." with the following sentence:

Apply pavement marking Materials to clean dry Pavement surfaces and according to the following:

Replace the bullet that begins "The Pavement surface ..." with the following bullet:

- Ensure the Pavement surface is not visible through the pavement marking.

Replace the bullet that begins "The top of pavement ..." with the following bullet:

- Provide a smooth and uniform top of pavement marking.

Replace the bullet that begins "Skip line ends ..." with the following bullet:

- Provide square and clean skip line ends.

00850.46 Placement Tolerance - Replace the bullet that begins "Skip Cycle ..." with the following bullet:

- **Skip Cycle:** A tolerance of 1/10 of the skip line length on the first skip line of a run, but on cycle within one skip

00850.47(c) Retroreflectivity - Replace the paragraph that begins "Except for paint applications ..." with the following paragraph:

Except for paint applications, evaluate longitudinal and transverse marking retroreflectivity according to ODOT TM 777. Acceptance is according to the following:

In the bullet that begins "**Longitudinal Markings**", replace the paragraph that begins "Each longitudinal marking ..." with the following paragraph:

- Each longitudinal marking subplot is accepted if the average of the measurements and at least 90 percent of the individual measurements within the subplot meet or exceed the required minimum initial retroreflectivity.

In the bullet that begins "**Transverse Markings**", replace the paragraph that begins "Each transverse marking ..." with the following paragraph:

- Each transverse marking subplot is accepted if the average of the measurements and at least 90 percent of the individual measurements within the subplot meet or exceed the required minimum initial retroreflectivity.

(Use the following two sentences only when Section 00868 – "Colored Lane Markings" is included in the Special Provisions)

Replace the sentence that begins "Except for paint applications..." with the following sentence:

Except for paint and colored lane marking applications, evaluate longitudinal and transverse marking retroreflectivity according to ODOT TM 777.

SP00855 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26

Requires SP00850)

SECTION 00855 - PAVEMENT MARKERS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00855 of the Standard Specifications modified as follows:

00855.40(b) Surface Preparation - Replace the paragraph that begins "Remove contaminants from ..." with the following paragraph:

Insert Project Name Here

Remove contaminants from the wearing Course surface that would adversely affect the bond of the adhesive.

00855.41(a) Surface Preparation - Replace this subsection, except for the subsection number and title, with the following:

Construct grooves in the Pavement to Neat Lines according to width, length and depth shown, and prepare the surface according to 00855.40(b).

00855.90 Payment – Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Mono-Directional _____ Type I Markers	Each
(b) Mono-Directional _____ Type IAR Markers	Each
(c) Bi-Directional _____ Type I Markers	Each
(d) Bi-Directional _____ Type IAR Markers	Each
(e) _____ Type II Markers	Each
(f) Mono-Directional _____ Type IAR Markers, Recessed	Each
(g) Bi-Directional _____ Type IAR Markers, Recessed	Each

In items (a), (b), (c), (d), (e), (f) and (g) the color of marker is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work.

No separate or additional payment will be made for constructing Pavement grooves, Pavement preparation, adhesive, or clean-up.

SP00856 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-22-26)

SECTION 00856 - SURFACE MOUNTED TUBULAR MARKERS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00856 of the Standard Specifications modified as follows:

00856.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00857 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-22-26)**

SECTION 00857 - RUMBLE STRIPS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00857 of the Standard Specifications modified as follows:

00857.20 Equipment - Replace this subsection, except for the subsection number and title, with the following:

(a) Longitudinal Rumble Strips - Construct continuous or gap pattern longitudinal Shoulder, edge line, and centerline rumble strips as shown using a rotary type cutting head with a maximum outside diameter of 24 inches. Provide a cutting head length that matches the rumble strip width as shown. Arrange the cutting head cutting tips in a pattern that provides a relatively smooth cut with approximately 1/16 inch between peaks and valleys. Attach the cutting heads to the power unit in a manner that allows the tool to self-align with the Slopes of the Pavement and Shoulder and any irregularities in the Pavement and Shoulder surfaces. Provide cutting Equipment capable of cutting rumble strips of the required width in a single Pass while moving in the same direction as the flow of traffic.

(b) Transverse Rumble Strips - Form transverse rumble strips using a rotary type cutting head 5 1/2 inches long. Arrange the cutting head cutting tips in a pattern that provides a relatively smooth cut (approximately 1/16 inch between peaks and valleys). Attach the cutting heads to the power unit in a manner that allows the tool to self-align with the Slope of the travel lane and any irregularities in the travel lane surface. Provide cutting Equipment capable of cutting rumble strips perpendicular to the travel lane.

00857.40 Construction - Replace the paragraph that begins "Where rumble strips ..." with the following paragraph:

Where rumble strips are constructed at the same locations where permanent pavement markings are installed, construct rumble strips within 3 weeks after temporary pavement markings have been placed for the final Roadway configuration, but before installing permanent pavement markings.

SECTION 00860 - LONGITUDINAL PAVEMENT MARKINGS - PAINT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00860 of the Standard Specifications modified as follows:

(Use one of the following Options)

00860.45 Installation -

[Option 1]

Replace the paragraph that begins "Minimum initial retroreflectivity ..." with the following paragraph:

Meet the following minimum initial retroreflectivity:

(Option 2 - Use the following when only one application of paint is required. Check with Region Pavement Marking Manager. DO NOT convert the initial retroreflective values to English units.)

Replace this subsection, except for the subsection number and title, with the following:

Apply painted longitudinal Pavement markings as follows:

- Apply one application at thickness of 15 mils wet, equivalent to 17 gallons per mile for a 4 inch wide solid stripe.
- Apply reflective elements at a minimum rate of 5 pounds per gallon of paint. Embed by means of wicking, a minimum of 80 percent of the reflective elements in the paint to a minimum depth of 50 percent of their diameter.

Meet the following minimum initial retroreflectivity:

- White - 250 mcd/m²/lx
- Yellow - 200 mcd/m²/lx

[End Option 2]

00860.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00865 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26

Requires SP00850)

SECTION 00865 - LONGITUDINAL PAVEMENT MARKINGS - DURABLE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00865 of the Standard Specifications modified as follows:

00865.45 Installation - Replace the bullet that begins "For grooved markings, grind ..." with the following bullet:

- For grooved markings, grind the slot depth as shown. Apply the specified marking Material centered in the slot as shown. Ensure the top of the marking is flat or slightly convex.

00865.75 Manufacturer Warranty - Replace the paragraph that begins "Furnish a manufacturer ..." with the following paragraph:

Provide a manufacturer warranty that unconditionally warrants to the Agency the product(s) and installation under this Section against failure, according to this Subsection and 00170.85(c)(1). Use Agency-supplied warranty forms, available from the Engineer.

00865.90 Payment - Replace the paragraph that begins "In items (a) and (b), ..." with the following paragraph:

In items (a) and (b), the word "Surface" or "Grooved" is inserted in the first blank and the word "Profiled" or "Non-Profiled" is inserted in the second blank.

Replace the paragraph that begins "In items (e) and (f), ..." with the following paragraph:

In items (e) and (f), "Rolled-In" or "Grooved" is inserted in the first blank and "Patterned" or "Non-Patterned" is inserted in the second blank.

Replace the paragraph that begins "In items (g) and (h), ..." with the following paragraph:

In items (g) and (h), the word "Surface" or "Grooved" is inserted in the first blank and the word "Profiled" or "Non-Profiled" is inserted in the second blank.

Insert Project Name Here

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00866 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26

Requires SP00850)

SECTION 00866 - LONGITUDINAL PAVEMENT MARKINGS - HIGH PERFORMANCE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00866 of the Standard Specifications modified as follows:

00866.45 Installation - Replace the paragraph that begins "For grooved markings, ..." with the following paragraph:

For grooved markings, grind the slot depth as shown. Apply the specified marking Material centered in the slot as shown. Ensure the top of the marking is flat or slightly convex.

00866.75 Manufacturer Warranty - Replace the paragraph that begins "Furnish a manufacturer ..." with the following paragraph:

Provide a manufacturer warranty that unconditionally warrants to the Agency the product(s) and installation under this Section against failure, according to this Subsection and 00170.85(c)(1). Use Agency-supplied warranty forms, available from the Engineer.

00866.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
-----------------	----------------------------

Method 1 (Extruded)

- (a) Hi-Build Paint, Extruded, _____ Foot
- (b) Hi-Build Paint, Extruded, Wet Weather, _____ Foot

Method 2 (Sprayed)

Insert Project Name Here

- (c) Plural Component, Sprayed, _____ Foot
- (d) Plural Component, Sprayed, Wet Weather, _____ Foot
- (e) Hi-Build Paint, Sprayed, _____ Foot
- (f) Hi-Build Paint, Sprayed, Wet Weather, _____ Foot

Method 1-2 (Extruded or Sprayed)

- (g) Hi-Build Paint, Extruded or Sprayed, _____ Foot
- (h) Hi-Build Paint, Extruded or Sprayed, Wet Weather, _____ Foot

The word "Surface" or "Grooved" is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Payment for Work under this Section will be limited to 75 percent of the amount due until the Agency has received the signed Warranty.

SP00867 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26
Requires SP00850)**

SECTION 00867 - TRANSVERSE PAVEMENT MARKINGS - LEGENDS AND BARS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00867 of the Standard Specifications modified as follows.

00867.45 Installation - Replace the paragraph that begins "Transverse joints ..." with the following paragraph:

Transverse joints are allowed with no overlap or gap allowed at the joint.

Replace the paragraph that begins "Minimum initial retroreflectivity ..." with the following paragraph:

Meet the following minimum initial retroreflectivity:

Replace the bullet that begins "**Type A: Liquid, Hot-Laid Thermoplastic Material ...**" with the following bullet:

- **Type A: Liquid, Hot-Laid Thermoplastic Material** - For pavement bars, apply the thermoplastic material to the Pavement by a spray or extrusion method, to the full width

shown, in a single application. For pavement legends, apply the thermoplastic material to the Pavement by a spray method, to the full width shown, in a single application. Apply Pavement markings 90 mils to 120 mils in thickness, exclusive of projecting surface-applied reflective elements, with a continuous and uniform cross sectional configuration, and with the upper surface slightly arched.

Separately apply reflective elements to the material as it is placed at a sufficient rate to obtain an initial reflectivity reading of 250 mcd/m²/lx. Locate the dispenser behind the pavement marking extrusion die and uniformly distribute the reflective elements over the entire width of the thermoplastic material.

Replace the bullet that begins "**Type D: Methyl Methacrylate ...**" with the following bullet:

- **Type D: Methyl Methacrylate** - Apply the methyl methacrylate material to the Pavement by a gravity and extrusion method, to the full width shown, in a single application. Apply Pavement markings 90 mils to 120 mils in thickness, exclusive of projecting surface-applied reflective elements, with a continuous and uniform cross-sectional configuration, and with the upper surface slightly arched. Provide intermixed reflective elements.

00867.75 Manufacturer Warranty - Replace the paragraph that begins "Furnish a manufacturer ..." with the following paragraph:

Provide a manufacturer warranty that unconditionally warrants to the Agency the product(s) and installation under this Section against failure, according to this Subsection and 00170.85(c)(1). Use Agency-supplied warranty forms, available from the Engineer.

00867.90 Payment - Replace the paragraph that begins "In items (a) through (s), ..." with the following paragraph:

In items (a) through (s), the type of pavement marking materials is inserted in the first blank.

(Use the following two paragraphs when the Bid Schedule contains item (q). Fill in the blank with a description of the Pay Item and all included details. Obtain information from the Traffic Designer and refer to the payment paragraphs in the standard for examples.)

Add the following paragraph after the paragraph that begins "Item (p) includes one...":

Item (q) includes (Description of pay item and included details).

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00868 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26
Requires SP00850)**

SECTION 00868 - COLORED LANE MARKINGS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00868 of the Standard Specifications modified as follows:

00868.45 Installation - Replace the paragraph that begins "Apply the material ..." with the following paragraph:

Apply the material to the pavement according to the manufacturer's installation instructions to the full width shown in the Plans. Joints are allowed with no overlap or gap allowed at the joint.

Replace the bullet that begins "**Methyl Methacrylate** ..." with the following bullet:

- **Methyl Methacrylate** - Apply methyl methacrylate to the pavement to the full width shown in a single application. Apply colored lane markings 90 mils to 120 mils in thickness, exclusive of projecting surface-applied friction elements, with a continuous and uniform cross sectional configuration.

00868.75 Manufacturer Warranty - Replace the paragraph that begins "Furnish a manufacturer ..." with the following paragraph:

Provide a manufacturer warranty that unconditionally warrants to the Agency the product(s) and installation under this Section against failure, according to this Subsection and 00170.85(c)(1). Use Agency-supplied warranty forms, available from the Engineer.

00868.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00869 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-24-26
Requires SP00850, SP00860 & SP00865)

SECTION 00869 - CURB AND NON-TRAVERSABLE MEDIAN MARKINGS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple

Insert Project Name Here

text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00869 is not a Standard Specification and is included in this Project by Special Provision.

Description

00869.00 Scope - In addition to the requirements of Section 00850, 00860, and 00865, install curb markings and non-traversable median markings according to the following Specifications.

Labor

00869.31 Manufacturer-Certified Installers - Provide certified installers according to 00850.31 for thermoplastic applications.

Construction

00869.45 Installation - Apply curb markings and non-traversable Median markings only when the following conditions are met:

- The ambient temperature is at least 50 °F and rising
- The Pavement has been dry for at least 48 hours
- 30 Calendar Days of cure time for new concrete curb or Median.

Apply the Material to the Pavement according to the manufacturer's installation instructions to the full height and width of curb or Median as shown in the Plans.

Apply one or more of the following marking material types:

- **Paint** - Apply according to 00860.45 along full height of curb face and along full width of top of curb or non-traversable Median.
- **Thermoplastic, Sprayed** - Apply according to 00865.45, using Method B Spray Markings to the full height of curb face and along full width of top of curb or non-traversable Median.
 - Apply each application of painted thermoplastic marking at a thickness of 60 mils.

Measurement

00869.80 Measurement - The quantities of non-traversable Median markings will be measured on the area basis. The quantities of curb markings will be measured on the length basis.

Insert Project Name Here

Payment

00869.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Curb Marking, Thermoplastic	Foot
(b) Curb Marking, Paint	Foot
(c) Non-Traversable Median Markings, Thermoplastic .	Square Foot
(d) Non-Traversable Median Markings Paint.....	Square Foot

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00902 (Special Provisions for the 2024 Book) (Bidding on or after: 11-01-26
Last updated: 07-22-26
Requires SP01070 when mailbox supports are required.)

SECTION 00902 - CROSSWALK CLOSURE SUPPORTS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00902 is not a Standard Specification and is included in this Project by Special Provision.

Description

00902.00 Scope - This Work consists of constructing crosswalk closure supports and associated signs as shown.

Materials

00902.10 Materials - Furnish Materials meeting the following requirements:

Commercial Grade Concrete.....	00440
Steel	01070.10 and 01070.12
Signs	00940

Insert Project Name Here

Construction

00902.40 General - Install crosswalk closure supports and associated signs as shown or directed.

Measurement

00902.80 Measurement - The quantities of crosswalk closure supports will be measured on the unit basis. No separate measurement will be made for signs attached to crosswalk closure supports.

Payment

00902.90 Payment - The accepted quantities of Work done under this Section will be paid for at the Contract unit price, per each, for the item "Crosswalk Closure Supports".

Payment will be payment in full for furnishing and placing all Materials, including signs, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00905 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-22-26

Requires SP02910)

SECTION 00905 - REMOVAL AND REINSTALLATION OF EXISTING SIGNS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00905 of the Standard Specifications modified as follows:

(Use the following subsection .00 "Modify and Repair Language" when modifying or repairing extruded aluminum panel signs and sign legends.

00905.00 Scope - In the paragraph that begins "This Work consists of..." replace the word "both" with the word "more".

Add the following bullet to the end of the bullet list:

- Modifying signs, modifying sign legends, and repairing existing signs as shown.

(Use the following subsection .10 "Modify and Repair Language" when modifying or repairing extruded aluminum panel signs and sign legends.

Insert Project Name Here

Add the following subsection:

00905.10 Materials - Furnish materials for modifying signs and legends, and for repairing signs, meeting the requirements of Section 02910.

00905.40 General - Replace the paragraph that begins "Do not remove signs ..." with the following paragraph:

Do not remove signs from existing supports until new supports are in place, ready to receive the signs. Install the signs on the new supports immediately after removing from existing supports. Furnish temporary supports as required. Furnish permanent supports according to Sections 00910, 00920, and 00930 as required.

Replace the paragraph that begins "Protect specific service signs ..." with the following paragraph:

Protect specific service signs (business logos) and TODS from damage, whether the signs are to remain in place or are placed on temporary supports, until reinstalled on permanent supports. Repair or replace damaged signs at no additional cost to the Agency. Liquidated damages are assessed against the Contractor in the amount of \$200 per Day for each sign out of service for more than 5 Calendar Days.

(Use the following subsection .41 "Modify and Repair Language" when modifying or repairing extruded aluminum panel signs and sign legends.

Add the following subsection:

00905.41 Modify Legends - Remove existing removable legends and install new legends as shown and according to 00940.45. Fill all rivet holes not covered by new legends with new blind rivets. Do not damage background sheeting and substrates.

(Use the following subsection .42 "Modify and Repair Language" when modifying or repairing extruded aluminum panel signs and sign legends.

Add the following subsection:

00905.42 Modify Signs - Modify signs as shown and according to Section 00940.

00905.90 Payment - Replace the paragraph that begins "Payment will be ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following subsection .90 "Modify and Repair Language" when modifying or repairing extruded aluminum panel signs and sign legends.

Add the following Pay Item to the end of the Pay Item list:

(c) Modify Existing Signs and Legends Lump Sum

SP00910 (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-26
Last updated: 08-25-26
Requires SP02110 & SP02190)

SECTION 00910 - WOOD SIGN POSTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00910 of the Standard Specifications modified as follows:

00910.90 Payment - Replace the paragraph that begins " Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00920 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26
Last updated: 04-24-26
Requires SP00440, SP02510 & SP02560)

SECTION 00920 - SIGN SUPPORT FOOTINGS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00920 of the Standard Specifications modified as follows:

00920.10 Materials - Replace this subsection, except subsection number and title, with the following:

Furnish Materials for constructing sign support footings meeting the following requirements:

Anchor Bolts	02560.30
Backfill, unless otherwise directed	00510.10 or 00510.11
Commercial Grade Concrete.....	00440
Reinforcement	02510
Structural Concrete	00540

Insert Project Name Here

Furnish Commercial Grade Concrete for minor sign support foundations. Furnish structural concrete for major sign support foundations.

00920.41 Concrete - Replace the paragraph beginning "Construct concrete sign foundations..." with the following:

Construct concrete minor sign support foundations according to Section 00440 and the applicable portions of 00540.48(a). Construct major sign support footings according to Section 00540.

(Use the following subsection .80 when minor or major sign supports are required.)

00920.80 Measurement - Add the following to the end of this subsection:

(Use the following paragraph and table when minor sign supports are required. Obtain support types and quantities from the Designer. Delete the entire row if the support type is not used on the project.)

The estimated quantities of concrete for minor sign supports are:

Support Type	Quantity
Multi-Post Breakaway Sign Supports	cu. yd.
Triangular Base Breakaway Sign Supports	cu. yd.
Pipe Breakaway Sign Supports	cu. yd.
Perforated Steel Square Tube Slip Base Sign Supports	cu. yd.
90 Degree Rotational Sign Supports	cu. yd.
Pipe Sign Supports	cu. yd.
Perforated Steel Square Tube Anchor Sign Supports	cu. yd.

(Use the following paragraphs and table when major sign support spread footings are required. Do not include any quantities for drilled shaft foundations, including the cap. Replace "(Support Type)" and "(Str. No.)" with specific information. Obtain support types, structure numbers, and quantities from the Designer. Replace "(Support Type)" only with one of the following:

- Truss Sign Bridge*
- Monotube Sign Bridge*
- Butterfly Sign Structure*
- Monotube Cantilever Sign Structure*

Delete materials and quantities that do not apply. Copy the table as necessary for additional locations.)

The estimated quantities of Materials for major sign supports are:

Location	Material	Quantity
(Support Type)	Excavation	cu. yd.
Structure Number (Str. No)	Backfill	cu. yd.
	Concrete	cu. yd.

Insert Project Name Here

Reinforcement	pound
Miscellaneous Metal	pound

00920.90 Payment - Replace the paragraph that begins "Secure temporary concrete barrier to bridge ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following two paragraphs when major sign supports are required.)

Add the following paragraph to the end of this subsection:

No separate or additional payment will be made for structural concrete in major sign support footings.

SP00921 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP00920, SP02001, SP02010 & SP02510)

SECTION 00921 - MAJOR SIGN SUPPORT DRILLED SHAFTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00921 of the Standard Specifications modified as follows:

(Use the following subsection .00 when traffic signal 60 foot through 75 foot mast arm supports are included in the Project. Check with the Traffic Signal designer.)

Add the following paragraph to the end of this subsection:

00921.00 Scope - This Work also consists of excavating and constructing drilled, cast-in-place, reinforced concrete shafts and footings for traffic signal 60 foot through 75 foot mast arm supports according to the Specifications and the Plans.

00921.10 Materials - Replace this subsection, except for the subsection number and title, with the following:

Furnish Materials meeting the following requirements:

Concrete	02001
Reinforcement	02510

Insert Project Name Here

Furnish Class 4000 - 3/8" drilled shaft concrete for the drilled shaft. Water may be added to the concrete mix at the Project Site only if allowed by the approved mix design.

Furnish concrete and anchor bolts according to 00920.10 for the drilled shaft cap.

00921.14(b) Synthetic Slurries . Replace this subsection, except for the subsection number and title, with the following:

Select synthetic slurries from the QPL. Use synthetic slurries according to the manufacturer's recommendations and the Contractor's quality control plan. Provide a Sand content of synthetic slurry at less than 2.0 percent (API 13B-1, Section 5) prior to final cleaning and immediately prior to concrete placement.

00921.15 Crosshole Sonic Log Access Tubes - Replace the bullet that begins "Steel access tubes ..." with the following bullet:

- Furnish steel access tubes at least 1 1/2 inch inside diameter Schedule 40 pipe according to ASTM A53, Grade A or B, Type E, F, or S.

Replace the bullet that begins "Access tube acceptance ..." with the following bullet:

- Access tube acceptance is based on manufacturer's certification that the furnished material meets the requirements of this specification.

00921.18 Crosshole Sonic Log Cement Grout - Replace this subsection, except for the subsection number and title, with the following:

Furnish non-epoxy grout or tendon grout from the QPL or furnish a pumpable CSL cement grout consisting of neat cement and water that has a water-cement ratio between 0.38 and 0.45. Furnish portland cement for the pumpable CSL cement grout meeting the requirements of Section 02010.

00921.30 Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

Perform the drilled shaft construction Work using a company and personnel experienced in drilled shaft construction work. Submit a list to the Engineer for approval identifying the on-site supervisors and drill rig operators assigned to the Project and the companies experience relevant to the Project. Submit experience relevant to the anticipated subsurface materials, groundwater conditions, shaft size, depth and any special construction techniques required. Also provide the experience qualifications of the company performing the CSL testing. Before the preconstruction conference, provide the following information to verify the firm's experience and the qualifications of personnel scheduled to perform the drilled shaft construction and CSL testing:

- Submit a project reference list of at least three separate foundation projects, successfully completed in the last 5 years, with Drilled Shafts of diameters and depths equal to or larger than those shown and in ground conditions similar to those indicated. Include a brief description of each project and the owner's contact person's name and current phone number for each project listed.

Insert Project Name Here

- Submit a resume for on-site supervisors with at least 2 years' experience in supervising construction of drilled shaft foundations of similar diameter and depth and scope to those shown and in similar geotechnical conditions to those described in the geotechnical report. Submit experience that includes the direct supervisory responsibility for the on-site construction operations.
- Submit a resume for drill operators that have at least 1 year experience in the construction of drilled shaft foundations.
- Perform CSL testing using an independent testing organization retained by the Contractor and approved by the Agency. Provide personnel experienced in operating the CSL testing equipment. Submit the CSL testing firm qualifications according to 00921.40(a). Provide a CSL testing firm that has successfully performed CSL testing on a minimum of five projects during the last 3 years. Ensure the CSL testing personnel have been trained in the operation of the CSL equipment and have at least 1 year of experience in operating CSL testing equipment on a minimum of 10 shafts.

The Engineer will respond within 21 Calendar Days after receipt of the submittal. Do not begin Work on any Drilled Shafts until the qualifications have been approved. The Engineer may suspend the drilled shaft construction if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of either on-site supervisors, drill operators, or CSL testing personnel to the Engineer, who will have 7 Calendar Days to respond to each request. Additional costs resulting from the suspension of Work due to the changing of personnel is the Contractor's responsibility, and no adjustment in Contract Time resulting from the suspension of Work is allowed.

00921.40(a) Drilled Shaft Installation Plan - Replace the paragraph that begins "The Engineer will approve ..." with the following paragraph:

The Engineer will approve or reject the drilled shaft installation plan within 21 Calendar Days after receipt of all submissions. Provide any additional information and submit a revised plan, if requested, for review and approval. All procedural approvals given by the Engineer are subject to trial in the field and will not relieve the Contractor of the responsibility to satisfactorily complete the Work. Submit requests for modification of adopted procedures to the Engineer. Allow 21 Calendar Days for approval of modifications. Do not begin drilled shaft construction Work until all drilled shaft submittals have been approved.

(Use the following two paragraphs when the foundation will be embedded in rock or there is another reason to have additional reinforcing cage length. Check with designer. Delete (s) or parentheses and the words in parentheses as needed.)

Add the following sentence to the bullet that begins "Unstamped reinforcing steel shop..."

For site(s) (insert site name) (and) (insert site name) only, include details of the method for supporting the reinforcement on the bottom of the shaft excavation

00921.41 Drill Shaft Coordination Meeting - Replace the paragraph that begins "Hold a drilled shaft ..." with the following paragraph:

Hold a drilled shaft coordination meeting at least 7 Calendar Days before beginning any shaft construction Work at the site to discuss construction procedures, schedules, staging, personnel, Equipment to be used, and other elements of the approved shaft installation plan

Insert Project Name Here

as specified in 00921.40. If synthetic slurry is used to construct the shafts, discuss the frequency of scheduled site visits to the Project Site by the synthetic slurry manufacturer's representative. Those attending the meeting include:

Replace the bullet that begins "**Representing the Contractor ...**" with the following bullet:

- **Representing the Contractor** - The superintendent, on-site supervisors, and all supervisors in charge of excavating the shaft, placing the casing, mixing and installing slurry as applicable, placing the steel reinforcing bars, and placing the concrete. If synthetic slurry is used, include the slurry manufacturer's representative and a Contractor's employee trained in the use of the synthetic slurry.

00921.42 Construction Tolerances - Replace the bullet that begins "Top of Steel Reinforcement ..." with the following bullet:

- Top of Steel Reinforcement - Plus 3 minus 0 inches from the plan top of steel reinforcement elevation. Maintain 3 inches of cover.

Replace the paragraph that begins "Frequently check the plumbness ..." with the following paragraph:

Frequently check the plumbness, alignment, and dimensions of the shaft during construction. Correct all out-of-tolerance shaft excavations and completed shafts to the satisfaction of the Engineer. Materials and Work necessary to complete corrections for out-of-tolerance Drilled Shafts are at no additional cost to the Agency, and no extension of the Project completion date will be granted. Materials and Work necessary to complete corrections for out-of-tolerance Drilled Shafts resulting from the removal of unexpected drilled shaft obstructions is paid for according to 00195.20.

00921.43(a) General - Replace the paragraph that begins "Excavate Drilled Shafts to ..." with the following paragraph:

Excavate Drilled Shafts to the dimensions and elevations shown or as directed. Provide and maintain stabilized drilled shaft sidewalls and bottoms for the full depth of the excavation, using approved Materials, Equipment and methods. If caving or other unstable conditions occur during any construction procedure, stop further construction, notify the Engineer, and stabilize the shaft excavation by approved methods and submit a revised installation plan that addresses the problem and prevents further instability. Do not continue with shaft construction until any damage that occurred has been repaired according to the Specifications and until receiving the Engineer's approval of the revised shaft installation plan.

00921.43(d) Unexpected Drilled Shaft Obstructions - Replace this subsection, except for the subsection number and title, with the following:

Remove any natural or manmade object encountered that was not revealed by the Agency's site investigation, and that would cause a significant decrease in the rate of advancement if removed using the techniques and Equipment used successfully to excavate the shaft. The Engineer is the sole judge of the significance of any reduced rate of shaft advancement and the classification of any unexpected obstructions. Removal of unexpected obstructions from the shaft excavation is paid according to 00195.20.

00921.43(e) Lost Tools - Replace this subsection, except for the subsection number and title, with the following:

Promptly remove drilling tools lost in the excavation. Lost tools will not be considered unexpected obstructions. Remove lost tools without additional compensation. Drilling tools lost during the course of removing unexpected drilled shaft obstructions are paid according to 00195.20.

00921.43(f) Drilling Slurry Installation - Replace the paragraph that begins "If synthetic drilling slurry is ..." with the following paragraph:

If synthetic drilling slurry is selected, provide a manufacturer's representative to provide technical assistance at the site prior to use of the slurry, who remains at the site during construction and completion of a minimum of one drilled shaft to adjust the slurry mix for the specific site subsurface conditions. After the manufacturer's representative is no longer at the site, provide the approved personnel trained in the use of the synthetic slurry for the remainder of the shaft slurry operations to supervise the proper slurry mix design and quality control procedures.

Replace the paragraph that begins "All in-hole drilling ..." with the following paragraph:

Ensure all in-hole drilling slurry meets the required slurry Specifications during excavation and prior to concrete placement. Clean, recirculate, de-sand or replace the slurry to maintain the required slurry properties.

00921.43(g) Drilling Slurry Inspection and Testing - Replace the paragraph that begins "Mix and thoroughly hydrate ..." with the following paragraph:

Mix and thoroughly hydrate all drilling slurries in an appropriate storage facility. Collect sample sets from the storage facility and perform tests to ensure the slurry conforms to the specified material properties before introduction into the drilled shaft excavation. A sample set is composed of samples taken at mid-depth and within 24 inches of the bottom of the storage facility.

Replace the paragraph that begins "Sample and test all ..." with the following paragraph:

Sample and test all slurry in the presence of the Engineer, unless otherwise directed. The sample sets of slurry within the excavation consist of samples taken at mid-depth of the excavation and within 24 inches of the bottom of the excavation. Collect and test sample sets during the drilling operation as necessary to ensure the specified properties of the slurry are maintained. Clean, recirculate, de-sand, or replace the slurry as necessary to maintain the specified slurry properties. Final cleaning of the excavation and placement of concrete is not allowed until the test results indicate the slurry properties are as specified.

00921.43(h) Clean Out - Replace the paragraph that begins "Use appropriate means ..." with the following paragraph:

Use appropriate means, such as a cleanout bucket, pump or air lift, to clean the bottom of the drilled shaft excavations. No more than 1 inch of loose or disturbed material is allowed at the bottom of the excavation.

(Use the following subsection .45(a) when the foundation will be embedded in rock or there is another reason to have additional reinforcing cage length. Check with designer. Delete (s) or parentheses and the words in parentheses as needed.)

00921.45(a) Placement - Add the following paragraph and bullets to the end of this subsection:

For site(s) (insert site name) (and) (insert site name) only:

- In each shaft, place reinforcing steel extending from 6 inches above the bottom of the shaft excavation to the elevation shown. The reinforcing cage may be supported on the bottom of the shaft excavation if approved. Support the reinforcing cage to prevent distortion or settlement during concrete placement. Support the reinforcing cage such that the supporting mechanism does not obstruct the center of the shaft and allows concrete placement vertically down the center of the shaft. If concrete placement does not immediately follow cage placement, remove the reinforcing cage from the excavation and rectify the integrity of the excavation prior to reinstallation of the cage.
- To accommodate variations in shaft length, furnish steel reinforcing bar cages, including CSL access tubes if specified, 4 feet longer than the lengths shown. Add the increased length to the bottom of the cage. Following bottom cleanliness approval, trim the bottom of the steel reinforcing bar cage to the proper length prior to placing it in the excavation. Shift or trim CSL access tubes (if present) to the revised cage length. If CSL tubes are cut, adapt the ends of the tubes to receive the watertight caps as specified.

00921.46 Crosshole Sonic Log Test Access Tubes - Replace the paragraph that begins "Furnish and install access ..." with the following paragraph:

Furnish and install access tubes for CSL testing as shown. Attach CSL access tubes securely to the interior of the reinforcement cage as near to parallel as possible in each drilled shaft and in the pattern shown. Extend the access tubes from the bottom of the reinforcement cage to at least 24 inches above the top of the shaft. Ensure joints required to achieve full-length access tubes are watertight. Do not damage the access tubes during reinforcement cage installation and concrete placement. Fill the tubes with potable water, according to 02020.10(b), as soon as possible, but no more than 1 hour after concrete placement and reinstall the top watertight caps. Check water level and top off as needed.

00921.47(a) Concrete Placement - Replace the paragraph that begins "Allow a maximum of ..." with the following paragraph:

Allow a maximum of 60 minutes between concrete placements and use no concrete older than 90 minutes from batch time. Use procedures for concrete placement ensuring that the concrete within the shaft becomes a monolithic, homogeneous unit.

00921.47(b) Dry Shaft Concrete Placement - Replace the paragraph that begins "Under free-fall placement ..." with the following paragraph:

Under free-fall placement, deposit concrete through the center of the reinforcement cage by a method that prevents segregation of Aggregates and splashing of concrete on the reinforcement cage. Place concrete so that the free-fall is vertical down the center of the shaft without hitting the sides, the steel reinforcing bars or steel cage bracing.

00921.47(e) Casing Removal - Replace this subsection, except for the subsection number and title, with the following:

Remove all temporary casing during or after completion of concrete placement. Do not start temporary casing removal until the level of fresh concrete within the casing has reached a depth of at least 10 feet or the level necessary to adequately counteract the external hydrostatic pressure head. As the temporary casing is withdrawn, maintain a minimum 5 feet head of concrete above the bottom of the casing. A slight downward movement of the casing while exerting downward pressure, or hammering or vibrating the casing is allowed to facilitate extraction. Extract the casing so that concrete is cast directly against the surrounding in-situ material. Check the elevation of the top of the reinforcing cage before and after temporary casing extraction for conformance with the construction tolerance criteria of 00921.42. Casing that cannot be extracted during, or immediately after, the concrete placement operation may be cause for rejection of the shaft.

00921.48 Drilled Shaft Testing and Acceptance - Replace the paragraph that begins "Acceptance of Drilled Shafts ..." with the following paragraph:

Acceptance of Drilled Shafts is based on the Engineer's review of the results of CSL, or other, integrity testing if conducted, field inspection reports and visual observations during drilled shaft construction. The Engineer has final authority on the approval of Drilled Shafts. For shafts that are integrity tested, the Engineer will determine final acceptance of each tested shaft, based on the integrity test results and inspection reports and will provide a response to the Contractor within 5 Calendar Days after receiving the CSL test report.

00921.48(a) Crosshole Sonic Log Testing - Replace the paragraph that begins "Provide crosshole sonic ..." with the following paragraph:

Provide crosshole sonic log testing Equipment and perform crosshole sonic log testing and analysis on the first drilled shaft completed at each foundation and subsequent shafts as specified or designated for testing by the Engineer. Provide CSL testing Equipment according to the requirements of ASTM D6760 and approved by the Engineer. Provide all necessary access and other support to the CSL testing firm necessary to do the CSL testing Work.

00921.48(b) Contractor's Crosshole Sonic Log Test Reports - Replace the paragraph that begins "Submit three copies of ..." with the following paragraph:

Submit three copies of a final CSL Test Report for each shaft tested according to ASTM D6760. Provide electronic file copies of the raw CSL data measurements compatible with the Cross Hole Ultrasonic Monitor (CHUM) program, if requested. Summarize the CSL testing performed, data analysis, and interpretation of CSL data with special attention made to the identification and location of any anomalies or possible defects. Provide interpretation of the CSL test data in terms of overall shaft integrity and acceptance. Submit all reports to the Engineer within 5 Calendar Days of the performance of the tests.

Insert Project Name Here

00921.48(c) Additional Testing and Investigation - Replace the paragraph that begins "If requested by the Engineer ..." with the following paragraph:

If requested by the Engineer, drill a core hole in any questionable quality shaft to explore the shaft condition. The number, location and depths of the core holes is determined by the Engineer. Submit the method and Equipment used to drill and remove cores from the shaft to the Engineer for review and approval prior to drilling. Use a coring method that provides complete core recovery and minimizes abrasion and erosion of the core. If a defect is confirmed, as determined by the Engineer, all investigation costs associated with identifying the defect is at no additional cost to the Agency and no extension of the Project completion date will be granted, regardless of whether the identified defect is repaired or not.

Replace the paragraph that begins "If no defect is identified ..." with the following paragraph:

If no defect is identified in the investigation Work, and the CSL tubes were satisfactorily installed according to ASTM D6760 and accepted, the Agency will pay for all coring and excavation costs associated with the additional investigation and grant an appropriate time extension, if required, according to Section 00190 and Section 00195. If it is determined by the Engineer that the CSL tubes were not installed properly thus invalidating the CSL test results, all coring, excavation, and other investigation and evaluation costs is at no additional cost to the Agency and no extension of the Project completion date will be granted.

00921.49 Scheduling and Restrictions - Replace the paragraph that begins "Unless otherwise approved ..." with the following paragraph:

Unless otherwise approved, do not proceed with construction of subsequent shafts until the CSL testing has been completed on the first drilled shaft and the results have been approved and accepted, in writing by the Engineer. Approval to proceed with the construction of subsequent shafts, before receiving approval of the first shaft is based on the Engineer's observations of the Contractor's workmanship during construction of the first shaft and the Engineer's review and assessment of the following:

Replace the paragraph that begins "Written notification ..." with the following paragraph:

Written notification is provided to the Contractor on whether or not to proceed with subsequent shaft construction within 24 hours after completion of the first shaft. If the Engineer determines the first shaft to be of questionable quality, discontinue all shaft construction until the CSL test results of the first shaft are received and reviewed and the shaft accepted, in writing, by the Engineer.

00921.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of Materials for the sign support drilled shaft foundations are:

(Fill in the blanks with the appropriate quantities. Obtain information from the designer.)

Location	Material	Quantity
Structure Type _____ (Br No. _____)	Concrete Class 3600	_____ cu. yds.

Insert Project Name Here

Concrete _____ cu. yds.
Class 4000

Uncoated Reinforcement _____ pounds
Grade 60

Drilled Shaft Excavation _____ cu. yds.

CSL Tubes _____ feet

CSL Test _____ each

00921.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per foot for the item "____ Inch Diameter Sign Support Drilled Shaft Foundation".

The diameter of the drilled shaft is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified. Work completed according to Section 00920 is Incidental to this Section.

No separate or additional payment will be made for:

- Providing drilling Equipment
- Temporary casings
- Drilled shaft excavation
- Drilled shaft concrete
- Drilled shaft reinforcement
- CSL Equipment mobilization
- CSL test access tubes
- CSL tests
- Shaft clean out below the bottom of shaft shown

SP00930 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02530 & SP02560)

SECTION 00930 - METAL SIGN SUPPORTS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00930 of the Standard Specifications modified as follows:

00930.01 Definitions - Add the following definition at the end of this subsection:

Street Name Sign Mount - This group includes plates, brackets, and fasteners necessary to install a street name sign on a sign support.

00930.02 Working Drawings - Replace the paragraph that begins “Submit six copies...” with the following paragraph:

Submit six copies of unstamped Working Drawings according to 00150.35 for all structural metal Work. Submit six copies of stamped designs, details, Plans, and calculations according to 00150.35 for all engineered details and drawings that are not prepared by the Agency but are required by the Contract Documents and Specifications for the Project prior to fabrication. Include the Field Verification of Post Lengths form, available from the Engineer. Material ordered or Work performed before the Engineer finishes and returns the documents is at the Contractor's risk.

Replace the paragraph that begins “Working Drawings for these supports...” with the following paragraph:

Working Drawings for these supports are provided by the Engineer. Use the Field Verification of Post Lengths form, available from the Engineer, to provide the necessary site data for the engineer of record to use in producing Working Drawings. Work performed, or Materials ordered, before receiving Working Drawings from the Engineer is at the Contractor's risk.

Replace the paragraph that begins “Include the completed Field Verification...” with the following paragraph:

Include the completed Field Verification of Post Lengths forms that are available from the Engineer for these intelligent transportation systems supports. Material ordered or work performed before receiving approved Working Drawings from the Engineer is at the Contractor's risk.

00930.09 Identifying Tags - Replace this subsection, except for the subsection number and title, with the following:

Furnish stainless steel or brass identifying tags for overhead and butterfly sign support Structures, except structure mounts. Attach tags to all posts, arms, and truss sections. Furnish tags that are at least 1/16 inch thick with lettering at least 1/4 inch in height, and stamped into the tag. Attach the tags with stainless steel pop rivets of at least 3/16-inch nominal body diameter. Do not locate pop rivet holes within 6 inches of welds. Locate post tags approximately 5 feet above the baseplate. Drill holes for pop rivets prior to hot-dip galvanizing. Remove excess hot-dip galvanizing from holes and repair according to ASTM A780.

Insert Project Name Here

Include the following information on the tags:

- Structure number
- Manufacturer
- Month and year of manufacture
- Highway number and mile point

00930.10 Materials - Replace the paragraph that begins “Except for Perforated Steel Square ...” with the following paragraph:

Except for Perforated Steel Square Tube Slip Base Sign Supports and for Perforated Steel Square Tube Anchor Sign Supports, galvanize according to the requirements of Section 02530. Galvanize Perforated Steel Square Tube Slip Base Sign Supports and Perforated Steel Square Tube Anchor Sign Supports according to ASTM A653 G90, zinc coat corner seam weld after scarfing, apply a conversion coating, and apply a final clear polymer coating.

(Use the following two paragraphs to list topcoat colors when specifying 00930.48 coating. Fill in the blanks as instructed and obtain information from the Designer. Copy and repeat the paragraph as needed. Use only basic color names and numbers from the SAE AMS-STD-595 color index.)

Example:

For Structure No. 12345A, furnish a topcoat color of Black that matches to SAE AMS-STD-595 color # 17038.)

Add the following to the end of this subsection:

For (Structure number or item description) , furnish a topcoat color of (Color Name) that matches SAE AMS-STD-595 color # (Color Number) .

00930.30 Fabricators - Replace this subsection, except for the subsection number and title, with the following:

Fabricators of metal sign supports are required to have either a current AISC Simple Steel Bridge Structures (Sbr) certification or a current AISC Major Steel Bridges (Cbr) certification.

00930.40(a) General - Replace the paragraph that begins “Except for Perforated Steel Square ...” with the following paragraph:

Where two or more posts are required to support a sign, orient and position both posts so that no twist or warp is imparted to the sign panels.

00930.40(b) Assembly of Metal - Replace this subsection, except for the subsection number and title, with the following:

Accurately assemble the parts as shown and follow any match marks. Handle the material carefully so that no parts are bent, broken or otherwise damaged. Clean bearing surfaces

Insert Project Name Here

and surfaces to be in permanent contact before the members are assembled. Roughen faying surfaces of slip-critical structural connections utilizing high strength bolts by means of hand wire brushing after galvanizing. Power wire brushing is not allowed.

Furnish faying surfaces of plates flat to within a tolerance of 1/32 inch in 12 inches and a tolerance of 1/16 inch overall. Furnish base plates with leveling nuts that are flat to within a tolerance of 1/8 inch in 12 inches and a tolerance of 3/16 inch overall.

00930.40(c) Welding - Replace the paragraph that begins “The fabricator shall ...” with the following paragraph:

Complete the welding inspection by the fabricator according to the details and requirements called out on the Contract Documents. This requirement overrides all appropriate weld inspection requirements called out in Section 5.15 WELDED CONNECTIONS in AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals*. Submit all Procedure Qualification Records, Welding Procedure Specifications, and testing procedures for Engineer's review prior to starting manufacturing. Submit certified copies of inspection reports to the Engineer for review.

Replace the paragraph that begins “If requested by the Engineer ...” with the following paragraph:

If requested by the Engineer, additional weld inspection may be required upon arrival of the material at the Project Site. If defects are found by this additional inspection, the Contractor is responsible for the additional testing and repair costs. If no defects are found, the Engineer is responsible for the additional inspection costs.

00930.40(d) Bolt Installation - Replace the paragraph that begins “Provide all high ...” with the following paragraph:

Furnish all high strength bolts with hardened washers under the element (nut or bolt head) turned in tightening. If a high strength bolt is installed in an oversized or short slotted hole in an outer ply, use a hardened washer. If a high strength bolt is installed in a long slotted hole in an outer ply, use a plate washer or a continuous bar made of structural grade steel at least 5/16 inch thick with standard holes. Make the washer or bar sufficiently large to completely cover the slot after installation.

00930.40(d)(1) Bolt Installation for Slip Bases (Breakaway) - Replace the paragraph that begins “Furnish, at no additional ...” with the following paragraph:

Provide, at no additional cost to the Agency, a calibrated torque wrench of a capacity appropriate to the size of the high-strength bolts installed and tightened. Confirm the accuracy of the calibrated torque wrench through calibration by an approved testing agency at least once a year.

00930.40(e)(1) General - Replace this subsection, except for the subsection number and title, with the following:

Notify the Engineer in writing at least 24 hours before starting installation. The Engineer will observe the installation and tightening of bolts to determine that the selected tightening procedure is properly used and that all bolts are tightened, and in the case of direct tension

Insert Project Name Here

indicators that the correct indication of tension has been achieved. Bolts may reach tensions substantially above the value given in Table 00560-1, but this will not be cause for rejection. The installation is rejected if the geometry does not satisfy the requirements of 02560.05.

00930.40(e)(2) Direct Tension Indicator Method - Replace this subsection, except for the subsection number and title, with the following:

Upon completion of a bolted joint, the Engineer will determine that all bolts have been tightened. A minimum of 10 percent, but not less than two bolts in each joint, are inspected. The joint is accepted as properly tightened when one open space allows entry of a 0.005-inch feeler gauge. If there is more than one space between the direct tension indicator protrusions that allow entry of a 0.005-inch feeler gauge, re-inspect all bolts, retighten bolts in the joint as required, and resubmit the joint for inspection. If no spaces exist between the direct tension indicator protrusions that allow entry of a 0.005-inch feeler gauge, replace bolt assembly, tighten bolts in the joint as required, and resubmit the joint for inspection. For connections with all bolts fully tightened, one bolt at a time may be replaced without providing crane support of the mast arm.

00930.40(e)(3) Turn-of-Nut Method - Replace the bullet that begins "In the presence ..." with the following bullet:

- In the presence of the Engineer, use an inspection wrench, that may be a calibrated torque wrench.

Replace the bullet that begins "Tighten each bolt specified ..." with the following bullet:

- Tighten each bolt specified in the paragraph above in the calibration device by any convenient means to an initial condition equal to 20 percent of the required tension, and then to a tension not less than 5 percent greater than specified for its size in Table 00560-1 in Section 00560. Do not produce greater nut rotation than 1.5 times that allowed in Table 00560-3 in Section 00560 when tightening beyond the initial condition. Then apply the inspecting wrench to the tightened bolt and determine the torque necessary to turn the nut or head 5 degrees, approximately 1 inch at 12 inches radius, in the tightening direction. Take the average torque measured in the tests of three bolts as the job inspecting torque to be used in the manner specified in the next paragraph.

Replace the bullet that begins "Test bolts that have been ..." with the following bullet:

Test bolts that have been tightened in the Structure and are represented by the sample prescribed above with the inspecting wrench. Apply the job inspecting torque to 10 percent of the bolts, but not less than two bolts selected at random. If no nut or bolt head is turned by this application of the job inspecting torque, the connection is accepted as properly tightened. If any nut or bolt head is turned by the application of the job inspecting torque, test all bolts in the connections. Retighten all bolts whose nut or head is turned by the job inspecting torque, and re-inspect. Retighten all of the bolts in the connection and then resubmit the connection for the specified inspection.

00930.40(f) Tube Bending - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

For Major sign supports, bend tube using induction heating methods according to TPA-IBS-98 *Recommended Standards for Induction Bending of Pipe and Tube*. Provide written bend qualifications that include bending procedures, essential variables, material group, and destructive testing results. Destructive testing results includes yield strength, tensile strength, and elongation at locations indicated in Table 2-1 of the TPA-IBS-98.

00930.41 Adjustable Sign Mounts - Replace this subsection, except for the subsection number and title, with the following:

Furnish adjustable sign mounts that allow vertical adjustment for positioning the sign and allow rotation to plumb the sign. Use galvanized or stainless steel nuts, bolts and washers for fasteners.

(Use the following lead-in paragraph and subsection .48 to specify coating of steel sign supports.)

Add the following subsection:

00930.48 Coating - Prepare and powder coat supports according to the applicable portions of Section 00593 or prepare and coat supports according to the applicable portions of Section 00594. Furnish coating materials for field application, repairing damaged coatings, and coating hardware after installation, according to Section 00593 or 00594. Do not coat:

- Slip plate or arm connection surfaces.
- Slip base bolting hardware.
- Anchor rods, anchor rod washers, and anchor rod nuts.

(Use the following subsection .80 to list the estimated quantities of steel. Fill in the blank with the quantity. For major sign supports, replace “(Structure Number)” with the Structure number. Obtain information from the Designer. Delete rows for support types not used on the Project. Delete a heading if all entries under that heading have been deleted.)

00930.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of structural steel are as follows:

Item	Quantity (Pound)
Major Sign Supports	
Truss Sign Bridge, Str. No. (Structure Number)	—
Monotube Sign Bridge, Str. No. (Structure Number)	—
Butterfly Sign Structure, Str. No. (Structure Number)	—
Monotube Cantilever Sign Structure, Str. No. (Structure Number)	—
Mounts	
Bridge Structure Mounts	—

Insert Project Name Here

Exit Number Mounts	—
Signal Pole Mounts	—
Adjustable Sign Mounts	—
Vertical Sign Mounts on Existing Structures	—
Secondary Sign Mounts	—

Minor Sign Supports

Multi-Post Breakaway Sign Supports	—
Triangular Base Breakaway Sign Supports	—
Pipe Breakaway Sign Supports	—
Perforated Steel Square Tube Slip Base Sign Supports	—
90 Degree Rotational Sign Supports	—
Pipe Sign Supports	—
Perforated Steel Square Tube Anchor Sign Supports	—

00930.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph that begins "No separate or additional payment will..." with the following paragraph:

No separate or additional payment will be made for:

- Coating steel sign supports
- Route marker frames
- Wind bracing
- Pole clamps
- Stainless steel clamps
- Mast Arm Street Name Sign Mounts
- Street Name Sign Mounts
- Special sign brackets.

SP00940 (Special Provisions for the 2024 Book)

**(Bidding on or after: 11-01-26
Last updated: 07-23-26
Requires SP02910)**

SECTION 00940 - SIGNS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00940 of the Standard Specifications modified as follows:

00940.03 Drawings - Replace this subsection, except for the subsection number and title, with the following:

Copies of Working Drawings for non-standard signs are made available to the Contractor by the Engineer. Construct standard signs called for in the Contract Documents using drawings available in FHWA's *Standard Highway Signs* (FHWA English Version) or ODOT's *Sign Policy and Guidelines for the State Highway System*. The ODOT sign policy is available on the ODOT Traffic Roadway Section website.

00940.10 Materials - Replace the paragraph that begins "Use sign sheeting colors..." with the following paragraph:

Use sign sheeting colors according to the Federal Highway Administration *Color Specifications for Retroreflective Sign and Pavement Marking Materials*. The Engineer will visually determine if all panels in any one sign match the specified color(s).

(Use the following paragraphs and bullets when Oregon Scenic Byway signs or Oregon State Park shields are required. Delete "(s)" or parentheses as appropriate, and delete sign types that are not applicable.)

Add the following paragraph and bullet(s) to the end of this subsection:

Digital graphic files for the following sign type(s) may be available from the State Sign Engineer. Find more information at:

<https://www.oregon.gov/ODOT/Engineering/Pages/Signing.aspx>

- Oregon Scenic Byway signs
- Oregon State Parks shields

(Use the following lead-in paragraph and subsection .12 when sign panels require anti-graffiti coating.)

Add the following subsection:

00940.12 Sign Coatings -

(Use only one of the following options as instructed below. Delete the option that does not apply.)

[Option 1 - Use the following paragraph when every sign on the project will receive anti-graffiti coating.]

Furnish all signs on the Project with a shop-applied anti-graffiti coating on both the background and legend sheeting according to 02910.70, regardless of substrate material.

Insert Project Name Here

[Option 2 - Use the following paragraph when only select signs will receive anti-graffiti coating and will be shown on the plans.]

Where shown, furnish signs with a shop-applied anti-graffiti coating on both the background and legend sheeting according to 02910.70, regardless of substrate material.

00940.40 General - Replace the paragraph that begins "Finished signs shall..." with the following paragraph:

Construct finished signs to the designs shown or specified.

(Use the following two paragraphs when sign panels require anti-graffiti coating.)

Add the following sentence to the end of the paragraph that begins "Fabricate all components...":

For signs that require anti-graffiti coating, fabricate all components of each individual sign with sheeting and anti-graffiti coating from the same supplier to ensure that all components are compatible and are warrantable by the manufacturer.

00940.41(a) General - Replace this subsection, except for the subsection number and title, with the following:

Fabricate aluminum panel signs as shown or specified. Do not round corners of panels outside the border. Reinforced sheet aluminum signs are not allowed. Furnish new Material for all aluminum used for sign panels.

00940.41(b) Extruded Aluminum - Replace this subsection, except for the subsection number and title, with the following:

Furnish a continuous section for each panel of extruded aluminum panel signs. Apply the sign sheeting to the extrusion a sufficient distance around the edge to ensure that no aluminum surface is visible on the face of the sign.

00940.41(c) Sheeting - Replace this subsection, except for the subsection number and title, with the following:

Apply the sign sheeting background color of the sign to the extrusions.

00940.42(a) General - Replace the paragraph that begins "Cut the sheet..." with the following paragraph:

Cut the sheet aluminum sign to size and shape as shown or specified. Furnish signs free of buckles, warps, dents, cockles, burrs and defects resulting from fabrication.

00940.42(b)(1) On Posts - Replace this subsection, except for the subsection number and title, with the following:

Signs having a vertical dimension of less than 48 inches and mounted on wood or metal posts are required to have at least two mounting holes. Signs having a vertical dimension of 48 inches or greater are required to have three mounting holes. Place the third mounting hole

Insert Project Name Here

near the center of the sign. Locate mounting holes so the mounting hardware will not cover any portion of the legend unless otherwise shown.

00940.44 Retroreflective, Reflective, or Nonreflective Sheeting Application - Replace this subsection, except for the subsection number and title, with the following:

Apply the sheeting according to the sheeting manufacturer's recommendations on extruded aluminum panel signs. Up to 25 percent of the extruded aluminum panel signs required in the Plans are allowed one manufacturer's splice for each sign. One patch is allowed for each 50 square feet of sign to a maximum of three patches for each sign. Furnish patches that are between 3/4 inches and 3 3/8 inches in diameter. Contractor splices are not allowed.

On all other signs, manufacturer's splices are not allowed except as noted on approved shop drawings, or when sign dimensions exceed the sheeting manufacturer's capabilities. Make these splices horizontal with the upper section of sheeting overlapping the lower by a minimum of 3/8 inch on encapsulated lens sheeting, and butt splice prismatic lens sheeting with no appreciable substrate visible. The use of overlaid transparent paste or electronic cuttable film is not allowed on overlapped splices. Contractor splices are not allowed.

00940.45(a) General - Replace the paragraph that begins "Spacing between letters or ..." with the following paragraph:

Ensure spacing between letters or numbers meet the requirements of the FHWA *Standard Alphabets for Highway Signs manual*.

Replace the paragraph that begins "Spacing between words for Series..." with the following paragraph:

Spacing between words for Series "E" (modified) legend are 1.5 times the upper case letter height. Spacing between words for other fonts is as tabulated below unless otherwise shown:

Replace the paragraph that begins "Spacing between symbols ..." with the following paragraph:

Follow the FHWA *Standard Highway Signs* for spacing between symbols, unless otherwise shown.

00940.45(b) Attachment - Replace this subsection, except for the subsection number and title, with the following:

Attach removable legend to aluminum panels using aluminum, domed head, 1/8-inch diameter, self-plugging blind rivets. Remove aluminum shavings from the sign face before attaching the legend. The entire sign is rejected if any shavings are left beneath the legend. Drill 0.128-inch diameter holes in the removable legend and sign panel as shown on the *Mounting Details for Removable Legend Standard Drawings*.

Apply screened legend according to the sheeting manufacturer's recommendations. Apply cut-out legend according to 00940.44.

Insert Project Name Here

Attach 1-inch retroreflective removable border sections by placing two rivets 1/2 inch from the end of each border section with additional rivets spaced at a maximum of 6 inches apart, centered in the section. Attach corner border sections with a minimum of five rivets, two rivets 1/2 inch from each end, and the remaining rivet centered in the middle of the section.

Attach 2-inch retroreflective removable border sections by placing two rivets 1/2 inch from the end of each border section with additional rivets spaced at a maximum of 6 inch apart, along the top and bottom edge of the section. Attach corner border sections with a minimum of five rivets, two rivets 1/2 inch from each end, and the remaining rivet centered in the section.

00940.46 Inspection - Replace this subsection, except for the subsection number and title, with the following:

The Engineer will inspect signs at the fabrication shop or at the Project Site or both. Inspection is for conformance to the Plans and Specifications, for conformance to nighttime visibility, and for rejectable defects. Rejectable defects include scratches, scuffs, tears, or any defect that impacts reflectiveness, readability, or performance. Signs not meeting inspection criteria are to be replaced at no additional cost to the Agency. The Contractor's expense for sign inspection is according to 00165.91.

00940.47 Sign Erecting - Replace the paragraph that begins "The closest edge of any..." with the following paragraph:

The closest edge of any column or overhead sign Structures is as shown.

Add the following paragraph to the end of this subsection:

Trim and remove branches, vegetation, or other materials obstructing the visibility of signs by Public Traffic, as directed.

(Use the following lead-in paragraph and subsection .48 when backs of aluminum substrate signs are coated. Obtain color number from Designer.)

Add the following subsection:

00940.48 Coating - Prepare and powder coat the backs of aluminum substrate signs according to the applicable portions of Section 00593 or prepare and coat according to the applicable portions of Section 00594.

Provide SAE AMS-STD-595 Color Number _____.

00940.90 Payment - Add the following paragraph(s) to the end of this subsection:

Trimming and removal of branches, vegetation, or other materials will be paid for according to 00320.90.

(Use the following sentence when sign panels require anti-graffiti coating.)

No separate or additional payment will be made for anti-graffiti coating of signs.

Insert Project Name Here

Replace the paragraph that begins “Payment will be payment in full...” with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00941 (Special Provisions for the 2024 Book)

**(Bidding on or after: 05-01-25
Last updated: 01-23-25)**

SECTION 00941 - SIGN COVERS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00941 of the Standard Specifications modified as follows:

00941.41 Installation - Add the following to the end of this subsection:

(List signs to be covered. Obtain information from the Sign Designer.)

Covers will be required on the following signs:

-
-

SP00942 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-03-26
Requires SP02910)**

SECTION 00942 - PERMANENT BARRICADES

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00942 is not a Standard Specification and is included in this Project by Special Provision.

Insert Project Name Here

Description

00942.00 Scope - This Work consists of furnishing, fabricating, and installing permanent Type III barricades as shown.

Materials

00942.10 Materials - Furnish Materials for permanent Type III barricades meeting the following requirements:

Hardware.....	02910.40
Plywood.....	02910.11
Posts	02110.40
Reflective Sheeting (Type III or Type IV)	02910.20

Construction

00942.40 General - Construct permanent barricades as shown.

Place reflective sheeting on the horizontal member before assembling the required splice.

A sheeting manufacturer approved lubricant may be used on the nylon and metal washers to prevent sign sheeting deformation. Replace damaged horizontal members or horizontal members with sheet deformation at no additional cost to the Agency.

Measurement

00942.80 Measurement - The quantities of permanent barricades will be measured on the unit basis.

Payment

00942.90 Payment - The accepted quantities of permanent barricades will be paid for at the Contract unit price, per each, for the item "Permanent Type III Barricades".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for excavation and backfill.

SP00950 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 00950 - REMOVAL OF ELECTRICAL SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then

Insert Project Name Here

include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00950 of the Standard Specifications modified as follows:

00950.40 General - Replace the paragraph that begins "Secure temporary concrete barrier to bridge ..." with the following paragraph:

Remove existing materials, as specified or approved, that interfere with or are incompatible with new construction before completion of the new construction. Notify the Engineer at least 4 Calendar Days in advance of removal.

(Use the following subsection .41 when removal work is not shown on the contract plan sheets.)

00950.41 Removal and Abandonment - Add the following to the end of this subsection:

[Option 1 - Use the following when NOT all removal Work is shown on contract plan sheets. Only list Work not shown]

This Work consists of removing existing electrical system(s) as shown. This Work also consists of removing the following existing electrical system(s):

Equipment Description

Location

[Option 2 - Use the following when NO removal Work is shown on contract plan sheets.]

This Work consists of removing the following existing electrical system(s):

Equipment Description

Location

(Use the following subsection .42 when salvaging and stockpiling removed Materials. Be sure that a "public interest finding letter" is on file before including this subsection. Contact Region electrician for Region number, phone number, and all information regarding Equipment to be salvaged. List Materials and stockpile locations.)

00950.42 Salvaging and Stockpiling Materials - Add the following to the end of this subsection:

The following Materials will remain the property of the Agency. Salvage the Materials and stockpile them at the locations indicated. Contact Region _____ Electrical Crew at _____ to confirm delivery 48 hours prior to delivery.

Materials

Stockpile Locations

Insert Project Name Here

00950.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00960 (Special Provisions for the 2024 Book) (Bidding on or after: 09-01-26
Last updated: 06-01-26
Requires SP00440, SP02510 & SP02560
Requires SP00962 when metal illumination and
traffic signal supports are required.
Requires SP00970 when illumination is required.
Requires SP02120 when wood poles are required.)

SECTION 00960 - COMMON PROVISIONS FOR ELECTRICAL SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00960 of the Standard Specifications modified as follows:

00960.01 Regulations, Standards, and Codes - Replace the paragraph that begins "All electrical Materials ..." with the following paragraph:

Furnish all electrical Materials and perform all Work according to the following standards where applicable:

00960.02 Equipment List and Drawing Submittals - Replace the paragraph that begins "Within 30 Calendar Days ..." with the following paragraph:

Within 30 Calendar Days after execution of the Contract, submit the Blue Sheets (see 00160.00 and 00160.07) and the Green Sheets (see 00160.00 and 00160.07) according to 00150.37 for all Materials the Contractor proposes to install. Blue Sheets and Green Sheets contain submittal instructions and are made available to the Contractor by the Engineer.

00960.10 Materials - Replace the paragraph that begins "Anchor rods shall ..." with the following paragraph:

Use anchor rods meeting the requirements of 02560.30 and to the types and sizes shown.

(Use the following lead-in paragraph and subsection .11 when decorative coating of signal equipment is required.)

Add the following subsection:

Insert Project Name Here

00960.11 Coating - Prepare and powder coat equipment where shown according to the applicable portions of Section 00593 or prepare and coat equipment according to the applicable portions of Section 00594. Do not coat equipment fabricated of aluminum, stainless steel, or hot-dipped galvanized material, except as shown or specified.

Provide the following colors:

Item

**SAE AMS-STD-595
Color Number**

00960.30 Licensed Electricians - Replace this subsection, except for the subsection number and title, with the following:

Only individuals that are properly registered or licensed are allowed to perform electrical work, according to Oregon Administrative Rule 918-282-0120(1). Provide a copy of the electrical license or apprentice registration to the Engineer prior to performing any electrical Work. Every person who installs electrical systems on the Project must be licensed as an S or a J under Oregon Administrative Rule 918-282-0140 or 918-282-0170.

00960.41 Horizontal Directional Drilling - Replace the paragraph that begins "Drilling shall ..." with the following paragraph:

Do not "hump" or deform the Pavement during horizontal directional drilling. Use guided horizontal directional drilling. Keep drilling pits at least 2 feet from the edge of Pavement. Do not use water to the extent that the Pavement might be undermined or Subgrade softened. Sand bedding and marking tape are not required with this method.

(Use the following subsection .42(c) when rigid metallic conduit is required.)

Add the following subsection:

00960.42(c) Metallic Conduit - Paint the following with rust-preventative coating:

- Threads on all metal conduit.
- Areas where the coating has been damaged so underlying metal is exposed.
- Exposed, ungalvanized threads resulting from field cuts.

If corrosive Soil conditions exist, coat metallic conduit with a nonmetallic coating or wrap with corrosion protection tape at least 10 mils thick.

(Use the following subsection .42(d) when connecting new conduit to existing conduit is required.)

Add the following subsection:

00960.42(d) Connecting Non-Metallic Conduit to Metallic Conduit - Use a nonmetallic female threaded connector to connect nonmetallic conduit to metallic conduit.

Insert Project Name Here

(Use the following subsection .42(e) when installing conduit under railroad tracks is required.)

Add the following subsection:

00960.42(e) Conduit under Railroad Tracks - Install conduit inside a galvanized, rigid metal conduit at the depth required by the governing Railroad company. Construct so that conduit ends are at least 30 feet beyond the centerline of every track or other distance as required by the Railroad.

(Use the following subsection .42(f) when installing conduit on or in a structure is required.)

Add the following subsection:

00960.42(f) Conduit on Structures - Install conduit according to 00583.40.

(Use the following subsection .42(g) when permanent wood poles are required.)

Add the following subsection:

00960.42(g) Conduit on Wood Poles - Mount conduit on wood poles with two-hole, galvanized, steel conduit straps spaced no more than 3 feet apart. Mount conduit on Utility-owned wood poles according to local Utility regulations. Use stand-off brackets if required.

(Use the following subsection .44 when permanent wood poles are required and the wood pole design is not detailed in the plans.)

Add the following subsection:

00960.44 Wood Poles - Submit stamped Working Drawings, details, and calculations for the wood pole designs to the Engineer for review according to 00150.35. Satisfy the requirements of 02120.10 and include designs for the wood poles, guy anchors, guy wires, span wires, pole setting depths, and pole bearing.

00960.45(b) Grounding/Bonding Wire - Replace this subsection, except for the subsection number and title, with the following:

Use a THWN No. 6 AWG stranded copper grounding/bonding wire in conduit or as shown. Use an un-insulated No. 4 AWG stranded copper grounding/bonding wire outside of conduit or as shown. When splicing grounding/bonding wire, use a reversable electrical splice.

(Use the following subsection .45(f) when poles or cabinets are mounted to a structure.)

Add the following subsection:

00960.45(f) Structure Mounted Poles and Cabinets - Bond all poles and cabinets mounted on Structures or walls to a common ground rod at the end of the Structure. Ground the system at the first convenient acceptable location off the Structure.

Insert Project Name Here

(Use the following subsection .45(g) when permanent wood poles are required.)

Add the following subsection:

00960.45(g) Wood Poles - Bond all metallic conduit, messenger cable, terminal cabinet, and other metallic parts within 10 feet of the ground line.

(Use the following subsection .45(h) when metallic junction boxes and lids are required.)

Add the following subsection:

00960.45(h) Metallic Junction Boxes and Lids - Bond metal junction boxes and lids to form a continuous effectively grounded and bonded system with metallic conduit, grounding wire, metal standards and controller cabinets. Leave enough slack in the bond wire connected to the lid to allow complete removal of the lid. Junction boxes only containing circuits that operate at less than 25 V do not need to be bonded.

00960.46 Service Cabinet and Electrical Energy - Replace the paragraph that begins "Install service cabinet ..." with the following paragraph:

Install service cabinet and associated Equipment, then arrange for the Utility providing power to have the service cabinet inspected and make the electrical hook-up prior to field testing. Field test according to 00990.71 for traffic signals, or according to 00970.70 for illumination.

(Use the following two paragraphs if Intelligent Transportation Systems (ITS) is included in the project)

Add the following to the end of the paragraph that begins "Install service cabinet and associated equipment..."

Field testing for Intelligent Transportation Systems (ITS) does not require prior electrical hook-up.

(Use the following lead in sentence and fill in the table and add or delete rows as necessary. Obtain information from the Signal, Illumination, or ITS designer. Delete language in purple parentheses that does not apply and delete all purple parentheses. Use one of the following options below the table.)

Add the following to the end of the subsection:

Table 00960-1 contains Utility contact information to arrange for (the Utility) (Utilities) to make electrical hookups:

Table 00960-1

Location	Utility	Utility Contact Person's Name, Email and Phone Number	Utility Job Number

Insert Project Name Here

Location	Utility	Utility Contact Person's Name, Email and Phone Number	Utility Job Number

(Option 1 - Use the following paragraph when the electrical power is metered, Standard Practice.)

Furnish and install a meter base approved by the serving Utility (with cover by the Utility), where shown.

(Option 2 - Use the following paragraph when the electrical power is billed using a flat rate with no meter. Verify with the Utility provider, IGA, and Region electricians.)

Electrical energy is flat-rated. Meter base is not required.

00960.71 As-Built Plans - Replace this subsection, except for the subsection number and title, with the following:

Upon completion of the installation, submit a red-lined copy of the original Plans noting all changes made. In the red-lined Plans, include all modifications made to accurately show the operation and materials installed. Sufficiently detail the red-lined Plans to enable maintenance forces to replace or repair any part of the Project under routine or emergency maintenance by direct reference.

SP00962 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26

Requires SP00440, SP02530 & SP02560

Requires SP00963 for drilled shafts)

SECTION 00962 - METAL ILLUMINATION AND TRAFFIC SIGNAL SUPPORTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00962 of the Standard Specifications modified as follows:

00962.01 Regulations, Standards, and Codes - Replace the paragraph that begins "All designs and workmanship ..." with the following paragraph:

Meet the following standards for all designs and workmanship, where applicable:

00962.02 Calculations and Drawings - Replace the paragraph that begins "All engineered details ..." with the following paragraph:

Insert Project Name Here

Submit all engineered details and drawings that are not prepared by the Agency, but are required in the Contract Documents, for review prior to fabrication. Stamp and submit designs, details, Plans, and calculations according to 00150.35. Include the Field Verification Forms for Signal and Illumination supports, available from the Engineer.

Replace the paragraph that begins "Upon completion of the installation ..." with the following paragraph:

Upon completion of the installation, submit six copies of all changes made from the original Plans. Include all modifications made and represent the Material installed and in operation. Sufficiently detail the changes to enable maintenance forces to replace or repair any part of the Project under routine or emergency maintenance by direct reference.

(Use the following subsection .05(a) when standard signal mast arm supports are required.)

00962.05(a) Traffic Signal Mast Arm Supports - Add the following to the end of this subsection:

The following standard signal mast arm pole shop drawings are prequalified for use on the Project:

Valmont Industries Inc.	Drg. DB00719 page 1, Rev. P, 6/8/18
	Drg. DB00719 page 2, Rev. P, 6/8/18
	Drg. DB00719 page 3, Rev. P, 6/8/18
	Drg. DB00719 page 4, Rev. P, 6/8/18
	Drg. DB00719 page 5, Rev. P, 6/8/18
	Drg. DB01290 page 1, Rev. D, 9/22/20
	Drg. DB01290 page 2, Rev. D, 9/22/20
	Drg. DB01290 page 3, Rev. D, 9/22/20
	Drg. DB01290 page 4, Rev. D, 9/22/20

Ameron Pole Products Division	Drg. OR13TR10, Rev. E, 8/27/18
	Drg. OR13TR11, Rev. F, 8/27/18
	Drg. OR13TR12, Rev. G, 8/27/18
	Drg. OR13TR13, Rev. C, 8/27/18

(Use the following subsection .05(c) when standard illumination supports are required.)

00962.05(c) Illumination Supports - Add the following to the end of this subsection:

The following standard luminaire support shop drawings are prequalified for use on the Project:

Valmont Industries Inc.	Drg. DB01371 page 1, Rev. B, 1/24/22
	Drg. DB01371 page 2, Rev. B, 1/24/22
	Drg. DB01371 page 3, Rev. B, 1/24/22
	Drg. DB01371 page 4, Rev. B, 1/24/22
	Drg. DB01372 page 1, Rev. B, 4/11/22
	Drg. DB01372 page 2, Rev. B, 4/11/22

00962.10 Materials - Replace the bullet that begins "Provide steel sheet ..." with the following bullet:

- Furnish steel sheet for pole and arms meeting the requirements of ASTM A595, Grade A or B, ASTM A572, or approved equal.

Replace the bullet that begins "Provide all other..." with the following bullet:

- Furnish all other steel sheet and plate meeting the requirements of ASTM A36 or ASTM A572, or approved equal.

(Use the following paragraphs to list topcoat colors. Fill in the blanks as instructed and obtain information from the Designer. Copy and repeat the paragraph as needed. Use only basic color names and numbers from the SAE AMS-STD-595 color index.)

Example:

For Luminaire Poles 1, 2, 3, 4, 5, provide a topcoat color of Black that matches to SAE AMS-STD-595 color # 17038.)

Add the following to the end of this subsection:

For (Structure number or item description), provide a topcoat color of (Color Name) that matches SAE AMS-STD-595 color # (Color Number).

00962.43 Foundations - Replace the paragraph that begins "Where breakaway bases ..." with the following paragraph:

Where breakaway bases are specified, do not exceed the limits shown for the post stub projection.

Replace the paragraph that begins "Where obstructions prevent ..." with the following paragraph:

Where obstructions prevent the construction of planned foundations, construct the foundations in the location directed. Any extra cost due to the site change is paid according to 00195.20.

Replace the paragraph that begins "If it is determined ..." with the following paragraph:

If it is determined that foundations will extend deeper than shown, the extra foundation depth is paid according to 00195.20.

00962.46(b) Pole Height - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Before poles are ordered, the Engineer will check the pole heights in the field and verify that the specified luminaire mounting heights above Pavement are provided. Furnish upsweep bracket arms of lengths as shown or specified. Furnish traffic signal poles of heights as shown or specified. Height of poles requiring slip plate bases is the length of shaft above the slip plate.

00962.46(c) Mast Arm - Replace this subsection, except for the subsection number and title, with the following:

Install mast arms for traffic signals and signs according to details provided by the manufacturer. Use proper type and size of mounting appurtenances that correctly fit the pole furnished, or as shown. Furnish self-supporting mast arms without tie rods or braces. Furnish tapered mast arms that are either round, 8 sided, 12 sided, or 16 sided.

Ensure all mast arms allow wiring entrances directly into the pole from inside the mast arm.

00962.46(d) Luminaire Arm - Replace this subsection, except for the subsection number and title, with the following:

Ensure the luminaire end of the arm is level when loaded to design weight. Use a bolted, flange type connection to join the upsweep arm to the pole. Furnish connections that are raintight and develop the strength of the arm. Furnish the mast arm rise according to the Metal Light Pole Table, or as shown or specified.

Provide self-supporting arms without tie rods, or braces. Measure upsweep rise from the point of attachment to the pole to the end tangent portion of the arm. Furnish tapered arms that are either round, 8 sided, 12 sided, or 16 sided.

Ensure all arms allow for wiring entrances directly into the pole from inside the arm.

Furnish pole bracket attachments for mounting upsweep arms with reamed, smooth ends.

The nominal mounting height (MH) shown in the Metal Light Pole Table or on the Plans is the distance between the Roadway at the edge of the Pavement and the luminaire. This height may vary plus or minus 1 foot.

00962.46(e) Deflection - Replace this subsection, except for the subsection number and title, with the following:

Ensure horizontal dead load deflection at the top of the poles does not exceed 1 percent of the pole length (2 percent for strain poles).

00962.46(f) Deviation from Straightness - Replace this subsection, except for the subsection number and title, with the following:

After the poles are delivered to the Project Site, and before they are erected on the foundations, the Contractor may be required to check any or all poles for deviation from straightness according to the following:

(1) Deviation in One Plane and One Direction Only - Ensure a straight line joining the surface of the pole at the base and the same surface of the pole at the top is not more

Insert Project Name Here

than 1/2 inch from the surface of the pole for each 10 feet of length from the closest of these points. Provide an opposite surface that meets the same requirement.

(2) Deviation in Any Plane - Ensure a straight line connecting the midpoint of the pole at the base, with the midpoint at the top, does not pass through the surface of the pole at any intermediate point.

Any pole not meeting these requirements is rejected. If more than 25 percent of the poles fail to meet these requirements, sufficient cause exists to reject the entire shipment of poles for the Project.

00962.46(g) Welding - Replace this subsection, except for the subsection number and title, with the following:

Weld steel illumination and signal poles according to AWS D1.1. Complete the welding inspection by the fabricator according to details and requirements called out on the Contract Documents. This requirement will override all appropriate weld inspection requirements called out in Section 5.15 WELDING CONNECTIONS in AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals*. Submit all testing procedures for Engineer's review prior to starting inspection. Submit certified copies of inspection reports to the Engineer for review.

If requested by the Engineer, additional weld inspection may be required upon arrival of the Material at the Project Site. If defects are found by this additional inspection, the Contractor is responsible for the additional testing and repair costs. If no defects are found, the Engineer is responsible for the additional inspection costs.

00962.46(h) Welding Steel After Galvanizing - Replace the paragraph that begins "No field welding ..." with the following paragraph:

No field welding of galvanized steel is allowed. Remove the existing galvanizing from the heat effected area before welding the effected piece. Perform the weld, remove the galvanizing totally from the entire piece, and hot-dip galvanize it. Submit the following data, stamped according to 00150.35, for review:

Replace the bullet that begins "Description of the..." with the following bullet:

- Description of the Work that is performed

00962.46(i) Identifying Tags - Replace the paragraph that begins "Attach a stainless steel ..." with the following paragraph:

Attach a stainless steel identifying tag to all poles. Furnish tags that are at least 1/16 inch thick with lettering at least 1/4 inch in height, stamped into the tag. Attach tags with stainless steel pop rivets of at least 3/16-inch nominal body diameter. Do not locate pop rivet holes within 6 inches of welds. Locate the pole tag approximately 24 inches below the top of the mast arm or messenger cable attachment point. Locate the tag on the side of the pole furthest from the intersection. Drill holes for pop rivets prior to hot-dip galvanizing. Remove excess hot-dip galvanizing from holes and repair according to ASTM A780.

Insert Project Name Here

00962(j) Erecting Metal Poles - Replace the paragraph that begins "Bolt protrusion on slip ..." with the following paragraph:

Do not allow bolt protrusion on slip base poles to interfere with the breakaway action of pole. File sharp edges smooth and repair according to ASTM A780.

00962(j)(2)a.2. Inspection - Replace the paragraph that begins "The installation will ..." with the following paragraph:

The installation is rejected if the geometry does not satisfy the requirements of 02560.05 or no permanent felt tip pen marks are present for at least 7 Days after installation showing the rotation past snug tight.

00962(j)(2)b.1. Installation - Replace the paragraph that begins "Furnish, at no ..." with the following paragraph:

Provide, at no additional cost to the Agency, a calibrated torque wrench of a capacity appropriate to the size and type of the bolts being tightened. Confirm the accuracy of the calibrated torque wrench through calibration by an approved independent testing agency at least once a year.

00962(j)(2)b.2. Inspection - Replace the paragraph that begins "The installation will ..." with the following paragraph:

The installation is rejected if the geometry does not satisfy the requirements of 02560.05 or no permanent felt tip pen marks are present for at least 7 Days after installation showing the rotation past snug tight.

00962(j)(2)c.1. Installation - Replace the paragraph that begins "Provide all high ..." with the following paragraph:

Furnish all high strength bolts according to the details shown. Use bolt, nut, and washer combinations from the same rotational capacity lot with new and unused direct tension indicators with protrusions in contact with the hardened washer.

00962(j)(2)c.2. Inspection - Replace the paragraph that begins "Notify the Engineer ..." with the following paragraph:

Notify the Engineer in writing at least 24 hours before starting installation. The Engineer will observe the installation and tightening of bolts to determine that the tightening procedures are properly used. Inspect all bolts in each joint. The joint is accepted as properly tightened when one open space allows entry of a 0.005 inch feeler gauge. If there is more than one space between the direct tension indicator protrusions that allow entry of a 0.005 inch feeler gauge, re-inspect all bolts, retighten bolts in the joint as required, and resubmit the joint for inspection. If no spaces exist between the direct tension indicator protrusions that allow entry of a 0.005-inch feeler gauge, replace bolt assembly, tighten bolts in the joint as required, and resubmit the joint for inspection. Connections that have all bolts fully tightened can replace one bolt at a time without providing crane support of the mast arm.

Replace the paragraph that begins "The installation will..." with the following paragraph:

Insert Project Name Here

The installation is rejected if the geometry does not satisfy the requirements of 02560.05.

00962(j)(2)d.1. Installation - Replace the paragraph that begins "Protect fasteners from ..." with the following paragraph:

Protect fasteners from dirt and moisture. Lubricate bolt threads and bearing surfaces that turn during installation according to 02560.70. Furnish all high-strength bolts with hardened flat washers under the element turned during tightening.

00962(j)(2)d.2. Inspection - Replace the paragraph that begins "The installation will ..." with the following paragraph:

The installation is rejected if the geometry does not satisfy the requirements of 02560.05 or no permanent felt tip pen marks are present showing the rotation past snug tight.

00962.46(j)(3) Bolt Inspection . Delete this subsection.

00962.46(k) Plate Flatness - Replace the paragraph that begins "Faying surfaces of plates ..." with the following paragraph:

Ensure faying surfaces of plates are flat to within a tolerance of 1/32 inch in 12 inches and a tolerance of 1/16 inch overall. Ensure base plates with leveling nuts are flat to within a tolerance of 1/8 inch in 12 inches and a tolerance of 3/16 inch overall.

00962.48 Coating - Replace the paragraph that begins "Prepare and powder coat ..." with the following paragraph:

Prepare and powder coat supports according to the applicable portions of Section 00593 or prepare and coat supports according to the applicable portions of Section 00594. Furnish coating materials for field application, repairing damaged coatings, and coating hardware after installation, according to Section 00593 or 00594. Do not coat:

00962.50 Grounding and Bonding - Replace the paragraph that begins "For fixed base ..." with the following paragraph:

For fixed base poles, furnish a 1/2-inch, Type 308, 309, or 310 stainless steel stud on the inside of the shaft. Locate the stud directly opposite and level with the handhole in the pole. Attach grounding electrode conductors and bonding conductors to the stud with a grounding wire clamp, "acorn style".

SP00963 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 08-21-26
Requires SP02510)**

SECTION 00963 - SIGNAL SUPPORT DRILLED SHAFTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00963 of the Standard Specifications modified as follows:

00963.30 Personnel Qualifications - Replace this subsection, except for the subsection number and title, with the following:

Perform the Drilled Shaft construction Work using a company and personnel experienced in Drilled Shaft construction work. Submit a list to the Engineer for approval identifying the on-site supervisors and drill rig operators assigned to the Project and the companies experience relevant to the Project. Submit experience relevant to the anticipated subsurface materials, groundwater conditions, shaft size, depth, and all special construction techniques required. Before the preconstruction conference, provide the following information to verify the firm's experience and the qualifications of personnel scheduled to perform the Drilled Shaft construction:

- Submit a project reference list of at least three separate foundation projects, successfully completed in the last 5 years, with Drilled Shafts of diameters and depths equal to or larger than those shown in the Plans and in ground conditions similar to those indicated. Include a brief description of each project and the owner's contact person's name and current phone number for each project listed.
- Submit a resume for on-site supervisors with at least 2 years' experience in supervising construction of Drilled Shaft foundations of similar diameter and depth and scope to those shown in the Plans and in similar geotechnical conditions to those described in the geotechnical report. Submit experience that includes the direct supervisory responsibility for the on-site construction operations.
- Submit a resume for drill operators with at least 1 year experience in the construction of Drilled Shaft foundations.

The Engineer will respond within 21 Calendar Days after receipt of the submittal. Do not begin Work on any Drilled Shafts until the qualifications have been approved. The Engineer may suspend the Drilled Shaft construction if the Contractor substitutes unapproved personnel during construction. Submit requests for substitution of either on-site supervisors or drill operators to the Engineer, who will have 7 Calendar Days to respond to each request. Additional costs resulting from the suspension of Work due to the changing of personnel is the Contractor's responsibility, and no adjustment in Contract Time resulting from the suspension of Work is allowed.

00963.40(a) Drilled Shaft Installation Plan - Replace the paragraph that begins "The Engineer will approve ..." with the following paragraph:

The Engineer will approve or reject the Drilled Shaft installation plan within 21 Calendar Days after receipt of all submissions. Provide any additional information and submit a revised plan, if requested, for review and approval. All procedural approvals given by the Engineer are subject to trial in the field and will not relieve the Contractor of the responsibility to satisfactorily complete the Work. Submit requests for modification of adopted procedures to the Engineer. Allow 21 Calendar Days for approval of modifications. Do not begin Drilled Shaft construction Work until all Drilled Shaft submittals have been approved.

Insert Project Name Here

00963.41 Drilled Shaft Coordination Meeting - Replace the paragraph that begins "If the Contractor's key ..." with the following paragraph:

If the Contractor's key personnel change, or if the Contractor proposes a significant revision of the approved shaft installation plan, hold an additional meeting before any additional shaft construction operations are performed.

00963.42 Construction Tolerances - Replace the paragraph that begins "Frequently check the plumbness ..." with the following paragraph:

Frequently check the plumbness alignment and dimensions of the shaft during construction. Correct all out-of-tolerance shaft excavations and completed shafts to the satisfaction of the Engineer. Correct out-of-tolerance Drilled Shafts at no additional cost to the Agency, and no extension of the Project completion date is granted. Materials and Work necessary to complete corrections for out-of-tolerance Drilled Shafts resulting from the removal of unexpected Drilled Shaft obstructions is paid for according to 00195.20.

00963.43(a) General - Replace the paragraph that begins "Frequently check the plumbness ..." with the following paragraph:

Excavate Drilled Shafts to the dimensions and elevations shown or as directed. Provide and maintain stabilized Drilled Shaft sidewalls for the full depth of the excavation, using approved Materials, Equipment and methods. If caving or other unstable conditions occur during any construction procedure, stop further construction, notify the Engineer, and stabilize the shaft excavation by approved methods and submit a revised installation plan that addresses the problem and prevents further instability. Do not continue with shaft construction until any damage that occurred has been repaired according to the Specifications and until receiving the Engineer's approval of the revised shaft installation plan.

00963.43.(e) Lost Tools - Replace this subsection, except for the subsection number and title, with the following:

Promptly remove drilling tools lost in the excavation. Lost tools will not be considered unexpected obstructions. Remove lost tools without additional compensation. Drilling tools lost during the course of removing unexpected Drilled Shaft obstructions is paid according to 00195.20.

00963.47(a) Concrete Placement - Replace the paragraph that begins "Allow a maximum of 60 ..." with the following paragraph:

Allow a maximum of 60 minutes between concrete placements and use no concrete older than 90 minutes from batch time. Use procedures for concrete placement ensuring that the concrete within the shaft becomes a monolithic, homogeneous unit.

0963.47(d) Casing Removal - Replace this subsection, except for the subsection number and title, with the following:

Remove all Temporary Casing during or after completion of concrete placement. Do not start Temporary Casing removal until the level of fresh concrete within the casing has reached a depth of 10 feet or the level necessary to adequately counteract the external hydrostatic pressure head. As the Temporary Casing is withdrawn, maintain a minimum 5 feet head of

concrete above the bottom of the casing. A slight downward movement of the casing while exerting downward pressure, or hammering or vibrating the casing is allowed to facilitate extraction. Extract the casing so that concrete is cast directly against the surrounding in situ material. Check the elevation of the top of the reinforcing cage before and after Temporary Casing extraction for conformance with the construction tolerance criteria of 00963.42. Casing that cannot be extracted during or immediately after the concrete placement operation may be cause for rejection of the shaft.

00963.48 Drilled Shaft Testing and Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of Drilled Shafts is based on the Engineer's review of the field inspection reports and visual observations during Drilled Shaft construction. The Engineer has final authority on the approval of Drilled Shafts.

00963.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Excavating the shafts and disposing of the excavated material
- Furnishing, placing, splicing and removing temporary shaft casing and forms
- Concrete and all reinforcement
- Anchor rods, anchor plates, nuts, and washers

SP00965 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-03-26

Requires SP02530 & SP02560)

SECTION 00965 - METAL CAMERA POLES AND FOUNDATIONS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00965 is not a Standard Specification and is included in this Project by Special Provision.

Description

00965.00 Scope - This Work consists of furnishing, fabricating, galvanizing, and installing Materials for camera poles and foundations. The location of the camera pole is approximate, with exact locations established in the field.

00965.01 Regulations, Standards, and Codes - Provide designs and workmanship meeting the following standards where applicable:

- *AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals.*
- *Standards of the American Society for Testing and Materials (ASTM).*
- *American Welding Society (AWS) - Steel D1.1.*

Wherever reference is made to any of the standards mentioned above, the reference means the code, order, or standard in effect on the date the Project is advertised unless specified otherwise on the Plans or Special Provisions.

Do not begin installations until all permits are obtained and copies are given to the Engineer.

00965.02 Calculations and Drawings - Within 30 Calendar Days after execution of the Contract, submit at least six copies of the calculations and shop drawings.

Submit stamped designs, details, plans and calculations along with all engineered details and drawings that are not prepared by the Agency, but are required in the Contract Documents, prior to fabrication according to 00150.35.

Upon completion of the installation, submit six copies of all changes made from the original Plans. Provide information that includes all modifications made represent the material installed and in operation. Provide information that is sufficiently detailed to enable maintenance forces to replace or repair any part of the Project under routine or emergency maintenance by direct reference.

00965.05 Design and Performance - Furnish camera poles designed to the *AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals*.

(a) Design - Design camera poles and foundations according to the *AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals 5th Edition* with all interim revisions. Design factors include:

- Basic wind speed (3 second gust) 110 mph
- Gust factor (G) 1.14
- Importance factor (Ir) 1.0 (50-year recurrence interval)
- Fatigue category II

Galloping and truck gust fatigue checks are not required.

(b) Performance Calculations - Design the camera pole to support the specified camera and accessories. Include all portions of the effective projected area of the complete lowering system and camera Equipment to be mounted on the pole along with the weight when designing the pole to meet the specified deflection performance criteria. Ensure the pole top deflection does not exceed 1 inch in a 30 mph (non-gust) wind. Provide calculations that include a pole, base plate, handhole, and anchor bolt analysis. Analyze the pole calculations at the pole base, at 5-foot pole intervals/segments, hand hole locations, and at any other critical pole section. At each of these locations, provide the following information:

- The pole's diameter, thickness, section modulus, moment of inertia, and cross sectional area.
- The centroid, weight, projected area, drag coefficient, velocity pressure, and wind force of each pole segment.
- The axial force, shear force, primary moment, total moment, axial stress, bending stress, allowable axial stress, allowable bending stress, and combined stress ratio (CSR).
- The pole's angular and linear deflection.

Furnish a slip base pole and its attachments above the anchor plate with minimal weight that does not exceed 1,000 pounds. Determine the total weight of the pole with all appurtenances attached to the pole and submit this with the design calculations.

Hand hole design requirements include:

- Calculations for the moment of inertia, section modulus, and area at the hand hole centerline that show that these values are equal to or greater than the full pipe section properties without a hand hole.
- Calculations that show that the net area of bar forming the hand hole frame is not less than 120 percent of pole cross section removed.
- Calculations that show that the combined stress ratio (CSR) for the steel pole at the centerline elevation of the hand hole is less than or equal to 0.60.

Materials

00965.10 Materials - Furnish Materials meeting the following requirements:

Anchor Rods, Nuts, and Washers	02560.30
Commercial Grade Concrete.....	00440
Reinforcement	00530

Furnish steel pole Materials meeting the requirements of Section 02530 modified as follows:

- Furnish steel sheet for pole and arms meeting the requirements of ASTM A595, Grade A or B, ASTM A572, or approved equal.
- Furnish all other steel sheet and plate meeting the requirements of ASTM A36 or ASTM A572, or approved equal.
- Supplementary Requirement S18 (ASTM A6), maximum tensile strength, is required.

Insert Project Name Here

- Galvanized base plates and small and hidden pieces do not require controlled silicon content.

Furnish anchor rods according to ASTM F1554 Grade 55 for fixed base foundations and ASTM A449 Type 1 for Slip Base foundations. Galvanize anchor bolts, nuts, and washers according to 02560.40(a).

Construction

00965.41 Excavation - Protect all existing pipes that become a part of a foundation as directed by the Engineer and cooperate with Utilities according to 00150.50.

Do all excavation, backfilling and resurfacing work necessary to complete the work. This includes removal and replacement of curbs, sidewalks, paved surfaces and other materials. On completion of the work, replace and finish all surfaces to correspond with the existing surfaces.

Provide, place, and remove any shoring required to prevent caving of walls.

When excavating in paved areas, cut with an approved Pavement cutting saw to a depth of at least 2 inches along the neat boundaries of the area to be removed. Cut sharp and well-defined Pavement edges with no evidence of cracking, delaminating, or stressing.

Restore all disturbed landscaping and underground systems to original condition at no additional cost to the Agency upon completion of the work. Use hand excavation if directed.

(a) Excavation for Poles Foundations - Make all excavations for pole foundations to the Neat Lines of the foundations. Hand excavation may be required. Place the concrete directly against the sides of the excavation in undisturbed or well-compacted material.

(b) Disposition of Waste Materials - Dispose of all waste materials on completion of the Work according to 00290.20, or as directed.

00965.43 Foundations - Set forms square and true to line and grade. Construct forms of rigid materials that remain in position until the concrete has set. Use a steel template to accurately locate the anchor bolts and hold them plumb and in proper alignment. Out-of-position anchor rods and anchor rods installed more than 40V:1H out of plumb are cause for rejection of the foundation. Field bending of anchor bolts and field modification of the base plate are not allowed. Where breakaway bases are specified, construct post stub projections within the limits shown.

Construct foundations of concrete according to Section 00440 and applicable portions of 00540.48(a). Place concrete:

- With a continuous pour.
- To the elevation shown or directed.
- With conduit ends and anchor rods held securely in proper vertical position and height with a manufacturer's recommended template until the concrete sets.

Maintain rebar clearances during concrete pour.

Insert Project Name Here

Finish tops of foundations to Roadway, sidewalk or curb grade, or as directed.

Finish exposed concrete foundations to present a smooth, neat appearance. Fill all holes.

Make no adjustment of anchor rods after concrete has set. Any adjustment made may be cause for rejection of the foundation.

Remove forms and place subsequent loading according to Table 00540-1.

Where obstructions prevent the construction of planned foundations, construct the foundations in the location directed. Any extra cost due to the site change will be paid according to 00195.20.

If it is determined that foundations need to extend deeper than shown, the extra foundation depth will be paid according to 00195.20.

00965.46 Steel Camera Poles - Camera poles include the pole shaft, hand holes, base plate, top tenon assembly, and anchor rod assembly. Furnish one-piece construction for poles up to 50 feet in length . Furnish two-piece construction for poles greater than 50 feet in length. Furnish pole shafts that are round, 8 sided, 12 sided, or 16 sided with a constant linear taper of 0.14 inch per foot, and contain only one longitudinal seam weld. Unless shown or specified, circumferential welded tube butt splices are not permitted. Laminated tubes are not permitted. Do not erect poles until the Engineer has made a visual inspection of pole welding.

Fabricate entrance openings in steel poles and tenons, including handholes, before galvanizing.

(a) Deviation from Straightness - After the poles are delivered to the Project Site, and before they are erected on the foundations, the Contractor may be required to check any or all poles for deviation from straightness according to the following:

(1) Deviation in One Plane and One Direction Only - Verify that a straight line joining the surface of the pole at the base and the same surface of the pole at the top is not more than 1/2 inch from the surface of the pole for each 10 feet of length from the closest of these points. Verify the opposite surface meets the same requirement.

(2) Deviation in Any Plane – Verify that a straight line connecting the midpoint of the pole at the base, with the midpoint at the top, does not pass through the surface of the pole at any intermediate point.

Any pole not meeting these requirements is rejected. If more than 25 percent of the poles fail to meet these requirements, sufficient cause exists to reject the entire shipment of poles for the Project.

(b) Welding - Weld steel camera poles according to the American Welding Society (AWS) D1.1. Provide a fabricator to inspect welds according to the details and requirements called out in the Contract Documents. This requirement will override all appropriate weld inspection requirements called out in Section 5.15 WELDING CONNECTIONS in *AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals*. Submit all testing procedures for Engineer's review

prior to starting inspection. Submit certified copies of inspection reports to the Engineer for review.

Provide tackers and welders qualified according to the code. Provide tube longitudinal seam welds free of cracks and excessive undercut, performed with automatic processes, and be visually inspected. Magnetic particle inspect longitudinal welds that are suspected to contain defects. Ultrasonically or radiographically inspect all circumferential butt-welded pole and arm splices. Provide complete penetration welds for longitudinal seam welds within 6 inches of complete penetration pole to base plate welds.

If requested by the Engineer, additional weld inspection may be required upon arrival of the material at the Project Site. If defects are found by this additional inspection, the Contractor is responsible for the additional testing and repair costs. If no defects are found, the Engineer is responsible for the additional inspection costs.

(c) Welding Steel After Galvanizing - No field welding of galvanized steel is allowed. Perform all welding in a shop. Remove existing galvanizing from the heat affected area before welding the effected piece. Perform the weld, remove the galvanizing totally from the entire piece, and hot-dipped galvanized it. A submittal for review according to 00150.35(b)(1) is required that includes the following:

- Explanation for modification.
- Name of shop performing the work.
- Welding procedure.
- Description of the work to be performed.
- Name of the shop performing the hot-dipped galvanizing.

(d) Identifying Tags - Attach a stainless steel identifying tag to all poles. Furnish tags at least 1/16 inch thick with tag lettering at least 1/4 inch in height, and be stamped into the tag. Attach tags with stainless steel pop rivets of at least 3/16-inch nominal body diameter. Do not locate pop rivet holes within 6 inches of welds. Locate the pole tag approximately 5 feet above the bottom of the base plate. Drill holes for pop rivets prior to hot-dip galvanizing. Remove excess hot-dip galvanizing from holes and repair according to ASTM A780.

Include the following information on the tags if applicable:

- Manufacturer
- Month and year of manufacture
- Structure Number
- Top Tenon Yield (ksi)
- Top Tenon Flange Plate Yield (ksi)
- Pole thickness (inch)
- Base Plate Yield (ksi)
- Anchor Rod Yield (ksi)

(e) Hand Holes - Provide the inside dimensions of the hand hole 5 inches wide and 28 inches tall. Provide the hand hole location and all other dimensions as shown. Provide a hand hole with a tapped hole for mounting the portable winch.

(f) Pole Top Tenon - Furnish the pole with a custom plate mounted tenon that allows the field modification of the arm/camera orientation up to 360 degrees. Furnish the tenon with mounting holes and slot as required for the mounting of the camera-lowering system. Provide the tenon with dimensions necessary to facilitate camera lowering device component installation. Provide slots parallel to the pole centerline for mounting the lowering device.

(g) Base Plates - Integrally weld the base plates to the tubes with a telescopic welded joint or a full penetration butt weld with backup bar.

(h) Grounding Connection - For standard four-bolt anchor base poles, furnish a 1/2-inch, Type 308, 309 or 310 stainless steel stud on the inside of the shaft. Locate the stud directly opposite and level with the handhole in the pole. Attach grounding electrode conductors and bonding conductors to the stud with a grounding wire clamp, "acorn style".

(i) Erecting Steel Camera Poles - Erect steel camera poles on concrete foundations and according to the recommendations of the pole manufacturer and as shown. Exercise reasonable care to prevent marking the finish and damaging poles.

Construct bolt protrusions on slip base poles that do not interfere with the breakaway action of pole. File sharp edges smooth and repair according to ASTM A780.

(1) Repair Damaged Finish - Repair damaged galvanizing according to ASTM A780. Minor scratches less than 3 inches long by 3/16 inch wide or an area of 1/2 square inch can be repaired with the sprayed zinc method.

(2) Assembly of Supports and Bolt Tightening - Furnish nuts that have full thread engagement.

a. Anchor Rods for Fixed Base Camera Pole Supports - After foundation concrete strength and curing requirements are satisfied and after inspection of the foundation, pole installation may begin.

Lubricate anchor rods and nuts according to 02560.70. Estimate the required rake, if any, and set the lubricated leveling nuts accordingly, so that when pole installation is complete and all appurtenances are installed on the pole, the top of the pole is plumb with the base of the pole.

Verify the orientation of the camera arm with the Engineer before installing the pole.

Lift the pole into position on the leveling nuts and washers. Make sure all leveling nuts and washers are in full contact with the base plate.

Install washers and lubricated top nuts, and bring to a snug tight condition. Snug tight is defined as the condition when all plies of the connection are in firm contact, and can be obtained by the full effort of a worker on the end of a 12-inch-long wrench. Several passes may be required to obtain uniform snug tightness.

When all anchor rods are snug tight, proceed with installation of arms and other appurtenances, if not previously installed. When installation of arms and appurtenances is complete, and the pole is plumb, final anchor rod tightening may begin. If the pole is not plumb, adjust as required and repeat snug tightening as described above. As a safety measure, provide crane support of the pole until anchor rods tightening is completed.

Mark the position of each turned element (nut or bolt head) with a felt tip pen or similar marker. Rotate each top nut past snug tight by the amount shown in 00965.46(i)(2)(d). Several passes may be required to obtain uniform final tightness. "Cheater" bars or slugging wrenches are allowed if required for large diameter anchor rods.

b. Anchor rods for Slip Base (Break-away) Camera Supports - After foundation concrete strength and curing requirements are satisfied and after inspection of the foundation, pole installation may begin.

Provide, at no additional cost to the Agency, a calibrated torque wrench of a capacity appropriate to the size and type of the bolts being tightened. Confirm the accuracy of the calibrated torque wrench through calibration by an approved independent testing agency at least once a year.

Lubricate anchor rods and nuts according to 02560.70. Estimate the required rake, if any, and set the lubricated leveling nuts accordingly, so that when pole installation is complete and all appurtenances are installed on the pole, the top of the pole is plumb with the base of the pole.

Install the anchor plate on the leveling nuts and washers. Make sure all leveling nuts and washers are in full contact with base plate.

Install washers and lubricated top nuts, and bring to a snug tight condition. Snug tight is defined as the condition when all plies of the connection are in firm contact, and can be obtained by the full effort of a worker on the end of a 12-inch-long wrench. Several passes may be required to obtain uniform snug tightness.

Verify the orientation of the camera arm with the Engineer before installing the pole.

When all anchor rods are snug tight, proceed with the "Slip Base Bolting Procedure" as shown on the Plans. When the "Slip Base Bolting Procedure" is complete, final anchor rod tightening may begin. As a safety measure, provide crane support of the pole until anchor rod tightening is complete.

Mark the position of each turned element (nut or bolt head) with a felt tip pen or similar marker. Rotate the top nut of each anchor rod past snug tight by the amount shown in .d below. Several passes may be required to obtain uniform final tightness. "Cheater" bars or slugging wrenches are allowed if required for large diameter anchor rods.

c. High-Strength Bolts in Camera Arm-to-Pole Connections - Do not reuse galvanized high strength bolts. Retightening previously tightened bolts that may

Insert Project Name Here

have been loosened by the tightening of adjacent bolts will not be considered a reuse.

Lubricate high-strength bolts according to 02560.70. Furnish all high-strength bolts with hardened flat washers under the element turned during tightening.

If arms or appurtenances are attached after pole erection, support them until bolts are snug tight.

Install high-strength bolt connections to a snug tight condition. Snug tight is defined as the condition when all plies of the connection are in firm contact, and can be obtained by the full effort of a worker on the end of a 12-inch-long wrench. Several passes may be required to obtain uniform snug tightness.

Mark the position of each turned element (nut or bolt head) with a felt tip pen or similar marker. Rotate each top nut past snug tight by the amount shown in .d below. Several passes may be required to obtain uniform final tightness.

d. Final Tightening - Required final tightening of anchor rods and high-strength bolts are shown in the following Table:

Connection Type	Rotation Past Snug Tight
ASTM A449 Type 1 Anchor Rods	60° (1/6 turn)
ASTM F1554 Gr. 55 Anchor Rods	60° (1/6 turn)
ASTM F3125, Grade A325 Arm Connection Bolts	60° (1/6 turn)

e. Bolt Inspection - The Engineer will observe the installation and tightening operations to ensure that proper procedures are followed. All inspections are visual and no testing will be conducted.

Top surface of bolts or rods that are not flush or do not extend beyond the top of the nut requires the rejection of the installation.

(Use the following subsection .48 to specify coating metal camera poles. Obtain item and color number from the Designer.)

00965.48 Coating - Prepare and powder coat poles according to the applicable portions of Section 00593 or prepare and coat poles according to the applicable portions of Section 00594. Furnish coating materials for field application, repairing damaged coatings, and coating hardware after installation, according to Section 00593 or 00594. Do not coat:

- Slip plate or arm connection surfaces.
- Slip base bolting hardware.
- Anchor rods, anchor rod washers, and anchor rod nuts.

Furnish the following colors:

Item

**SAE AMS-STD-595
Color Number**

Insert Project Name Here

Measurement

00965.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00965.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract Lump Sum amount for the item "Camera Poles and Foundations".

Payment will be payment in full for furnishing and installing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00970 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP00960, SP00962 & SP02926)

SECTION 00970 - HIGHWAY ILLUMINATION

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00970 of the Standard Specifications modified as follows:

00970.03 Luminaire Submittal - Replace this subsection, except for the subsection number and title, with the following:

Furnish a sample luminaire for inspection and photometric testing if required. Sample luminaires may be considered as part of the shipment furnished for installation.

(Use the following lead-in paragraph and subsection .15 when an LED luminaire is required on a traffic signal support. Suggested mounting heights are 40 feet, but illumination designer may use a combination of different mounting height and different wattage on luminaires to achieve project site specific light level requirements. Substitute other approved product as applicable.)

Add the following subsection:

00970.15 LED Luminaires on Traffic Signal Supports, at intersections or at crosswalks - Furnish one of the following approved models or an approved equal:

Insert Project Name Here

- CREE LED - Guideway Series,
GWY-M-A-17L-30K7 (or 40K7) 3M-UL-GY w/7 pin receptacle
- Current LED - Evolve, ERL2-0-16-C5-30 (or 40)-D-Gray
- AEL Acuity AutoConnect - ACM-P608-Mvolt-ZT-R3-3K (or 4K)-GY-P7-SH

When higher light output is desired, higher wattage luminaires up to 160 watt within the same brand/model listed above, may be furnished.

When furnishing an LED luminaire model that is not specified as approved, the luminaire shall meet the requirements of 02926.54.

(Use the following lead-in paragraph and subsection .16 when an LED luminaire is required on a freeway interchange lighting system. Suggested mounting heights are 40 feet, but illumination designer may use a combination of different mounting height and different wattage on luminaires to achieve project site specific light level requirements. Substitute other approved product as applicable

Replace "(Voltage Information)" with the voltage information. Check with the Illumination Designer.)

Add the following subsection:

00970.16 LED Luminaires on Freeway Interchange Lighting Systems - Furnish one of the following models or an approved equal:

AEL Acuity AutoConnect - ACL-P127-(Voltage Information)-ZT-R3-3K (or 4K)-GY-P7-SH

- Current LED - Evolve, ERL2-(Voltage Information)-25-C5-30 (or 40)-D-GRAY
- CREE LED - Guideway Series,
GWY-L-A-25L-30K7 (or 40K7) 3M -(Voltage Information)-GY w/7 pin receptacle

When higher light output is desired, higher wattage luminaires up to 250 watt within the same brand/model listed above, may be furnished.

When furnishing an LED luminaire model that is not specified as approved, the luminaire shall meet the requirements of 02926.54.

00970.42 Cable and Wire - Replace the paragraph that begins "Support the conductors ..." with the following paragraph:

Support the conductors at the top of the pole using a flexible metal cable support grip to prevent insulation damage at the upsweep arm opening. When splicing cable into a new or existing circuit at a pole base (minimum wire length: 18 inches outside handhole), install a watertight, in-line fuse holder in the pole base for each current-carrying wire going up the pole. Construct the fuse holder so the wire to the ballast can be disconnected without cutting or disconnecting wiring at the ballast. Insulate terminal ends of the in-line fuse holder using

Insert Project Name Here

either heat shrink tubing or electrical insulating rubber tape over-wrapped with electrical vinyl plastic tape as specified.

Replace the paragraph that begins "For double arm illumination ..." with the following paragraph:

For double arm illumination pole, install two sets of wires separately from the pole base to each luminaire end. Do not splice wires inside the illumination pole except at the pole base.

Replace the paragraph that begins "Wires from the ballast ..." with the following paragraph:

Furnish wires from the ballast to the lamp holders according to the manufacturer's recommendations.

00970.43 Photocontrol Electronic Relay - Replace the paragraph that begins "Use 1 1/4-inch welded ..." with the following paragraph:

Use 1 1/4-inch welded hub in top of cabinet to install photocontrol electronic relay with minimum 24-inch-long galvanized metal conduit and twistlock plug. When photocontrol relay is attached on the side of the cabinet, use LB type conduit outlet body, 1 1/4-inch galvanized metal conduit riser, and galvanized channel support for the riser. Ensure riser conduit is a minimum of 2 feet above the top of the control cabinet. Secure field installed relay and conduit extensions against vandalism and ensure they are rain tight.

00970.44(c)(2) Lamp Size and Identification Decal Code - Replace the paragraph that begins "Use the lamp size ..." with the following paragraph:

Use the lamp size and color codes according to the following:

Replace the paragraph that begins "¹ In addition, metal ..." with the following paragraph:

¹ In addition, metal halide lamp targets include a 1/2 inch wide by 3-inch-long strip of pressure sensitive, flat top, wide angle reflective tape to show lamp burning position requirements. Apply tape 1/2 inch from the lamp size target as follows:

00970.45 LED Luminaires - Replace this subsection, except for the subsection number and title, with the following:

Install LED luminaires as shown or as specified. See 02926.54.

00970.46 Pole Identification - Replace the paragraph that begins "Identify luminaire poles ..." with the following paragraph:

Identify luminaire poles with a numbered label corresponding to the pole numbers on the highway illumination Plans. Provide labels that:

Replace the bullet that begins "Be made of ..." with the following bullet:

- Are made of noncorrosive, pressure-sensitive Material suitable for outdoor use and resistant to fading and abrasion.

00970.47 HDPE Conduit and Connectors - Replace the paragraph that begins "High Density Polyethylene (HDPE) conduit may be used..." with the following paragraph:

High Density Polyethylene (HDPE) conduit may be used for horizontal directional drilling (HDD) applications. Provide HDPE conduit that is gray in color. Join HDPE conduit sections by mechanical fittings that have barbed threads on both ends or by a swedge coupler with two-part conduit adhesive.

00970.60 Maintaining Existing and Temporary Illumination Systems - Replace the paragraph that begins "Protect existing illumination ..." with the following paragraph:

Protect existing illumination systems and approved temporary replacements. Shutdown of a system may be allowed for alterations or final removal, as approved. Ensure lighting system shutdowns do not interfere with the regular lighting schedule. Notify the Engineer before performing any Work on existing systems.

00970.70 Field Test - Replace the bullet that begins "A Megger test on each ..." with the following bullet:

- A Megger test on each circuit between the conductor and ground with all switchboards, panelboards, fuse holders, switches, receptacles and overcurrent devices in place. Record all readings. Provide the Engineer with one copy of the test results identifying observed readings with their respective circuits.

Replace the bullet that begins "Test the insulation ..." with the following bullet:

- Test the insulation resistance between conductor and ground. Ensure resistance is as follows on circuits with total single conduction length of:

00970.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following two paragraphs when refurbishing and reinstalling existing illumination systems.)

Replace the paragraph that begins "Item (e) includes..." with the following paragraph:

Item (e) includes all refurbishing, reinstalling, and other Work as specified or shown.

SP00984 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-27-26)**

SECTION 00984 - FIBERGLASS POLES FOR ITS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project,

Insert Project Name Here

unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document.

The Work covered under this Section is diverse and this boilerplate may not include Specifications for all the Work or ITS elements on the Project. Modify as necessary by adding, deleting, or revising language for the specific Project requirements. Modifications to this Section, other than deleting language not required, will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00984 is not a Standard Specification and is included in this Project by Special Provision.

Description

00984.00 Scope - This Work consists of furnishing and installing fiberglass poles.

00984.01 Submittals - Submit stamped Working Drawings according to 00150.35. The stamped Working Drawings show the design standards and criteria, calculated wind loads and pressure, material description, dimensioning, member size and connection details. Material ordered or Work performed before the Engineer finishes and returns the documents is at the Contractor's risk.

00984.02 Regulations, Standards, and Codes - Comply with the following standards where applicable:

- American Association of State Highway and Transportation Officials (AASHTO)
 - Standard Specification for Structural Support for Highway Signs, Luminaires and Traffic Signals 5th Edition with all interim revisions.
- American Society for Testing and Materials (ASTM)
 - D635 Standard Test Method for Rate of Burning or Extent and Time of Burning of Plastics in a Horizontal Position

00984.03 Design and Performance - Design the poles according to AASHTO and the following design factors:

Basic wind speed (3 second gust)	110 mph
Extreme I Wind Loading, Basic Wind Speed (3 second gust)	130 mph (1700-yr MRI)
Service I Wind Loading, Basic Wind Speed (3 Second gust)	82 mph (10-yr MRI)
Gust factor (G)	1.14
Importance factor (If)	1.0 (50-year occurrence)
Fatigue category	II
Safety factor	2.0

(a) Performance Calculations - Design the pole to support the specified devices and all associated accessories to be mounted on the pole as shown. Include all portions of the

effective projected area (EPA) of the complete system, sensors, and Equipment to be mounted on the pole along with the weight when designing the pole to meet the specified deflection performance criteria. Pole top deflection cannot exceed 1/2 inch in a 30 mph (non-gust) wind. Design calculations include pole and ground anchorage embedment requirements in addition to meeting design demand at any other critical pole sections (e.g. base, handholes). At each of these locations, provide the following information:

- The pole's diameter, thickness, section modulus, moment of inertia, and cross sectional area.
- The axial force, shear force, primary moment, total moment, axial stress, bending stress, allowable axial stress, allowable bending stress, and combined stress ratio (CSR) at the maximum location.
- The pole's angular and linear deflection under service level wind loading.

00984.04 Additional Testing - Perform the following tests on the poles per AASHTO *Standard Specification for Structural Support for Highway Signs, Luminaires and Traffic Signals 5th Edition* with all interim revisions section 8.7.2:

- Weathering resistance according to ASTM G53
- Adhesion of coatings
- Color Change from UV Exposure

Materials

00984.10 Fiberglass Pole - Furnish fiberglass poles with one-piece construction (or breakaway as required) and include the pole shaft, handholes, top tenon assembly (if applicable), ground anchorage, and conduit penetrations. Furnish pole shaft with a round cross section having a constant linear taper of 0.14 inch per foot. Do not erect poles until the Engineer has made a visual inspection of poles.

Height and location of the poles are as shown. Furnish poles constructed of continuous fiberglass filament combined with thermosetting epoxy resin. Furnish direct burial style poles constructed of UV resistant materials. Furnish flame resistant poles according to ASTM D635.

00984.11 Coating - Color the pole SAE AMS-STD-595C color number 10059. Furnish coating materials for field application, repairing damaged coatings, and coating hardware after installation.

Construction

00984.41 Excavation - Complete all excavation, backfilling and resurfacing work necessary to complete the Work, including removal and replacement of curbs, sidewalks, paved surfaces and other materials. On completion of the Work, replace and finish all surfaces to correspond with the existing surfaces.

Provide, place, and remove any shoring required to prevent caving of walls.

Insert Project Name Here

When excavating in paved areas, cut with an approved pavement cutting saw to a depth of at least 2 inches along the Neat Lines of the area to be removed. Cut sharp and well defined pavement edges with no evidence of cracking, delaminating, or stressing.

Restore all disturbed landscaping and underground systems to original condition at no additional cost to the Agency. Use hand excavation as needed and if directed.

(a) Excavation for Pole Foundations - Make all excavations for pole foundations to the Neat Lines of the foundations. Hand excavation may be required. Place the backfill material directly against the sides of the excavation in undisturbed or well-compacted material.

(b) Disposal of Waste Materials - Dispose of all waste materials according to 00290.20, or as directed.

00984.42 Foundations - Backfill excavated pole foundation holes with Selected Granular Backfill according to 00330.14. Excavate pole foundation holes to the lines and grades established and to the depth shown.

Where obstructions prevent the construction of planned foundations, construct the foundations in the location directed. Any extra cost due to the site change will be paid according to 00195.20.

If it is determined that foundations will extend deeper than shown, the extra foundation depth will be paid according to 00195.20.

00984.43 Fiberglass Poles -

(a) Deviation from Straightness - Any pole not meeting these requirements is rejected. After the poles are delivered to the Project Site, and before they are erected on the foundations, check all poles for deviation from straightness according to the following:

(1) Deviation in One Plane and One Direction Only - Verify that a straight line joining the surface of the pole at the base and the same surface of the pole at the top is not more than 1/2 inch from the surface of the pole for each 10 feet of length from the closest of these points. Meet the same requirement for the opposite surface.

(2) Deviation in Any Plane - Ensure that a straight line connecting the midpoint of the pole at the base with the midpoint at the top does not pass through the surface of the pole at any intermediate point.

(b) Identifying Tags - Furnish a permanent identification tag and locate the pole tag approximately 2 feet above ground level.

Provide the following information for each pole identification tag:

- Manufacturer and Model
- Month and year of manufacture

Insert Project Name Here

(c) Handholes - Furnish a handhole reinforced as necessary to meet the design demand with inside dimensions of 2.5 inches wide and 5 inches tall with a handhole for wiring access located near the base of the pole above grade, and a second handhole and a 1.5-inch threaded hub one foot down from the top of the pole or as shown. Furnish a handhole cover attached with socket head screws.

(d) Tenons - Permanently bond tenons (as applicable) to the fiberglass shaft and hot-dip galvanize steel according to ASTM A153.

(e) Erecting Fiberglass Poles - Erect fiberglass poles according to the recommendations of the pole manufacturer and as shown. Exercise reasonable care to prevent marking the finish and damaging poles.

Repair damage according to the manufacturer and at no additional cost to the Agency.

Measurement

00984.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00984.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Fiberglass Poles, Complete".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP00985 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-03-26

Requires SP02530)

SECTION 00985 - ITS ELECTRICAL SYSTEM INSTALLATION

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document.

The Work covered under this Section is diverse and this boilerplate may not include Specifications for all the Work or ITS elements on the Project. Modify as necessary by adding, deleting, or revising language for the specific Project requirements. Modifications to this Section, other than deleting language not required, will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Section 00985 is not a Standard Specification and is included in this Project by Special Provision.

Description

(In the following subsection .00, delete the language in purple parentheses that does not apply and delete the purple parentheses.)

00985.00 Scope - In addition to requirements of Section 00960, install ITS electrical system as shown or specified. (Install Agency-furnished Equipment listed in 00160.30.)

00985.01 Regulations, Standards, and Codes - Comply with the following standards where applicable:

- Underwriters Laboratories (UL)
 - 50-2015 - Enclosures for Electrical Equipment, Non-Environmental Considerations
 - 508A-2018 - Standard for Industrial Control Panels
 - 1561-2011 - Standard for Dry-Type General Purpose and Power Transformers
 - 1581-2001 - Reference Standard for Electrical Wires, Cables, and Flexible Cords
 - 1685-2015 - Standard for Vertical-Tray Fire-Propagation and Smoke-Release Test for Electrical and Optical-Fiber Cables
 - 83-2017 - Thermoplastic-Insulated Wires and Cables

(In the following subsection .02, delete the language that does not apply. Fill in the appropriate blanks.)

00985.02 Submittals - Submit according to 00150.37, within 30 Calendar Days after execution of the Contract, the following:

- Transformers and cabinets according to 00985.10
- Pole mounted service cabinets according to 00985.11
- Termination enclosures according to 00985.12
- Coaxial video cable according to 00985.13
- Atmospheric sensors and accessories according to 00985.14
- Pavement sensors and accessories according to 00985.14(d)
- Circuit breakers according to 00985.15
- Metal conduit according to 00985.16
- Metallic conduit fittings according to 00985.17
- Conduit seal according to 00985.18
- Electrical splice materials according to 00985.19
- Camera lowering system according to 00985.20
- Wood pole according to KB__.

(Use the following three bullets when RWIS are included in the Project.)

Insert Project Name Here

- Power supplies according to KB__
- Serial converter according to KB__
- Analog to Ethernet converter according to KB__

Include the manufacturer's name, model numbers, catalog sheets and other descriptive literature of proposed materials. Provide the catalog sheets and literature including technical data, physical properties and operational description in sufficient detail to demonstrate the equipment meets these specifications.

Materials

(Use the following subsection .10 when a transformer is required.)

00985.10 Transformers and Cabinets - Furnish general purpose dry type transformers with two windings 1000 Volts or less, 60 Hz, self-cooled according to UL 1561, kVA rating as shown. Furnish transformers installed in cabinets that are compliant with UL 50, Type 3R ventilated, 14-gauge Type 304 or 316 stainless steel, and rated for outdoor use. Include a cabinet door with a seamless gasket that is liquid-tight. Remove all sharp edges. Furnish two 2.5 percent taps above and two 2.5 percent taps below normal rated primary voltage minimum, as well as ground and neutral terminal lugs. Furnish an insulation rating of 150 °C winding temperature rise above ambient. The cabinet is to be padlockable.

Furnish a dead front panel within the transformer cabinet, such that when the door is opened only circuit breakers and no live parts are exposed. Dead front material is to be the same as the rest of the cabinet and hinged to allow access to live parts.

(Use the following paragraph only if a safety switch is NOT used with the transformer.)

Furnish a primary protection circuit breaker that is lockable in the "OFF" position, but not on the "ON" position.

(Include following paragraph only if a safety switch is used with the transformer)

Furnish safety switches that comply with NEMA KS 1 and are heavy duty, NEMA 3R, 4, or 4X type. Voltage, current rating, number of poles, and fusing as shown. The cover or door cannot be opened while the switch handle is in the "ON" position. Furnish a safety switch that is made to lock the handle in the "OFF" position but not the "ON" position. Switches are to be of the quick make, quick break type.

(Use the following subsection .11 when a pole mounted service cabinet is required.)

00985.11 Pole Mounted Service Cabinet - Furnish pole mount service cabinets formed from 10-gauge thick sheet metal hot-dipped galvanized after fabrication according to 02530.70, or 12-gauge Type 304 or 306 stainless steel. Furnish cabinets that are UL 508A listed with a top hinged lift cover including provision to hold cover in open position and dead fronts. Include cabinet doors with a seamless gasket that are liquid-tight. Accommodate for eight single pole circuit breakers or four double pole circuit breakers. Install copper buss bars

Insert Project Name Here

in cabinets for main and branch circuits. Furnish a minimum of 2 locator studs near top for dead fronts, and handle on dead front near bottom. The cabinet is to be padlockable.

Fabricate dead fronts from code thickness galvanized sheet metal or type 304 or 316 stainless steel. For galvanized sheet metal dead fronts, treat cut edges with zinc-rich paint. Prime with vinyl wash primer and finish with exterior polyurethane enamel.

(Use the following subsection .12 when a termination enclosure is required.)

00985.12 Termination Enclosure - Furnish enclosures constructed from 14-gauge Type 304 or 316 stainless steel, as well as be UL 50 compliant and Type 4X rated with a #4 brushed finish. Remove all sharp edges. Include doors with a continuous hinge and seamless gasket that is liquid-tight. Enclosures are to be padlockable. Dimensions are location specific as shown.

(Use the following subsection .13, when Cables are required.)

00985.13 Coaxial Video Cable - Furnish RG-59/U or RG-6 coaxial cable, 75 ohms with 18 AWG solid bare copper center conductor with 95 percent or greater bare copper braided shield for fixed mounted cameras with UL 1581 or UL 1685 rating. Furnish video cable suitable for wet locations. Video cable may be hybrid type combining the coaxial video cable and multi-conductors for providing power in one single cable assembly. Install nickel plated body, for corrosion resistant, BNC connector on end of cable. Furnish video cable that is one continuous conductor from the camera assembly to the video encoder. Splices are not allowed, unless approved in writing by the Engineer.

(Use the following subsection .14, when atmospheric sensors are required.)

00985.14 Atmospheric Sensors and Accessories - Provide the following list of Equipment and install as shown:

(a) Temperature/Relative Humidity Sensor

- RM Young Model 41382LC2 (4-20 mA option)
- RM Young Model 41003P-24 radiation shield
- RM Young Model 18446 five conductor cable

(b) Anemometer

- RM Young Model 05106-12M (12-meter cable included)
- RM Young Model 05631C wind line driver
- RM Young Model 18446 five conductor cable

(c) Sensor Mounting Bracket

- Vaisala DRUNIVARM-US with band straps included

(d) Pavement Sensors

- Vaisala DSC111 with the DSCVIS visibility option enabled non-invasive surface state sensor
- Vaisala DST111 non-invasive surface temperature sensor

Insert Project Name Here

- Vaisala 216548 communication cable between DSC111 and DST111
- Vaisala non-remote pole installation kit for non-invasive sensors with 28VDC power supply with cables at 50-meter length minimum

(Use the following subsection .15, when circuit breakers are required.)

00985.15 Circuit Breakers - Furnish UL489 listed circuit breakers of the voltage rating shown or specified, unenclosed, molded case bolt-on type with end conductor terminals, and suitable for surface mounting in the cabinet on a false back or bracket. The interrupting rating is to meet or exceed the short circuit rating of the specified electrical system.

(Use the following subsection .16, when metal conduit is required.)

00985.16 Metal Conduit - Furnish metal conduit meeting the following requirements:

- **Rigid Metal Conduit** - Galvanized rigid metal manufactured of mild steel conforming to UL 6, Rigid Metal Electrical Conduit.
- **Liquid-Tight Flexible Metal Conduit** - Furnish UL 360 listed, liquid-tight, nonmetallic, sunlight resistant outer jacket over an inner flexible metal core.

(Use the following subsection .17, when conduit fittings are required.)

00985.17 Metallic Conduit Fittings - Furnish conduit fittings meeting the following requirements:

- **Metallic Expansion Fittings** - Weatherproof, hot dip galvanized malleable iron expansion head and body. Where the Plans do not specify an Equipment grounding wire in the conduit run, furnish fittings with external bonding jumpers. Permit a 4-inch conduit movement minimum.
- **Metallic Bushings** - Galvanized steel or die cast zinc with insulated throat. Include a bonding lug if required.
- **Conduit Hub** - Hot-dip galvanized malleable iron screw-on style with neoprene "O" ring.

00985.18 Conduit Seal - Furnish conduit plug Material used to seal the ends of conduit composed of duct seal that is UL listed clay putty material designed to seal electrical conduit. Seal all conduit impacted by the Project.

00985.19 Electrical Splice Materials - Furnish electrical splice Material meeting the following requirements:

- **Split Bolt** - Made of silicon bronze to securely join the wires both mechanically and electrically.
- **Heat-Shrink Tubing** - Surface-irradiated tube complying with UL 486, rated at 194 °F, with 600 V inner melting wall or liner to provide void-free encapsulated insulation.
- **Insulating Rubber Tape** - Electrical grade, nondrying, rubber based, elastic type according to ASTM D4388.
- **Insulating Vinyl Plastic Tape** - Comply with ASTM D3005, Type II and UL 510.

(Use the following subsection .20, when a camera lowering system is required.)

00985.20 Camera Lowering System:

(a) General Description - Design the camera lowering system to support and lower a traffic surveillance IP camera, lens, Pan/Tilt mechanism, associated cabling and connectors, and other supporting field components without damage or causing degradation of camera operations. Provide a lowering system that consists of a suspension contact unit, divided channel support arm, and a pole adapter for attachment to a pole top junction box and camera connection box. Design the divided support arm and receiver brackets to self-align the contact unit with the pole centerline during installation and ensure the contact unit cannot twist under high wind conditions.

(b) Lowering Tool - Operate the camera lowering system by the use of a portable lowering tool. The lowering tool consists of a metal frame winch assembly with a cable, a quick release connector, and adjustable clutch and a variable speed heavy duty electric motor. Provide a lowering tool that is compatible with accessing the support cable through the hand hole of the pole. Provide a lowering tool with a reduction gear for ease of service and operation. Equip the lowering tool with a positive braking mechanism to secure the cable reel during raising and lowering operations and to prevent freewheeling. The use of a strap to attach the lowering device will not be accepted.

(c) Materials - Furnish pulleys that have sealed, self-lubricating bearings. Furnish a lowering cable that is a stainless steel cable with a minimum breaking strength of 1700 lbs.

Protect all electrical and video connections between the fixed assembly and the lowering portion of the connection block from exposure to the weather by a waterproof seal. Design the electrical connections (contacts) to minimize loss. The last electrical connection to disengage when servicing is the ground wire or pin.

(d) Suspension Contact Unit - Furnish a suspension contact unit that allows the camera, Pan/Tilt Unit and dome assembly to easily separate from the camera pole for lowering purposes. Only the stainless steel lowering cable is permitted to move within the pole or lowering device during lowering or raising. Furnish a locking mechanism between the fixed and moveable components that when latched has all weight removed from the lowering cable. Furnish a suspension contact unit that has a heavy duty cast tracking guide to allow latching in the same position every time. House the suspension contact unit in a weatherproof enclosure with a gasket to seal the interior.

Construction

(In the following subsection .40, delete the language in purple parentheses that does not apply and delete the purple parentheses.)

00985.40 Installation - Install the Materials as specified, shown, and according to the manufacturer's instructions.

(Install the Agency-furnished Materials listed in 00160.30; and all other Incidental items necessary to complete the Work as shown.)

00985.41 Metallic Conduit - If corrosive Soil conditions exist, coat metallic conduit with a nonmetallic coating or wrap with corrosion protection tape at least 10 mils thick.

(a) Metallic Conduit - Paint the following with rust-preventative coating:

- Threads on all metal conduit
- Areas where the coating has been damaged so underlying metal is exposed.
- Exposed, non-galvanized threads resulting from field cuts.

(b) Bushings - Furnish and install bushing according to the following:

- **Metallic Bushing** - Use metallic bushings with rigid metallic elbows, metallic risers, and junction boxes containing circuits less than 25 V.
- **Metallic Bonding Bushing** - Use metallic bonding bushings with rigid metallic elbows, metallic risers, and junction boxes containing 25 V or greater circuits.

00985.42 Cable and Wire - Install No. 16 AWG TFFN orange base with blue tracetone wire in all conduits as a locate wire. Leave slack as required in 00985.43 and install a wire nut. Do not join multiple locate wires under a common wire nut unless otherwise shown.

Tape the ends of unused conductors with insulated vinyl plastic tape.

Install polyethylene pull line in all new conduits for future use. Leave 6 feet of slack pull line. If an existing pull line is used, replace the existing pull line with a new pull line during the installation.

Arrange wiring neatly within cabinets and junction boxes. Use electrical lubricants when inserting conductors in conduit. Before pulling wires through underground conduit runs, blow the conduit out with 120 cubic feet per minute compressed air.

Do not use tapes, straps, ties or other binding materials to bundle single conductors or cables together inside conduits or poles. Bundling of conductors or cables are allowed at the terminating end points for pulling only.

Pull all wire and cable by hand and on a straight line with the conduit opening to prevent damage to wire and cable insulation. Use a pulley device to achieve a straight pull if pulls are made with poles or controller cabinet in place.

00985.43 Conductor Slack - Leave slack in each wire and cable as follows:

- 2 feet in junction boxes and poles
- 6 feet in the first junction box nearest the controller cabinet
- 6 feet in controller cabinet and service cabinet

00985.44 Identification and Marking - Clearly and permanently label all cables and wiring between subsystems. Mark all conductors within 2 inches of wire terminations by means of imprinted tubular white or yellow plastic wire markers at termination points. Install marker nomenclature that is visible without moving wires or markers. Use thermal transfer label printer with minimum 3/4" tape.

Insert Project Name Here

00985.45 Covers and Guarding - Furnish covers or guarding for live parts of terminations on circuits of 50 V or more to ground.

00985.46 Conductor Splicing - Install all conductors as shown without splicing. Field verify lengths prior to ordering cables. If splicing is required to complete Work as shown, then submit the method using all materials listed in 00985.19 and the location of splicing for approval by Engineer before construction.

(Use the following subsection .47, when Variable Message Sign Installation is required.)

00985.47 Variable Message Sign (VMS) Installation - Install the Agency-furnished variable message signs, sign control cable, and controller cabinets as shown. Coil and stow minimum 50 feet slack of sign control cable in the sign housing and controller cabinet after pulling. Sign control cable is terminated by Agency.

(Use the following paragraph when variable message signs are being removed on a Project.)

Notify the Engineer at least 14 Calendar Days before taking any individual VMS out of service, if applicable. Keep the existing VMS and cabinets in service until the new VMS and cabinets are ready to be installed, and minimize the time that the individual signs are out of service.

(Use the following subsection .48, when Variable Speed Sign Installation is required.)

00985.48 Variable Speed Sign (VAS) Installation - Install the Agency-furnished variable speed signs, sign control cable, and controller cabinets as shown. Coil and stow minimum 50 feet slack of sign control cable in the sign housing and controller cabinet after pulling. Sign control cable is terminated by Agency.

(Use the following subsection .49, when Radar Traffic Sensor Installation is required.)

00985.49 Radar Traffic Sensor Installation - Install the Agency-furnished radar traffic sensors, mounting brackets, accessories, and associated wiring as shown. Configuration and final aiming of the sensor to be completed by the Agency.

(Use the following subsection .50, when Camera Installation is required.)

00985.50 Camera Installation - Install Agency-furnished camera and accessories consisting of the camera, housing, mounting bracket, power supply, and associated wiring as shown and specified. Final aiming of the camera to be completed by the Agency.

(Use the following subsection .51, when Radio Installation is required.)

00985.51 Radio Installation - Install Agency-furnished radio and accessories, consisting of the radio, mounting bracket, power supply, and associated radio network cable as shown and specified. Configuration and final aiming of the radio to be completed by the Agency.

Insert Project Name Here

Measurement

00985.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

(Use one of the following two options for subsection .90)

[Option 1. Use this subsection .90 if site work needs to be broken out by Pay Items]

00985.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Add additional Pay Item(s) as required for the Schedule of Items and delete all purple parentheses.)

Pay Item

Unit of Measurement

- (a) Electrical Systems Installation, Site _____ Lump Sum
- (b) Electrical Systems Installation, Site _____ Lump Sum

(In the following paragraph delete the items that are not included as part of the Pay Item. Copy and paste the paragraph as necessary to accommodate all Work.)

Item (a) includes furnishing and installing the cabinet, riser frame, cabinet concrete foundations, junction boxes, handhole, communications bracket, pole concrete foundation, transformer with cabinet, wood pole, meter service, pole mounted service cabinet, base mounted meter service cabinet (BMC), conduits, trenching, backfill, horizontal directional drilling, conductors, grounding and bonding, and all other Incidental items necessary to complete the Work.

Payment will be payment in full for furnishing and placing all Materials; and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Required submittals and documentation
- Assistance for commissioning Equipment and systems
- Pick-up and installation of the Agency-furnished Material listed in 00160.30, furnishing and installing the conductors and mounting hardware, and removal and disposal.

[End Option 1]

[Option 2. Use this subsection .90 if site work does NOT need to be broken out per site.]

00985.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Electrical Systems Installation".

Insert Project Name Here

(Include following paragraphs only if Agency furnished materials are included in this specification.)

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for pick-up and installation of the Agency furnished Materials.

(Include following paragraph only if Agency furnished materials are NOT included in this specification.)

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

[End Option 2]

SP00987 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 03-27-26)

SECTION 00987 - TELECOMMUNICATIONS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document.

The Work covered under this Section is diverse and this boilerplate may not include Specifications for all the Work or ITS elements on the Project. Modify as necessary by adding, deleting, or revising language for the specific Project requirements. Modifications to this Section, other than deleting language not required, will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00987 is not a Standard Specification and is included in this Project by Special Provision.

Description

(In the following subsection .00, delete the language in purple parentheses that does not apply and delete the purple parentheses.)

00987.00 Scope - This Work consists of furnishing and installing fiber optic cabling for the telecommunications (of signalized intersection devices) (of Intelligent Transportation Systems (ITS) devices).

(In the following subsection .01, delete the standards that are not required.)

00987.01 Regulations, Standards, and Codes - Comply with the following standards where applicable:

- Telecommunications Industry Association (TIA/EIA)
 - EIA-455-3A (FOTP-3) Procedure to Measure Temperature Cycling Effects on Optical Fibers, Optical Cable, and Other Passive Fiber Optic Components
 - TIA-455-8 (FOTP-8) Measurement of Splice or Connector Loss and Reflectance Using an OTDR
 - TIA-526-7 (OFSTP-7) Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant
 - EIA-455-25 (FOTP-25) Impact Testing of Optical Fiber Cables
 - EIA-455-33 (FOTP-33) Fiber Optic Cable Tensile Loading and Bending Test
 - EIA-455-41 (FOTP-41) Compressive Loading Resistance of Fiber Optic Cables
 - EIA-455-81 (FOTP-81) Compound Flow (Drip) Test for Filled Fiber Optic Cable
 - EIA-455-82 (FOTP-82) Fluid Penetration Test for Fluid Blocked Fiber Optic Cable
 - EIA-455-104 (FOTP-104) Fiber Optic Cable Cyclic Flexing Test
 - EIA-455-171 (FOTP-171) Attenuation by Substitution Measurement for Short-Length Multimode Graded-Index and Single Mode Optical Fiber Cable Assemblies
 - EIA/TIA-568-B.3 Optical Fiber Cabling Components
 - EIA/TIA-758 Customer Owned Outside Plant Telecommunications Cabling
 - EIA-598-B Optical Fiber Cable Color Coding
- American National Standards Institute/Insulated Cable Engineers Association (ANSI/ICEA)
 - ANSI/ICEA S-87-640 Standard for Optical Fiber Outside Plant Communications Cable
- International Telecommunication Union - Telecommunication Standardization Sector (ITU-T)
 - G.652 (11/09) Characteristics of a single-mode optical fiber and cable Telecommunications Industry Association (TIA)
 - G.652 (11/16) Characteristics of a single-mode optical fiber and cable

(In the following subsection .02, delete the submittals that are not required.)

00987.02 Submittals - Within 30 Calendar Days after the execution of the Contract, submit the following:

- Disruption Request according to 00987.04
- Outside plant fiber optic cable according to 00987.10

(Use the following 3 bullets when splicing is required. Do not use these 3 bullets for Traffic Signal Interconnect.)

- Fiber optic jumper/patch cables according to 00987.11.

Insert Project Name Here

- Splice closures and installation instructions according to 00987.12
- Splice trays according to 00987.13.
- Fiber Optics Installer or Fiber Optics Technician Certification according to 00987.30.
- OSP cable installation procedure according to 00987.40(a)
- Fiber optic cable test plan according to 00987.41(a)
- Factory testing according to 00987.41(b)
- Arrival on-site testing according to 00987.41(c)
- Fiber optic cable testing according to 00987.41(d) and (f)

Include the manufacturer's name, model numbers, catalog sheets and other descriptive literature of proposed materials. Provide the catalog sheets and literature including technical data, physical properties and operational description in sufficient detail to demonstrate the Equipment meets these specifications.

(Use the following subsection .04, when Existing System Disruption and Restoration is required.)

00987.04 Existing System Disruption and Restoration - Work of this Contract requires disruptions to the specified existing systems, circuits, and equipment.

Notify the Engineer 14 Calendar Days before existing Ethernet switches are impacted.

Obtain Engineer's approval before disrupting the system. Disruptions will only be considered for non-holiday weekdays between 8 a.m. and 4 p.m. For each written disruption request include the following:

- System(s) to be affected
- Disruption start date and time
- Estimated duration required

(Insert the locations of the existing systems that require disruption)

Existing systems that require disruption include the following:

-
-

Do not disrupt any other communication systems not listed or approved.

Materials

00987.10 Outside Plant Fiber Optic Cable - Furnish and install outside plant (OSP) single mode fiber optic (SMFO) cable containing single mode dual window (1310 nm and 1550 nm) fibers.

(a) Optical Fiber - Meet optical, mechanical and environmental requirements for all usable fibers in buffer tubes.

Insert Project Name Here

(b) Fiber Characteristics and Tests - Meet the requirements in Table 00987-1 for single mode fibers:

Table 00987-1

Fiber Characteristic Table	
Parameters:	Single Mode
Type:	Step Index
Core diameter:	8.3 μm (nominal)
Cladding diameter	125 $\mu\text{m} \pm 1.0 \mu\text{m}$
Core to cladding offset:	$\leq 1.0 \mu\text{m}$
Coating:	dual layer, UV-cured acrylate strippable mechanically or chemically without damaging fibers
Optical fibers:	doped silica core with concentric silica cladding
Coating diameter:	250 $\mu\text{m} \pm 15 \mu\text{m}$
Cladding non-circularity defined as:	$\leq 2.0\%$ [1-(min. cladding dia÷max. cladding dia.)]x100 FOP cable: all dielectric, gel-filled or water blocking tape, duct-type
Proof/Tensile Test:	345 MPa, min
Attenuation at 1310 nm:	$\leq 0.4 \text{ dB/km}$
Attenuation at 1550 nm:	$\leq 0.4 \text{ dB/km}$
Design Standard:	ANSI/ICEA S-87-640
Test cable according to:	EIA-455-25 (FOTP-25) EIA-455-33 (FOTP-33 Condition II) EIA-455-41 (FOTP-41) EIA-455-81 (FOTP-81) EIA-455-82 (FOTP-82) EIA-455-104 (FOTP-104 Conditions I and II)
Test optical fiber according to:	EIA-455-3A (FOTP-3)
Attenuation at the Water Peak:	$\leq 2.1 \text{ dB/km @ } 1383 \pm 3 \text{ nm}$
Chromatic Dispersion	
Zero Dispersion Wavelength:	1301.5 to 1321.5 nm
Zero Dispersion Slope:	$\leq 0.092 \text{ ps}/(\text{nm}^2 \cdot \text{km})$
Maximum Dispersion:	$\leq 3.3 \text{ ps}/(\text{nm}^2 \cdot \text{km})$ for 1285 – 1330 nm $\leq 0.092 \text{ ps}/(\text{nm}^2 \cdot \text{km})$ for 1550 nm
Cut-Off Wavelength:	$< 1250 \text{ nm}$
Mode Field Diameter	9.3 $\pm 0.5 \mu\text{m}$ at 1310 nm
Petermann II	10.5 $\pm 1.0 \mu\text{m}$ at 1550 nm

(c) Color Coding - Distinguish each fiber from others in the same tube or cable by means of color coding according to the following:

- | | |
|----------------|---------------|
| 1. Blue (BL) | 7. Red (RD) |
| 2. Orange (OR) | 8. Black (BK) |

- | | |
|---------------|-----------------|
| 3. Green (GR) | 9. Yellow (YL) |
| 4. Brown (BR) | 10. Violet (VL) |
| 5. Slate (SL) | 11. Rose (RS) |
| 6. White (WT) | 12. Aqua (AQ) |

Target colors according to the Munsell color shades and comply with EIA/TIA-598.

The color formulation needs to be compatible with the fiber coating and the buffer tube filling compound, be heat stable, not fade, smear, be susceptible to migration, and not affect the transmission characteristics of the optical fibers and not cause the fibers to stick together.

(d) Cable Construction - Furnish fiber optic cables with the following components:

(1) Buffer Tubes - Provide clearance in the loose buffer tubes with fibers and the inside of the tube to allow for expansion without constraining the fiber. The fibers are to be loose or suspended within the tubes. Do not adhere the fibers to the inside of the buffer tube. Do not exceed a maximum of 12 fibers in each buffer tube. Furnish the number of fibers per cable as shown.

Extrude loose buffer tubes from a material having a coefficient of friction sufficiently low to allow free movement of the fibers. Furnish material that is tough and abrasion resistant to provide mechanical and environmental protection of the fibers, yet designed to permit safe intentional "scoring" and breakout, without damaging or degrading the internal fibers.

Furnish buffer tube filling compound that is a water blocking tape or gel based filling compound with anti-oxidant additives to prevent water intrusion and migration homogenous hydrocarbon. Furnish filling compound that is non-toxic, dermatologically safe to exposed skin, as well as chemically and mechanically compatible with all cable components, non-nutritive to fungus, non-hygroscopic and electrically non-conductive. Furnish filling compound free from dirt and foreign matter and be readily removable with conventional nontoxic solvents.

Strand buffer tubes around a central member by a method, such as reverse oscillation stranding process that will prevent stress on the fibers when the cable jacket is placed under strain.

(2) Central Member - Furnish a central member that functions as an anti-buckling element that is a glass reinforced plastic rod with similar expansion and contraction characteristic as the optical fibers and buffer tubes. To ensure the proper spacing between buffer tubes during stranding, a symmetrical linear overcoat of polyethylene may be applied to the central member to achieve the optimum diameter.

(3) Filler Rods - Fillers may be included in the cable to maintain the symmetry of the cable cross section. Furnish filler rods that are solid medium or high-density polyethylene. Filler rods are to be the same diameter as the outer diameter of the buffer tubes.

(4) Stranding - Strand completed buffer tubes around the over-coated central member using stranding methods, lay lengths and positioning such that the cable

meets mechanical, environmental and performance specifications. A polyester binding is to be applied over the stranded buffer tubes to hold them in place. Apply binders with sufficient tension to secure the buffer tubes to the central member without crushing the buffer tubes. Furnish a binder that is non-hygroscopic, non-wicking, and dielectric with low shrinkage.

(5) Core and Cable Flooding - Furnish a cable core that contains a water blocking tape material to prevent water ingress and migration. Furnish water blocking tape material that is either a polyolefin-based compound, that fills the cable core interstices, or an absorbent polymer, that fills voids and swells to block the ingress of water. The flooding compound or material needs to be homogeneous, non-hygroscopic, non-conductive, and non-nutritive to fungus. Furnish compound or material that is nontoxic, dermatologically safe and compatible with other cable components.

(6) Tensile Strength Member - Furnish tensile strength by high tensile strength aramid yarns or fiberglass, that are helically stranded evenly around the cable, core and not adhere to other cable components.

(7) Ripcord - Furnish cable that contains at least one ripcord under the jacket for easy sheath removal.

(8) Outerjacket - Furnish jacket that is free of holes, splits, and blisters and be medium or high density polyethylene, or medium density cross linked polyethylene with minimum nominal jacket thickness of 1 mm $\pm$ 0.076 mm. Apply jacketing material directly over the tensile strength members and water blocking materials and not adhere to the aramid strength material. The polyethylene needs to contain carbon black to provide ultraviolet light protection and not promote the growth of fungus.

Mark the jacket or sheath with the manufacturer's name, the words "Optical Cable", the number of fibers, "SM", year of manufacture, and sequential measurement markings every meter. The marking is to be of contrasting color to the cable jacket.

(e) Packaging and Shipping Requirements - Pack completed cable on reels for shipment. Wrap cable in weather and temperature resistant covering. Seal both ends of cable to prevent ingress of moisture. Secure each cable end to the reel to prevent the cable from coming loose during transit. Have at least 6 feet of cable length accessible for testing purposes.

Label each cable reel with a durable, weatherproof label showing manufacturer's name, cable type, actual length of cable on the reel, Contractor's name, contract number, and reel number. Include a shipping record in a weatherproof envelope showing the above information and include the date of manufacture, cable characteristics (size, attenuation, bandwidth), factory test results, cable identification number and any other pertinent information.

Minimum hub diameter of reel needs to be at least thirty times the cable diameter. Fiber optic cable is to be continuous length on each reel. Mark reel indicating direction reel should be rolled to prevent loosening of cable.

Provide installation procedures and technical support information at delivery.

(Use the following subsection .11 when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

00987.11 Fiber Optic Jumpers/Patch Cable - Furnish a minimum of 2 duplex or 4 simplex jumper cables in each cabinet that has new or modified fiber optic cable installation. Use jumpers of simplex or duplex design. Use duplex jumpers of duplex round cable construction. Use jumpers that are at least 6 feet in length, sufficient to avoid stress and allow orderly routing. Use an outer jacket of duplex jumpers that is yellow in color. Use the two inner simplex jackets that are contrasting colors to provide easy visual identification of polarity. Store jumpers within the cabinets. The Agency will connect at the time of commissioning.

Use connectors that are ceramic ferrule for single mode fiber with ultra-physical contact (UPC) polishing, type as shown. Furnish connector body housing that is glass-reinforced polymer. The associated coupler is to be of the same material as the connector housing. Each connector is not to exceed 0.75 dB loss as specified by EIA/TIA-568-B.3.

(Use the following subsection .12 when splicing is required. Do not use this subsection for Traffic Signal Interconnect. Delete the language in purple parentheses that does not apply and delete all purple parentheses. Fill in the blanks with the appropriate quantity of cables, splice trays and the diameter of cables.)

00987.12 In Handhole Splice Closures - Enclose the fiber optic field splices in splice closures, complete with splice organizer trays, brackets, clips, cable ties, seals and sealant, as needed. Furnish splice closures suitable for (aerial) (or) (direct burial) application. Supply the Manufacturer's installation instructions to the Engineer prior to the installation of any splice closures. Furnish splice closures that meet the following requirements:

- Non-filled thermoplastic case
- Rodent proof, waterproof, re-enterable and moisture proof
- Expandable from ____ cables per end to ____ cables per end by using adapter plates if necessary
- Cable entry ports that accommodate ____ inch to ____ inch diameter cables
- Multiple grounding straps
- Accommodate up to ____ splice trays
- Suitable for butt or through cable entry configurations
- Place no stress on finished splices within the splice trays

Attach the splice closure to the inside wall of the handhole.

(Use the following subsection .13 when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

00987.13 Splice Trays - Furnish splice trays that accommodate a minimum of 12 fusion splices and allow for a minimum bend radius of 1-3/4 inches. Loop individual fibers one full turn within the splice tray to allow for future splicing. Do not apply stress on the fiber when it is located in its final position. Secure buffer tubes near the entrance of the splice tray. Secure buffer tubes with channel straps.

Insert Project Name Here

Furnish splice trays of the same manufacturer as the splice closure or fiber distribution panel depending on use.

00987.14 Warning Tags - Furnish warning tags with a long life material, orange in color, and marked in a permanent and consistent manner with black lettering.

Include the text "CAUTION FIBER OPTIC CABLE" on all warning tags and show the cable fiber count.

Attach warning tags to fiber optic cables using UV-resistant zip ties according to the manufacturer's recommendations. Do not affix in a manner that causes damage to the fiber.

Attach warning tags to the cables in at least two locations in junction boxes and handholes, and at least one location in cabinets.

00987.15 Labels - Use labels to identify cables and jumpers and patch cords at all termination points, junction boxes, handholes, and cabinets. Use labels to identify all communications equipment and devices in junction boxes, handholes, and cabinets. Use yellow or white colored labels with permanent black lettering. Mechanically imprint labels, do not use handwritten labels.

Use tubular plastic labels on cables and jumpers and patch cords. Label duplex jumpers to provide a visual distinction between the two fibers. Furnish labels with the following information:

- Owner
- Number of fibers
- Fiber number
- Cable origin
- Cable destination

Labor

00987.30 Personnel Qualifications - Individuals performing fiber optic installation are to possess either a Fiber Optics Installer or Fiber Optics Technician Certification recognized by the Electronics Technicians Association (ETA) or a Fiber Optics for ITS certificate from the International Municipal Signal Association (IMSA). Submit a copy of certification to the Engineer prior to performing any work.

Construction

00987.40 Fiber Optic Cable Installation and Setup:

(a) OSP Cable Installation - Submit a fiber optic cable installation plan including the manufacturer's recommended procedures for pulling fiber optic cable for review 30 Calendar Days of execution of the Contract. Use mechanical aids to install cable. Place tension measuring device or breakaway swivel between ends of cable grip and pull rope to ensure tension does not exceed 80 percent of recommended tension or 500 pounds,

whichever is less. Use cable grips with a ball bearing swivel for installing fiber optic cable to prevent cable from twisting during installation.

During installation, maintain a minimum bend radius of 20 times the outside diameter of the cable per EIA/TIA-568-B.3. Do not stress the cable beyond the minimum bend radius. Install fiber optic cable using cable pulling lubricant as recommended by the manufacturer. Use a non-abrasive pull tape. Station personnel at each splice vault and hand hole to lubricate the cable and prevent kinking or other damage. Install fiber optic cable without splices, except as specifically allowed for on the plans, as described herein, or as directed. Divide slack equally on each side of splice closures. Following installation of cable in conduit, seal all entrances in cabinets, junction boxes and vaults with duct sealing compound to keep out moisture, foreign materials, and rodents.

(Use the following subsection .40(b) when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

(b) Splicing - Use fusion type splices for all optical fibers that do not exceed a maximum optical attenuation of 0.3 dB per splice as required by EIA/TIA-568-B.3. Place completed splices in a splice tray. Place splice tray in a splice closure unless using a splice enclosure. Protect all splices with a thermal shrink sleeve.

(Use the following subsection .40(c) when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

(c) Cable Terminations - At the splice closure, the cable jacket of the SMFO cable is to be removed exposing the aramid yarn, filler rods, and buffer tubes. The exposed length of the buffer tubes needs to be at least the length recommended by the splice closure manufacturer to allow the tubes to be secured to the splice trays. Secure each buffer tube to the splice tray where it is to be spliced. Remove the remainder of the tube to expose sufficient length of the fibers in order to properly install in the splice tray.

Splice and secure fiber optic cable with tie wraps and route to its appropriate fiber distribution unit location.

When applicable, the moisture blocking gel is to be removed from the exposed buffer tubes and fibers. The transition from the buffer tube to the bundle of jacketed fibers is to be treated by an accepted procedure for sleeve tubing, shrink tube and silicone blocking of the transition to prevent future gel leak. Follow manufacturer's installation instructions to ensure that throughout the specified temperature range gel will not flow from the end of the buffer tube if using gel filled fiber optic cable. Strip and prepare the cable for splicing.

All fibers of the fiber distribution panel are to be labeled within the cabinet.

Make a transition with flexible tubing, to isolate each fiber to protect the individual coated fibers. The final transition from bundle to individual fiber tube is to be secured with an adhesive heat shrink sleeve.

00987.41 Fiber Optic Testing:

(Use the following subsection .41(a) when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

(a) Test Plan - Prior to beginning testing, submit for approval copies of installation and test plan detailing methods of installation and testing for all materials, equipment, and systems. At the same time, submit the associated schedule of activities. Notification of approval or rejection will be made within 28 Calendar Days. If the test plan is rejected, submit a revised test plan within 28 Days. Do not begin testing until receiving approval of the test plan by the Engineer. Submit all test results, including results of failed tests or re-tests to the Engineer. Supply all test equipment.

Provide 48 hours notice of intent to proceed prior to commencing each functional or subsystem test. In the notice, provide location(s) of test(s). Conduct environmental tests of field equipment as part of the functional tests. Subsystem testing and inspections are to include visual inspection from damaged or incorrect installation, adjustments, alignments, and measurement of parameters and operating conditions.

(b) Factory Testing - Documentation of compliance with the fiber specifications as listed herein is to be supplied by the original equipment manufacturer. Before shipment, but while on the shipping reel, test 100 percent of all fibers for attenuation. Maintain copies of the results on file by the manufacturer with a file identification number, attached to the cable reel in a waterproof envelope, and submitted to the Contractor and Engineer.

(c) Arrival On-Site Testing - Physically inspect each cable upon delivery. Attenuation test 100 percent of the fibers to confirm that the cable meets the requirements at wavelengths of both 1310 nm and 1550 nm with the Optical Time Domain Reflectometer (OTDR) test equipment. The failure of any single fiber in the cable is cause for rejection of the entire reel. Record test results and compare and file with the copy accompanying the shipping reel in a waterproof envelope. Do not install the cable until completion of this test sequence and the Engineer provides written approval. Submit copies of traces and test results to the Engineer. If the tests are unsatisfactory, the reel of cable is considered unacceptable and all records corresponding to that reel are to be marked accordingly. Replace the unsatisfactory reels of cable with new reels of cable. Test the new reels of cable to demonstrate acceptability. Submit copies of the test results to the Engineer.

(d) Fiber Optic Cable Testing - Testing is to include the tests on elements of the passive fiber optic components: (1) at the factory; (2) after delivery to the project site, but prior to installation; (3) after installation, but prior to connection to any other portion of the system. Provide all personnel, Equipment, instrumentation, and Materials necessary to perform all on-site testing.

Provide documentation of all test results to the Engineer at most 3 Days after the test is completed. At least 21 Calendar Days prior to the arrival of cable on site, provide detailed field testing procedures. In the procedures, include the test involved and the method the tests are to be conducted. Include in the notification the model, manufacturer, configuration, calibration, and alignment procedures for all proposed test equipment

(Use the following subsection .41(e) when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

(e) Outdoor Splices - Verify insertion loss quality of each splice prior to sealing splice closure.

(f) Cable Verification:

(1) OTDR Testing - Once the cabling system has been installed and is ready for splicing, test all fiber links with the OTDR test equipment for attenuation at wavelengths of both 1310 nm and 1550 nm. Index matching gel is not allowed in connectors during testing. Record, date and compare test results and file with previous copies. Submit hard copy printout of traces and test results to the Engineer. Use OTDR test equipment capable of recording and displaying anomalies of at least 0.02 dB. Calibrate the OTDR with traceability to a national metrology unit such as the National Institute of Standards and Technology (NIST).

(Use the following subsection .41(f)(2) splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

(2) Power Meter and Light Source Testing - At the conclusion of the OTDR testing, 100 percent of the fiber links are to be tested end to end with a power meter and light source, according to FOTP-171 and in the same wavelength specified for the OTDR tests. Conduct tests in one direction. Calculate the insertion. Record test results, compared, and filed with the other recordings of the same links. Submit test results to the Engineer. Use a power meter that was calibrated with traceability to the National Institute of Standards and Technology (NIST).

(3) Test Failures -

(Use the following paragraph when splicing is required. Do not use this subsection for Traffic Signal Interconnect.)

If the link loss measured from the power meter and light source exceeds the calculated link loss, or the actual location of the fiber ends does not agree with the expected location of the fiber ends (as would occur with a broken fiber), the FO link is rejected. Replace the unsatisfactory segments of cable, or splices with a new segment of cable or splice. Complete the OTDR testing, power meter and light source testing for the repair to determine acceptability. Submit copies of the test results to the Engineer. The removal and replacement of a segment of cable is interpreted as the removal and replacement of a single continuous length of cable connecting two splices, two connectors. The removal of only the small section containing the failure and therefore introducing new unplanned splices is not allowed.

(Use the following paragraph when splicing is NOT required. Use this paragraph for Traffic Signal Interconnect.)

If the attenuation measured after installation does not match the attenuation measured on-site before installation then the fiber optic link is rejected. Replace the unsatisfactory segments of cable with a new segment of cable. Complete the OTDR testing for the repair to determine acceptability. Submit copies of the test results to the Engineer. The removal and replacement of a segment of cable is interpreted as the removal and replacement of a single continuous length of cable. The removal of only the small section containing the failure and therefore introducing new unplanned splices is not allowed.

(4) Allowed Loss - Evaluate fiber optic cable tests based on the following maximum allowable loss per EIA/TIA-568-B.3:

- Fiber on-reel: 0.40 dB/km at 1310nm and 0.30 dB/km at 1550nm
- Installed fiber: 0.40 dB/km at 1310nm and 0.30 dB/km at 1550nm
- Per connector: 0.75 dB bi-directional average

(Use the following bullet when splicing is required. Do not use this bullet for Traffic Signal Interconnect.)

- Per splice: 0.30 dB bi-directional average

Losses exceeding the above limits are only allowed with written approval from the Engineer.

Measurement

00987.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

00987.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete pay item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the pay items. Also delete the paragraph that begins with "Item (x) includes..." for the corresponding pay item(s) that are being deleted. Select the appropriate unit of measurement, delete the one that does not apply, and delete all purple parentheses. Delete pay item (c) when splicing is NOT required.)

Pay Item

Unit of Measurement

- | | |
|--|----------|
| (a) Telecommunications, Material..... | Lump Sum |
| (b) Telecommunications, Installation | Lump Sum |
| (c) Telecommunications, Splicing and Testing | Lump Sum |

Item (a) includes furnishing outside plant fiber optic cable, fiber optic jumpers, fiber optic patch cable, splice closures, splice trays, and all other Incidental items necessary to complete the Work.

(Use the following paragraph when splicing is NOT required. Use this paragraph for Traffic Signal Interconnect.)

Item (b) includes installation and testing of all materials as shown or specified.

(Use the following paragraph when splicing is required. Do not use this paragraph for Traffic Signal Interconnect.)

Insert Project Name Here

Item (b) includes installation of all materials as shown or specified.

(Use the following paragraph when splicing is required.)

Item (c) includes fiber optic cable splicing and fiber optic testing as shown or specified.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for required submittals and documentation.

No separate or additional payment will be made for replacement of disturbed earthwork, base, and surfacing.

SP00989 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-27-26)**

SECTION 00989 - PHOTOVOLTAIC EQUIPMENT INSTALLATION

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document.

The Work covered under this Section is diverse and this boilerplate may not include Specifications for all the Work or ITS elements on the Project. Modify as necessary by adding, deleting, or revising language for the specific Project requirements. Modifications to this Section, other than deleting language not required, will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00989 is not a Standard Specification and is included in this Project by Special Provision.

Description

(In the following subsection .00, delete the language in purple parentheses that does not apply and delete the purple parentheses.)

00989.00 Scope - In addition to requirements of Section (00960,) (and) (00985) install ITS photovoltaic systems as shown or specified.

00989.01 Regulations, Standards, and Codes - Comply with the following standards where applicable:

- Underwriters Laboratories (UL)

Insert Project Name Here

- 50-2015 - Enclosures for Electrical Equipment, Non-Environmental Considerations
- 83-2017 - Thermoplastic-Insulated Wires and Cables
- 498-2016 – Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures
- 508-2018 – Standard for Industrial Control Equipment
- 508A-2018 - Standard for Industrial Control Panels
- 1059-2001 – Standard for terminal
- 1561-2011 - Standard for Dry-Type General Purpose and Power Transformers
- 1581-2001 - Reference Standard for Electrical Wires, Cables, and Flexible Cords
- 1685-2015 - Standard for Vertical-Tray Fire-Propagation and Smoke-Release Test for Electrical and Optical-Fiber Cables
- 1703-2002 - Standard for Flat-Plate Photovoltaic Modules and Panels
- 1741-2010 - Standard for Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources

(In the following subsection .02, delete the language that does not apply.)

00989.02 Submittals - Submit according to 00150.37, at least 30 Calendar Days after execution of the Contract, the following:

- Photovoltaic Modules according to 00989.10
- Module Mounting Bracket according to 00989.11
- Photovoltaic Module Combiner Cabinet according to 00989.12
- DC Disconnect according to 00989.13
- DC Circuit Breakers according to 00989.14
- Photovoltaic Charge Controller according to 00989.15
- DC Load Controller according to 00989.16
- Batteries according to 00989.17
- Battery Enclosure according to 00989.18
- Controller cabinet according to 00989.19

Include the manufacturer's name, model numbers, catalog sheets and other descriptive literature of proposed materials. Provide the catalog sheets and literature including technical data, physical properties and operational description in sufficient detail to demonstrate the equipment meets these specifications.

Materials

(Use the following subsection .10 when photovoltaic modules are required. Fill in the appropriate blanks.)

00989.10 Photovoltaic Modules - Furnish photovoltaic modules with cables that meet the following requirements:

Insert Project Name Here

Module Characteristic Table	
Maximum Power:	___ Watts or greater
Maximum Voltage:	___ Volts or greater
Maximum Power Point Current:	___ Amps or greater
Open Circuit Voltage:	___ Volts or less
Short Circuit Current:	___ Amps or less
Maximum System Voltage:	___ V
Length:	___ inches maximum
Width:	___ inches maximum
Weight:	___ lbs. maximum
Wind Load Rating:	___ mph minimum

Furnish photovoltaic modules with a minimum combined total of ___ watts at rated maximum power that are UL 1703 listed and be constructed using an anodized aluminum or similar frame.

(Use the following subsection .11 when module mounting brackets are required. Fill in the appropriate blanks.)

00989.11 Module Mounting Bracket - Furnish mounting hardware to mount the photovoltaic modules on the side-of-pole. Furnish bracket sized to fit the modules selected and mount to the metal pole selected. Mount the modules as ___ arrays, with ___ panels on the first array, and ___ panels on the second array. Furnish stainless steel nuts, bolts, washers, and band clamps. The mounting assembly is to be rated for wind loads up to 120 mph and be constructed from anodized aluminum, powder coated aluminum, 304 stainless steel, or 316 stainless steel.

(Use the following subsection .12 when Photovoltaic module combiner cabinet is required.)

00989.12 Photovoltaic Module Combiner Cabinet - Furnish NEMA Type 3R rated, UL 1741 listed enclosures with terminals to combine the photovoltaic modules into one circuit. Protect each photovoltaic module input circuit with an overcurrent protection device sized as shown. Furnish cabinet constructed from anodized aluminum, powder coated aluminum, 304 stainless steel, or 316 stainless steel.

(Use the following subsection .13, when DC disconnects are required.)

00989.13 DC Disconnect - Furnish DC Disconnect that is UL 508 listed for overcurrent protection and has a means for disconnecting the photovoltaic and battery system's circuits. Include DC circuit breakers for protecting the photovoltaic, battery, and load distribution circuits, circuit breaker sizing as shown. Furnish a DC bonding block for grounding.

(Use the following subsection .14, when DC circuit breakers are required.)

00989.14 DC Circuit Breakers - Furnish DC circuit breakers rated for 150V DC minimum, UL 489 listed, and DIN rail mounted. Size circuit breakers and label as shown.

Insert Project Name Here

(Use the following subsection .15, when photovoltaic charge controllers are required. Fill in the appropriate blanks.)

00989.15 Photovoltaic Charge Controller - Furnish a photovoltaic charge controller that meets the following requirements:

Charge Controller Characteristic Table	
Controller Charge Type	Maximum Power Point Tracking
Voltage Step Down Capability	Convert photovoltaic module voltage selected to 12 VDC nominal for battery charging
Maximum Output Current:	__A DC continuous
Charging Regulation	4 stages minimum
Short Circuit Protection:	Electronic with auto-reset
LCD Meter Module:	Photovoltaic Input Voltage
	Photovoltaic Input Current
	Battery Voltage
	Battery Charging Current
	Cumulative amp/watt hours
Operating Temperature Range:	-__ to __ degrees F
Mounting:	Module/Wall
Wire Size:	Capable of accepting __ AWG conductors
Accepted Battery Type:	Sealed AGM
Temperature Compensation:	Furnish an external battery temperature sensor to the charge control set points.
Listing	UL 1741

(Use the following subsection .16, when DC load controller is required. Fill in the appropriate blanks.)

00989.16 DC Load Controller - Furnish a DC load controller that meets the following requirements:

Insert Project Name Here

Load Controller Characteristic Table	
Controller Charge Type	Pulse Width Modulation
Voltage Configuration:	12V DC
Minimum Charging/Load Current:	__ A DC continuous
Charge Regulation:	Solid State
Short Circuit Protection:	Electronic with auto-reset
LCD Meter Module:	Battery Voltage
	Load Current
	Cumulative amp/watt hours
Temperature Range:	-40 to 113 degrees F
Mounting:	Module/Wall
Wire Size:	Capable of accepting __ AWG conductors
Load Control:	Low voltage disconnect and reconnect
Listing	UL 1741

(Use the following subsection .17, when batteries are required. Fill in the appropriate blanks.)

00989.17 Batteries - Furnish a system of batteries that meets the following requirements:

Battery Characteristic Table	
Voltage:	6V DC or 12V DC, 6V DC batteries may be used to form a 12V DC base system.
Type:	Absorbed glass mat (AGM) sealed deep cycle lead acid
24 Hour Rate:	___ amp-hours minimum
Designed Maintenance Life:	_ years
Length:	_ inches maximum
Width:	_ inches maximum
Height:	_ inches maximum
Weight:	_ lbs. maximum

Provide a minimum of ____ amp-hours at rated capacity. This includes ____ Days autonomy factoring in temperature de-rating and discharge limit. Include all clamps, connectors, wiring, and other Incidental Materials as needed to wire and secure batteries.

(Use the following subsection .18, when battery enclosures are required.)

00989.18 Battery Enclosure - Furnish a battery enclosure that is UL 50 listed, Type 3R (ventilated), and be constructed from anodized aluminum, powder coated aluminum, 304 stainless steel, or 316 stainless steel. Place vents near the top of the enclosure to prevent the buildup of gases. Size enclosure to fit all of the batteries required for the system plus 2 additional batteries of the same size for future expansion. Include a 2-or 3-point locking mechanism with an integrated interchangeable lock core.

Insert Project Name Here

Furnish racks or trays that are rigid metal, designed to support the load, treated to be resistant to deteriorating action by the electrolyte, and included with non-conducting members directly supporting the cells.

The battery trays are frames of nonconductive material and constructed or treated so as to be resistant to deteriorating action by the electrolyte.

Furnish battery enclosure that is ground mounted.

(Use the following subsection .19, when controller cabinets are required.)

00989.19 Controller Cabinet - Furnish enclosure constructed from 14-gauge Type 304 or 316 stainless steel, UL 50 listed, Type 3R ventilated, and with a #4 brushed finish. Remove all sharp edges. Include door with continuous hinge, seamless gasket that is liquid-tight, and padlockable. Enclosure dimensions are location specific and shown on plans.

Construction

00989.40 Installation - Install the Equipment as specified, shown, and according to the manufacturer's instructions. Ground the Photovoltaic Power System according to Article 690 of NFPA 70, the National Electrical Code.

00989.41 Photovoltaic Component Identification and Marking - Photovoltaic modules, module combiner, DC disconnect, circuit breakers, charge controller, load controller, batteries, battery enclosure, and wiring are to be marked according to Article 690 of NFPA 70, the National Electrical Code.

Measurement

00989.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

(Use one of the following two options for subsection .90)

[Option 1. Use this subsection .90 if site work needs to be broken out by Pay Items]

00989.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Add additional Pay Item(s) as required for the Schedule of Items.)

Pay Item

Unit of Measurement

- (a) Photovoltaic Equipment Installation, Site _____ Lump Sum
- (b) Photovoltaic Equipment Installation, Site _____ Lump Sum

Payment will be payment in full for furnishing and placing all Materials, labor, and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

No separate or additional payment will be made for:

- Required submittals and documentation
- Assistance for commissioning Equipment and systems

[End Option 1]

[Option 2. Use this subsection .90 if site work does NOT need to be broken out per site.]

00989.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Photovoltaic Equipment Installation".

Payment will be payment in full for furnishing and placing all Materials, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Required submittals and documentation
- Assistance for commissioning Equipment and systems

[End Option 2]

SP00990 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26

Requires SP00960)

SECTION 00990 - TRAFFIC SIGNALS

This Section title is replaced with the following:

SECTION 00990 - TRAFFIC SIGNALS, RAMP METERS, FLASHING BEACONS, INTERCONNECT SYSTEMS & AUTOMATIC TRAFFIC RECORDERS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 00990 of the Standard Specifications modified as follows:

00990.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

In addition to requirements of Section 00960 and Section 00962, install traffic signals, ramp meters, flashing beacons, interconnect systems, and automatic traffic recorders according to the following Specifications.

Insert Project Name Here

(Use the following lead-in paragraph and subsection .10 when inductive loops are used.)

Add the following subsection:

00990.10 Materials - Furnish backer rod materials meeting the requirements of 02440.14. Furnish hot-melt loop sealant from the QPL.

00990.12 Traffic Signal Control Devices - Replace the paragraph that begins "The traffic signal controller ..." with the following paragraph:

Furnish the traffic signal controller cabinet and related green sheet Equipment according to requirements of the current edition of the ODOT *Standard Specification for Microcomputer Signal Controller* and errata.

00990.30 Video/Radar Detector Manufacturer's Representative - Replace this subsection, except for the subsection number and title, with the following:

When video/radar detection is shown, provide the services of a manufacturer's representative on-site within 1 week in advance of the anticipated electrical installation completion date to set-up devices with Agency electrical crew present.

(Use the following lead-in paragraph and subsection .40 when there is work at an existing controller cabinet.)

Add the following subsection:

00990.40 Work in Existing Controller Cabinets - Install new field wiring as shown into the existing controller cabinet without terminating.

New control equipment installed as shown in an existing controller cabinet is tested prior to installation according to 00990.70.

At existing controller cabinets the Agency is responsible for:

- Storage, delivery, installation, and activation of new control equipment
- Any required modifications to existing control equipment or existing field wiring terminations
- Terminating new field wiring

Prior to the anticipated installation of new control equipment, modification of existing control equipment, or modification of existing field wiring terminations, schedule field testing according to 00990.71. Field testing and activation of the new control equipment or modifications will occur within the same work shift. Be present at the Project Site during field testing.

(Use the following lead-in paragraph and subsection .41 when inductive loops are used.)

Add the following subsection:

00990.41 Inductive Loop Detectors:

(a) General - Do not begin sawcutting until the loop layout has been inspected by the Engineer.

Do not place wire in sawcuts until the cuts have been inspected by the Engineer.

(b) Sawcut and Wire Installation - Sawcut in a manner that is the most practicable, direct line between loops and junction boxes.

Immediately after sawcutting and before the cuttings dry, thoroughly flush each cut with a high-pressure water stream. Before the cuts dry, blow cuts free of water, debris, rock, and grit with compressed air. Slots may also be cleaned by means of a high-pressure water injection/vacuum extraction system. Remove rocks or other material that may be wedged in the cut. Remove and dispose of all cuttings according to 00290.20.

Dry cuts before placing wire.

After the sawcut is cleaned of debris, place the loop wire by pushing it into the slot with a blunt nonmetallic object. Use care to avoid damaging the insulation.

(c) Sealant - Install the sealant in slots according to the manufacturer's instructions. Furnish a copy of the manufacturer's specifications including application procedures. The Engineer may order a test run of any application method or material before filling sawcuts.

In order to prevent heat damage to the insulation, do not allow the temperature of the sealant to exceed 410 °F during application. Install hot-melt sealants in layers to prevent damage to wire insulation. Allow each layer to cool before the next layer is installed. Do not use water to accelerate cooling.

Sealants that crack or pull away from the sawcuts after curing will be rejected.

(d) Resistance and Continuity Testing - The resistance to ground of the loop and loop feeder combinations, shall be 500 MΩ or greater when checked at the following conditions:

- Before splicing and sealing - continuity test
- Before splicing after sealing - resistance test
- After splicing and sealing - resistance test

Furnish a report of the resistance and continuity results for each loop at each testing condition.

(Use the following lead-in paragraph and subsection .42(a) when inductive loops are used.)

Add the following subsection:

00990.42(a) Loop Feeder Cables - When terminating loop feeder cable inside the controller cabinet, do not remove the outside jacket and shield more than 6 inches from the end of the cable. Crimp lugs used for loop wire field terminals may be insulated or non-insulated.

Insert Project Name Here

Terminate loop feeder shield drain wire to the cabinet input panel grounding bus nearest the feeder wire termination point.

00990.43 Traffic Control Signs - Replace this subsection, except for the subsection number and title, with the following:

Furnish and install the type of sign and mount as shown, according to the applicable portions of Section 00940.

Add the following subsection:

00990.45 Repair Open Holes in Metal Poles, Pedestals, and Mast Arms - Repair holes in metal poles, pedestals, and mast arms caused by removal of equipment using pipe plugs. For holes larger than 1 inch in diameter or of irregular shape, submit method and materials to be used.

(Use the following lead-in paragraph and subsection .47 when Railroad interconnect is required.)

Add the following subsection:

00990.47 Railroad Interconnect - Run the circuit conductors in underground electrical conduit of the size shown. Terminate the conduit at the Railroad cabinet at the location and in the manner directed by the Railroad company. Extend the ends of the wire at least 3 feet beyond the end fitting of the supplied conduit. All other Work inside the Railroad cabinet is the responsibility of the Railroad.

Do not Work in the immediate vicinity of the Railroad cabinet without first notifying the Engineer and receiving permission. The Agency will obtain supervisory personnel from the Railroad company.

Do not place any Materials or Equipment in the vicinity of the tracks without observing proper clearance (see 00170.01(e)).

00990.50 Signal Covers - Add the following paragraph to the end of this subsection:

Signal covers may be omitted for flashing beacon bid items.

00990.70 Testing and Turn-On - Replace this subsection with the following subsection:

00990.70 Chamber Testing - This Work includes testing Equipment that requires chamber testing.

(a) Delivery of Equipment - Provide all Equipment requiring chamber testing for the Project according to the cabinet print(s), including all associated manuals, diagrams, and other documents. The cabinet print(s) are available from the Engineer. Deliver all Equipment, including wiring diagrams and operation manuals, in one shipment. Partial shipments will not be accepted and returned to the Contractor at no additional cost to the Agency. Include the following information with the Equipment shipments:

Insert Project Name Here

- Contractor
- Location of Equipment on Project (i.e. street names of Intersection or street alignment/name plus station)
- For controller cabinets, TSSU ID number
- Contract number
- Completed Green Sheets

Deliver the Equipment and information for testing to:

Oregon Department of Transportation
Traffic Systems Services Unit
2445 Liberty St. NE
Salem, Oregon 97303-6738

(b) Equipment Requiring Chamber Testing - The following Equipment is tested by the Agency before being installed:

- Controller unit
- Controller cabinet
- Power supplies
- Input devices
- Output devices
- Conflict monitors
- Flasher units
- Relays
- Preemption devices
- Auxiliary Equipment in the controller cabinet
- Other Equipment required for the operation of the installation
- Video/radar/hybrid detection systems
- Equipment listed as “chamber tested” on the green sheets

Equipment is tested at no cost to the Contractor.

The Equipment is tested in three categories: physical, functional, and environmental as specified in the *Standard Specification for Microcomputer Signal Controller*. ODOT will require at least 8 weeks for completion and evaluation of the testing.

(c) Equipment Failure - An Equipment failure is any occurrence that results in non-specified operation of the Equipment.

The Engineer will provide notification of any Equipment failures. Make on-site repairs within 5 Days of receiving the notification.

Following repair of the Equipment, the testing is resumed at the beginning of the test category where the failure occurred.

(d) Equipment Rejection - The Equipment is rejected under either of the following conditions:

(1) Twice Fail - The Equipment fails twice in the same testing category.

(2) Failure to Repair - The Contractor fails to repair the Equipment within 5 Days of receiving notification of the failure.

Pick up rejected Equipment within 10 Days of receiving the rejection notice, or it is returned, at Contractor's cost, to the Contractor.

Replace rejected Equipment with Equipment having a different serial number.

Rejected Equipment will not be accepted for testing or installation on any subsequent project within the State of Oregon.

(e) Equipment Acceptance - Equipment that successfully passes the chamber testing procedure is certified by the Agency as acceptable for installation. Acceptability for installation does not guarantee final acceptance of the completed installation.

The successful completion of the testing does not relieve the Contractor of the responsibility to furnish a complete working electrical installation at the time the Equipment is placed in operation.

The Contractor will be notified when the testing has been completed. Pick up the controller cabinet and video/radar/hybrid detection systems at the test facility.

(f) Controller Cabinet Control Equipment Installation - Be responsible for pick-up, delivery and installation of the controller cabinet and video/radar/hybrid detection systems.

The Agency is responsible for delivery and installation of the other control Equipment, such as controller units, input devices, switch packs, monitor units, miscellaneous plug-in devices and auxiliary devices not physically wired to the controller cabinet.

Equipment that the Agency installs is stored at the test facility until the electrical installation is ready to be turned on.

Add the following subsection:

00990.71 Field Testing - Field testing of electrical installations is performed by Agency electrical crews. Notify the Engineer one week in advance of the anticipated electrical installation completion date.

Field testing is performed within one week following the date of completion. The Engineer will notify the Contractor of the test results.

Information on Agency field testing procedures is available from the Engineer.

Add the following subsection:

00990.72 Turn-on - This Work includes turning on completed electrical installations.

(a) General - The Engineer establish the date and time the electrical installation is to be turned on. The Agency will turn on the electrical installation within one week after completion of corrections identified during field testing.

Be present at the Project Site the date of the turn-on, for the duration of the turn-on process.

After electrical installations are turned on and operating as designed, the agency responsible for maintenance assumes operation and maintenance of the electrical installation. Turn-on does not constitute final approval. The Contractor is still obligated to finish any incomplete portion of the electrical installation and correct problems with workmanship or replace material that does not meet Specifications. After turn-on, damage to the electrical installation caused by conditions beyond the Contractor's control is the responsibility of the maintaining agency.

(b) For Traffic Signals, Ramp Meters, and Automatic Traffic Recorders - The Agency is responsible for providing operating software and timing parameters for traffic signals, ramp meters and automatic traffic recorders. Do not turn on electrical installations without the Agency provided timing parameters.

(c) For Flashing Beacons and Other Electrical Installations - The Agency is responsible for providing the timing and setting parameters for the following flashing beacons and other electric installations as listed in the Green Sheets:

- 24/7 flashing beacon assembly, yellow + speed feedback
- Actuated flashing beacon assembly (all subcategories)
- Rectangular rapid flashing beacon (RRFB) assembly
- Unintegrated speed feedback assembly

Do not turn on electrical installations without the Agency provided parameters.

(Use the following subsection .80 when unintegrated speed feedback assemblies are required.)

00990.80 Measurement – Add the following paragraph to the end of this subsection:

Unintegrated speed feedback assemblies will be measured according to 00991.80.

00990.90 Payment - Replace the paragraph that begins "In items (a), (b), (c) ..." with the following paragraph:

In items (a), (b), (c), (e), and (f), the intersection location is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Insert Project Name Here

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

(Use the following paragraph and bullet when installing conduit on or in a structure)

In the paragraph that begins “No separate or additional payment will be...”, add the following bullet to the bullet list:

- Conduit installed according to 00960.42(f)

(Use the following paragraph when crosswalk closure supports are required.)

Add the following paragraph to the end of this subsection:

Crosswalk closure supports will be paid for according to 00902.90.

(Use the following paragraph when unintegrated speed feedback assemblies are required.)

Add the following paragraph to the end of this subsection:

Unintegrated speed feedback assemblies will be paid for according to 00991.90.

SP00991 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP00960 & SP00990)

SECTION 00991 – UNINTEGRATED SPEED FEEDBACK ASSEMBLY

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 00991 is not a Standard Specification and is included in this Project by Special Provision.

Description

00991.00 Scope - This Work consists of installing an Unintegrated speed feedback assembly as shown. Refer to Section 00990 for integrated speed feedback assemblies.

00991.01 Definitions -

Insert Project Name Here

Unintegrated - A stand-alone electrical device that is not integrated with any other electrical devices on the same support.

Materials

00991.10 Materials - Furnish Materials meeting the following requirements:

Commercial Grade Concrete.....	00440
Pedestrian pedestal.....	00960.02
Speed feedback sign.....	00960.02
Signs	00940

Construction

00991.40 General - Install pedestrian pedestal foundation according to Section 00960.

Provide and install Unintegrated speed feedback assembly, including the electronic speed feedback sign, as shown.

Furnish and install the static sign according to the applicable portions of Section 00940.

Finishing and Testing

00991.71 Field Testing - Perform field testing of the device according to 00990.71.

00991.72 Turn-on - Perform turning on the device according to 00990.72.

Measurement

00991.80 Measurement - The quantities of Unintegrated speed feedback assembly will be measured on the unit basis.

Signs installed on the assembly that are shown on the sign and post data table will be measured according to 00930.80 and 00940.80.

Payment

00991.90 Payment - The accepted quantities of Work done under this Section will be paid for at the Contract unit price, per each, for the item "Unintegrated Speed Feedback Assembly".

Payment will be payment in full for furnishing and placing all Materials, including support, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Signs installed on the assembly that are shown on the sign and post data table will be paid for according to 00930.90 and 00940.90

SP01010 (Special Provisions for the 2024 Book) **(Bidding on or after: 08-01-26)**

SECTION 01010 - STORMWATER CONTROL, WATER QUALITY STRUCTURES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Be sure to include a separate bid item for each water quality Structure identified by the Drainage Facility Identification Number (DFI).)

Section 01010 is not a Standard Specification and is included for this Project by Special Provision.

Description

01010.00 Scope - This Work consists of furnishing and installing a Water Quality Structure as shown.

01010.02 Definitions:

Water Quality Structure - An underground self-activating Structure with no moving mechanical parts or external power sources that removes pollutants from stormwater runoff and retains the pollutants in the Structure.

01010.03 Submittals - Furnish Water Quality Structures from the QPL or an approved equal according to 00160.05.

Furnish the following Water Quality Structures as indicated in Table 01010-1:

(Fill in the table for each water quality structure with one of the following treatment categories: "sediment pretreatment", "oil treatment", "suspended solids treatment", "dissolved metals treatment", or "phosphorous treatment". Obtain the types from the Designer.)

Table 01010-1

Drainage Facility Identification Number	Location (Station)	Stormwater Control Facility Treatment Category	Manufacturer's Model Number

Insert Project Name Here

Submit the following according to 00150.35:

- Unstamped Working Drawings that include the following information:
 - All design and construction details.
 - Structure plan view with dimensions.
 - Typical section with dimensions.
 - All appurtenances labeled.
 - Installation and pipe connection details.
 - Peak flow bypass details.
- Manufacturer prepared product brochures.
- Design calculations showing the water quality design flow rate and online peak flow rate requirements for each Water Quality Structure listed in the Table 01010-2.

(Fill in the table for each water quality structure. Obtain information from the Designer.)

Table 01010-2

Drainage Facility Identification Number	Location (Station)	Contributing Impervious/Drainage Area (Acres)	On-line or Off-line	Water Quality Design Flow Rate (cubic feet per second)	On-line Water Quality Structure Peak Flow Rate (cubic feet per second)

Materials

01010.11 Facility Field Markers - Furnish Type S3 field markers according to 00842.10.

Construction

01010.40 General - Construct Water Quality Structures according to the manufacturer's recommendations and as shown or directed.

01010.41 Pipe connections - Place connecting pipe at the required alignment and grade. Set the connecting pipe through the full thickness of the wall and flush with the inner face of the wall. Ensure that pipe connections to the Structure are watertight. Connect all pipes to Water Quality Structure according to the manufacturer's recommendations.

01010.42 Facility Field Markers - Install field markers as shown and according to Section 00842.

Maintenance

Insert Project Name Here

01010.70 Cleaning - Remove all accumulated sediment and debris before completing the facility.

Measurement

01010.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Field facility markers will be measured according to 00842.80.

Payment

01010.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Water Quality Structure, _____".

The drainage facility identification number is inserted in the blank.

Field facility markers will be paid for according to 00842.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01011 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP00842, SP01030, SP02320 & SP03020)

SECTION 01011 - STORMWATER CONTROL, PONDS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01011 is not a Standard Specification and is included for this Project by Special Provision.

Description

01011.00 Scope - This Work consists of furnishing and installing stormwater ponds as shown.

Materials

(Delete material items that do not apply and include other materials as necessary.)

Insert Project Name Here

01011.10 Materials - Furnish Material meeting the following requirements:

Concrete	00440
Drainage Geotextile, Type 1	02320
Facility Field Markers	00842.10
Granular Drain Backfill	00430.11
Manholes, Catch Basins, and Inlets	00470.11
Riprap	00390.11
Riprap Geotextile, Type 1	02320
Storm Sewer Pipe	00445.11
Subsurface Drain Pipe	00430.10

(Use the following subsection .11 when porous pavers are required. Fill in the blank with one of the following types of pavers to use only in storage ponds: heavy duty, medium duty, or light duty. Obtain the type to use from the Designer.)

01011.11 Porous Pavers - Furnish _____ porous pavers from the QPL.

01011.12 Water Quality Mixture - Furnish medium compost meeting the requirements of Section 03020. Furnish soil meeting the following gradation requirements:

Sieve Size	Percent Passing (by Weight)
No. 4	100
No 10	95 - 100
No. 40	40 - 60
No. 100	10 - 25
No. 200	5 - 10

Sample soil according to AASHTO R 90. Determine sieve analysis according to AASHTO T 27 and AASHTO T 11.

Blend the medium compost and soil so that the mixture:

- Is composed of between 20 percent and 25 percent medium compost material and between 75 percent and 80 percent soil material.
- Has a pH between 5.5 and 8.0.
- Does not have clumps greater than 3 inches in any direction.

Construction

01011.40 General - Construct storage facility as shown. Perform excavation and fine grading work only when the facility area is dry and only from the top of the pond area. Do not stockpile material in the facility area.

01011.41 Storage Pond - Scarify the subsoil area a minimum 12 inches deep. After scarification, place the water quality mixture in maximum 12-inch Lifts. Compact each Lift with a water filled landscape roller.

Insert Project Name Here

01011.42 Bioretention Pond:

- (a) **Scarify** - Scarify the subsoil area a minimum 12 inches deep.
- (b) **Laying Pipe** - Lay the pipe according to Section 00445. Place pipe with perforations down unless otherwise directed.
- (c) **Joining Pipe** - Fasten pipes together with coupling fittings or bands as specified for the type of pipe used. Cap the upstream end of the pipe.
- (d) **Inspection and Repair** - Place Type 2 water quality mixture only after all the pipe is laid, joined, and inspected. Remove and reinstall or replace all pipe that is out of alignment, has settled, or is damaged at no additional cost to the Agency.
- (e) **Placement of Water Quality Mixture** - Place water quality mixture in maximum 12-inch Lifts. Compact each Lift by using a water filled roller.
- (f) **Seeding** - Seed according to 01030.13.

01011.43 Facility Field Markers - Install field markers as shown and according to Section 00842.

Maintenance

01011.70 Cleaning - If a stormwater control facility is used for erosion and sediment control, remove all accumulated sediment and debris before completing the facility.

Measurement

01011.80 Measurement - No measurement of quantities will be made for Work performed under this Section. The estimated quantities of Materials are:

(Use the following "Storage Pond" heading and item list when Pay Item (a) is included in the Pay Item list below. Identify ponds by the Drainage Facility Identification Number (DFI). List each DFI separately. Obtain the DFI, the items, and the quantities from the Designer. Fill in all the required blanks. Delete items that do not apply. Copy and paste for multiple facilities.)

Storage Pond (DFI) **Quantities:**

Item	Quantity
Excavation	_____ Cu. Yd.
Drainage Geotextile, Type 1	_____ Sq. Yd.
Riprap Geotextile, Type 1	_____ Sq. Yd.
Loose Riprap, Class _____	_____ Cu. Yd.
Water Quality Mixture,	_____ Cu. Yd.
Catch Basin, _____	_____ Each
Concrete Storm Sewer Manhole (Flow Control)	_____ Each
_____ Inch Storm Sewer Pipe	_____ Foot

Insert Project Name Here

Porous Pavers Sq. Ft.

(Use the following "Bioretention Pond" heading and item list when Pay Item (b) is included in the Pay Item list below. Identify ponds by the Drainage Facility Identification Number (DFI). List each DFI separately. Obtain the DFI, the items, and the quantities from the Designer. Fill in all the required blanks. Delete items that do not apply. Copy and paste for multiple facilities.)

Bioretention Pond (DFI) **Quantities:**

Item	Quantity
Excavation	_____ Cu. Yd.
Drainage Geotextile, Type 1	_____ Sq. Yd.
Riprap Geotextile, Type 1	_____ Sq. Yd.
Loose Riprap, Class _____	_____ Cu. Yd.
Granular Drain Backfill.....	_____ Cu. Yd.
Water Quality Mixture	_____ Cu. Yd.
Catch Basin, _____	_____ Each
Concrete Storm Sewer Manhole (Flow Splitter)	_____ Each
_____ Inch Storm Sewer Pipe	_____ Foot
_____ Inch Subsurface Drain Pipe	_____ Foot
Porous Pavers	_____ Sq. Ft.

Field facility markers will be measured according to 00842.80.

Payment

(Delete the "(s)" or parentheses from the word "item(s)", as appropriate.)

01011.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Storage Pond, _____	Lump Sum
(b) Bioretention Pond, _____	Lump Sum

The drainage facility identification number is inserted in the blank.

Field facility markers will be paid for according to 00842.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01012 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

Requires SP00842, SP02320 & SP03020)

SECTION 01012 - STORMWATER CONTROL, WATER QUALITY BIOFILTRATION SWALE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01012 is not a Standard Specification and is included for this Project by Special Provision.

Description

01012.00 Scope - This Work consists of furnishing and installing a water quality biofiltration swale as shown.

Materials

(Delete material items that do not apply and include other materials as necessary.)

01012.10 Materials - Furnish Material meeting the following requirements:

Check Dam, Type 2.....	00280.15(a)
Concrete.....	00440
Drainage Geotextile, Type 1.....	02320
Facility Field Markers	00842.10
Granular Drain Backfill Material.....	00430.11
Manholes, Catch Basins, and Inlets	00470.11
Slope and Channel Liner Matting	00280.14(e)
Riprap.....	00390.11
Riprap Geotextile, Type 1.....	02320
Storm Sewer Pipe	00445.11
Subsurface Drain Pipe	00430.10

(Fill in the blank with one of the following types of pavers: heavy duty, medium duty, or light duty. Obtain the type to use from the Designer.)

01012.11 Porous Pavers - Furnish _____ porous pavers from the QPL.

01012.12 Water Quality Mixture - Furnish medium compost meeting the requirements of Section 03020. Furnish soil meeting the following gradation requirements:

Percent Passing

Insert Project Name Here

Sieve Size	(by Weight)
No. 4	100
No 10	95 - 100
No. 40	40 - 60
No. 100	10 - 25
No. 200	5 - 10

Sample soil according to AASHTO R 90. Determine sieve analysis according to AASHTO T 27 and AASHTO T 11.

Blend the medium compost and soil so that the mixture:

- Is composed of between 20 percent and 25 percent medium compost material and between 75 percent and 80 percent soil material.
- Has a pH between 5.5 and 8.0.
- Does not have clumps greater than 3 inches in any direction.

01012.13 Plastic Board - Furnish plastic board meeting the following requirements:

- Is HDPE or LDPE consisting of recycled plastic.
- Does not contain wood.
- Smooth and free of splinters.
- Includes an ultra-violet inhibitor.

01012.14 Stone Embankment Material - Furnish stone embankment material meeting the requirements of 00330.16 except:

- Furnish a maximum size between 9 inches and 3 inches.
- No large rock fragments are allowed.

01012.15 Slope and Channel Liner Matting - Furnish channel liner matting meeting the requirements of 00280.14(e) for resistance to shear stresses calculated for a 10-year storm event.

Construction

01012.40 General - Construct water quality biofiltration swale facility as shown. Perform excavation, fine grading, and placement work only when the facility area is dry and only from the top of the swale area. Do not stockpile excavated material in the facility area. Perform work in sequence as follows:

(Use one of the following two options as instructed below. Obtain the information from the Designer. Delete the option that does not apply.)

[Option 1 - Use the following subsection .40 when a swale does not have a subsurface drain system.]

(a) Scarify - Scarify the subsoil area a minimum 12 inches deep.

(b) Placement of Water Quality Mixture - Place the water quality mixture in maximum 12-inch Lifts. Compact each Lift with a water filled landscape roller.

(c) Pervious Pavers - Install pervious pavers for full length of swale and full width of channel bottom. Fasten adjoining paver panels together.

(d) Seeding - Seed according to 01030.13.

(e) Slope and Channel Liner Matting - After seeding install slope and channel liner matting as shown or directed.

(Select permanent or temporary for type of check dam. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

(f) Check Dams - Install (permanent/temporary) check dams spaced as shown or directed.

(g) Stone Embankment - Key and embed permanent check dams and rock basin flow Spreaders constructed with stone embankment horizontally into side slopes of swale to a depth not less than 12 inches. Where rock basin flow spreaders embed into side slopes, extend stone embankment 6 inches higher on side slope.

(h) Plastic Boards - Install plastic boards plumb, level and perpendicular to swale flow line. Key and embed plastic boards horizontally into side slopes of swale to a depth not less than 12 inches. Where plastic board embeds into side slope, extend stone embankment 6 inches higher than plastic boards on both sides of boards on side slope.

[End Option 1]

[Option 2 - Use the following subsection .40 when a swale does have a subsurface drain system.]

(a) Scarify - After excavation scarify the subsoil area a minimum 12 inches deep.

(b) Laying Pipe - Lay the pipe according to Section 00445. Place pipe with perforations down.

(c) Joining Pipe - Fasten pipes together with coupling fittings or bands as specified for the type of pipe used. Cap the upstream end of the pipe.

(d) Inspection and Repair - Place the water quality mix only after all the pipe is laid, joined, and inspected. Remove and reinstall or replace all pipe that is out of alignment, has settled, or is damaged at no additional cost to the Agency.

(e) Placement of Water Quality Mixture - Place the water quality mixture in maximum 12-inch Lifts. Compact each Lift with a water filled landscape roller or approved equal.

(f) Pervious Pavers - Install pervious pavers for full length of swale and full width of channel bottom. Fasten adjoining paver panels together. Infill pervious pavers with water quality mixture to depth as shown or directed.

Insert Project Name Here

(g) **Seeding** - Apply seed according to 01030.13.

(h) **Slope and Channel Liner Matting and Seeding** - After seeding install slope and channel liner matting as shown or directed.

(Select permanent or temporary for type of check dam. Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

(i) **Check Dams** - Install (permanent/temporary) check dams spaced at intervals as shown or directed.

(j) **Stone Embankment** - Key and embed permanent check dams and rock basin flow spreaders constructed with Stone Embankment horizontally into side slopes of swale to a depth not less than 12 inches. Where rock basin flow spreaders embed into side slopes, extend stone embankment 6 inches higher on side slope.

(k) **Plastic Boards** - Install plastic boards plumb, level and perpendicular to swale flow line. Key and embed plastic boards horizontally into side slopes of swale to a depth not less than 12 inches. Where plastic board embeds into side slope, extend stone embankment 6 inches higher than plastic boards on both sides of boards on side slope. Seal bottom of plastic boards to prevent water from flowing under boards.

[End Option 2]

01012.41 Facility Field Markers - Install field markers as shown and according to Section 00842.

Maintenance

01012.70 Cleaning - If a stormwater control facility is used for erosion and sediment control, remove all accumulated sediment and debris before completing the facility.

01012.71 Removal - Remove temporary erosion and sediment control features according to 00280.70 only after water quality vegetation has met the establishment requirements of 01030.60.

Measurement

01012.80 Measurement - No measurement of quantities will be made for Work performed under this Section. The estimated quantities of Materials are:

(Identify swales by the Drainage Facility Identification Number (DFI). List each DFI separately. Obtain the DFI, the items, and the quantities from the Designer. Fill in all the required blanks. Delete items that do not apply. Copy and paste for multiple facilities. Include excavation quantity only when the swale excavation is not part of the Roadway typical section.)

Water Quality Swale ___(DFI)___ Quantities:

Item

Quantity

Insert Project Name Here

Excavation	_____	Cu. Yd.
Drainage Geotextile, Type 1	_____	Sq. Yd.
Riprap Geotextile, Type 1	_____	Sq. Yd.
Loose Riprap, Class _____	_____	Cu. Yd.
Granular Drain Backfill.....	_____	Cu. Yd.
Water Quality Mixture	_____	Cu. Yd.
Ditch Inlet, Type D	_____	Each
Concrete Storm Sewer Manhole (Flow Splitter)	_____	Each
_____ Inch Storm Sewer Pipe	_____	Foot
_____ Inch Subsurface Drain Pipe	_____	Foot
Plastic Board Flow Spreader	_____	Foot
Matting, Type _____	_____	Sq. Yd.
Check Dam, Type 2	_____	Each
Concrete Basin Flow Spreader.....	_____	Each
Rock Basin Flow Spreader with Stone Embankment ...	_____	Cu. Yd.
Rock Basin Flow Spreader with Riprap	_____	Cu. Yd.
Riprap Flow Spreader.....	_____	Each
Porous Pavers	_____	Sq. Ft.

Field facility markers will be measured according to 00842.80.

Payment

01012.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Water Quality Swale, _____".

The drainage facility identification number is inserted in the blank.

(Use the following paragraph when the swale excavation is included in the Roadway excavation quantity.)

Excavation will be paid according to 00330.90.

Field facility markers will be paid for according to 00842.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01013 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP00842 & SP02320

Requires SP02640 when shoulder aggregate is required)

SECTION 01013 - STORMWATER CONTROL, WATER QUALITY BIOSLOPE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple

Insert Project Name Here

text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01013 is not a Standard Specification and is included for this Project by Special Provision.

Description

01013.00 Scope - This Work consists of furnishing and installing a water quality bioslope as shown.

Materials

(Delete material items that do not apply and include other materials as necessary.)

01013.10 Materials - Furnish Material meeting the following requirements:

Drainage Geotextile, Type 1	02320
Facility Field Markers	00842.10
Granular Drain Backfill Material.....	00430.11
Shoulder Aggregate	02640.10
Subsurface Drain Pipe	00430.10

01013.11 Ecology Mix - Furnish an ecology mix composed of the following:

- 3/8" - No. 8 mineral Aggregate gradation meeting the requirements of Section 00680.
- Horticultural grade perlite in a pelletized or granular form, meeting the following gradation:

Sieve Size	Percent Passing (by Weight)
------------	-----------------------------

No. 4	99 - 100
No. 18	30 max
No. 30	10 max

- Agricultural grade dolomite lime in a pelletized or granular form, meeting the following gradation:

Sieve Size	Percent Passing (by Weight)
------------	-----------------------------

No. 8	80 min
No. 60	25 min

- Agricultural grade gypsum consisting of Calcium Sulfate ($\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$) in a pelletized or granular form, meeting the following gradation:

Insert Project Name Here

Sieve Size	Percent Passing (by Weight)
------------	-----------------------------

1/4"	99 - 100
No. 20	20 max

Blend the mineral Aggregate, perlite, dolomite, and gypsum so that the mixture is composed of:

- 3 cubic yards of mineral Aggregate per 1 cubic yard of perlite
- 40 pounds of dolomite per 1 cubic yard of perlite
- 12 pounds of gypsum per 1 cubic yard of perlite

Mix the Aggregate, perlite, dolomite, and gypsum before delivery to the Project. Mix the materials in the presence of the Engineer. Provide at least 5 Calendar Days' notice to the Engineer before beginning mixing.

Construction

01013.40 General - Construct water quality bioslope facility as shown. Perform excavation and placement work only when the facility area is dry. Do not stockpile excavated material in the facility area.

(a) Laying Pipe - Lay the pipe according to Section 00445. Place pipe with perforations upslope.

(b) Joining Pipe - Fasten pipes together with coupling fittings or bands as specified for the type of pipe used. Cap the upstream end of the pipe.

(c) Inspection and Repair - Place the ecology mix only after the pipe is laid, joined, and inspected. Remove and reinstall or replace all pipe that is out of alignment, has settled, or is damaged at no additional cost to the Agency.

(d) Compaction - After placing the ecology mix and shoulder Aggregate, compact by saturating with water.

01013.41 Facility Field Markers - Install field markers as shown and according to Section 00842.

Maintenance

01013.70 Cleaning - Remove all accumulated sediment and debris before completing the facility.

Measurement

01013.80 Measurement - No measurement of quantities will be made for Work performed under this Section. The estimated quantities of Materials are:

(Identify bioslopes by the Drainage Facility Identification Number (DFI). List each DFI separately. Obtain the DFI, the items, and the quantities from the Designer. Fill

Insert Project Name Here

in all the required blanks. Delete items that do not apply. Copy and paste for multiple facilities.)

Bioslope (DFI) Quantities:

Item	Quantity
Excavation	_____ Cu. Yd.
Mineral Aggregate	_____ Cu. Yd.
Perlite	_____ Cu. Yd.
Dolomite	_____ Lbs.
Gypsum	_____ Lbs.
Crushed Shoulder Aggregate	_____ Cu. Yd.
Drainage Geotextile, Type 1	_____ Sq. Yd.
Granular Drain Backfill.....	_____ Cu. Yd.
_____ Inch Subsurface Drain Pipe.....	_____ Foot

Field facility markers will be measured according to 00842.80.

Payment

01013.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Bioslope, _____".

The drainage facility identification number is inserted in the blank.

Field facility markers will be paid for according to 00842.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01014 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP00842, SP01030 & SP03020)

SECTION 01014 - STORMWATER CONTROL, WATER QUALITY FILTER STRIP

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01014 is not a Standard Specification and is included for this Project by Special Provision.

Description

01014.00 Scope - This Work consists of furnishing and installing a water quality filter strip as shown.

(Delete material items that do not apply and include other materials as necessary.)

Materials

01014.10 Water Quality Mixture - Furnish medium compost meeting the requirements of Section 03020. Furnish soil meeting the following gradation requirements:

Sieve Size	Percent Passing (by Weight)
No. 4	100
No 10	95 - 100
No. 40	40 - 60
No. 100	10 - 25
No. 200	5 - 10

Sample soil according to AASHTO R 90. Determine sieve analysis according to AASHTO T 27 and AASHTO T 11.

Blend the medium compost and soil so that the mixture:

- Is composed of between 20 percent and 25 percent medium compost material and between 75 percent and 80 percent soil material.
- Has a pH between 5.5 and 8.0.
- Does not have clumps greater than 3 inches in any direction.

01014.11 Facility Field Markers - Furnish field markers meeting the requirements of 00842.10.

Construction

01014.40 General - Construct water quality filter strip facility as shown. Perform excavation, fine grading, and placement work only when the facility area is dry and only from the perimeter of the filter strip area. Do not stockpile excavated material in the facility area. Scarify the subsoil area a minimum 12 inches deep. After scarification, place the water quality mixture in maximum 12-inch Lifts. Compact each Lift with a water filled landscape roller. Seed according to 01030.13.

01014.41 Facility Field Markers - Install field markers as shown and according to Section 00842.

Maintenance

Insert Project Name Here

01014.70 Cleaning - If a stormwater control facility is used for erosion and sediment control, remove all accumulated sediment and debris before completing the facility.

Measurement

01014.80 Measurement - No measurement of quantities will be made for Work performed under this Section. The estimated quantities of Materials are:

(Identify filter strips by the Drainage Facility Identification Number (DFI). List each DFI separately. Obtain the DFI, the items, and the quantities from the Designer. Fill in all the required blanks. Delete items that do not apply. Copy and paste for multiple facilities.)

Filter Strip (DFI) Quantities:

Item	Quantity
Excavation	_____ Cu. Yd.
Water Quality Mixture	_____ Cu. Yd.

Field facility markers will be measured according to 00842.80.

Payment

01014.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Water Quality Filter Strip, _____".

The drainage facility identification number is inserted in the blank.

Field facility markers will be paid for according to 00842.90.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01030 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP03020.

**Requires SP01040 when topsoil, soil modifiers,
area preparation, soil testing or planting is required.)**

SECTION 01030 - SEEDING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Comply with Section 01030 of the Standard Specifications modified as follows:

01030.02 Definitions - Replace the paragraph that begins "**Noxious Weed** - All Weed ..." with the following paragraph:

Noxious Weed - All Weed designated by the Oregon State Weed Board as injurious to public health, agriculture, recreation, wildlife, or all public or private property. The Oregon Department of Agriculture (ODA) is the authority in determination of Noxious Weed species.

(Use the following subsection .13(a) when alternate labeling for native plant seeds is required. Obtain information from the Erosion Control Designer.)

01030.13(a) Label - Add the following to the end of this subsection:

Provide alternate labeling for native plant seeds as follows:

•

01030.13(d) Inspection - Replace this subsection, except for the subsection number and title, with the following:

Each lot of seed is subject to inspection upon delivery to the Project. Seed that is not labeled or that does not conform to the Specifications is rejected. Replace rejected seed at no additional cost to the Agency.

(Use the following subsection .13(f) to include seed mix formulas. Obtain the information from the Erosion Control Designer. Delete what does not apply. Detail seed mixes according to the following instructions:

- Use the format in .13(f) which follows. Show seeding categories as needed: Permanent Seeding, Temporary Seeding, Wildflower Seeding, Plant Seeding, Water Quality Seeding, Wetland Seeding, or Native Plant Seeding. To add more categories, blank columns, or lines, copy from the blank seeding category below.*
- Fill in the botanical and common names and the PLS seeding rate. For Oregon Certified Seed, show an asterisk (*) at the beginning of the botanical name.*
- For several mixes within the same category, use (Category Name) Seed Mix No. 1, No. 2, etc. and each mix will be a bid item. When using these numbered mixes, a brief mix description may also be added that doesn't show in the bid item name. An example is Wetland Seeding, Mix No. 1 (Emergent Areas.)*
- When more than one seed mix needs to be specified but quantities seem too small to be more than one bid item, this format can be used: Under a single bid item such as Wetland Seeding, detail multiple mixes by showing Seed Mix A, Seed Mix B, etc. Give an approximate quantity for each mix that equals the quantity of the bid item.)*

01030.13(f) Types of Seed Mixes - Replace the paragraph that begins "Seed mixes, quantities ..." with the following paragraph:

Insert Project Name Here

Seed mixes, quantities, standards, seeding rates, and other information is included in the Special Provisions for each type of seed mix.

Replace the bullet that begins "**Plant Seeding** ..." with the following bullet:

- **Plant Seeding** - Seeding that typically includes more than just grass species, such as seeds of woody or herbaceous plants.

Add the following to the end of this subsection:

Provide the following seed mix formulas:

- _____ **Seeding:**

Botanical Name (Common Name)	PLS Specified Rate (lb/acre)
---	---

_____	_____
-------	-------

_____	_____
-------	-------

_____	_____
-------	-------

_____	_____
-------	-------

_____	_____
-------	-------

* Oregon Certified Seed

- **Lawn Seeding:**

Name	PLS Specified Rate (lb/acre)
-------------	---

Fine Fescue**	_____
---------------	-------

Perennial Ryegrass**	_____
----------------------	-------

Kentucky Bluegrass**	_____
----------------------	-------

Colonial Bentgrass**	_____
----------------------	-------

** Furnish strong growing, site appropriate, disease resistant varieties

01030.13(g) Availability - Replace this subsection, except for the subsection number and title, with the following:

Provide a list of seed sources for all specified seeds within 60 Calendar Days after execution of the Contract. Verify that all specified seed has been located and is available for use on the Project. Submit the seed and seed mixes to be used on the project according to 00150.37.

01030.14(b) Type of Fertilizer - Replace the paragraph that begins "Provide the following ..." with the following paragraph:

Insert Project Name Here

Furnish the following fertilizer:

01030.14(b)(3) Statewide, Near Water - Replace this subsection, except for the subsection number and title, with the following:

For application within 50 feet of open water, furnish 22-2-11 low-phosphorus fertilizer analyzing 22 percent nitrogen, 2 percent phosphorus, and 11 percent potassium that releases slowly over an eight-to-nine-month period. Furnish fertilizer containing a minimum of 60 percent available water-insoluble, controlled-release nitrogen derived from one of the three sources stated for west of the Cascades above. Furnish phosphorus and potassium that is coated to allow a minimum of 95 percent controlled-release.

(Use the following lead-in paragraph and subsection .14(b)(4) when organic fertilizer is required. Obtain information from the Erosion Control Designer.)

Add the following subsection:

01030.14(b)(4) Organic Fertilizer - Furnish organic fertilizer that analyzes ___ % nitrogen, ___ % phosphoric acid, and ___ % soluble potash. Furnish fertilizer that has no toxicity to sites where it will be applied.

01030.15 Mulch - Replace the paragraph that begins "Furnish mulch Materials ..." with the following paragraph:

Furnish mulch Materials free of all Weed or plant seeds and containing no substances detrimental to plant life. The kind of mulch materials acceptable for use is shown, listed in the Special Provisions, or as approved. Furnish mulch meeting the following requirements:

Add the following paragraph(s) and bullets to the end of this subsection:

Use the following paragraph and bullet(s) to specify other types of mulch not listed in the Standard Specifications, such as composted yard debris. Use the generic name for the mulch and include Specifications, or cite the ODOT QPL if applicable. Obtain information from the Erosion Control Designer.)

Furnish mulch for seeding according to the following:

-

(Use the following paragraph and bullets when hydromulch may be used for temporary erosion control seeding. Obtain the Erosion Control Designer's approval before using.)

Furnish straw mulch for all temporary roadside erosion control seeding, except hydromulch may be used under the following conditions:

- Spring planting west of the Cascades between March 1 and May 15.
- Slopes are steeper than 1V to 1.5H and longer than 16 feet.
- Residential or commercial sites with low erosion potential such as sidewalk, Median, or parking lot planter strips.

Insert Project Name Here

Projects that have variable slopes may include straw mulch and hydromulch when approved.

01030.15(b) Straw - Replace the paragraph that begins "Straw mulch for ..." with the following paragraph:

Straw mulch for non-hydroseeding applications from bentgrass, bluegrass, fescue or ryegrass singly or in combination. Cereal grain straw from barley, oat or wheat may be allowed upon approval of the Agency. Furnish straw that is not moldy, caked, decayed or of otherwise low quality. Submit certification from the Supplier that the straw is free of Noxious Weed seeds or plant parts. Acceptable documentation is any one of the following:

01030.16(a) Liquid Stabilizer Emulsion - Replace this subsection, except for the subsection number and title, with the following:

Tackifier with a base material of liquid, polyvinyl acetate polymers, using emulsion resins and containing not less than 55 percent total solids by weight. Furnish tackifier containing no polyacrylates or polyvinyl acrylics. Furnish an emulsion that, when diluted with water and upon drying, allow exchange of air and moisture to the seeds and have an effective life of 1 year or more.

01030.16(b) Dry Powder Tackifier - Replace the paragraph that begins "Tackifier base consisting ..." with the following paragraph:

Tackifier base consisting of one or more active hydrocolloids from natural plant sources, that hydrates in water and blends with other slurry materials, and upon application and drying tacks the slurry particles to the Soil surface, and exhibits no growth or germination inhibiting factors. Furnish stabilizing emulsion in a dry powder form that may be re-emulsifiable, and consisting of a processed organic adhesive derivative of one of the following:

(Use the following subsection .17 when the Federal Aid Highway Program Biological Opinion is applicable to the project and herbicide use will be allowed. Coordinate with the Region Environmental Coordinator and include the weed control pay item.)

01030.17 Pesticides - Add the following to the end of this subsection:

Do not apply herbicides that include any herbicide carrier (i.e. solvent) other than water or vegetable oil. Utilize only the following herbicides for Project Work:

- aquatic imazapyr
- aquatic glyphosate
- aquatic triclopyr-TEA
- chlorsulfuron
- clopyralid
- imazapic
- imazapyr
- metsulfuron-methyl

Insert Project Name Here

- picloram
- sethoxydim
- sulfometuron-methyl

Apply only the herbicide adjuvants described in Table 01030-1 for Project Work.

Table 01030-1

Adjuvant Type	Trade Name
Surfactant	Agri-Dex
Surfactant	LI 700
Drift Retardant	41-A
Drift Retardant	Vale

01030.40 General - Replace the paragraph that begins "Remove all non-approved ..." with the following paragraph:

Remove all non-approved plants resulting from the seed mixes furnished for the Project at no additional cost to the Agency, including erosion protection required during reseeding.

(Use the following subsection .42 to list Specified Weeds and plant species to be removed. Obtain list from the Erosion Control Designer.)

01030.42 Weed Control - Add the following paragraph and bullets after the paragraph that begins "If a pesticide has been approved for..." and before subsection (a):

The Specified Weeds and plant species to be removed include the following:

-

01030.42(b) Weed Control Inspections - Replace the paragraph that begins "Inspect the Project for new growth..." with the following paragraph:

Inspect the Project for new growth of specified weeds at least monthly and apply weed control measures as appropriate. This requirement may be waived by the Engineer during the period that weeds are fully dormant. To ensure satisfactory Weed removal, the last WMA inspection will occur at least 30 Days after growing has begun or as directed.

01030.42(c)(2) Sensitive Areas - Replace the bullet that begins "Inside Sensitive Areas ..." with the following bullet:

- Inside Sensitive Areas, obtain approval before using wheeled or tracked construction Equipment. Requests are approved only when all vegetation in the area is cleared, such as under new Roadways or slopes.

Replace the bullet that begins "The Engineer..." with the following bullet:

- The Engineer is the authority in the determination of Sensitive Areas.

Insert Project Name Here

(Use the following lead-in paragraph and subsection .42(e) and table(s) when the Federal Aid Highway Program Biological Opinion is applicable to the project and herbicide use will be allowed.)

Add the following subsection:

01030.42(e) Herbicide Application - Obtain written approval from the Engineer prior to application of herbicides in sensitive areas. Apply herbicides at the lowest effective label rates. Mix herbicides a minimum of 150 feet away from natural water bodies. Wash spray tanks a minimum of 300 feet from any natural water body. Utilize a non-hazardous indicator dye during herbicide applications within 100 feet of natural water bodies. Keep spray nozzles as low as possible and utilize the largest droplet size possible in order to minimize drift. Provide documentation of wind speed and direction, air temperature, ground temperature, and date of application to the Engineer within 5 Days of broadcast herbicide applications.

Do not apply herbicides during the following conditions:

- When soil is saturated, except for soil-activated herbicides.
- Within 48 hours prior to and during a forecasted rain event of 0.5 inches or greater in a 24-hour period.
- When wind speeds exceed 10 miles per hour, or are less than 2 miles per hour.
- During temperature inversions.
- When ground temperatures exceed 80 °F.

Adhere to the adjuvant application limitations in Table 01030-2. Regulated work area (RWA) is defined in 00290.34(a).

Table 01030-2

Adjuvant Type	Trade Name	Limitations
Surfactant	Agri-Dex	Do not apply within RWA
Surfactant	LI 700	Do not apply within RWA
Drift Retardant	41-A	Do not apply within RWA
Drift Retardant	Vale	Do not apply within 150 feet of natural water bodies

During herbicide application, adhere to the buffer distance requirements in Table 01030-3 through Table 01030-10.

Table 01030-3: Application Buffer Width for Perennial Streams and Wetlands, and Intermittent Streams and Roadside Ditches with flowing or standing water present, Labeled for Aquatic Use

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
aquatic glyphosate	100 feet	Waterline	Waterline
aquatic imazapyr	100 feet	15 feet	Waterline
aquatic triclopyr-TEA	Not Allowed	15 feet	Waterline

Table 01030-4: Application Buffer Width for Dry Intermittent Streams, Dry Intermittent Wetlands, Dry Roadside Ditches, Labeled for Aquatic Use

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
aquatic glyphosate	50 feet	No buffer	No buffer
aquatic imazapyr	50 feet	No buffer	No buffer
aquatic triclopyr-TEA	Not Allowed	No buffer	No buffer

Table 01030-5: Application Buffer Width for Perennial Streams and Wetlands, and Intermittent Streams and Roadside Ditches with flowing or standing water present, Low Risk to Aquatic Organism

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Imazapic	100 feet	15 feet	RWA boundary
Clopyralid	100 feet	15 feet	RWA boundary
metsulfuron-methyl	100 feet	15 feet	RWA boundary

Table 01030-6: Application Buffer Width for Dry Intermittent Streams, Dry Intermittent Wetlands, Dry Roadside Ditches, Low Risk to Aquatic Organism

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Imazapic	50 feet	No buffer	No buffer
Clopyralid	50 feet	No buffer	No buffer
metsulfuron-methyl	50 feet	No buffer	No buffer

Table 01030-7: Application Buffer Width for Perennial Streams and Wetlands, and Intermittent Streams and Roadside Ditches with flowing or standing water present, Moderate Risk to Aquatic Organism

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Imazapic	100 feet	50 feet	RWA boundary
sulfometuron-methyl	100 feet	50 feet	5 feet
Chlorsulfuron	100 feet	50 feet	RWA boundary

Table 01030-8: Application Buffer Width for Dry Intermittent Streams, Dry Intermittent Wetlands, Dry Roadside Ditches, Moderate Risk to Aquatic Organism

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Imazapic	50 feet	15 feet	RWA boundary
sulfometuron-methyl	50 feet	15 feet	RWA boundary
Chlorsulfuron	50 feet	15 feet	RWA boundary

Table 01030-9: Application Buffer Width for Perennial Streams and Wetlands, and Intermittent Streams and Roadside Ditches with flowing or standing water present, High Risk to Aquatic Organism

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Imazapic	50 feet	15 feet	RWA boundary
sulfometuron-methyl	50 feet	15 feet	RWA boundary
Chlorsulfuron	50 feet	15 feet	RWA boundary

Insert Project Name Here

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Picloram	100 feet	50 feet	50 feet
Sethoxydim	100 feet	50 feet	50 feet

Table 01030-10: Application Buffer Width for Dry Intermittent Streams, Dry Intermittent Wetlands, Dry Roadside Ditches, High Risk to Aquatic Organism

Herbicide	Broadcast Spraying	Spot Spraying	Hand Selective
Picloram	100 feet	50 feet	50 feet
Sethoxydim	100 feet	50 feet	50 feet

01030.43(a) Temporary Seeding - Replace this subsection, except for the subsection number and title, with the following:

Temporarily seed disturbed Soils and slopes that are not at finished grade and are exposed for 2 months or longer before being disturbed again. Provide fertilizer, mulch, water, and other amendments necessary to ensure establishment. Ensure that temporary seeding Work achieves the coverage of live plants required by 01030.60 by the end of the next permanent seeding date stated in 01030.43(b). If this coverage is not achieved, or if the Agency determines that it is not effective in stabilizing the Soil from erosion, stabilize the area with other temporary stabilization methods as described in 00280.42 at no additional cost to the Agency.

(Use the following lead-in paragraph and subsection .44(c) when organic fertilizer is required. Obtain information from the Erosion Control Designer.)

Add the following subsection:

01030.44(c) Organic Fertilizer - Apply organic fertilizer at a rate of ____ pounds per acre at the following locations:

-

(Use the following subsection .45 when soil testing is required.)

01030.45 Soil Testing - Replace this subsection, except for the subsection number and title, with the following:

When the Contract Schedule of Items include items for "soil testing", test soil according to 01040.13.

01030.48(a)(1)b.2. Step 2 - Replace this subsection, except for the subsection number and title, with the following:

Apply mulch and tackifier. Hydromulch, if used as a tracer in Step 1, is included as part of the specified hydromulch rate specified in 01030.48(a)(3).

01030.48(b)(2)a Straw Mulch - Replace the paragraph that begins "Place straw mulch approximately ..." with the following paragraph:

Insert Project Name Here

Place straw mulch approximately 2 inches deep, in loose condition, that requires approximately 2 1/2 Tons per acre of dry mulch, depending on moisture content. Do not use straw mulch on Slopes of 1V:1.5H or steeper.

(Use the following subsection .60 when the "Plant Seeding, ____" or "Native Plant Seeding, ____" Pay Items are included in the Schedule of Items. Delete "(s)" or the parentheses as applicable.)

01030.60 General - Add the following sentence(s) after the last bullet:

(Use the following paragraph when the "Plant Seeding, ____" Pay Item is included in the Schedule of Items. Obtain information from the Erosion Control Designer and fill in the blank.)

The minimum living plant coverage for woody or other plant seeding is ____ percent of ground surface.

(Use the following paragraph when the "Native Plant Seeding, ____" Pay Item is included in the Schedule of Items. Obtain information from the Erosion Control Designer and fill in the blank.)

The minimum living plant coverage for native plant seeding is ____ percent of ground surface.

01030.61(b) All Other Seeding - Replace the bullet that begins "The seeding Establishment Period..." with the following bullet:

- The seeding Establishment Period will end 45 Days after the beginning of the Establishment Period, if the area was seeded within the seeding dates according to 01030.43, and all establishment responsibilities have been met.

Replace the bullet that begins "If the original seeding construction..." with the following bullet:

- If the original seeding construction is completed and accepted outside the permanent seeding dates, the Establishment Period will end 45 Calendar Days after all necessary reseeding is completed and accepted during the following seeding dates according to 01030.43.

01030.62(b)(3) Weed Control - Replace this subsection, except for the subsection number and title, with the following:

Kill and remove Specified Weeds as directed, prior to the Weeds going to seed. Keep WMAs and seeded areas, Weed Free throughout the Establishment Period.

01030.90 Payment . Delete Pay Items (l) and (m) from the Pay Item list.

Replace the paragraph that begins "In items (c) through (i), ..." with the following paragraph:

Insert Project Name Here

In items (c) through (i), the type of seed mix, such as Mix No. 1, if applicable, is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate or additional ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Mobilization for application by blowers, mechanical spreaders, or hand spreading
- Inspections or maintenance
- Seeding mobilization if it is not included in the Contract Schedule of Items

(Use the following two paragraphs when topsoil, wetland soil soil amendments or bio-amendments are required.)

Replace the paragraph that begins "Soil testing will be..." with the following paragraph:

Soil testing, topsoil, wetland soil, soil amendments, and bio-amendments will be paid for according to 01040.90.

SP01040 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP01030 & SP03020.)**

SECTION 01040 - PLANTING

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01040 of the Standard Specifications modified as follows:

01040.02 Definitions: Add the following definitions to the end of this subsection:

Fall - The period beginning on the equinox in September through solstice in December.

Summer - The period beginning on the solstice in June through the equinox in September.

Insert Project Name Here

Replace the paragraph that begins "**Permanent Wilting Point** ..." with the following paragraph:

Permanent Wilting Point - The level of Soil wetness at the point a plant wilts and can no longer recover its sustainable turgidity when placed in a saturated atmosphere for 12 hours.

Replace the paragraph that begins "**Root Protection Zone** ..." with the following paragraph:

Root Protection Zone - A generally circular area around an existing plant to be protected from disturbance or compaction by the use of temporary fencing or other means. The zone as actually staked may exceed the current root area to allow for future growth of the plant. Root Protection Zones are shown or staked before construction activities begin.

01040.03(b) Pesticide Applicators License and Chemical Registration - Replace this subsection, except for the subsection number and title, with the following:

Provide evidence to the Agency that each applicator is licensed for the specific class of chemical being applied. Also, provide evidence that any chemical is registered for the proposed use by the Oregon Department of Agriculture according to ORS Chapters 452, 561, 570, and 634.

01040.04(a) Planting Work Plan – Replace the bullet that begins "Plant installation and..." with the following bullet:

- Plant installation

Add the following bullet to the end of the bullet list:

- Plant establishment plan according to 01040.70

Add the following subsection:

01040.05 Submittals – Submit the following for review and approval:

- Contract Growing Plan according to 01040.19(g).
- Planting work plan according 01040.04(a).
- Plant establishment plan according to 01040.70.
- Weed Control Work Plan according to 01030.42(a).
- Photo log 10 Days after each plant establishment visit and periodic inspection. Provide date stamped photographs in photo log of each plant establishment site visit with photos of multiple individual plants, seeded areas and weed control areas that are sufficiently close to display plant condition and that are representative of the health, vigor and growth of the site plantings.

01040.10 General - Replace this subsection, except for the subsection number and title, with the following:

Submit a list of Project Materials for approval according to 01040.04(a) before arranging for procurement of any Materials. For materials not approved, submit a list of alternate Materials

Insert Project Name Here

for approval. Materials installed without approval are subject to removal and replacement with acceptable Material at no additional cost to the Agency.

Substitute Materials may be allowed if proof of equivalent quality, suitable product specifications, manufacturer's literature and other detailed information is provided to the Agency according to 00140.70.

01040.13(a) Soil Fertility Test and Soil Amendment Report - Replace the paragraph that begins "Prior to planting ..." with the following paragraph:

Prior to planting, provide a Soil fertility analysis of existing Soils performed by a certified testing lab. Prior to planting, adjust Soil amendment and fertilizer applications as recommended by the Soil amendment report and as approved by the Agency.

01040.13(a)(1) Sampling - Replace this subsection, except for the subsection number and title, with the following:

Take five samples per acre of each Soil type. Mix the five samples into one test sample for each Soil type. Provide Soil fertility test results that provide information on available nutrient content and fertility status of the Soil. Conduct sampling procedures according to the Oregon State University Extension Service handout EC 628, *How to Take a Soil Sample... and Why*.

01040.13(a)(3) Soil Amendment Report - Replace this subsection, except for the subsection number and title, with the following:

Provide a report from the testing laboratory summarizing sampling locations and procedures with printed results, and that makes recommendations for fertilizers and Soil amendments to effectively develop productive Soil.

01040.14 Topsoil - Replace the bullet that begins "Provide one 20..." with the following bullet:

- Furnish one 20-pound representative Soil sample of each Topsoil type for testing of particle size range and organic matter by the Agency, unless otherwise specified.

01040.14(a) Selected Topsoil - Replace the paragraph that begins "Furnish native Topsoil ..." with the following paragraph:

Furnish native Topsoil from the required excavations meeting the requirements of 00330.10 or from other Agency-Controlled Lands. The general limits of Topsoil Materials are indicated on the Plans. The Agency will make the final determination of the areas where the most suitable materials exist. Furnish Topsoil that is the fertile part of a Soil profile commonly referred to as the "A" horizon, typically ranging in depth from 3 inches to 12 inches. Do not take material for Topsoil from a depth greater than 12 inches below existing ground, unless approved.

01040.14(c) Wetland Topsoil - Replace the paragraph that begins "Furnish a native..." with the following paragraph:

Furnish a native, naturally hydric Wetland Topsoil consisting of Silts, Clays, and organic matter in combination that is free from substances detrimental to plant growth, such as Noxious Weeds, undesirable plant roots, refuse, sticks, or lumps. Furnish Wetland Topsoil

Insert Project Name Here

that is from a Wetland with an existing, well established, healthy growth of the desired Wetland plants. Obtain approval of the source before excavation of Wetland Topsoil begins.

01040.15 Soil Conditioners - Replace the paragraph that begins "Soil conditioners..." with the following paragraph:

Soil conditioners are for modifying Soil structure and improving Soil aeration characteristics, as distinguished from plant foods, mulch, and Soil organism amendments. Furnish Soil conditioners free of Noxious Weeds, living plants and rhizomes, and substances detrimental to plant life. For mushroom compost and Peat moss only, submit a 15-pound sample for approval by the Agency prior to construction. Furnish Soil conditioners that are free of weed seeds, excessive salts, chemicals detrimental to plant growth, and pest organisms. Soil conditioners proposed for use are subject to testing at any time or place the Agency deems appropriate.

01040.16 Soil Amendments - Replace the paragraph that begins "Soil amendments..." with the following paragraph:

Soil amendments are intended to improve Soil nutrition. Furnish Soil amendments that are free of materials detrimental to plant life. Provide manufacturer or Supplier quality compliance certification according to 00165.35. Ensure that material testing methods meet the requirements of the Oregon Department of Agriculture appropriate to that material. Obtain approval for use before beginning Work. Soil amendments may include the following:

01040.17 Soil Bio-Amendments - Replace the paragraph that begins "Soil bio-amendments..." with the following paragraph:

Soil bio-amendments are intended to increase beneficial Soil organism numbers or Soil organic nutrient content. Furnish bio-amendment products or materials that are free of substances or life forms detrimental to plant life and receive approval prior to use on the Project. Provide manufacturer or Supplier quality compliance certification according to 00165.35. Ensure that material testing methods meet the requirements of the Oregon Department of Agriculture appropriate to that material. The following are typical Soil bio-amendments that may be identified in the Soil bio-amendment report:

01040.18(b) Plant Bags and Tablets - Replace the paragraph that begins "Furnish plant bags..." with the following paragraph:

Furnish plant bags or tablets that are controlled-release with a minimum one-year release period. Chemical formulation, rates and are approved by the Agency.

01040.19(a) Nomenclature - Replace this subsection, except for the subsection number and title, with the following:

Use the most current edition of *Hortus Third*, by Bailey for botanical identification and nomenclature of plant materials. The Agency may authorize use of other references such as the *Sunset Western Garden Book*, the *Flora of the Pacific Northwest*, by Hitchcock, or the *Manual of California Plants*, by Jepson.

Insert Project Name Here

Furnish plants according to the applicable requirements of the current issue of the *American Standard for Nursery Stock*, published by the American Association of Nurserymen. When a conflict exists between this publication and the Specifications, the Specifications will prevail.

01040.19(b) Quality - Replace the paragraph that begins "Provide plants that are healthy..." with the following paragraph:

Furnish plants that are healthy, first-class representatives of their species or variety, free from disease and insect pests, with top growth that is well developed and free of disfiguring knots, sun scalds, bark abrasions, wind or frost injury or any other objectionable features.

Replace the paragraph that begins "Furnish plants that are acclimated..." with the following paragraph:

Furnish plants that are acclimated to the specific Project environmental site conditions prior to planting. Store all container-grown and balled and burlapped plant materials acquired for planting a minimum of 3 months before planting, as specified in 01040.41 or 01040.42, at a location north of the Oregon - California border.

Replace the paragraph that begins "Furnish plants that possess..." with the following paragraph:

Furnish plants that possess top growth and root systems typical to their variety. Furnish trees with central leaders that have a symmetrical, well-branched, straight trunk. Trees with a damaged or missing leader, multiple leaders or Y-crotches, or sheared conifer trees are rejected.

01040.19(c) Certification - Replace the paragraph that begins "Furnish a State..." with the following paragraph:

Provide a State inspection certificate and shipping certificate for each load or lot of plant material that includes the following information:

01040.19(d) Inspection - Replace this subsection, except for the subsection number and title, with the following:

Plants are subject to inspection by the Agency, at any time and place. The Agency will make no plant material inspection at the source, except as it may elect. Notify the Agency of each delivery of plants to the Project site no less than 24 hours ahead of delivery. Do no planting until the plants have been inspected and approved for use. Any planting done without prior approval of the plants is considered in violation of the Specifications.

The presence of Noxious Weeds in the Soil accompanying plants or at the nursery source is cause for rejection of any or all plants from that source.

01040.19(e) Availability - Replace this subsection, except for the subsection number and title, with the following:

Provide a list of nursery sources for all specified plants within 90 Calendar Days after execution of the Contract. Verify, by this list, that all specified plant material has been located

Insert Project Name Here

and is available for use on the Project. If applicable, see 01040.19(g) for alternate requirements.

01040.19(f) Plant Substitution - Replace this subsection, except for the subsection number and title, with the following:

No substitution of plant materials is allowed unless written evidence is submitted that a specified plant or material cannot be obtained and has been unobtainable since the execution of the Contract. If substitution is allowed, it is by written approval from the Agency for the nearest acceptable variety, size and grade. Make any request for substitution in writing to the Agency with ample time for approval without delaying the Work.

(Use the following subsection .19(g) when a contract growing agreement is required.)

01040.19(g) Contract Growing Plant Materials - Add the following sentence to the end of this subsection:

This Project requires a contract growing agreement.

01040.19(h)(2) Deciduous Trees - Replace the paragraph that begins "Trees with leaves that are..." with the following paragraph:

Trees which shed their leaves annually.

01040.19(h)(3) Transplanted Specimen Plants - Replace this subsection, except for the subsection number and title, with the following:

Unique or large plants typically used in low numbers on projects. See the Plans for specimen type, size, and location. Deliver trees to the site that are dormant and with buds that have not yet swelled. Furnish plants that have an unbroken root ball sufficient to sustain continued growth. Ensure that the root ball size conforms to the current edition of the American Standard for Nursery Stock. Furnish plants with no broken limbs or bark abrasions, and cleanly cut off any frayed roots or damaged limbs. Deliver trees that are balled and burlapped, boxed or moved by commercial tree spade.

01040.19(h)(4) Balled and Burlapped (B&B) Plants - Replace the paragraph that begins "Furnish plants with ..." with the following paragraph:

Furnish plants with root balls securely wrapped in burlap or similar mesh fabrics not harmful to plants, and bound with removable twine or wire. Furnish root balls that are firm, intact and held solidly together by a fibrous root system consisting of only the earth where the plant was growing. "Made" balls are rejected.

01040.19(h)(6) Container Grown Plants - Replace this subsection, except for the subsection number and title, with the following:

Plants that are grown and delivered in containers that possess well-formed top growth and whose root growth is typical to the variety.

Insert Project Name Here

Furnish plants that are resident in their delivery containers long enough to have established new fibrous roots, have a root mass that will retain its shape, and hold 90 percent (visual estimate) of the root ball material when removed from their containers. Some root growth should be visible along the outer edges of the container. Root-bound container grown plants and "made" container plants are rejected.

01040.19(h)(7) Seedling Trees - Replace the paragraph that begins "Plants that are grown from seed..." with the following paragraph:

Plants that are grown from seed in a nursery and brought to the site in a bare root condition. Furnish seedlings labeled with age and certification (class number) that shows the length of time grown in a nursery seedbed, followed by the length of time grown in a transplant bed. Furnish seedling trees that are a minimum of 2 years old.

01040.19(h)(9) Plant Cuttings - Replace this subsection, except for the subsection number and title, with the following:

Living, freshly cut branches from certain woody shrub or tree species that readily propagate when embedded in damp Soil. Furnish plant cuttings of regionally native species and dimensions as shown. Obtain written approval of the cutting stock sources before taking any cuttings and provide a brief, written description of the cutting sites and the date and time the cuttings were taken to the Agency. Take cuttings in such a manner so as to leave no long-term damage to the source population. If willow species are called for, select the local native shrub variety.

01040.19(h)(15) Wetland Plants - Replace this subsection, except for the subsection number and title, with the following:

Plants that meet the definition of hydrophyte, that is any macrophyte that grows in water, or on a substrate, that is at least periodically deficient in oxygen as a result of excessive water content.

01040.19(h)(16) Bulbs - Replace this subsection, except for the subsection number and title, with the following:

For the purposes of this section, these will typically include the forms known as bulbs, corms, culms, plantlets, rhizomes, runners, small offsets, stolons and tubers. These plants are collectively referred to as "Bulbs". The appropriate propagule (plant part that can be separated and used to grow another plant) will vary depending on the plant species.

01040.19(h)(17) Sod Lawn - Replace this subsection, except for the subsection number and title, with the following:

Grass sod grown on agricultural land that is commercially cultivated specifically for turf sod. Furnish sod that is free of Weeds, diseases, harmful nematodes and insects. Furnish sod that is mature, not less than 10 months old, and machine cut to a uniform thickness of 5/8 inch or more, excluding top growth and thatch. Broken pieces and torn or uneven ends will not be accepted. Plant sod within 36 hours of harvest.

01040.20 Mulch - Replace this subsection, except for the subsection number and title, with the following:

Furnish plant bed mulch Materials free of Noxious Weed seeds or plants and that contain no substance detrimental to plant life. Mulches are subject to inspection at any time and place at the discretion of the Agency. The following are some types of Materials that fall under the category of "mulch", and may be used on projects:

(a) Bark Mulch - Ground, shredded or broken particles from the bark of fir, pine or hemlock trees that are free of non-bark debris, harmful bacteria, disease spores, pests and substances toxic to plant growth. Furnish mulch that is the standard trade size known as "medium fine mulch".

(b) Cinder Mulch - Crushed lava cinders, screened to an approximate size between 3/16 inch to 5/8 inch. Furnish cinders free of fines and other non-cinder material.

(c) Straw Mulch - Furnish straw mulch according to 01030.15.

(d) Rock Mulch - Round 3/8" - No. 4 pea gravel or round 2" - 3/8" Rock. Furnish Material that is free of fines and other non-gravel material. Rock colors may vary.

(e) Wood Chip Mulch - Mulch that is chipped from cleared site vegetation. Ensure that chipped material is free of any Noxious Weeds or invasive vegetation.

(Use the following paragraph and bullet when the allowable size of wood chip mulch is to be listed in the Special Provisions. Obtain the allowable size range from the Designer.)

Provide wood chip mulch in the following size range:

•

(f) Compost Mulch - Commercially manufactured medium compost material meeting the requirements of Section 03020, unless otherwise approved.

01040.21 Herbicides - Replace the paragraph that begins "The use of herbicide ..." with the following paragraph:

The use of herbicide chemicals is allowed only upon approval of the Agency. Select and apply chemical herbicides according to all applicable Federal, State and local laws, as well as the WCWP requirements of the PWP. The following are standard herbicide functional categories:

(Use the following subsection .22 when pressure moisture stress sensors or moisture retention chemicals are required. Delete "(s)" or parentheses.)

01040.22 Water - Add the following paragraph(s) to the end of this subsection:

(Use the following paragraph when pressure moisture stress sensors are required.)

Provide a pressure moisture stress sensor device for this Project.

(Use the following paragraph when moisture retention chemicals are required.)

Insert Project Name Here

Provide moisture retention chemicals for this Project.

01040.22(b) Moisture Retention Chemicals - Replace this subsection, except for the subsection number and title, with the following:

Granular chemical that are typically cross-linked potassium based polyacrylate or polyacrylamide copolymers. Furnish commercial quality product from the QPL.

01040.23 Miscellaneous Items - Replace the paragraph that begins "Furnish miscellaneous items ..." with the following paragraph:

Furnish miscellaneous items meeting the following requirements or furnish commercial-quality products from the QPL. Obtain approval from the Agency prior to use.

01040.23(g) Tree Stakes and Ties - Replace this subsection, except for the subsection number and title, with the following:

Rough sawn tree stakes of 1 1/2 inches x 1 1/2 inches Douglas fir or pine, construction grade or better. Use stakes 6 feet long for trees less than 8 feet tall, and stakes 8 feet long for trees 8 feet or taller. Stain all tree stakes with an approved, dark green penetrating oil stain. Furnish tree trunk protection of guying material of either a commercially available tree tie or a section of garden hose. Furnish tree guying material of a commercial product manufactured for this use, such as plastic chain, or stainless steel woven-wire with clamp fasteners. Size the guying material appropriate to the size of the tree and the wind factors of the area.

01040.41 Planting Season (West of the Cascades) - Replace the title of this subsection with "Planting (West of the Cascades)".

01040.42 Planting Season (East of the Cascades) - Replace the title of this subsection with "Planting (East of the Cascades)".

01040.44(c) Hauling and Spreading - Replace this subsection, except for the subsection number and title, with the following:

Transport select Wetland Topsoil to the site by any means that meets all applicable regulations related to hauling potentially wet or moist materials. Spread the Topsoil to a depth of 6 inches minimum to 24 inches maximum, or to meet the finished elevations as specified on the Plans. Make as smooth as practicable without excessive Soil compaction. After spreading, have the area inspected and approved by the Agency prior to planting.

01040.45 Soil Amendments - Replace this subsection, except for the subsection number and title, with the following:

Incorporate Soil amendments into the Topsoil when required by the Soil fertility test and Soil amendment report. The application rate is verified by checking settings on the spreading or application Equipment.

01040.46 Bio-Amendments - Replace the bullet that begins "Mycorrhizal Inoculation (Injection) ..." with the following bullet:

- Mycorrhizal Inoculation (Injection) - Furnish pre-measured packets containing live endomycorrhizal and ectomycorrhizal fungi.

Replace the paragraph that begins "The application rate ..." with the following paragraph:

The application rate is verified by visual inspection of application rates. A one-time application should be adequate, as long as pesticides, fertilizers or other toxic materials are not used at the same time. If it becomes necessary to apply pesticides that have non-target organism effects, or to apply fertilizer at rates greater than 13 pounds per acre, re-inoculate the organisms about 1 month after the pesticide or fertilizer was applied.

01040.47 Fertilizers - Replace the paragraph that begins "The application rate ..." with the following paragraph:

The application rate is verified by visual inspection. Provide manufacturer or Supplier quality compliance certification according to 00165.35. Ensure that material testing methods meet the requirements of the Oregon Department of Agriculture appropriate to that material.

01040.48 Planting Area Preparation - Replace the paragraph that begins "All planting areas ..." with the following paragraph:

Provide Weed Free planting areas before planting or seeding operations begin. Identify, kill, and remove Weeds according to 01030.62(b)(3).

01040.48(b) Method "B" (Non-Cultivated Planting Areas) - Replace the paragraph that begins "Finish Wetland mitigation planting ..." with the following paragraph:

Finish Wetland mitigation planting areas to specified finish elevations, blending to existing ground smoothly, as required and directed. Except for projects that are less than 1 year in duration and unless otherwise approved, review the hydrology of the area to be planted for the period November 15 to February 28 prior to planting any Wetland plants. Adjust plant types and planting locations as required or directed, based on the review of site hydrology.

01040.48(c) Method "C" (Sod Lawn and Seeded Lawn Areas) - Replace the paragraph that begins "Furnish the Agency ..." with the following paragraph:

Provide the Agency with sod mixture information and a quality compliance certificate from the sod grower, certifying sod compliance with mixture requirements, according to 01040.10.

01040.49 General Planting - Replace the bullet that begins "Apply bark or wood chip ..." with the following bullet:

- Apply bark or wood chip mulch of the type and depth as shown. Correct contamination of new mulch due to the Contractor's operations at no additional cost to the Agency. Feather mulch into plant material trunks, stems, canes or root collars, and leave 1 inch below the top of junction and valve boxes, curbs and Pavement edges. Any mulch placed to a thickness greater than specified is at no additional cost to the Agency.

01040.50(a)(1) Mechanical Digging - Replace this subsection, except for the subsection number and title, with the following:

Use a tree spade unless otherwise directed. Move only while the tree is dormant. Treat deciduous plants with anti-transpirant prior to excavation. Confirm with the Agency that the

Insert Project Name Here

size of the spade is appropriate to the size and type of tree prior to beginning Work. Dig the receiving hole prior to digging the tree to be transplanted. Take care not to damage the tree bark. Refill the original hole after transplanting. Do not move Oregon White Oak (*Quercus garryana*) by this method.

01040.50(c) Seedling Trees - Replace the paragraph that begins "No pre-staking of planting ..." with the following paragraph:

No pre-staking of planting locations is required. The Agency will be present as planting begins and will approve the spacing, planting method, and areas to be planted before Work can begin. Vary plant spacing in order to allow seedlings to be planted in suitable Soil. During the planting process, remove one tree at a time from the planting bag or other container to prevent drying of roots.

01040.50(g) Plant Cuttings - Replace this subsection, except for the subsection number and title, with the following:

Collect and plant the cuttings while the plant is dormant, generally between October and March. Notify the Agency if conflicts exist with permit requirements. Store all cut material in ventilated plastic containers that allow free flow of water. Protect root systems from excessive drying at all times. Do not store plants in airtight containers.

Plant stock within 4 hours of harvest. If plants are a willow species, plant in the riparian zone on that portion of the slope where the plant stem ends are in contact with year-round moist Soil as determined by the Agency. Make planting holes by forcing a steel bar or similar tool into the ground about 12 inches deep. Place the cuttings into the holes and tamp Soil firmly around the stems, leaving a minimum of 6 inches showing. Vary these dimensions as required for larger plant cuttings.

01040.53(a) Ornamental Plant Bed Areas - Replace the paragraph that begins "Submit a 15-pound ..." with the following paragraph:

Submit a 15-pound sample of bark mulch to the Agency for visual inspection and approval. The approved sample is the standard of acceptability for all mulch used on the Project.

01040.53(b)(3) Compost Blanket - Replace this subsection with the following subsection:

01040.53(b)(3) Compost Mulch - Spread compost on top of the Soil to a nominal depth of 3 inches. Where a compost erosion blanket is in place according to 00280.44(f) apply and spread additional compost to achieve a depth of 3 inches.

01040.54(a) Pressure Moisture Stress Sensor - Replace the paragraph that begins "When a pressure moisture ..." with the following paragraph:

When a pressure moisture stress sensor is specified, the Agency will test a 1 to 5 percent representative sample to ensure that the moisture stress level is below 20 bars of pressure and inform the Contractor if any material exceeds this limit. Any plant material found to have greater than 25 bars of pressure is considered to be under extreme moisture stress. Provide sufficient water within 24 hours to bring the plant into normal range. The Agency will retest to determine the new representative pressure. Plant material that have 30 bars or greater is considered to have reached its Permanent Wilting Point. Replace all such material during the

Insert Project Name Here

next planting period. Testing will occur mid-day at the following times until the end of the Establishment Periods:

Replace the bullet that begins "At 1-month intervals..." with the following bullet:

- At 1-month intervals throughout the Summer, up to the first Fall rain or snow.

01040.70 Plant Establishment - Replace this subsection, except for the subsection number and title, with the following:

The Contractor is responsible for the survival of all plant material until the end of a Plant Establishment Period of 1 calendar year. The Plant Establishment Period begins when all the original planting is complete. The original planting is considered complete when all the plant material has been planted to the satisfaction of the Agency.

At a minimum of 15 Days prior to landscape Work, submit the plant establishment plan as part of the planting work plan according to 01040.05. Should the plan become unworkable at any time during Plant Establishment Period, submit a revised plan prior to proceeding with further Work. Include the following in the plant establishment plan:

- Activity descriptions necessary to ensure continued health and vigor of planted and seeded areas according to 01030.60 and 01040.71.
- Proposed scheduling of joint inspection meetings, weeding, and watering/irrigation schedule.
- Materials including herbicides and fertilizers, and Equipment to be utilized for the plant establishment.
- Proposed adaptive management activities for successful establishment of seeded, sodded, and planted areas, during changing environmental conditions or unanticipated weather.

Establishment Period Work includes removing all plants that have reached their Permanent Wilting Point, are dead, dying, or do not meet Specifications, and replacing them with healthy plants. All plants in place after this replacement are recognized as the original planting and are subject to the establishment Specifications. Repair, restore, and replace all plantings that have been damaged by vehicles, vandalized, and stolen according to 00170.80.

01040.71 Plant Care and Success Criteria - Replace the paragraph that begins "The determination of a successful ..." with the following paragraph:

The determination of a successful Plant Establishment Period is made at periodic plant establishment inspections. A successful planting establishment for each inspection is defined as follows:

Replace the paragraph that begins "At the discretion of the Agency, ..." with the following paragraph:

At the discretion of the Agency, certain types of regularly spaced plantings such as groundcovers may be measured using an area sampling method. To determine the rate of survival, set out (delineate) representative plots measuring 100 square feet at the completion of the original planting at random locations in each general planting area. The representative

Insert Project Name Here

plots are mutually agreed upon between the Contractor and the Agency. Mark the plot corners with permanent markers such as re-bar, including date and identification. Delineate a minimum of three plots per acre of new planting area.

(Use the following paragraphs and bullets to include minimum watering frequencies for trees and shrubs. Obtain information from the Designer. Delete what does not apply.)

Add the following to the end of this subsection:

The following watering frequencies are required:

- Deciduous trees that are 1 1/2 inch and larger, water at a frequency of _____.
- Conifer trees that are over 4 feet tall, water at a frequency of _____.
- All shrubs, water at a frequency of _____.

01040.72 Periodic Inspections - Replace the bullet that begins "Spring..." with the following bullet:

- Early May

Replace the bullet that begins "Summer..." with the following bullet:

- Mid-July

Replace the bullet that begins "Fall..." with the following bullet:

- Late September

Replace the paragraph that begins "Depending on when the Establishment ..." with the following paragraph:

Depending on when the Establishment Period begins, one of the above inspections is the final inspection.

01040.73 Corrective Work - Replace the paragraph that begins "The Contractor will be allowed..." with the following paragraph:

The Contractor is allowed to replace plants outside the planting times described in 01040.41 or 01040.42 as applicable to perform corrective work after each periodic inspection.

Replace the paragraph that begins "Furnish plant replacements ..." with the following paragraph:

Furnish plant replacements of the same variety, size, and quality as specified for the original plants, unless otherwise approved.

(Use the following subsection .75 when Weed Control is not included as a Pay Item under 01030.90.)

01040.75 Weed Control - Replace this subsection, except for the subsection number and title, with the following:

Perform weed control throughout the Plant Establishment Period. Kill and remove Specified Weeds as directed, prior to the Weeds going to seed. Keep the plant areas Weed Free throughout the Plant Establishment Period.

01040.77(b) Trimming and Pruning - Replace the paragraph that begins "Prune during the dormant..." with the following paragraph:

Prune during dormancy unless otherwise specified. Remove and dispose of all dead and critically damaged plant material to maintain the overall appearance of the Project.

01040.77(d) Sod Lawn - Replace the paragraph that begins "Mow, cut and fertilize ..." with the following paragraph:

Mow, cut and fertilize sod lawns as required to maintain a healthy and vigorous condition. A schedule of feeding, mowing, and general treatment, including thatching and aeration is listed in the Special Provisions. Final acceptance of sod lawn areas will depend on its health and condition. Keep sod lawns mowed to a height between 1 1/2 inches to 2 inches.

(Use the following paragraphs and bullet when sod lawn is required. Obtain the schedule from the Designer.)

Add the following to the end of this subsection:

Provide sod lawn feeding, mowing, and general treatment as follows:

-

(Use the following subsection .80(c) when soil conditioner is required.)

01040.80(c) Soil Conditioners - Replace this subsection with the following subsection:

01040.80(c) Soil Conditioners and Hydraulically Applied Soil Conditioner - Soil conditioners and hydraulically applied soil conditioners will be measured according to one of the following:

- **Area Basis** - Hydraulically applied soil conditioners and other surface applied soil conditioners will be measured on the area basis, along the ground surface.
- **Volume Basis** - Soil conditioners will be measured on the volume basis in the hauling vehicle or in containers delivered to the Project Site.

01040.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

Replace the paragraph and bullets that begin "No separate ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Soil amendments
- Lime, gypsum, or trace minerals
- Soil bio-amendments
- Fertilizer
- Herbicides
- Anti-transpirants
- Game repellent
- Browsing protectors
- Pesticides
- Trunk wraps
- Tree stakes and ties
- Water
- Pressure moisture stress sensors
- Mulch materials required as part of replacement planting
- Corrective work during the Plant Establishment Period

(Use the following subsection .90(c) when soil conditioner is required.)

01040.90(c) Soil Conditioners - Replace this subsection with the following subsection:

01040.90(c) Soil Conditioners and Hydraulically Applied Soil Conditioner - Soil conditioners will be paid for at the Contract unit price, per cubic yard, for the item "Soil Conditioner".

Hydraulically applied soil conditioners will be paid for at the Contract unit price, per acre or square yard, for the item "Hydraulically Applied Soil Conditioner".

SP01050 (Special Provisions for the 2024 Book)

(Bidding on or after: 09-01-26

Last updated: 06-01-26

Requires SP00960, SP02110, SP02510 & SP03010

Requires SP00587 when protective fence is required.

Requires SP02820 when metal guardrail is required.)

SECTION 01050 - FENCES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01050 of the Standard Specifications modified as follows:

(Use the following subsection .00 when SP00587 for protective fence is used.)

01050.00 Scope - Delete the bullet that begins "Protective Fences, on and...".

(Use the following subsection .01(e) when SP00587 for protective fence is used.)

01050.01(e) Run - Delete the bullet that begins "Bridge protective Fence...".

(Use the following subsection .10 when SP00587 for protective fence is used.)

01050.10 Materials - Delete "Protective Fence Materials, On and Off Structures."

01050.41 Lines, Grades, and Preparation Work - Replace the paragraph that begins "Clear, grub and prepare ..." with the following paragraph:

Clear, grub and prepare the Fence line area. Remove all shrubs, brush, snags, downed timber, float Rock, and other obstacles, including trees up to 6 inches in diameter that interfere with Fence construction. If directed, preserve trees and geographic features on Fence lines by varying the Fence alignment to miss them.

Replace the paragraph that begins "Fill or excavate ground ..." with the following paragraph:

Fill or excavate ground surface irregularities that interfere with maintaining specified clearance above ground surface of the bottom wire of the Fence. Limit the width as necessary to provide a clear way for the Fence.

01050.43(a) General - Replace the paragraph that begins "Set posts to the depths ..." with the following paragraph:

Set posts to the depths shown. Reasonable variation in depths are allowed and posts may be appropriately shortened or left slightly high, as approved by the Engineer, to:

(Use the following subsection .43(a) when SP00587 for protective fence is used.)

Delete the paragraph that begins "For bridge protective Fence...".

01050.43(a)(1) Driven Posts - Replace this subsection, except for the subsection number and title, with the following:

Ensure posts set by driving are free of damage after installation. Remove and replace any driven posts that are split, twisted or bent, or have a badly misshapen tops.

01050.43(a)(3) Concrete Footings - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Construct footing to dimensions no less than shown. Place the concrete to fill the excavated areas with contact against firm Soil at the sides and bottom and tamp around the posts and brace ends after the posts and braces have been brought to and firmly held in proper position. Strike off, slope or crown and smooth the surface of the concrete at the ground level to shed water. Allow to cure for at least 5 Calendar Days before subjecting the posts and braces to strain.

(Use the following subsection .43(c) on Projects in Regions 4 and 5 as requested by the Designer.)

01050.43(c) Intermediate End Posts - Add the following sentence to the end of this subsection:

Space intermediate end posts a maximum of 300 feet apart.

01050.43(d)(1) Barbed and Woven Wire Fences - Replace this subsection, except for the subsection number and title, with the following:

At angle of deflection exceeding 5 degrees for Fences with steel line posts or 15 degrees for Fences with wood line posts. Changes in line where the angle of deflection does not exceed the above limitations are considered alignment angles. Make the adjacent line posts at alignment angles fast to the angle post by means of diagonal tension wires.

01050.43(g)(1) Metal Braces - Replace the paragraph that begins "Provide corner posts ..." with the following paragraph:

Furnish corner posts and intermediate end posts with two braces, one each direction from the post in the main Fence lines. Furnish end posts and Gate posts with one brace in the line of the Fence as shown.

01050.44(a) Placing Fabric and Wire - Replace the paragraph that begins "Place fabric and wire ..." with the following paragraph:

Place fabric and wire on the face of the post that is away from the Highway or as shown. On curved alignment, place the fabric and wire on the face of the post where the normal pull of the fabric and wire is exerted.

Attach Fence fabric and barbed wire to each post according to recognized standard practice for Fence construction and as shown or directed.

01050.44(b) Splicing Fabric and Wire - Replace this subsection, except for the subsection number and title, with the following:

Splices of fabric and splices of separate lines of wire between posts are allowed provided that not more than two fabric or separate wire splices, spaced at least 50 feet apart, occur in any one Run of Fence. Use wrap or telephone type splices for the longitudinal woven wire and barbed wire with each end wrapped around the other wire for not less than six complete turns.

01050.44(e) Swinging Panels at Waterway Crossings - Replace this subsection, except for the subsection number and title, with the following:

At waterway crossings subject to floating debris, if directed, construct wood framed swinging Panels of Fence fabric, barbed wire or combinations. Attach the Panels to the lower wires of the Fence to provide fenced closure of the waterway so there is no unfenced side or bottom openings exceeding 6 inches when the waterway is at its lightest flow or is dry.

01050.44(f) Additional Panels at Depressions - Replace this subsection, except for the subsection number and title, with the following:

If depressions in the ground surface leave unfenced openings greater than 12 inches in height beneath the bottom line of the Fence, provide additional Panels of Fence fabric, barbed wire, or combinations between line posts, as approved, across the opening so no side or bottom openings exceeds 6 inches. If the bottom line of the Fence leaves an unfenced opening beneath it of 12 inches or less, pull the fabric and wires down between posts and anchor with pins or posts driven at least 18 inches into the ground so there is no bottom opening at any point along the Fence greater than 6 inches in height.

01050.44(g) Stay Wires and Final Adjustments - Replace this subsection, except for the subsection number and title, with the following:

Free the fabric and barbed wire in final position from warp and sag with stay wires placed approximately vertical to the grade of the Fence. Retighten brace guys and leave the lever restrained against the Fence fabric or Fence wires.

01050.45(b)(1) Rails - Replace this subsection, except for the subsection number and title, with the following:

Attach rails to end, Gate and corner posts by clamps and sockets, and thread through loop caps on the end of line posts. Furnish expansion sleeves or couplings at spacings not exceeding 200 feet in longitudinal top and bottom rails.

01050.45(b)(2) Tension Wire - Replace this subsection, except for the subsection number and title, with the following:

Attach tension wire to end, Gate and corner posts by bands and clamps. Either thread the top tension wire through line post loop caps or hold in open slots in a manner to limit vertical movement. Tie or attach the bottom tension wire to the bottom of line posts by ties or clamps in a manner that prevents vertical movement. Furnish tension wires with one turnbuckle or one ratchet take-up in each Run of Fence.

(Use the following subsection .45(c) when SP00587 for protective fence is used.)

01050.45(c) Chain Link Fence Fabric and Wire - Delete the paragraph that begins "For bridge protective Fence only..."

(Use the following subsection .46 when SP00587 for protective fence is used.)

01050.46 Protective Fences for Bridges – Delete this subsection.

(Use the following subsection .47(a) when SP00587 for protective fence is used.)

Insert Project Name Here

01050.47(a) General - Replace the paragraph that begins "Except for bridge protective Fence..." with the following paragraph:

Provide at least one "ground" for each Run of Fence and place at any post within the Run according to 00960.45(b).

01050.48(a) Metal Gates - Replace this subsection, except for the subsection number and title, with the following:

Install metal Gates and fittings between Gate posts previously set as specified. Firmly attach the fittings to the posts and Gates. Hinge each Single Gate in a manner that prevents removal of the Gate without tools. Set the Gate in an approximately horizontal plane to swing freely inward and outward, and so it can be fastened securely in its latch holder, or in the case of Double Gates, in its latch holder and gate stops. Set Double Gates on their respective hinge pintles to provide a common horizontal plane where each Single Gate swings.

Install Gates to swing open at least of 90 degrees in each direction.

01050.49 Removing and Rebuilding Fence - Replace this subsection, except for the subsection number and title, with the following:

Remove and rebuild existing Fences as shown or directed. Construct Fences to approximately the same condition as the original Fence. Salvage the materials in existing Fences to be removed and rebuilt and incorporate in the rebuilt Fences. Replace Fence materials damaged beyond reuse at no additional cost to the Agency. Firmly reset posts to the staked alignment. Provide the same post spacing and number of wires to be strung and stapled to the posts as the original Fence. Furnish and use new staples or clips to fasten the wires to the posts.

01050.50(b) Line Posts, Braces, End Posts, Corner Posts, and Gate Post - Replace this subsection, except for the subsection number and title, with the following:

Furnish metal post and brace components. Do not use wood posts and braces.

01050.50(e) Jumpouts - Replace this subsection, except for the subsection number and title, with the following:

Construct jumpouts as shown or directed with Borrow Material according to 00330.12 that contains no particles with any dimension greater than 3 inches. Make jumpouts of uniform grade and compact until there is no reaction or yielding under the compactor. Jumpouts are visually accepted by the Engineer.

01050.80(a) Barbed and Woven Wire Fence and Gateways - Replace this subsection, except for the subsection number and title, with the following:

Barbed wire Fence, woven wire Fence, and barbed and woven wire Fence will be measured on the length basis. Measurement will be from center to center of posts, measured along the line and grade of each separate continuous Run of Fence as constructed, exclusive of Gates. Where existing Fences are extended to intersect the new Fence, the length of extension, from point of joining to the center of the new end post, will be measured and included for

Insert Project Name Here

payment, if similar in design or type to a Pay Item, otherwise this Work will be paid for according to 00195.20.

(Use the following subsection .80(e) when SP00587 for protective fence is used.)

01050.80(e) Protective Fence for Bridges - Delete this subsection.

01050.90(a) Barbed and Woven Wire Fence - Replace the paragraph that begins "In item (a) ..." with the following paragraph:

In item (a) the type of Fence is inserted in the blank.

Replace the paragraph that begins "In items (b) and (c) ..." with the following paragraph:

In items (b) and (c) the width of the Gate opening is inserted in the blank.

01050.90(b) Chain Link Fence - Replace the paragraph that begins "In item (a) ..." with the following paragraph:

In item (a) the type of Fence is inserted in the blank.

Replace the paragraph that begins "In item (b) ..." with the following paragraph:

In item (b) the type of Fence is inserted in the first blank and the type of Material or pickets used for screening is inserted in the second blank.

Replace the paragraph that begins "In item (c) ..." with the following paragraph:

In items (c) and (d) the width of the Gate opening is inserted in the first blank and the height of Gate is inserted in the second blank.

(Use the following subsection .90(c) when SP00587 for protective fence is used.)

01050.90(c) Protective Fence for Bridges - Delete this subsection.

01050.90(e) Wildlife Fence - Replace the paragraph that begins "In item (c) ..." with the following paragraph:

In items (c) and (d) the width of the Gate is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01060 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-02-26

**Requires SP02510, SP02530, SP02560,
and SP02810)**

SECTION 01060 - METAL CATTLE GUARDS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01060 is not a Standard Specification and is included in this Project by Special Provision.

Description

01060.00 Scope - This Work consists of constructing metal cattle guards at the locations shown or specified.

Materials

01060.10 Materials - Furnish Materials meeting the following requirements:

Anchor Bolts	02560.30
Bearing Pads	00582
Coating Steel Structures	00594
Commercial Grade Concrete	00440
Fasteners	02560.20
Precast Concrete Units	00550
Reinforcement	02510.10
Structural Steel	02530.20
Tubing	02810.20

01060.11 Other Materials - Furnish black, welded or seamless steel pipe meeting the requirements of ASTM A53, Type F.

Construction

01060.40 General - Construct cattle guards as shown and according to the following:

- After road construction is complete.
- Excavate and backfill according to Section 00510.
- Provide drainage pits or areas beneath the cattle guard surfaces as shown or specified.
- Use precast or construct cast-in-place concrete abutments.
- Install reinforcement and place concrete according to Sections 00530 and 00440.

Insert Project Name Here

- Assemble structural steel members and other steel according to Section 00560, except that prequalification of welders is not required and inspection of welding is visual.
- Coat steel according to Section 00594 except blast cleaning will not be required. Coat all steel members with at least three applications.
- Connect fences to the cattle guards as shown.

Finishing and Cleaning Up

01060.70 General - Remove excess materials and debris from the cattle guard sites.

Measurement

01060.80 Measurement - The quantities of cattle guards will be measured on the unit basis.

Payment

01060.90 Payment - The accepted quantities of cattle guards will be paid for at the Contract unit price, per each, for the item "_____ Cattle Guard". The width of the cattle guard is inserted in the blank.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for excavation or backfill Work.

SP01069 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP02830 and SP02831)

SECTION 01069 - METAL HANDRAIL AND PEDESTRIAN FENCE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01069 of the Standard Specifications modified as follows:

01069.41 Welding - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Provide welding, welder qualifications, prequalification of weld details and inspection of welds according to AWS D1.1 or AWS D1.2. Submit all welding procedure specifications 7 Days prior to fabrication to the Engineer for approval.

01069.42 Concrete Footings - Replace the paragraph that begins "Dimensions of footings ..." with the following paragraph:

Construct footings to dimensions no less than shown and fill the excavated areas. Place the concrete with contact against firm Soil at the sides and bottom and tamp around the posts and brace ends after the posts and braces have been brought to and firmly held in proper position. Strike off, slope or crown and smooth the surface of the concrete at the ground level to shed water. Allow to cure for at least 5 Calendar Days before subjecting the posts to strain.

01069.43(b) Accuracy of Punched Holes - Replace this subsection, except for the subsection number and title, with the following:

After punching the holes in the plate, stack the plates with the edges even and insert a cylindrical pin, 1/8 inch smaller in diameter than the nominal size of the punched hole, through the punched holes perpendicular to the face of the plate. No drifting of the rod while passing through each of the punched holes in the stack is allowed. Ensure that the edges of the stack stay in alignment. Non-conforming pieces are rejected.

01069.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Metal Handrail, _____ Rail.....	Foot
(b) Pedestrian Fence.....	Each
(c) Metal Handrail, _____ Rail with Edge Rail.....	Foot

In item (a), "two" or "three" is inserted in the blank.

In item (c) "two" or "three" is inserted in the blank. Item (c) also includes the additional bottom edge rail.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01070 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP02420 and SP02510)

SECTION 01070 - MAILBOX SUPPORTS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01070 of the Standard Specifications modified as follows:

(Use the following subsection .00, .80, and .90 when existing mailbox supports are reused. Use only when the existing mailbox supports, brackets, hardware, and post sockets are crash worthy and meet current standards. Check with the Designer.)

01070.00 Scope - Add the following paragraph to the end of this subsection:

This Work includes removing, maintaining, and reinstalling existing mailboxes and existing supports.

01070.12 Tube Support Frame - Replace the bullet that begins "Tensile requirements ..." with the following bullet:

- Tensile requirements of ASTM A53, Grade B, and galvanized with a minimum 0.9 ounce per square foot coating, as tested according to ASTM A90, on the exterior surface followed by a chromate conversion coating and a cross link polyurethane acrylic coating. Also apply a zinc base corrosive resistant interior coating.

(Use the following subsection .80 when existing mailbox supports are reused. Use only when the existing mailbox supports, brackets, hardware, and post sockets are crash worthy and meet current standards. Check with the Designer.)

01070.80 Measurement - Add the following paragraph to the end of this subsection:

The quantities of mailboxes and supports removed, maintained, and reinstalled will be measured on the unit basis, regardless of type, installed in permanent locations.

01070.90 Payment – Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Removing existing mailbox supports
- Providing temporary installations
- Installing new supports in permanent locations
- Installing owner-furnished mailboxes and newspaper boxes

Insert Project Name Here

(Use the following paragraphs when existing mailbox supports are reused. Use only when the existing mailbox supports, brackets, hardware, and post sockets are crash worthy and meet current standards. Check with the Designer.)

Add the following Pay Item to the Pay Item list:

(d) Remove and Reinstall Mailbox SupportsEach

Item (d) includes removing mailboxes and supports, maintaining them at temporary locations, and reinstalling them at their permanent locations.

SP01090 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 01090 - GRAVEL BEDS AND BLANKETS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01090 of the Standard Specifications modified as follows:

01090.10 Soil Sterilant - Replace this subsection, except for the subsection number and title, with the following:

Furnish products with current legal labels listing active ingredients, such as simazine, diuron, bromacil, sulfometuron-methyl, or from the QPL. Submit a sample of the proposed Soil sterilant's registered label to the Engineer for approval before using.

01090.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01091 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-27-26)**

(Use this Section on Projects that require work on and near waterways. Be sure all permits and all conditions are met before using this Section.)

SECTION 01091 - WATERWAY ENHANCEMENTS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01091 is not a Standard Specification and is included in this Project by Special Provision.

Description

01091.00 Scope - This Work consists of constructing waterway enhancements such as fish Rocks, large woody Material (LWM), engineered streambed Material, and other types of waterway items as shown or directed.

01091.05 Pre-Work Meeting - Attend a pre-work meeting at the Project Site with the Engineer, at a mutually agreed upon time, at least 8 Calendar Days prior to implementation of any waterway enhancement work. Required attendees include:

- Engineer
- Contractor
- Waterway Enhancement Subcontractors
- ODOT Region Environmental Coordinator
- ODOT Hydraulics Designer

The pre-work meeting agenda typically includes the methods of accomplishing all phases of the waterway enhancement work, including:

- temporary water management (TWM)
- fish salvage plan and strategy
- environmental risks discussion
- turbidity monitoring
- energy dissipation
- dewatering and re-watering plan and strategy
- existing streambed Material salvage
- site clean-up expectations
- circumstances when contacting the Engineer is required

Representatives from interested permitting agencies are invited by the Agency.

Materials

01091.10 Material - Furnish Materials meeting the following requirements:

(When native streambed Material is to be excavated, salvage and stockpile native Material to be used as a streambed sediment within the constructed channel.)

Insert Project Name Here

Streambed Gravels are classified as follows:

- Salvaged streambed Material
- Streambed Sand
- Streambed sediment
- Streambed Cobbles 4 in.
- Streambed Cobbles 6 in.
- Streambed Cobbles 8 in.
- Streambed Cobbles 10 in.
- Streambed Cobbles 12 in.

Furnish a streambed Material mix of the following streambed Gravels with the associated ratios:

(Use the engineered streambed list below for the Project mix design. Add or remove Materials to match Project design needs. Fill in all appropriate blanks.)

Engineered Streambed Material:

Salvaged streambed Material _ % by volume
Streambed sediment: _ % by volume
Streambed Cobbles _ in. _ % by volume
Streambed Sand: _ % by volume

Thoroughly blend streambed Gravels before placement. Acceptance of the Engineered Streambed Material is based upon visual inspection by the Engineer.

Components of the salvaged streambed Material that meet the criteria for the specific Material may be used to supplement the streambed sediment and streambed Cobbles and is based upon visual acceptance by the Engineer.

(a) Loose Riprap - Furnish loose riprap meeting the requirements of Section 00390.

(b) Engineered Streambed Material - Furnish uncrushed, free of deleterious Material, hard, durable Material that is well graded from the maximum size to the minimum size meeting the following test requirements for quality:

Aggregate Property	Test Method	Requirement
Degradation Factor	ODOT TM 208	15 min,
L.A. Wear, 500 Rev.	AASHTO T 96	50% max
Bulk Specific Gravity	ODOT TM 203	2.55 min.

- **Streambed Sand:** Grade Sand to meet the following requirements expressed as a percentage by weight:

	Percent Passing	
Sieve	Natural Sand	Manufactured Sand

Insert Project Name Here

	Min.	Max.	Min.	Max.
No. 4	99	100	99	100
No. 8	90	100	90	100
No. 16	60	90	60	90
No. 30	35	70	35	70
No. 50	10	30	20	40
No. 100	0	5	10	25
No. 200	0	3	0	10

- **Streambed Sediment** - Grade streambed sediments according to the following requirements expressed as a percentage by weight:

Sieve Size	Percent Passing
2 1/2" square	100
2" square	65 - 100
1" square	50 - 85
U.S. No. 4	26 - 44
U.S. No. 40	16 max.
U.S. No. 200	5.0 - 9.0

- **Streambed Cobbles** - Grade streambed Cobbles according to the following requirements expressed as a percentage by weight:

Percent Passing					
Approx. Size¹	4" Cobbles	6" Cobbles	8" Cobbles	10" Cobbles	12" Cobbles
12"					99-100
10"				99-100	70-90
8"			99-100	70-90	
6"		99-100	70-90		
5"		70-90			30-60
4"	99-100			30-60	
3"	70-90		30-60		
2"		30-60			
1 1/2"	20-50				
3/4"	10 max.	10 max.	10 max.	10 max.	10 max.

¹Approximate size can be determined by taking the average dimension of the three axes of the Rock, length, width, and thickness, by use of the following calculation:

$$\frac{\text{Length} + \text{Width} + \text{Thickness}}{3} = \text{Approximate Size}$$

Length is the longest axis, width is the second longest axis, and thickness is the shortest axis.

The grading of the Cobbles is determined by the Engineer by visual inspection of the load before it is placed.

(c) Fish Rocks:

Type 1 - 700 pounds to 900 pounds size, hard, durable, angular shaped Rock. Furnish a single Rock with a thickness of not less than one-third its length. Round Rock, non-durable Rock, shale, or Rock with shale seams will not be accepted.

Type 2 - Greater than 900 pounds to 1,800 pounds size, hard, durable, angular shaped Rock. Furnish a single Rock with a thickness of not less than one-third its length. Round Rock, non-durable Rock, shale, or Rock with shale seams will not be accepted.

Type 3 - Greater than 1,800 pounds to 2,200 pounds size, hard, durable, subangular Rock. Furnish a single Rock with a thickness of not less than three-fourths its length. Non-durable Rock, shale or Rock with shale seams will not be accepted.

(d) Large Woody Material - Furnish 18-inch minimum diameter by 20 to 32 feet long conifer trees with rootwad. Furnish structurally sound logs that are free of rot and disease.

(e) Boulder Weirs - Furnish fish Rocks used in the construction of boulder weirs as follows:

(Fill in the blank with the Type of fish Rock required. Obtain information from the hydraulic engineer.)

Type _____ and Type _____ fish Rocks as shown and placed as directed.

Construction

01091.40 General - Obtain all permits and perform Work in and around water according to Section 00290, Section 00245 and the following:

(a) Streambed Excavation - Excavate the foundation for streambed Materials to the elevations and grades as shown. As directed by the Engineer, excavate scour holes in the approximate locations as shown.

(b) Salvaged Streambed Materials - During streambed excavation, salvage and stockpile the existing streambed Materials as directed for re-use.

(c) Loose Riprap - Place loose riprap Material within the stream channel as shown or as directed.

(d) Engineered Streambed Material - Place engineered streambed Material in the stream channel as shown or directed. Place the streambed Material in lifts no thicker than 12 inches. Furnish streambed Material in its final location with a well graded mix of streambed sediments and streambed Cobbles.

Construct streambed Material to ensure that low stream flows are conveyed above the finished channel. Pressure apply water to each placed layer to facilitate filling the interstitial voids of the streambed Materials with streambed Sand. The voids are satisfactorily filled when water equivalent to the flow rate of the stream does not go subsurface and there is visual acceptance by the Engineer. If water is not present in the stream, apply water to the stream channel for visual acceptance by the Engineer.

(e) **Streambed Sand** - Place streambed Sand in the streambed lifts as directed. Do not change the finished channel elevation or affect the channel shape as shown.

(f) **Fish Rocks** - Place Rocks as shown or as directed.

(g) **Large Woody Material** - Place LWM as shown or as directed. Place LWM with the rootwad end projecting into the water with the trunk placed at a 45-degree horizontal angle to the bank. Bury the trunk end approximately two-thirds the total length into the embankment.

(h) **Boulder Weirs** - Install boulder weirs as shown or directed. Arch boulder weirs into the stream flow as shown. Seal weirs with streambed sediments as shown or directed. Acceptance is based on water flowing over the boulder weirs and not through the Boulders.

Measurement

(Use one of the following options as instructed. Delete the option that does not apply.)

(Option 1 - Use this subsection .80 when streambed enhancement is measured and paid using a single Streambed Enhancement Pay Item.)

[Begin Option 1]

01091.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

The estimated quantities of Materials required for streambed enhancement are:

(Complete the following for lump sum items. Delete items that are not required on the Project. Obtain quantities from the Designer.)

Item	Quantity
Excavation	_____ cu. yd.
Loose riprap, Class _____	_____ cu. yd.
Salvaged Streambed Material	_____ cu. yd.
Engineered Streambed Materials	_____ cu. yd.
Fish Rocks, Type 1	_____ each
Fish Rocks, Type 2	_____ each
Fish Rocks, Type 3	_____ each
Large Woody Material.....	_____ each

[End Option 1]

(Option 2 - Use this subsection .80 when streambed enhancement is measured and paid using the individual streambed excavation, LWM, and streambed Material Pay Items.)

Insert Project Name Here

[Begin Option 2]

01091.80 Measurement - Work performed under this Section will be measured according to the following:

(a) Fish Rocks and Large Woody Material - The quantities of fish Rocks and LWM will be measured on the unit basis.

(b) Streambed Excavation and Streambed Materials - The quantities of streambed excavation, salvaged streambed Materials and engineered streambed Materials will be measured on the volume basis.

[End Option 2]

Payment

(Use one of the following options as instructed. Delete the option that does not apply.)

(Option 1 - Use this subsection .90 when streambed enhancement is measured and paid using a single Streambed Enhancement Pay Item.)

[Begin Option 1]

01091.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract lump sum amount for the item "Streambed Enhancement".

[End Option 1]

(Option 2 - Use this subsection .90 when streambed enhancement is measured and paid using the individual streambed excavation, LWM, and streambed Material Pay Items.)

[Begin Option 2]

01091.90 Payment - The accepted quantities of waterway enhancement items will be paid for at the Contract unit price, per unit of measurement, for the following items:

(Delete Pay Item(s) from the list that are not included in the Schedule of Items, but do not change the alpha characters next to the Pay Items.)

Pay Item	Unit of Measurement
(a) Streambed Excavation	Cubic Yard
(b) Salvaged Streambed Material	Cubic Yard
(c) Engineered Streambed Materials	Cubic Yard
(d) Fish Rocks, _____	Each
(e) Large Woody Material	Each

Insert Project Name Here

(Use the following paragraph when Pay Item (d) is included in the Pay Item list above.)

In item (d), the type of fish Rocks is inserted in the blank.

Loose riprap will be paid for according to 00390.90.

[End Option 2]

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01095 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 03-27-26)

SECTION 01095 - SITE FURNISHINGS

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01095 is not a Standard Specification and is included in this Project by Special Provision.

Description

01095.00 Scope - This Work consists of constructing site furnishings such as benches, picnic tables, litter receptacles, bicycle racks, and other furnishings as shown or directed.

Materials

01095.10 General:

(a) **Benches** - Furnish benches meeting the following requirements:

-

(b) **Picnic Tables** - Furnish picnic tables meeting the following requirements:

-

(c) **Litter Receptacles** - Furnish trash receptacles meeting the following requirements:

Insert Project Name Here

-
- (d) **Bicycle Racks** - Furnish bicycle racks meeting the following requirements:
 -
- (e) **Sand Urns** - Furnish sand urns meeting the following requirements:
 -
- (f) **Aeration System** - Provide aeration system meeting the following requirements:
 -
- (g) **Plant Trellis** - Furnish plant trellises meeting the following requirements:
 -

Construction

01095.40 General - Install all site furnishings as shown and according to the manufacturer's recommendations.

Measurement

01095.80 Measurement - The quantities of site furnishings will be measured on the unit basis.

Payment

(Delete the "(s)" or parentheses from the word "item(s)", as appropriate.)

01095.90 Payment - The accepted quantities of site furnishings will be paid for at the Contract unit price, per unit of measurement, for the following item(s):

(Delete Pay Item(s) from the list that are not included in the Schedule of Items. Re-alphabetize the list to be consecutive, beginning with (a).)

Pay Item	Unit of Measurement
(a) Benches, Type _____	Each
(b) Picnic Tables	Each
(c) Litter Receptacles	Each
(d) Bicycle Racks	Each
(e) Sand Urns	Each
(f) Aeration System	Each
(g) Plant Trellis	Each

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SECTION 01120 - IRRIGATION SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01120 of the Standard Specifications modified as follows:

01120.10 General - Replace this subsection, except for the subsection number and title, with the following:

Furnish only commercial quality Materials and Equipment. All items proposed for use are subject to testing to ensure compliance with the Specifications. Furnish Materials of the same function that are of the same type and the same manufacturer.

Submit a list of proposed materials for approval as soon as practicable after Award and before arranging for procurement of any materials, especially those materials or products not shown or specified. If any initially proposed materials are not approved, submit substitutes for approval. Any materials installed without approval are subject to removal and replacement with acceptable material at no additional cost to the Agency.

Materials may be designated by trade name or by manufacturer's catalogue information as shown or specified. The use of a substitute material may be allowed if a written request for substitution and proof of equivalent quality and suitability are provided. Make any request for substitution with ample time for approval without delaying the Work.

When alternate Equipment, such as sprinkler heads, is proposed for use with hydraulic characteristics differing from that originally shown, provide the following:

- A redrafted, legible plan that shows the redesigned layout, location, or sizes of every affected system element as required for proper operation as originally designed. Provide a plan showing every relevant system element, site feature, and plan element that was shown on the original plan. A plan made by marking up the original plan will not be accepted.
- A hydraulic calculation table for the alternate Equipment. At a minimum, show a complete calculation for one average sprinkler zone (section) and a complete calculation for the "worst case" sprinkler zone (i.e., the section that is farthest from the point of connection (P.O.C.), is the largest, or otherwise presents the most challenging hydraulics). Starting from the P.O.C., show the calculation with a step-down method with flow and loss at each piece of Equipment and length of pipe run between Equipment. Show the new total water required for each zone and the total for all zones to ensure that maximums for meter size, pipe sizes, and watering times will not be exceeded.

Insert Project Name Here

- Where any controller run-time change is required, submit a separate page showing the total timing per controller required for each section, to show that timing changes will still allow all zones to be run within a reasonable time period.
- A cost page showing the Contractor's actual discount cost from the Suppliers, comparing the original plan costs versus the proposed Equipment costs for each type of item, such as pipe by size, where there is a change required. Show the line total of each type of item and the grand total for the proposed change.

01120.11 Pipe, Tubing, and Fittings - Replace this subsection, except for the subsection number and title, with the following:

Furnish galvanized iron or steel, PVC, or polyethylene pipe as shown or specified that meets the following requirements:

(a) Galvanized Pipe and Fittings - Furnish pipe of standard weight, hot-dip galvanized iron or steel, standard threaded, coupled, and that meets the requirements of ASTM A53. Non-standard threaded fittings are rejected.

(b) Polyvinyl Chloride Pipe and Fittings - Furnish PVC pipe and fittings of PVC compound Type 1, Grade 1, according to ASTM D2241 and certified approved by the National Sanitation Foundation. Furnish pipe and fittings free from defects caused by poor materials, low quality of Work, or rough handling. Dimensional and quick burst tests of pipe and fittings may be required after arrival at the Project Site before materials are accepted.

Furnish pipe and fittings as follows:

Used for	Class or Schedule
Main and lateral lines	Class 200 or Schedule 40 PVC
Irrigation sleeves.....	Schedule 40 PVC
Caps	Schedule 80 PVC
Direct bury pipe, not in sleeves, placed under road beds or other paved areas	Schedule 40 PVC

Unless otherwise specified, furnish entire Project with one pipe class or schedule type.

Furnish PVC threaded pipe of PVC 1120, schedule 80 material according to ASTM D1785.

Furnish PVC solvent-weld pipe of PVC 1120 materials having a 200-psi minimum pressure rating with SDR 21 walls according to ASTM D2241.

Furnish PVC pipe fittings according to ASTM D2466, Type I, Grades 1 or 2.

Pipe may be belled on one end with the dimensions of the tapered bell according to ASTM D2672.

Install PVC pipe with walls heavier than SDR 21 when shown or specified.

(c) Non-Potable Colored Coded Pipe - Wherever non-potable, reclaimed or reuse water is used, furnish PVC pipe that is tinted purple and imprinted with the warning "Caution: Reclaimed Water - Do Not Drink". Furnish pipe meeting the same AWWA and ASTM specifications as the potable water pipe sizes that they are based on.

(d) Polyethylene Pipe - Furnish polyethylene pipe of Class 80, SDR 15, medium density, meeting the requirements of ASTM D2239, conforming to U.S. Commercial Standard CS-255, and approved by the National Sanitation Foundation (NSF).

(1) Micro Tubing and Fittings - Where drip emitters are not required, furnish a blank type and furnish any connections necessary. Furnish tubing consisting of nominal-sized linear, low-density, minimum 1/4 inch outside diameter (OD) polyethylene.

(2) Low Volume (Drip) Tubing - Furnish drip tubing manufactured from specially formulated, chemical-resistant, low to medium density, virgin polyethylene or polybutylene that is selected for excellent weatherability and stress cracking resistance, and is designed specifically for use in drip irrigation systems. Furnish drip tubing having a minimum wall thickness of 0.044 inch.

01120.12 Automatic Controllers - Replace the paragraph that begins "Provide Underwriter's Laboratories ..." with the following paragraph:

Furnish Underwriter's Laboratories (UL) approved controllers as shown or specified. Furnish each outdoor controller with either a pedestal or wall mount brackets when appropriate. Furnish and install the controller in a weatherproof and vandal-proof cabinet of corrosion-resistant metal. Furnish the controller housing or cabinet with hasp and lock or locking device. Furnish locks or locking devices that are master-keyed and include three sets of keys for the locks. If the irrigation system serves both lawns and planting beds, furnish a controller that has a dual programming capability. Furnish controllers that are compatible with and capable of operating the irrigation system as constructed.

01120.13 Quick-Coupling Equipment - Replace this subsection, except for the subsection number and title, with the following:

Furnish quick coupling Equipment with a body of cast leaded semi-red brass alloy No. C84400 according to ASTM B584, and a service rating not less than 125 psi for non-shock cold water. Furnish couplers having standard male pipe threads at the top and standard female pipe threads at the base. Ensure that the valve is designed to open only upon inserting a coupler key and close completely after removing the key, with absolutely no leakage of water between the coupler and valve body. Furnish valve bodies to receive couplers that are designed with double worm slots to allow smooth opening and closing action with a minimum of effort. Ensure that slots notched at the base hold the coupler firmly in the open position. Furnish couplers of one piece construction with steel reinforced side handles attached, a locking top of the same material as the valve body, and stainless steel double guide lugs to fit the worm slots. Furnish two couplers and two hose swivels for operation of the valves, and two keys for the locking caps if quick-coupling valves are required. For non-potable water systems, furnish a color-coded, purple tinted cap that bears the printed warning "Caution: Reclaimed Water - Do Not Drink".

01120.15 Cross-Connection Control Devices - Replace this subsection, except for the subsection number and title, with the following:

Cross-connection control devices are shown. Furnish and install cross-connection control devices meeting the requirements of the Oregon Health Division and the local water authority.

01120.16 Water Meter - Replace this subsection, except for the subsection number and title, with the following:

Water meter procurement, installation, and associated costs are the responsibility of the Agency. Be responsible for coordinating water meter needs in a timely fashion with the Agency.

01120.17 Valves: Replace this subsection, except for the subsection number and title, with the following:

(a) Gate Valves - Furnish gate valves of heavy-duty bronze according to the requirements of ASTM B62. Furnish valves of the same size as the connecting pipes and install with union or flange connections. The service rating for non-shock cold water is 150 psi. Furnish valves of the double disk, taper seat type, with rising stem, union bonnet and hand wheel or suitable cross wheel for standard key operation, with the manufacturer's name, type of valve, and size clearly cast on them.

(b) Drain Valves - Furnish bronze or brass drain valves, 1 inch or 3/4 inch in size, manual angle globe type, with rising stem, hex brass union, removable bonnet and stem, and adjustable packing gland. Ensure that valves are designed for underground installation with a suitable cross wheel operable with a standard key and the minimum service rating is 150 psi non-shock cold water. Furnish three standard operating keys.

(c) Check Valves - Furnish heavy duty bronze or steel check valves that function by means of a hinged disc suspended from the body, and is able to close of its own weight. Furnish valves that are of the same size as the connecting pipes, unless otherwise specified, and with union or flanged connections. Furnish valves that are rated for non-shock cold water service of not less than 150 psi and have the manufacturer's name, valve type, and size cast on them.

(d) Pressure-Reducing Valves - Furnish pressure-reducing valves with a minimum of 150 psi working pressure and an adjustable outlet range of 20 psi to 70 psi, rated for non-shock cold water service up to 175 psi. Furnish factory set valves as shown or specified.

(e) Isolation Valve - Furnish isolation valves as shown or as specified. If no isolation valves are shown, furnish ball valves as indicated below.

(f) Ball Valves - Furnish bronzed-bodied ball valves according to ASTM B62 and with a hard, chrome plated ball according to ASTM B124. The minimum non-shock cold water service-rating is 400 psi. Plastic valves will not be accepted.

(g) Air Relief Valve - The air relief valve automatically relieves air pressure to break an air vacuum in the pipe section where it is located. Install air relief valves at the exact high point of each pipe section where relief is needed. (Note: air relief valves are not associated with backflow prevention).

(h) Control Valves:

(1) Manual Control Valves - Furnish manual valves of bronze or brass, angle type, with hex brass union, and with a service rating not less than 150 psi non-shock cold water. Furnish valves for underground installation designed with a cross wheel suitable for operation with a standard key. Furnish three suitable operating keys per irrigation system. Furnish valves that have removable bonnet and stem assembly, with adjustable packing gland housing for the long acme-threaded stem to ensure full opening and closing. Furnish valves with discs that are full floating with replaceable seat washers.

(2) Automatic Control Valves - Furnish automatic control valves of a normally closed design, operated by an electric solenoid of the required rating, but not more than 6.5 W and operating on 24 V AC power. Ensure that solenoids directly attached to the valve bonnets or bodies have completely internal control parts. Furnish bodies that are not less than 150 psi if brass or bronze and not less than 125 psi if plastic, with a manual control bleed cock to operate the valve without electric current. Ensure that the closing speed is not less than 5 seconds and the opening speed is not less than 3 seconds. A constant rate of opening and closing is required so the water flow is completely stopped when the valve is either manually or electrically closed. Furnish valves having manual shutoff stems with cross handles that will adjust the valve from fully closed to wide open with the valve automatically operable in the adjusted position.

(3) Automatic Control Valves with Pressure Regulator - Furnish valves of the same manufacture as the automatic control valves, capable of reducing the inlet pressure to a constant lower pressure regardless of supply fluctuations, and are fully adjustable.

01120.18 Valve Boxes and Protective Sleeves - Replace this subsection, except for the subsection number and title, with the following:

Furnish automatic control valves, flow control valves, pressure reducing valves, backflow preventers, filters and other serviceable fixtures with valve boxes that are extendable to obtain the depth required. Furnish boxes constructed of thermoplastic, with locking lids, green in color, and of the type shown or specified. Include a protective sleeve and cap with all manual drain valves and manual control valves.

01120.19 Electrical Wire and Splices - Replace the paragraph that begins "Provide and Install..." with the following paragraph:

Furnish and install an extra wire with all wiring runs that is the same gauge, but of a different color than the hot wire and common wire. The extra wire is reserved for future use or modifications to the system.

01120.21 Detectable Wire and Marking Tape - Replace this subsection, except for the subsection number and title, with the following:

Furnish a detectable wire using continuous No. 14 gauge, single strand locator wire that is blue in color. Furnish marking tape consisting of inert polyethylene plastic that is impervious to all known alkalis, acids, chemical reagents, and solvents likely to be encountered in the Soil. Furnish color-coded tape with the type of line buried below and the word "Caution" imprinted continuously over its entire length in permanent black ink. Furnish tape of the width recommended by the manufacturer for the depth of installation used.

Insert Project Name Here

01120.40 General - Replace the paragraph that begins "The irrigation Plans are ..." with the following paragraph:

The irrigation Plans are a schematic design and may require adjustment. Do not install the sprinkler system as shown if it is evident that obstructions, grade differences, or differences in area dimensions create conditions different than anticipated in the design. Bring all such obstructions or differences to the attention of the Engineer. In the event this notification is not performed before construction begins on a part of the system where discrepancies exist, any revisions necessary to make the system operate as designed is the Contractor's responsibility.

01120.40(a)(1) Double Check Valve Assembly - Replace this subsection, except for the subsection number and title, with the following:

Install, inspect, and test the double check valve assembly (DCVA) according to applicable regulations of the Oregon Health Division and the local water authority. Provide test records on forms approved by the Oregon Health Division. Provide forms filled out by a State-licensed Backflow Device Tester documenting that the DCVA is in good operating condition before any flushing and testing of downstream water lines. During the life of the Contract, test the DCVA annually, or more often if successive inspections indicate repeated failure. Repair or replace the DCVA whenever it is found to be defective.

01120.40(b) Electrical Service - Replace this subsection, except for the subsection number and title, with the following:

Install electrical service according to the *National Electrical Code* and all State and local laws. Power sources will be as shown or as directed. Be responsible for coordination and installation of electrical service. Furnish and install meter bases at the power source according to the requirements of the power supplier. Give the power supplier's representative notice before making any installation. Furnish a separate, dedicated circuit for the controller.

01120.43 Piping - Replace the paragraph that begins "Place all live mains ..." with the following paragraph:

Place all live mains to be constructed under existing Pavement in sleeves jacked under the Pavement, unless otherwise shown. Place all PVC pipe installed under Pavement in pipe sleeves of Schedule 40 PVC, unless steel sleeving is shown or specified. Furnish pipe caps of Schedule 80 PVC. Install sleeves 2 feet below Subgrade when passing under Roadways. Extend sleeves 2 feet beyond the edge of Gravel, edge of sidewalk or back of curbs. Mark sleeves with a 2 feet piece of No. 4 rebar driven flush with the ground or other adjacent surface. Place PVC caps over both ends of sleeves but do not glue. Solvent-weld sleeve sections. Use pipe bedding and backfill according to Section 00405. Extend the sleeve a minimum of 12 inches beyond the edge of Pavement. Perform all jacking operations according to an approved jacking plan. If obstacles are encountered during required jacking, notify the Engineer, who may authorize corrective measures according to 00140.60. Provide for complete drainage of all pipelines with manual drain valves installed at section low points. Drain valves may not be shown.

01120.46 Low Voltage Electrical Installation - Replace this subsection, except for the subsection number and title, with the following:

Use direct burial wiring between the automatic controller and automatic valves. Install waterproof splices according to the manufacturer's recommendations. The wiring may share a common neutral. When more than one automatic controller is required, provide a separate common neutral for each controller and the automatic valves it controls. Run separate control conductors from the automatic controller to each valve. Furnish and install an extra wire according to 01120.40.

Install wire adjacent to or beneath the irrigation pipe. Use plastic tape or nylon tie-wraps to bundle wires together at 10-foot intervals. Snake the wire from side to side in the trench to provide slack in the wire run. When it is necessary to run wire separate from the irrigation pipe, bundle and place the wire under detectable marking tape. Splices are allowed only at junction boxes, valve boxes, pole bases, or control Equipment. Leave a minimum of 2 feet of excess conductor at all splices, terminals and control valves to facilitate inspection and future splicing.

01120.47(e) Main Line Testing - Replace this subsection, except for the subsection number and title, with the following:

Purge all main supply lines of air and test with static water pressure of at least 150 psi for 60 minutes without introduction of additional service or pumping pressure. Test with one pressure gauge installed on the line where directed. Install an additional pressure gauge at the pump when directed. Lines showing loss of pressure exceeding 5 psi at the end of the specified test period are rejected. Correct rejected installations and retest for leaks.

01120.47(g) Lateral Line Testing - Replace this subsection, except for the subsection number and title, with the following:

Purge all lateral lines of air and test under operating line pressures with risers capped and drain valves closed. Maintain operating line pressures for 30 minutes through open valves and pressure regulating devices. Lines showing leaks when visually inspected at the end of the specified test periods are rejected. Correct and retest lateral line installations that have been rejected.

01120.47(h) Lateral Line Alternate Test Method - Replace this subsection, except for the subsection number and title, with the following:

When conditions prevent effective visual inspection of lateral lines, the Engineer may require that the lines be tested by use of pressure gauges. In that event, maintain the static water pressure equal to the operating line pressure in the lines for 30 minutes, with valves closed and without introduction of additional service pressure. Lateral lines showing loss of pressure exceeding 5 psi at the end of the specified test period are rejected. Correct and retest lateral line installations that have been rejected.

01120.47(i) Testing of Micro Tubing - Replace this subsection, except for the subsection number and title, with the following:

Micro tubing is tested by visual inspection while operating and before burial. Tubing that has obvious leaks or that doesn't operate as designed is rejected. To fully test micro tubing, a water collection procedure recommended by the manufacturer may be required. Correct all faults before retesting.

Insert Project Name Here

01120.49 Backfill - Replace the paragraph that begins "Pipe bedding Material ..." with the following paragraph:

Pipe bedding Material according to 00405.12 may be authorized in quantities determined by the Engineer. When authorized to proceed, fill the bottom 2 inches of the trench with approved bedding before laying pipe. After the pipe is in position, add enough bedding Material to bring the backfill height to 2 inches above the pipe. Continue backfilling as usual.

Replace the paragraph that begins "If sufficient suitable backfill Material..." with the following paragraph:

If sufficient suitable backfill Material is not available from trench excavation or other sources on the Project, notify the Engineer. Provide an estimate of imported backfill required, if possible. Unless otherwise shown or specified, imported pipe bedding Material is authorized according to 00140.30.

01120.60 System Operation - Replace the paragraph that begins "This responsibility includes, but is not..." with the following paragraph:

This responsibility includes, but is not limited to, draining the system before the first freeze and reactivating the system in early May and at other times as directed.

Replace the paragraph that begins "In the spring, when the..." with the following paragraph:

In early May, when the drip irrigation system is in full operation, make a full inspection of all emitters. This involves visual inspection of each emitter under operating conditions. Make all adjustments, flushing or replacements to the system at this time to ensure the proper operation of all emitters.

01120.70 As-Built Plans and System Orientation - Replace the paragraph that begins "Notify the Engineer ..." with the following paragraph:

Notify the Engineer in writing not less than 2 weeks before the proposed date of the training and orientation session and obtain mutual agreement.

01120.90 Payment - Replace the paragraph that begins "Payment will be..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01140 (Special Provisions for the 2024 Book)

(Bidding on or after: 12-01-26

Last updated: 08-31-26

Requires SP02470 and SP02475)

SECTION 01140 - POTABLE WATER PIPE AND FITTINGS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then

include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01140 of the Standard Specifications modified as follows:

01140.10 Materials - Delete the paragraph that begins "High Density Polyethylene (HDPE) pipe shall..."

01140.11 Handling Pipe and Fittings - Replace the paragraph that begins "Handle pipe and fittings ..." with the following paragraph:

Handle pipe and fittings to prevent damage to or contamination of the pipe, fitting, lining, or coating. Load and unload pipe and fittings using hoists and slings so as to avoid shock or damage, and under no circumstances allow them to be dropped, skidded, or rolled against other pipe or fittings. If any part of the coating or lining is damaged, repair in a manner satisfactory to the Engineer. Damaged or contaminated pipe and fittings are rejected. Immediately separate all damaged or contaminated pipe and fittings and remove from the Project Site.

01140.41(b)(1) Curves - Replace this subsection, except for the subsection number and title, with the following:

Lay horizontal and vertical long radius curves with standard pipe by deflecting the joints. Use standard fittings and standard pipe lengths, unless otherwise shown. If shorter pipe lengths are required, the maximum allowable pipe lengths are shown. Do not exceed 80 percent of the manufacturer's recommendations for the amount of deflection at each pipe joint when pipe is laid on a horizontal or vertical curve. Where field conditions require deflection or curves not shown, the Engineer will determine the methods to be used.

01140.41(d) Polyvinyl Chloride (PVC) Pipe - Replace the paragraph that begins "Lay horizontal and vertical ..." with the following paragraph:

Lay horizontal and vertical curves in pipe, as shown, with standard pipe by deflecting the joints. Use standard fittings and standard pipe lengths unless otherwise shown. If shorter lengths of pipe are required, the maximum allowable pipe lengths are shown. Do not exceed 80 percent of the manufacturer's recommendations for the amount of deflection at each pipe joint when pipe is laid on a horizontal or vertical curve. Where field conditions require deflection or curves not shown, the Engineer will determine the methods to be used. Do not bend PVC pipe segments.

01140.41(e) Water and Sanitary Sewer Separation - Replace this subsection, except for the subsection number and title, with the following:

Comply with OAR 333-061 0050 governing horizontal and vertical separation between water and sanitary sewer facilities for installation of new water lines and appurtenances. Submit all proposals for variance in writing. Include in the proposal the reason for the variance, type of material and condition of the sewer line, and location of the water and sewer facilities, including horizontal and vertical skin-to-skin clearances. Proposals are reviewed by the Engineer and approved, approved as noted, or returned for correction. Each variance is addressed on a case-by-case basis.

01140.42(b)(1) Joints and Fittings - Replace this subsection, except for the subsection number and title, with the following:

Join pipes and fittings using the thermal butt fusion method according to ASTM D3261. Use HDPE fittings of the same class as the HDPE piping.

01140.45(a) Installation - Replace this subsection, except for the subsection number and title, with the following:

Install marking tape and wire over all nonmetallic water lines, including service connections. Place a continuous solid copper wire along the top of all water pipe, including service lines. Use cable ties to secure the copper wire to the top of the pipe at a maximum spacing of 10 feet. Tie all splices and make them electrically continuous and waterproof. Provide access to terminal ends of the wire at all valve boxes, meter boxes, hydrants, and vaults. Ensure a continuous wire circuit electrically isolated from ground. Place the marking tape approximately 1 foot above the top of the pipe for its full length.

01140.45(c) Testing - Replace this subsection, except for the subsection number and title, with the following:

Test for continuity and isolation from ground in the wire after all Work has been completed on the test section. Perform intermediate testing after backfilling operations and prior to surface restoration Work. Test continuity between access locations by use of a temporary wire connecting test points in-line with an ohmmeter. Measure resistance with an approved ohmmeter that has been properly calibrated. The continuity of a test section is accepted if the resistance of the test section does not exceed 5 ohms for each 500 feet of location wire being tested. Measure isolation from ground with an approved 1000-volt Megger, applied for 1 minute. The isolation of a test section is accepted if the isolation resistance of the test section is at least 10 megohms. Locate and repair all breaks or defects in the wire and re-test until specified results are obtained.

01140.48 Maintaining Service - Replace this subsection, except for the subsection number and title, with the following:

(a) Service Transfer - Where existing services are to be transferred from old to new mains, plan and coordinate the Work with that of the Utility so that service is resumed with the least possible inconvenience to the public.

(b) Connections by Utility - Allow the Utility to make connections into the new pipe at such locations as the Utility may elect to supply customers with water, after the affected section of pipe has passed hydrostatic and bacteriological tests. Do not construe the installation of any such connections by the Utility as an acceptance by the Agency of any part of the Work required under the Contract.

01140.50(a) Flush and Disinfect - Replace this subsection, except for the subsection number and title, with the following:

Flush sections of pipe to be tested and disinfect to remove any solids or contaminated material that may have become lodged in the pipe. The minimum flushing velocity is 3 feet per second. If no hydrant is installed at the end of the main, provide a tap large enough to

Insert Project Name Here

develop a velocity of at least 3 feet per second in the main. Perform flushing and disinfection according to AWWA C651-14.

01140.51(a) General - Replace the paragraph that begins "Test all water mains and ..." with the following paragraph:

Test all water mains and appurtenances in sections of convenient length under a hydrostatic pressure equal to one and one-half times the working pressure, but at least 150 psi, measured at the highest point of the test section. Provide and operate all pumps, gauges, plugs, saddles, corporation stops, miscellaneous hose and piping, and measuring Equipment necessary for performing the test. Provide certifications of accuracy for gauges used in the test from an approved laboratory.

01140.51(a)(5) Loss Formula - Replace the paragraph that begins "The quantity of water ..." with the following paragraph:

Do not exceed the number of gallons per hour determined by the formula for the allowable quantity of water lost from the main:

01140.51(a)(6) Pressure Loss - Replace this subsection, except for the subsection number and title, with the following:

No appreciable or abrupt loss in pressure during the test period is allowable.

01140.51(a)(8) Use of Hydrant Valves - Replace this subsection, except for the subsection number and title, with the following:

Make all tests with the hydrant auxiliary gate valves open and pressure against the hydrant valve. After the pipe test has been completed, test each gate valve in turn by closing it and relieving the pressure beyond. This test of the gate valve is acceptable if there is no immediate loss of pressure on the gauge when the pressure beyond the valve is relieved. Verify that the pressure differential across the valve does not exceed the rated working pressure of the valve.

01140.51(b)(1) Exceptions - Replace this subsection, except for the subsection number and title, with the following:

When an existing water main is extended with new pipe to a new valve, and the distance from the existing pipe to the new valve is 18 feet or less, no hydrostatic test is required if the section of new pipe between the new valve and the end of the existing main is installed with pretested, prechlorinated pipe. When the required hydrostatic tests are conducted in the new main section beyond the installed new valve in the closed position, the normal pressure of the existing main may be present against the other side of the new valve.

01140.51(c) Testing Sections with Hydrants Installed - Replace the paragraph that begins "¹ Test each hydrant ..." with the following paragraph:

¹ Test each hydrant to the required test pressure. When testing a hydrant singly, pressure in the supply main beyond the hydrant auxiliary gate valve is 25 psi.

Insert Project Name Here

01140.52(a) General - Replace the paragraph that begins "The initial chlorine ..." with the following paragraph:

Ensure the initial chlorine content of the water is not less than 25 ppm. Ensure a chlorine residual of not less than 10 ppm remain in the water after standing 24 hours in the pipe.

01140.52(d) Rate of Application - Replace this subsection, except for the subsection number and title, with the following:

Control water from the existing distribution system, or other source of supply, to flow very slowly into the newly laid pipeline during application of the chlorine. Provide a chlorine application rate in such proportion to the rate of water entering the newly laid pipe that the initial chlorine content of the water is at least 25 ppm.

01140.52(f) Retention Period - Replace this subsection, except for the subsection number and title, with the following:

Retain chlorinated water in the pipe at least 24 hours. After this period, ensure the residual chlorine at pipe extremities and at other representative points is at least 10 ppm

01140.52(h)(3) Service Resumption - Replace this subsection, except for the subsection number and title, with the following:

Do not place the lines into service before a satisfactory report is received from the local or State health department on samples collected from representative points in the new system. Samples are collected and bacteriological tests obtained by the Engineer.

01140.90 Payment - Replace the paragraph that begins "In items (a) and (b) ..." with the following paragraph:

In items (a) and (b), the nominal diameter of pipe, fittings and couplings is inserted in the first blank. The class of backfill is inserted in the second blank. The quantities include the pipe plus the allowance for the fittings and couplings.

Replace the paragraph that begins "In item (c) ..." with the following paragraph:

In item (c), the class of backfill is inserted in the blank.

Replace the paragraph that begins "In item (d) ..." with the following paragraph:

In item (d), the nominal diameter of assembly is inserted in the blank.

Replace the paragraph that begins "In item (e)..." with the following paragraph:

In item (e) the nominal diameter of pipe is inserted in the first blank and the nominal diameter of the main line is inserted in the second blank.

Replace the paragraph that begins "In item(s) (f) and (g) ..." with the following paragraph:

In item(s) (f) and (g), the nominal diameter of pipe is inserted in the first blank. The class of backfill is inserted in the second blank.

Insert Project Name Here

Replace the paragraph that begins "In item(s) (h), (i), (j), (k), (l), ..." with the following paragraph:

In item(s) (h), (i), (j), (k), (l), (m), and (n), the nominal diameter of the fittings or couplings is inserted in the blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate ..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Trench excavation
- Bedding
- Pipe zone material
- Backfill Work
- Polyethylene encasement
- Concrete thrust blocks
- Detectable marking tape and wire
- Flushing, hydrostatic testing and disinfection, and water for testing
- Exposing and cleaning existing mains, cutting and removing existing pipe, draining existing mains, disinfecting existing mains, and refilling existing mains
- PVC fittings under 4 inch
- HDPE fittings
- Pipe reconnections

SP01150 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-23-26

Requires SP01140, SP01160 & SP02480)

SECTION 01150 - POTABLE WATER VALVES

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01150 of the Standard Specifications modified as follows:

Insert Project Name Here

01150.11 Handling - Replace this subsection, except for the subsection number and title, with the following:

Handle valves so as to prevent damage to the valve, lining or coating. Load and unload valves using hoists and slings so as to avoid shock or damage, and under no circumstances allow them to be dropped or skidded. Damaged valves are rejected. If damage is confined to the coating or lining, it may be repaired in a manner satisfactory to the Engineer. Immediately place all damaged valves apart from the undamaged and remove the damaged valves from the site as soon as possible

01150.90 Payment - Replace the paragraph that begins "In items (a) through (f) ..." with the following paragraph:

In items (a) through (f), the size of the valve or assembly is inserted in the first blank.

Replace the paragraph that begins "In items (a) through (d) ..." with the following paragraph:

In items (a) through (d), the type of valve, check valve, or assembly is inserted in the second blank.

Replace the paragraph that begins "In item (b) ..." with the following paragraph:

In item (b), the type of actuator is inserted in the third blank.

Replace the paragraph that begins "In item (g)..." with the following paragraph:

In item (g), the size of tapping sleeve is inserted in the first blank. The size of valve assembly is inserted in the second blank.

Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

Replace the paragraph and bullets that begins "No separate..." with the following paragraph and bullets:

No separate or additional payment will be made for:

- Earthwork not covered under other Pay Items
- Jointing
- Blocking of valves
- Protective coatings
- Valve boxes
- Valve box extensions
- Valve operator extensions
- Valve reconnections

- Hydrostatic testing

SP01160 (Special Provisions for the 2024 Book)

(Bidding on or after: 11-01-26

Last updated: 07-22-26

Requires SP00440, SP01140, SP02480 & SP02485

Requires SP00815 when bollards are required)

SECTION 01160 - HYDRANTS AND APPURTENANCES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01160 of the Standard Specifications modified as follows:

01160.11 Handling of Hydrants - Replace this subsection, except for the subsection number and title, with the following:

(a) Loading and Unloading - Handle hydrants to prevent damage to the hydrant, lining or coating. Load and unload hydrants using hoists and slings so as to avoid shock or damage, and under no circumstances allow them to be dropped, skidded, or rolled against other hydrants. Damaged hydrants are rejected. If damage is confined to the coating or lining, it may be repaired in a manner satisfactory to the Engineer. Immediately place all damaged hydrants apart from the undamaged hydrants and remove the damaged hydrants from the Project Site.

(b) End Caps - Furnish factory applied end caps on pipe connection ends. Maintain end caps through shipping, storage, and handling to prevent damage and prevent dirt and moisture from entering the hydrants.

01160.43 Gate Valves and Valve Boxes - Replace this subsection, except for the subsection number and title, with the following:

Install gate valves and valve boxes according to Section 01150, except furnish end connections with lugs for tie rods, or furnish bells with sufficient clearance between the body of the valve and the hub to permit the installation of tie rods.

01160.46 Moving Existing Hydrants - Replace this subsection, except for the subsection number and title, with the following:

Move existing hydrants where shown. As shown, remove the existing hydrant lateral tee from the main if the main is to remain active, and insert a new section of pipe into the water main in place of the existing hydrant lateral tee. Where the existing main to the existing hydrant lateral tee is connected is to be abandoned or temporarily activated after the existing hydrant is moved, plug the open end of the hydrant lateral pipeline. Provide temporary thrust restraint if temporarily reactivated.

Insert Project Name Here

01160.90 Payment - Replace the paragraph that begins "Payment will be payment ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01170 (Special Provisions for the 2024 Book) (Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP01140, SP01150 & SP02490)

SECTION 01170 - POTABLE WATER SERVICE CONNECTIONS, 2 INCH AND SMALLER

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 01170 of the Standard Specifications modified as follows:

01170.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Work consists of furnishing and installing service connections, 2 inch in diameter and smaller, from the main to the water meter, and furnishing and installing sampling stations. The water meters are furnished and installed by others unless otherwise shown or specified.

01170.40(b) Installation - Replace this subsection, except for the subsection number and title, with the following:

Furnish and install water service assemblies at the locations shown, or as directed. Furnish service pipe, meter assemblies, fittings, and appurtenances according to the details and standards of the agency having jurisdiction. As shown, install the water service saddle, corporation stop, water service pipe, meter assembly, and meter, and reconnect the customer service pipe to the installed meter assembly.

Cut customer service pipes using tools specifically designed to leave a smooth, even, and square end on the pipe. Ream cut ends to the full inside diameter of the pipe. For pipes that are connected using couplings that seal to the outside surface of the pipe, clean pipe ends to a sound, smooth finish before installing couplings.

Make service connections to water mains according to the recommendations of the pipe manufacturer and appropriate AWWA standard for water service installation. Furnish continuous water services without splices between the main and the meter unless otherwise approved by the agency having jurisdiction.

Insert Project Name Here

Install water service assemblies to match finished lines and grades, and maintain proper clearances and cover for the entire service connection. Adjust the meter box to the finished grade after the surface has been acceptably restored. When meter boxes are to be installed in driveways or a vehicular Traveled Way, use approved traffic rated meter boxes.

01170.90 Payment - Replace the paragraph that begins "In items (a) and (b), ..." with the following paragraph:

In items (a) and (b), the nominal pipe diameter is inserted in the blank.

Replace the paragraph that begins "In item (d) ..." with the following paragraph:

In item (d), the nominal pipe diameter is inserted in the first blank. The type of pipe is inserted in the second blank.

Replace the paragraph that begins "In items (e) and (f), ..." with the following paragraph:

In item(s) (e) and (f), the nominal size of the meter is inserted into the blank.

Replace the paragraph that begins "Payment will be payment, ..." with the following paragraph:

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor, and Incidentals necessary to complete the Work as specified.

SP01201 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 03-27-26
*This Section requires SP00253,
SP00535, SP01210 SP01215,
SP01220, SP01235, SP01240,
SP01245, SP01260, SP01270,
SP01280, & SP01285)*

(This Section may require SP00120 Contractor Special Prequalification to ensure that the contractor prequalification requirements are included in the Contract if applicable. Contact the State Specifications Engineer if you have any questions.)

SECTION 01201 - COMMON PROVISIONS FOR CATHODIC PROTECTION SYSTEMS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Impressed current cathodic protection systems are not intended for pre-stressing, post-tensioning, or any Structure where reinforcement yield strength exceeds 100ksi. If corrosion protection of this type of Structure is necessary, contact the ODOT Technical Resource.)

Section 01201 is not a Standard Specification and is included in this Project by Special Provision.

Description

01201.00 Scope - This Work consists of **furnishing** and installing Materials and Equipment for cathodic protection of existing Bridges.

To the extent feasible, and in **conformance** with the Plans, perform the Work without degrading the visual and architectural character of the Bridge.

01201.01 Abbreviations and Definitions:

(a) Abbreviations:

CP - Cathodic Protection

PVC - Polyvinyl chloride

(b) Definitions:

CP Zone - An area of the Bridge surface marked by edge boundaries of the anode, as defined in the Plans. CP Zones are established for the purpose of managing the power needed to operate the cathodic protection system effectively.

Damaged Concrete - Concrete that is spalled or delaminated; concrete with near-surface rock pockets; concrete that is unbonded from reinforcing bars; unsound or delaminated concrete in existing patches; and concrete that has been drilled, excavated, or removed during prior maintenance work or during the Work of this Project. Areas of near-surface metal removal in sound concrete less than 1/2 square foot will not be considered Damaged Concrete.

Essential Near-Surface Metal - Metal located less than 1/2 inch below the surface of the concrete, and that has a structural or functional purpose. Essential near surface metal includes objects such as reinforcing bars, reinforcing mesh, bearing devices, drains, conduits, Bridge supports, and anchors.

Hold Point - A time when the Contractor is required to cease a particular activity until a phase of Work is inspected by or tested in the presence of the Engineer. If the Engineer finds this phase **conforms** to the Specifications, the subsequent phase of Work may proceed.

King Bar - Primary connection of the direct current power source of a cathodic protection system to the reinforcement of a concrete structure (cathode).

Non-Essential Near-Surface Metal - Metal located less than 1/2 inch below the surface of the concrete, and that does not have a structural or functional purpose. Non-essential near surface metal includes objects such as form ties, wires, nails, rebar supports, staples, and abandoned conduits.

Primary Deck Bar - Reinforcing bars in the Bridge deck slab, that span between the members that support the deck slab.

Pumped Concrete - Portland cement, Sand and admixtures or a pre-packaged repair mortar thoroughly mixed and hydrated that is suitable for placement by pumping into restricted liquid tight formwork.

QCE Work - Quality Critical Elements (QCE) of Work is any Work that requires trained personnel to complete the Work. QCE Work consists of the following:

- Quality Control according to Section 01210
- Locate and Remove Near Surface Metal according to Section 01215
- Replace Damaged Concrete according to Section 01235
- Install Reference Cells according to Section 01240
- Locate and Eliminate Electrical Discontinuities in Rebar according to Section 01245
- Prepare Surfaces and Apply Zinc Anodes according to Section 01260

Saturated Surface Dry Condition - Surface condition where hardened concrete is thoroughly saturated with water without any free standing water.

Secondary Deck Bar - Reinforcing bars in the Bridge deck slab, oriented perpendicular to the Primary Deck Bars.

Shallow Rebar - Rebar that is less than 1/2 inch below the surface of the concrete.

Materials

01201.10 Hand Patching Materials - Furnish hand patching Materials from Section 02015.30 of the QPL designated for vertical and overhead application.

01201.11 Non-Conductive Resin - Furnish non-conductive resin from Section 00535.10 of the QPL designated as "high strength".

01201.12 Non-Conductive Sealant - Furnish one of the following non-conductive sealants:

- Dow Corning 790 Silicone Building Sealant.
- GE SCS9000 SILPRUF Sealant.
- Sikaflex 1a Polyurethane Elastomeric Sealant/Adhesive.

01201.13 Heat Shrink Tubing; Electrical Tape - **Furnish** the following heavy-walled heat-shrink tubing or approved equal:

- Raychem WCSM series.

Insert Project Name Here

Furnish the following electrical tapes or approved equal:

- Electro Tape Specialties MW101 Mastic Rubber Wrap and 750 Premium Grade Vinyl.

01201.14 Ring Connectors; Tap Connections; Solder - Furnish UL listed, un-insulated copper ring connectors sized for #10 AWG wire.

Furnish the following C-taps or approved equal:

- Thomas & Betts catalog number 54715.

Furnish RoHS compliant solder meeting IPC-J-STD-004, 005 and 006.

01201.15 Conduit and Fittings - Furnish UL listed, schedule 40, extruded PVC electrical conduit that **conforms** to UL Standard Number 651, rated for 194 °F conductors. Furnish gray conduit and gray fittings.

Furnish **gray** conduit fittings constructed from PVC or thermoplastic according to UL Standard Number 514. Furnish **PVC** expansion fittings that are UL listed and constructed to **provide** a weathertight seal. Furnish **UL listed** PVC conduit elbows.

Furnish **gray** UL listed junction boxes constructed from PVC or thermoplastic **furnished** with mounting feet and a gasketed weathertight cover mounted with brass or stainless steel screws.

Furnish **gray** UL listed, single-hole PVC conduit straps.

Furnish **cement** recommended by the conduit manufacturer to secure conduit joints.

Furnish **pre-fastening** plastic anchors designed for 1 1/2" minimum embedment in concrete. Furnish fasteners rated for indoor/outdoor and damp/dry location that are also rated for -30 °F or less and 140 °F or greater.

01201.16 Fasteners:

(a) Brass Nuts and Bolts - Furnish **1/4-inch-diameter** brass hex nuts and brass bolts or all-thread according to ASTM F467/468 UNS number C27000, C46200 or C46400.

(b) Stainless Steel Bolting Materials - Furnish **Type 316** stainless steel bolting Materials according to ASTM A193/194, Grade B8M, B8MA, B8M2, or B8M3, Class 1, 1A, 1D, or 2 or ASTM F593/594 Group 2 Condition CW.

- For conduit hangers, furnish **bar stock** and all-thread from the same alloy group as the nuts and bolts listed in the subsection.

01201.17 Labels - Use printed labels at least 1 1/2 inches in length with a text height of at least 1/8 inch (12-point Arial). Protect labels by completely covering with clear, flexible heat shrink tubing that is CSA/UL approved meeting MIL-I-23053.

Insert Project Name Here

01201.18 Electrical Conductors - Furnish UL listed, Type XHHW stranded copper wire with 600 volt rated insulation rated for 167 °F operation in wet or dry locations.

01201.19 Marking Tape - Furnish marking tape made of red polyethylene six inches wide and a minimum of four mils thick, continuously imprinted with the message "CAUTION BURIED ELECTRIC LINE".

Equipment

01201.20 Short Circuit Detection Equipment - Use a voltage detection system that monitors the potential between the steel rebar and the zinc coating and activates an alarm if a short circuit occurs during conduit or junction box installation. Use one of the following digital panel meters, installed in a NEMA 4 enclosure:

- Newport digital panel voltmeter number Q2005AVR2-SPC
- Simpson Hawk 3 digital panel voltmeter number H345-2-12-0-1-0
- Laurel Electronics Laureate digital panel voltmeter number L10100DCV2

Labor

01201.30 Electricians - Provide electricians licensed as a S or J in the State of Oregon, under Oregon Administrative Rule 918-282-0140 or 918-282-0170.

Construction

01201.40 Short Circuit Detection - Monitor the potential between the steel rebar and the zinc to detect short circuits. A short circuit is indicated if the measured potential is less than 100 mV.

Connect the negative input terminal of the detection Equipment to the anode terminal plate connection in the zone where Work is being performed and connect the positive input terminal to a terminal on the rebar at the nearest reference cell rebar connection or King Bar connection.

Operate the short circuit monitoring system during any Work capable of causing a short circuit between the zinc anode and the rebar including conduit installation over zinc anode surfaces. If this alarm is actuated, stop installation Work until the short circuit has been eliminated. Perform elimination of short circuits using a method approved by the Engineer.

Use a separate short circuit detector for each concurrent Work area where the anode is discontinuous. When a short is detected, Work may continue in other areas not continuous with the affected anode.

01201.41 Installing Conduit and Fittings:

(a) Conduit - Furnish conduit of the sizes shown. If the size is not shown, meet the requirements of the conduit fill limits listed in Table 4 of Chapter 9 of the NEC.

Support major conduit runs through Bridge Utility holes under the Bridge using stainless steel all-thread and plate hangers. Provide an insulated threaded hole for plate hangers

by drilling into the concrete surface, inserting non-conductive sealant into the hole, and inserting a plastic anchor. Secure all-thread with non-conductive resin. Maintain major conduit runs straight and level between transverse beams where the conduit is run.

Support surface-mounted conduit with conduit straps. **Provide** an insulated threaded hole for the strap by drilling into the concrete surface, inserting non-conductive sealant into the hole, and inserting a plastic anchor. Mount the conduit straps with stainless steel bolts and secure with non-conductive resin.

Provide square-cut or square-formed ends on all sections of conduit. Remove any internal and external sharp edges if the conduit is cut. Cap conduit ends, and **provide** protection for wires that are exposed at the end of a Work shift until the Work can be completed.

If obstructions require conduit runs to deviate from the routing shown, locate the conduit to minimize visual impact after obtaining written approval from the Engineer. Only drill through concrete with written approval from the Engineer. Locate reinforcing bars before drilling through concrete. Perform drilling through concrete without drilling through reinforcing bars unless otherwise approved. Repair any damage to the surrounding concrete.

(b) Conduit Fittings - When fittings require removable access holes for pulling conductors, furnish conduit fittings with a gasketed cover mounted with stainless steel or brass screws according to 01201.16, to form a weathertight fit. Install conduit fittings as follows:

(1) Expansion Fittings - Furnish **expansion** fittings with at least a 6-inch throw for all major conduit runs at all Bridge expansion joints.

Secure the expansion fitting to the surface only at the barrel end of the fitting. Adjust the initial setting of the fitting to account for installation temperature and future expansion/contraction movement based on a minimum design temperature of 10 °F and a maximum design temperature of 110 °F.

(2) Conduit Elbows - Wherever possible, **provide** factory made bends. If a field bend is necessary, **provide** a bending radius not less than six times the inside diameter of the conduit. Do not use conduit that is damaged or flattened during bending.

(3) Reducer Couplings - Reducer couplings are not allowed.

(4) Junction Boxes - **Provide** insulated threaded holes for mounting junction boxes by drilling into the concrete surface, inserting non-conductive sealant into the hole, and inserting a plastic anchor. Mount junction boxes with stainless steel screws. If no size is shown, furnish junction boxes sized according to the guidelines given in the NEC.

Field removal of the bottom of junction boxes is allowed, if the Plans show the box without a bottom. Accomplish field removal of box bottoms without damaging the box mounting feet and leaving a minimum of 3/4 inch of box bottom along each side of box.

Install junction boxes with the bottom flush on the concrete surface. Drill a 1/8-inch-diameter hole through the lowest point in each junction box to **provide** drainage.

Junction boxes without mounting feet are acceptable if a hole is drilled in each corner of the bottom for fasteners.

(5) Conduit Cement - Apply cement only within the manufacturer's recommended installation temperature range. Follow all other manufacturer's recommendations.

Temporary

01201.70 Electrical Service - Install and remove any temporary electrical service needed to perform the Work at no additional cost to the Agency. Use electricians meeting the requirements of 01201.30.

SP01210 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 03-27-26

This Section requires SP01201.)

SECTION 01210 - QUALITY CONTROL

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01210 is not a Standard Specification and is included in this Project by Special Provision.

Description

01210.00 Scope - In addition to the requirements of Section 01201, Section 01215, Section 01220, Section 01235, Section 01240, Section 01245, Section 01260, Section 01270, Section 01280, Section 01285 create and execute a Quality Control (QC) Plan to ensure that all Quality Critical Elements (QCE) of Work conform to the Contract Documents, and providing Quality Control Specialist(s) (QCS) to execute the QC plan according to the following Specifications.

For the purposes of all Work related to cathodic protection, QC is understood to refer specifically to the QC for cathodic protection.

01210.01 Submittals - Submit the QC Plan according to 00150.37 at least 21 Calendar Days before QCE Work begins. At a minimum, include:

- The names of the QCS(s).

Insert Project Name Here

- A list of all Work items and Hold Points. Identify all QC tests, pass/fail criteria as stated in the Specifications, and the names of personnel who will perform and witness the test. Include a checklist clearly outlining the work flow for the QCS to follow.
- A copy of each form used to report QC inspection and test data to the Agency.

Following each QC inspection and test, submit all inspection and test data according to 00150.37.

Labor

01210.30 Quality Control Specialist(s) - Provide Quality Control Specialist(s).

Provide QCS qualified to inspect QCE Work for defects. The Engineer will determine if the QCS is qualified to perform the Work based on their familiarity with all cathodic protection QC test methods and by experience in performing the specified Work. Each QCS is required to be approved by the Engineer prior to performing quality control Work.

Multiple QCSs may be designated. A QCS need not fill this role for all QCEs as long as each QCE has at least one QCS responsible for it.

The QCS is responsible for:

- Reviewing all Work for defects and ensuring defects are corrected prior to requesting verification testing and inspection
- Witnessing or performing all QC tests and submitting inspection and test data according to the QC Plan
- Establishing Work limits prior to beginning QCE Work or anytime Work limits are broken into smaller areas
- Inspecting Equipment and abrasive daily
- Cooperating with Agency verification testing and inspection
- Stopping Work when test Equipment is not available, and when necessary to ensure that the Work is performed according to the Contract Documents

Do not allow the QCS to perform production duties or supervision for any QCE Work when the QCS is responsible for quality control.

The QCS will be immediately removed from QCS duties and disqualified from future QCS duties if any quality control failure occurs. Quality control failure includes:

- Three separate occurrences of accepting QCE Work that does not comply with the Contract Documents
- A determination that zinc anode thickness approved by the QCS are later found to be below the minimum or above the maximum thickness values.
- Two separate occurrences of QCS performing production duties when they are designated as the QCS for that QCE Work.
- Two separate occurrences of the QCS failing to perform any duties as specified.

Stop QCE Work if the QCS responsible for it is no longer employed by the Contractor, a Subcontractor, or is otherwise unavailable. If the QCS will no longer be available, propose a new QCS for approval by the Engineer before resuming the QCE Work in question.

Construction

01210.40 Quality Control Testing and Inspection - Provide QC testing and inspection to ensure compliance of the Work with the Contract Documents. Ensure that defects are corrected prior to requesting verification testing and inspection.

01210.41 Agency Verification Testing and Inspection - Coordinate with Agency verification testing and inspection to provide timely access and ensure a QCS is present.

Provide the Inspector timely access to areas where Work is being performed. Allow adequate time for inspection and testing at each Hold Point. The Engineer will inspect each phase of the Work. If the Engineer finds a phase conforms to the Specifications, the subsequent phase of Work may proceed.

The following Hold Points are defined for Agency verification testing and inspection:

- After the Work platforms and containment Structures have been installed and accepted according to Section 00253.
- After marking of near-surface metals, before removal of near-surface metals according to Section 01215
- After removal of near-surface metals, before patching according to Section 01215
- After patching of near-surface metals areas according to Section 01215
- After marking of corroded reinforcing bars according to Section 01220
- After preparation for reinforcing bar repairs, before splicing according to Section 01220
- After completion of splicing, before patching according to Section 01220
- After patching of reinforcing bar repair areas according to Section 01220
- After marking of damaged concrete according to Section 01235
- After removal of damaged concrete, before installing forms according to Section 01235
- After installation of forms, immediately before pumping patch concrete according to Section 01235
- After form removal according to Section 01235
- After surface finishing according to Section 01235
- After conducting potential surveys according to Section 01240
- After preparation, before installation of reference cells according to Section 01240
- After installation of reference cells according to Section 01240
- After continuity checks, before continuity welding according to Section 01245
- After continuity welding, before patching according to Section 01245
- After patching of continuity weld areas according to Section 01245
- After completion of anode terminal installation according to Section 01260
- Before abrasive blast according to Section 01260

Insert Project Name Here

- After abrasive blast according to Section 01260
- Before anode application according to Section 01260
- After anode application according to Section 01260
- After installation of conduits and wiring according to Section 01270
- After fabrication of cabinets, before shipment of cabinets according to Section 01285
- After installation of cabinets according to Section 01285

Measurement

01210.80 Measurement - No measurement will be made for Work performed under this Section.

Payment

01210.90 Payment - The accepted quantities of Quality Control Work will be paid for at the Contract Lump Sum amount for the item "Quality Control Plan".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

SP01215 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 03-27-26

This Section requires SP01201.)

SECTION 01215 - LOCATE AND REMOVE NEAR-SURFACE METAL

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01215 is not a Standard Specification and is included in this Project by Special Provision.

Description

01215.00 Scope - In addition to the requirements of Section 01201, Section 01210, Section 01235, and Section 01260, this Work consists of locating, and eliminating low resistance paths for CP current from the thermal spray anode to the rebar.

01215.02 Timing - Perform locating and marking of Essential and Non-Essential Near-Surface Metal after boundaries of damaged concrete have been marked for removal according to Section 01235.

01215.03 Submittals - At least 21 Calendar Days before beginning Work, submit according to 00150.37 detailed procedures for locating and marking Essential and Non-Essential Near-Surface Metal. Identify patching Materials and resins to be used. Include the manufacturers' specifications and operating instructions for all Equipment. The Engineer will respond within 21 Calendar Days after receipt of the submittal.

Do not start Work until written approval of submittals is received from the Engineer.

Materials

01215.10 Hand Patching Materials - Comply with 01201.10.

Construction

01215.40 Location and Removal Requirements - Locate and mark all metal bearing plates, drains, Bridge supports, anchors, and other exposed Essential Near-Surface Metal on all concrete surfaces receiving anode.

Locate all reinforcing bars, reinforcing mesh, and other Essential Near-Surface Metal that have less than 1/2 inch of concrete cover. Locate by visual inspection and by using a metal detector.

Within areas marked for replacing damaged concrete under Section 01235:

- Do not mark Essential Near-Surface Metal.
- Do not mark Non-Essential Near-Surface Metal.
- Do not remove Non-Essential Near-Surface Metal as it is removed under 01235.
- Do not perform resin coating or concrete build-up over Essential Near-Surface Metal, as concrete cover is restored under Section 01235.

Outside areas marked for replacing damaged concrete under Section 01235:

- On surfaces identified as high visual impact in 01235.46, mark for resin buildup on shallow rebar according to 01235.46.
- On surfaces not identified as high visual impact in 01235.46, mark for mortar buildup on shallow rebar according to 01235.46.
- Remove all Non-Essential Near Surface Metal within 1/2 inch from the concrete surfaces. Do not remove or cover objects if it is obvious that none of the metal can survive abrasive blasting.

Wire brush and mask Essential Near-Surface Metal and the adjacent concrete surface within four inches of metal to prevent bonding of the anode to the exposed metal and the immediate area surrounding it.

Insert Project Name Here

Explore all spots of rust visually and with a metal detector to determine if a metallic object is present. Mark the location and extent of all known Non-Essential Near Surface Metal.

If a pattern of form ties or other objects is identified, examine all expected locations visually and with a metal detector. If form ties are found, examine the opposite side of the member to locate the other end of the tie.

Remove marked Non-Essential Near-Surface Metal to a minimum of 1/2 inch below the concrete surface and clean the cavity.

An acceptable removal technique for Non-Essential Near Surface Metal of less than 1/4-inch diameter that is oriented perpendicular to the concrete surface is to drill one or more small diameter holes, a minimum of 3/4 inch deep, with a rotary or rotary-impact drill beside each object. Sever the object at the required depth by grinding, sawing, or shearing.

Leave nails and other small metallic objects with their entire length at the concrete surface for removal during abrasive blasting under Section 01260.

Mark cavities that are greater than 1/2 square foot in area and long cavities such as those from removal of a piece of wire more than 12 inches long as repair damaged concrete under Section 01235.

Repair cavities with hand patching Materials created by non-essential near surface metal removal that are less than 1/2 square foot leaving no feathered edges. Observe QPL remarks and follow manufacturer's guidelines for application.

Measurement

01215.80 Measurement - The quantities of Work performed under this Section will be measured according to the following:

- (a) **Locate Near Surface Metal** - Locating near surface metal will not be measured.
- (b) **Remove Non-essential Near Surface Metal** - Removal of Non-Essential Near-Surface Metal will be measured on the unit basis.

Payment

01215.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Locate Near Surface Metal	Lump Sum
(b) Remove Non-Essential Near-Surface Metal	Each

Item (b) includes removing Non-Essential Near-Surface Metal and hand patching cavities less than 0.5 square foot.

No separate or additional payment will be made for Non-Essential Near-Surface Metal that is left in place to be removed by abrasive blasting under Section 01260.

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

SP01220 (Special Provisions for the 2024 Book) (Bidding on or after: 07-01-26
Last updated: 03-27-26
This Section requires SP01201 and SP02510.)

SECTION 01220 - REPAIR DAMAGED REINFORCING BARS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01220 is not a Standard Specification and is included in this Project by Special Provision.

Description

01220.00 Scope - In addition to the requirements of Section 01201, Section 01210, Section 01235, Section 01240, Section 01245, and Section 01260, locate and repair damaged reinforcing bars according to the Specifications.

01220.02 Timing - Perform reinforcing bar repairs after removing all damaged concrete and blast-cleaning all exposed concrete and reinforcement according to Section 01235, and before:

- Patching concrete excavations (including excavation made in competent concrete under this Section) as specified in Section 01235
- Performing any Work under Section 01240
- Performing any installation Work under Section 01245
- Performing any Work other than initial abrasive blast under Section 01260

01220.03 Pre-Welding Conference - Before beginning the Work of this Section, attend a pre-welding conference with the Engineer, at a mutually agreed-upon date and time. Attendance is mandatory for the Contractor's supervisory personnel and the Contractor's Certified Welding Inspector (CWI). The pre-welding conference includes discussion of the Contractor's quality control responsibilities, documentation requirements, and welding procedures and Equipment; and demonstration(s) of welder(s) skills.

No later than 21 Calendar Days before the pre-welding conference, submit the following according to 00150.37:

Insert Project Name Here

- Descriptions of Materials to be used. Identify all relevant constituents and properties of each Material and the Specifications where it complies. Data published by the manufacturer is acceptable, except when certifications of Materials characteristics are required.
- Detailed procedures for performing the Work of this Section. Include the manufacturer's specifications and operating instructions for all Equipment, and:
- Welder certifications according to AWS D1.4
- Pre-approved Welding Procedure Specifications (WPS) or Procedure Qualification Record / Welding Procedure Specifications (PQR/WPS)
- Detailed procedures for electrode control measures
- Detailed procedures for achieving, maintaining and monitoring pre-heat and inter-pass temperatures

Do not schedule the Work until at least 21 Calendar Days after submitting procedures, and do not start Work until written approval is received from the Engineer.

Materials

01220.10 Reinforcing Bars - Furnish uncoated, ASTM A706, Grade 60 reinforcing bars according to 02510.10.

01220.11 Welding Materials - Use weld Materials according to the current version of AWS D1.4, "Structural Welding code - Reinforcing Steel". When using shielded metal arc welding (SMAW), furnish low-hydrogen electrodes.

Labor

01220.30 Welders; Welding Inspectors - Provide certified welders and welding inspectors according to AWS D1.4.

Construction

01220.40 Location Requirements - Mark all locations where exposed bars have 50 percent or more section loss. At all such locations, splice bars according to the following:

(a) Sidewalks, Miscellaneous Beams, and Walls - On sidewalks and their supports, and on miscellaneous beams and walls:

- Splice longitudinal and transverse bars at each location having at least 50 percent section loss.
- Splice every stirrup and hoop having a location with at least 50 percent section loss.

(b) Longitudinally Framed Floor Systems:

(1) Girders - In the bottoms of girders, splice every longitudinal bar at each location having at least 50 percent section loss. Use tied splices only.

Splice every stirrup having at least 50 percent section loss.

(2) Bottom of Deck Slabs - Splice every primary deck bar at each location having at least 50 percent section loss except within one half of a splice length of a supporting member.

(c) Transversely Framed Floor Systems:

(1) Transverse Floor Beams - In the bottoms of floor beams, splice every longitudinal bar at each location having at least 50 percent section loss. Use tied splices only.

Splice every stirrup having at least 50 percent section loss.

(2) Bottom of Deck Slabs - Splice every primary deck bar at each location having at least 50 percent section loss except within one half of a splice length of a supporting member. Use tied splices only.

01220.41 Repair Requirements - Remove sound concrete as necessary according to Section 01235, to leave a minimum of 3/4 inch clearance between the bar and concrete around the entire perimeter of all splice bars over their entire length. Remove any additional concrete that cracks or spalls during welding. Remove only as much sound concrete as needed to shape excavations for adequate patch retention. Avoid gouging or loosening rebar and damaging sound concrete outside of splice areas.

Furnish splice bars with cross sectional area equal to or greater than the section loss of the bar being repaired. Repair round bars with splice bars the same diameter as the original bars. Repair square bars with round splice bars of a diameter equal to the thickness of the square bars. Extend splice bars both ways beyond the area of 50 percent section loss for at least the minimum splice length shown.

If feasible, place splice bars so as to allow 1/2 inch of concrete cover without raising the original concrete surface. Furnish enough wire ties to keep the splice bar in position during the placement of concrete cover and to provide electrical continuity between existing and new bars.

Except where tied splices are specified, tied or welded splices are allowed.

Perform all weld splicing according to ANSI/AWS D1.4, "Structural Welding Code - Reinforcing Steel". Since the carbon content of existing reinforcement is unknown, assume that preheating is required under ANSI/AWS D1.4. Limit the temperature of reinforcing bar at concrete interface to 500 °F or less, verified using an infrared thermometer.

Perform weld inspection according to ANSI/AWS D1.4. A Certified Welding Inspector marks each inspected weld.

01220.42 Documentation - Provide a map in an approved electronic format detailing the locations of all rebar repairs within $\pm$ three inches.

Measurement

Insert Project Name Here

01220.80 Measurement - The quantities of reinforcing bar repair Work will be measured on the unit basis, by count of splice bars installed.

Payment

01220.90 Payment - The accepted quantities of reinforcing bar repair Work will be paid for at the Contract unit price, per each, for the item "Repair Damaged Reinforcing Bars".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for documentation of repairs.

SP01235 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26
Requires SP01201 & SP02020.)**

SECTION 01235 - REPAIR DAMAGED CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01235 is not a Standard Specification and is included in this Project by Special Provision.

Description

01235.00 Scope - In addition to the requirements of Section 01201, Section 01210, Section 01215, and Section 01260, this Work consists of:

- Locating and removing damaged concrete and replacing it with pumped repair mortar.
- Removing Non-Essential Near-Surface Metal in areas larger than 1/2 square foot and long cavities such as those from removal of a piece of wire more than 12 inches long and filling cavities with pumped repair mortar.

01235.02 Timing - Begin the Work only after the entire surface within the Work area has been cleaned to remove dirt, grease, oils, laitance, paint, sealers, coatings, and other deleterious material according to Section 01260.

Provide temporary shoring of Work areas when required by 01235.50 before removing existing concrete.

Insert Project Name Here

Mark boundaries for excavating concrete and boundaries for adding concrete cover before locating surface metal according to Section 01215.

Place and cure repair mortar before preparing anode surfaces according to Section 01260

01235.03 Submittals - Submit the following according to 00150.37. Within 21 Calendar Days after receipt of submittals, the Engineer will review the submittals and designate them in writing as "approved", "approved as noted", or "returned for correction". At least 21 Calendar Days before beginning concrete repair Work, submit the following:

(a) Repair Mortar:

- A description of all relevant constituents and properties of the Material. Data published by manufacturer is acceptable unless certifications of the material characteristics are required by these Specifications.
- For prepackaged products, the manufacturer's certification that the furnished Material meets the requirements of 01235.11.
- The Specifications subsection where each repair mortar complies
- If proposing an alternate repair mortar to those specified in 01235.10, test data demonstrating compliance with 01235.10.

For alternate repair mortar submit three 4 by 8-inch cylinders of patch Material cast in the presence of the Engineer using the proposed mix proportions, admixtures, and mixing and application Equipment, at least 7 Calendar Days before starting concrete repair Work. Cast and cure the cylinders according to AASHTO R 100 or AASHTO R 39.

Submit records of mix proportions and identify the mix design that was used in each repair location. Maintain and provide records that are complete enough to be able to match repaired bridge areas with the mix records.

(b) Concrete Repair Procedure:

- Manufacturer's specifications and operating instructions for all Equipment
- Details of each step to accomplish the Work
- Steps to maintain quality control of all newly applied mortar
- Plan to maintain records of verification of mix proportions for all repair mortar mixed on-site
- Plan to maintain records identifying the mix design for each repaired area

Do not begin Work until written approval is received from the Engineer.

Submit stamped shoring drawings and design calculations according to 00150.35, at least 21 Calendar Days before starting concrete removal.

01235.04 Procedure Qualification - Demonstrate in the presence of the Engineer, proposed procedures and Equipment for patching and curing.

The Engineer will evaluate the results and determine whether procedures are accepted or rejected.

Insert Project Name Here

01235.05 Acceptance Criteria – The Work performed under this Section is acceptable if it passes the tests described below.

After the repair mortar has cured, and in the Engineer's presence, conduct a delamination survey of all repaired areas, as follows:

- Sound all repaired areas with a hammer.
- Mark boundaries of all delamination in the repaired areas.
- Identify the following delaminations for repatching:
 - All delaminations greater in area than a 3-inch diameter circle.
 - All delaminations with a dimension greater than five inches.
- Verify that delamination survey results are repeatable by spot checking using a different surveyor.
- When a spot check finds a non-repeatable result, re-survey the area surveyed since the latest repeatable spot check.

After repairing repatched areas repeat the survey. Repeat the survey and repair procedure until all areas of unsound repair mortar have been successfully repaired.

Perform quality control testing according to 01235.47.

Furnish material for verification testing according to 01235.48.

If a core tested for pull-off strength according to 01235.47 has Sand pockets or voids, fully remove the defects and repair the affected area.

Materials

01235.10 Repair Mortar - Furnish one of the following micro-concrete (MC) or repair mortars with the required admixture as specified in 01235.14:

- SikaEmaco 440MC (formerly BASF MasterEmaco S 440MC)
- Alternative repair mortar according to the following:
 - Non-polymer flowable micro-concrete
 - Suitable for pumping
 - At least 3,000 psi 28-Day compressive strength
 - “Low” potential for cracking and no cracking in 28 Calendar Days when tested according to ASTM C1581, including Appendix
 - Electrical resistivity in the range of 2,000 to 20,000 ohm-cm

Submit proposed alternate repair mortar for approval according to 01235.03.

Furnish hand patching Materials complying with 01201.10.

01235.11 Prepackaged Product - Premixed and prepackaged concrete furnished for on-site mixing is acceptable if approved by the Engineer. Furnish packages containing cement

Insert Project Name Here

and Aggregate according to these Specifications with no silica fume, fly ash, or any other porosity-reducing admixture.

01235.12 Non-Conductive Resin - Furnish non-conductive resin according to 01201.11.

01235.13 Embedded Steel - Furnish un-galvanized steel whenever welded wire fabric or other metal is to be embedded in the mortar.

01235.14 Admixtures - Use only admixtures approved by the Engineer.

When admixtures are used to reduce water-cement ratio or retard or accelerate the development of strength, use only admixtures compatible with the cement used, at the rate specified by the manufacturer.

01235.15 Hollow Wall Anchors - Furnish the following plastic hollow wall anchors or approved equal:

- ITW Red Head EZP100 Nylon E-Z Drywall Anchor

01235.16 Water - Furnish water according to 02020.

Construction

001235.40 Access; Containment; Disposal - Provide Work access and debris containment according to Section 00253.

Dispose of waste according to 00290.20.

01235.41 Locating and Marking - Locate and mark all damaged concrete and surface defects.

Locate surface defects such as rock pockets or delaminated finishing coatings or mortars by visual inspection. Mark boundaries for patching all surface defects that do not sound as damaged concrete and are not located over a rebar or it is obvious that rebar corrosion is not associated with the surface defect.

Locate damaged concrete by visual inspection and by sounding the concrete surface with a 16-ounce masonry hammer. Mark as damaged concrete all areas where damaged concrete is visually obvious or is suspected based on sounding with a hammer. Where sounding indicates possible delamination and the concrete surface appears sound, with no obvious damage, use a bar locator to determine rebar location and cover depth. Remove concrete according to 01235.41 from a four-inch wide by eight-inch-long exploration area centered over the rebar, and extend the exploration area along the rebar until rebar that is free of rust scale or pitting is exposed. Mark the exploration area as damaged concrete.

Mark boundaries for concrete removal around all:

- Damaged concrete
- Shallow rebar, if the reinforcement is a prefabricated mesh
- Patches that were located and marked according to Section 01215

Insert Project Name Here

Do not use angles sharper than 45 degrees in defining the repair boundaries. Make all repairs at least four inches wide in each direction. While conforming to these guidelines, draw repair boundaries that minimize the effort needed to saw and excavate.

The Engineer will perform verification surveys of selected sections of the Work and determine the final quantity of repairs. Do not begin concrete removal until the Engineer has completed the verification surveys of the selected sections.

01235.42 Concrete Removal - Sawcut the boundaries of concrete to be removed, to a depth just missing the reinforcing bars or to a depth of 1/2 inch, whichever is less. Do not overrun sawcuts at the corners of the marked boundaries. Sawcutting is not required if the Contractor can consistently provide, by another technique, a minimum 1/2-inch deep excavation surface that is uniformly perpendicular to the original concrete.

Remove concrete within the marked boundaries with high-pressure waterjet blasting Equipment, pneumatic hammers, chipping guns, manual picks and chisels, or other Equipment approved by the Engineer. Do not use pneumatic hammers heavier than a nominal 15-pound class. Remove concrete in such a way that removal of sound concrete beyond established boundaries is kept to a minimum. When working around reinforcing bars, avoid loosening the reinforcement or fracturing the concrete around it beyond the repair area.

Remove all damaged concrete within the marked boundaries to the depth of sound concrete. In areas where the reinforcing bar lacks bond with the existing concrete, continue to excavate to 1/2 inch beyond the depth of the reinforcing bar. In areas where it is difficult to determine if the reinforcing bar lacks bond with the existing concrete, do not excavate beyond the depth of the reinforcing bar if a 4-inch wide exploration area shows the reinforcing bar to be free of rust scale or pitting, and the reinforcing bar is not separated from the remaining concrete. Limit removal to no more than one inch above the bottom mat reinforcing bar in deck soffits. If further excavation is required to remove all damaged concrete, inform the Engineer and do not proceed until approved.

Do not remove sound concrete over shallow rebar.

Verify that all damaged concrete has been removed by sounding with a 16-ounce hammer.

01235.43 Surface Preparation - Abrasive-blast or water blast all concrete surfaces that are to receive repair mortar to remove all debris, loose concrete, concrete pulverized during removal, scale, and loose rust. Abrasive-blast exposed reinforcing bars according to SSPC Standard SP6 "Commercial Blast Cleaning" or equivalent procedure. Do not allow prepared surfaces to remain exposed more than 36 hours before placing repair mortar.

Prepare surfaces that are to receive repair mortar with a surface profile according to International Concrete Repair Institute (ICRI) *Guideline 310.2R-2013 surface profile CSP 6*.

Furnish hollow wall anchors according to 01235.15 for concrete surfaces that are to receive more than one inch of repair mortar and have reinforcing bar spacing greater than nine inches. Install anchors by drilling 1/4-inch diameter holes 1/2 to 3/4 inch deep on a nine-inch maximum grid in the concrete substrate. Apply non-conductive resin and insert anchors. Remove excess resin from the concrete substrate.

01235.44 Repair Mortar Installation - Install repair mortar patches as follows:

(a) Forms - Furnish smooth-surfaced form Materials. Provide adequate support and bracing of forms to prevent deflection under the weight and pressure of new concrete, and to prevent vibration damage to mortar during setting and curing. Leave forms in place for a minimum of 72 hours after concrete placement.

Furnish watertight form Materials and a watertight form system to prevent loss of water during presoaking repair mortar placement, and curing. Incorporate enough pumping ports to ensure consistent placement, drains for flushing, and enough vent holes or vent tubes to allow air to escape extreme surface irregularities and remote cavities. Limit port spacing to prevent mortar segregation.

Provide forms that can readily be removed and reinstalled for presoaking, flushing, and blowdown, and for verification of saturated surface dry condition.

(b) Pre-soak - Saturate the substrate concrete for at least 24 hours before application of repair mortar, using either a watertight form kept full of water or saturated burlap or foam Material packed inside the forms, in contact with the entire existing concrete surface, and soaked frequently, or any other method demonstrated to produce saturated surface dry condition.

After the substrate has been saturated, temporarily remove the form and, immediately before placing mortar, remove all dust, dirt, and other debris by flushing the surface with water pressurized to at least 60 psi, followed by blasting with clean compressed air to remove excess water. Provide a damp surface free of standing water (saturated surface dry condition) and free of contaminants when applying repair mortar. Light surface rust that appears during the pre-soak stage does not need to be removed. When the concrete surface is in saturated surface dry condition and free of contaminants, and reinforcement is clean or has only light surface rust, immediately reinstall the forms and place mortar.

(c) Mixing - When a package of prepackaged repair mortar is opened, mix the entire contents of the package. Do not allow packaging to be mixed into the repair mortar.

Mix repair mortar according to the manufacturer's instructions, including, but not limited to, mixing speed, mixing time, and mixing Equipment.

(d) Placing Repair Mortar - Pump repair mortar and achieve thorough and uniform hydration without the use of excess water.

Do not pump mortar before acceptance of saturated surface dry condition by the Engineer.

Follow all of the manufacturer's recommendations regarding temperature and weather conditions during mortar placement, and:

- Do not pump mortar during freezing weather, or if temperatures are likely to drop below freezing during the cure period.
- Ensure that substrate, surface and ambient air temperatures are at least 40 °F and rising when mortar is applied, and remain above 40 °F for at least 24 hours after application.

Insert Project Name Here

- Do not apply mortar to frosted surfaces

Provide adequate pumping pressure into each port to ensure mortar completely fills the cavity and mortar is observed at all vents. Vibrate only if approved in advance by the Engineer.

(e) Miscellaneous Metal - Electrically connect all welded wire fabric or other metal installed to facilitate repair mortar placement to existing metal reinforcement, and fasten securely to remain 1/2 inch clear of final finished surface. Do not use galvanized or coated Materials.

(f) Adjacent Surface Protection - Protect surfaces outside the repair area from mortar overshoot and drip, and remove the excess Material from these areas after the application has been completed.

(g) Mix Records - Record mix proportions for all mortar mixed on-site at the start of each mortar placement operation and every time proportions or additives are changed.

Repair surface defects with hand patching Materials. Observe QPL remarks and follow manufacturer's guidelines for application.

01235.45 Curing and Finishing - Take care to avoid cracks in the new mortar due to excessive surface evaporation in the dry, controlled environment of the containment Structure. Continuously cure all newly applied mortar for a minimum of 72 hours.

Finish all exposed surfaces and surface defects to straight and true lines, as shown. Provide a Class 2 surface finish according to 00540.53(c) on all exposed surfaces and a general surface finish according to 00540.53(a) on all other surfaces, with no coating on any surface unless otherwise directed.

01235.46 Essential Near-Surface Metal - For sound concrete in the following areas of high visual impact provide electrical isolation of Essential Near-Surface Metal identified in 01215.40 with resin buildup on shallow rebar. Coat the concrete over the Essential Near-Surface Metal with two-inch wide strips of non-conductive resin before abrasive-blasting:

- Bottom surface of girders, cross beams, and sidewalk stringers.
- Outer surface of exterior girders, box girders, or sidewalk stringers.
- All sidewalk bracket surfaces.
- Sidewalk soffits except areas of prefabricated mesh where both dimensions exceed 12 inches.
- All columns, spandrel, and abutment walls.
- All arch rib and strut surfaces.
- Web walls in bents and cross bracing in arches.

For sound concrete in all other areas provide electrical isolation of Essential Near-Surface Metals identified in 01215.40 with mortar buildup on shallow rebar. Use hand tools to prepare the existing surface according to 01235.43. Form raised patches to provide at least 1/2 inch of clearance between Essential Near-Surface Metal and surface of the patch and install repair mortar according to 01235.43.

For damaged concrete, provide additional mortar build-up on shallow rebar as needed to achieve at least 1/2 inch of cover between the Essential Near-Surface Metal and the surface of the repair.

01235.47 Quality Control Testing - For each 500 square feet of applied mortar placed on the Bridge, but not less than once per production Work shift, cast three 4 by 8-inch cylinders in single-use plastic molds, at the same time and under the same conditions as placement on the Bridge. Cast and cure strength specimens according to AASHTO R 100 or AASHTO R 39. Test the cylinders for compressive strength after 28-Day cure according to AASHTO T 22. The minimum acceptable 28-Day compressive strength (f'c) of cylinders is 3000 psi.

Following a 7-Day cure, core one 3-inch-diameter test specimen at a location designated by the Engineer, from each 500 square feet of newly applied mortar placed on the Bridge surface but not less than one specimen from each Day's production. Locate cores to avoid rebar and to have sufficient length to extend into the original Bridge concrete. Do not break cores free before testing. Perform pull-off strength tests of the cores in the presence of the Engineer once dolly adhesive has fully cured. Individually seal the cores taken from the test panel in plastic bags and tag them for identification.

Measure the core pull-off strength according to ASTM C1583. The minimum acceptable pull-off strength is 175 psi or as directed by the Engineer. Conduct the test until failure.

If any quality control test fails to meet the minimum requirements, any or all mortar represented by that test may be rejected by the Engineer.

01235.48 Verification Testing - For each 1,500 square feet of applied mortar placed on the Bridge, cast three 4 by 8-inch cylinders in single-use plastic molds, at the same time and under the same conditions as placement on the Bridge. Cast and cure strength specimens according to AASHTO R 100 or AASHTO R 39. Deliver these specimens to the Engineer within 48 hours of casting for verification testing by the Agency.

01235.49 Deficient Repair Mortar - All repair mortar represented by a failed verification test is rejected regardless of any passing quality control tests. Replace all repair mortar that is rejected based on quality control testing or verification testing, or that are found deficient in respect to any of the specified criteria, as directed. Further testing is allowed to identify the extent of deficient repair mortar in the quality control test area represented at no additional cost to the Agency. If additional areas are found to be deficient, repair the represented production test area, as directed. Repairs include, but are not limited to, removal and replacement of repair mortar.

"Deficient repair mortar" includes new repair mortar with alligatored surface or uncontrolled cracks that are visible without magnification after completion of abrasive blasting.

Repair small crevices a maximum of 0.4 inch deep and 0.1 inch wide at the edge of a repair area with non-conductive resin at no additional cost to the Agency. Cut out pockets and other defects and replace with new repair mortar according to the Specifications.

Temporary

(The EOR shall review the Bridge Program Unit load ratings for the Structures included in the Project. Delete options that do not apply to the Structures included in the Project. If multiple Structures exist on a Project, clearly define which options are acceptable for each Structure.)

01235.50 Concrete Removal Limits - Prevent damage to Bridge structural components during concrete removal and repair. For the purposes of this subsection, repaired concrete is defined as past repairs to the Structure or repair mortar that has been wet cured for the minimum requirement of this Section. Limits defined in the subsection only apply to removal of concrete and pumped patch sizes may be larger when not in conflict with this subsection.

When the concrete removal requirements of 01235.50 cannot be met, design shoring to support the entire dead load, live load, and wind load of member(s) being protected, with a safety factor not less than 2.0. Construct shoring according to AASHTO *Construction Handbook for Bridge Temporary Works* except if in conflict with the Specifications.

Do not combine any of the following methods without the Engineer's approval. Prevent damage to structural components by one or more of the following methods:

(a) General - Removal Work is unlimited for concrete removal on all structural components, except arches and columns, to the centerline depth of the reinforcement closest to the surface being worked on and not behind reinforcement.

(b) Bottom Surface of Girders - Limit concrete removal on the bottom surface of girders to four-foot-long sections separated by at least eight feet of intact un-repaired or repaired concrete. Limit concrete removal to 1/2 inch above the highest longitudinal bar in the bottom reinforcement.

(c) Sides of Girders and Crossbeams - Limit concrete removal on the sides of girders and crossbeams higher than 1/2 inch above the highest longitudinal bar in the bottom reinforcement to one side of girder or crossbeam centerline at a time. Limit the length of removal to the spacing between two stirrups separated by at least the spacing between four stirrups of intact un-repaired or repaired concrete.

(d) Girders - Eliminate live loading on the girder by closing the Traffic Lane, according to 00220.40(e), above the girder and limit concrete removal to one side of girder centerline at a time. Do not use this method to protect any girder within two feet of Project centerline unless both lanes can be closed as shown or directed.

(e) Bottom Surface of Crossbeams - Limit concrete removal on the bottom surface of crossbeams to sections of concrete no longer than 22D, where D equals longitudinal bar diameter (bar width for square bars), separated by a distance of at least 44D. Limit concrete removal to one inch above the highest longitudinal bar in the bottom reinforcement.

(f) Top Surface of Girders or Crossbeams - Limit concrete removal on the top surface of girders or crossbeams to sections of concrete no longer than 22D, where D equals longitudinal bar diameter (bar width for square bars), separated by a distance of at least 44D. Limit concrete removal to 1/2 inch below the lowest longitudinal bar in the top reinforcement. If the bottom surface also requires repair beyond the centerline depth of

the reinforcement nearest the surface at the same section, complete each repair separately or limit removal to one side of the component centerline at a time.

(g) Columns and Arches - Limit concrete removal on columns and arches to sections of concrete covering two hoop bars and a vertical height of $22D$, where D equals vertical or primary bar diameter (bar width for square bars), separated by a distance of at least $44D$. Limit concrete removal to 1/2 inch inside the vertical bars on columns and longitudinal bars on arches.

(h) Deck Soffits - Limit concrete removal on deck soffits to half the section of the deck. Limit removal length and width to twice the smallest spacing between two parallel reinforcement bars in the mat closest to the surface.

(i) Abutments and Pier Walls -

(1) Repairs at Least 24 Inches Thick - Limit concrete removal on abutments and pier walls at least 24 inches thick to sections of concrete covering up to 10 square feet, separated by a distance of at least 3 feet. Limit concrete removal to 1/2 inch behind the reinforcement closest to the surface.

(2) Repairs less than 24 Inches Thick - Limit concrete removal on abutments and pier walls less than 24 inches thick to sections of concrete covering two vertical bars and a vertical height of $22D$, where D equals vertical bar diameter (bar width for square bars), separated by a distance of $44D$. Limit concrete removal to 1/2 inch inside the longitudinal bars.

Measurement

01235.80 Measurement - No measurement of quantities will be made for locating damaged concrete.

The quantities of repair damaged concrete will be measured on the area basis, and is the outside measurement of each area marked for concrete removal and verified by the Engineer, not including areas marked for mortar buildup on shallow rebar. Measurement will be made before concrete removal.

The quantities of mortar buildup on shallow rebar will be measured on the area basis, and is the outside measurement of each area marked for concrete removal and verified by the Engineer containing shallow rebar. Measurement will be made before concrete removal.

The quantities of resin buildup on shallow rebar will be measured on the area basis. Measurement is the outside measurement of each area marked for resin buildup and verified by the Engineer. Measurement will be made before resin placement.

The quantities of repair surface defects will be measured on the area basis. Measurement will be the outside measurement of the defect prior to patching.

Payment

01235.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Insert Project Name Here

Pay Item	Unit of Measurement
(a) Locate Damaged Concrete	Lump Sum
(b) Repair Damaged Concrete	Square Yard
(c) Mortar Buildup on Shallow Rebar	Square Yard
(d) Resin Buildup on Shallow Rebar	Square Yard
(e) Repair Surface Defects	Square Yard

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for providing mix proportions or mix design records.

No payment will be made for repair of initially sound concrete that is micro-fractured or otherwise damaged by the Contractor's operations.

SP01240 (Special Provisions for the 2024 Book) (Bidding on or after: 07-01-26
Last updated: 03-27-26
This Section requires SP01201.)

SECTION 01240 - INSTALL REFERENCE CELLS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01240 is not a Standard Specification and is included in this Project by Special Provision.

Description

01240.00 Scope - In addition to the requirements of Section 01201, Section 01210, Section 01215, Section 01235, Section 01245, and Section 01260, conduct corrosion potential surveys to determine reference cell locations and install permanent reference cells.

01240.01 Timing - Begin the Work of this Section only after the entire surface within the Work area has been cleaned to remove dirt, grease, oils, laitance, paint, sealers, coatings and other deleterious material according to Section 01260.

Do not start this Work until written approval of detailed procedures is received from the Engineer. Provide at least 24 hours' notice before the installation of each reference cell.

Insert Project Name Here

Make corrosion potential surveys in each zone only after the Work of Sections 01215, 01235, and 01245 is complete, and:

- All patches and new concrete have cured at least three Calendar Days.
- All curing compounds have been removed from patches and the adjacent concrete by abrasive blasting.

01240.02 Submittals - Submit detailed descriptions of all Materials according to 00150.37. Identify all relevant constituents and properties of each Material and the Specifications with which it complies. Data published by the manufacturer is acceptable if testing was performed and reported by an independent test laboratory. This includes but is not limited to reference cell assembly, grout, and test Equipment.

Submit complete and detailed procedures for this Work according to 00150.37 at least 21 Calendar Days before the first scheduled Work under this item. Include the recommended reference cell conditioning procedures, Specifications, calibration certificates, and operating instructions for all Equipment, grout mixing, and wire labeling.

Submit a report according to 00150.37 detailing the following reference cell data:

- Pre-installation calibration potential of each reference cell after conditioning.
- Location of each permanent cell and labeling system for its lead wires.
- Circuit resistance measurements.
- Potential of each reference cell in its permanent location with respect to the rebar and the potential of a portable Copper/Copper sulfate (Cu/CuSO_4) or Silver/Silver Chloride (Ag/AgCl) reference cell taken in the test hole adjacent to the reference cell.
- Potential, with respect to the rebar, of a portable Cu/CuSO_4 or Ag/AgCl reference cell placed on the surface of the reference cell grout backfill.
- Resistance between each reference cell, the rebar adjacent to the reference cell, and the king bar.
- Potential of each reference cell in its permanent location with respect to the zinc anode placed directly over the reference cell grout.

Submit the following potential survey information according to 00150.37 at least 10 Calendar Days before installation of reference cells. Provide all potential survey data in an approved electronic format labeled to indicate the cathodic protection zone:

- One copy of large-scale potential survey data. Clearly identify data taken over patches or within three inches of patches. Provide a labeling method for survey grids and typical grid layout and survey procedures (e.g. origin location, direction in which data was taken) in sufficient detail to allow interpretation of data.
- One copy of a summary of large-scale potential survey data. For each survey grid provide a location description, the number of data points collected, the average potential for the grid, the minimum potential in the grid, and a rank of the grid's minimum potential as compared to other grids in the zone.
- One copy (each) of maps of small-scale potential surveys, designating their location with respect to the original surveys and the location of rebar and potential readings.

Insert Project Name Here

Provide surveys for each reference cell location plus one backup location for each reference cell. Scale these surveys with units indicated and use compass point directions and reference to the Bridge structural elements. Identify the cathodic protection zone. Show the precise location and orientation marks where the reference cells are to be installed.

- A summary sheet showing the grid number and location, rank of minimum potential and minimum potential from the large-scale grid survey, and the type of reference cell for each selected location. If additional locations with greater negative potentials are omitted, show the grid number, rank, minimum potential, and reason the location was omitted.

Do not start survey Work until these submittals have been approved by the Engineer.

Materials

01240.10 Reference Cells - Furnish two permanent Silver/Silver Chloride (Ag/AgCl) reference cells for each zone. Furnish the following reference cells or approved equal:

- Staperm by GMC Electrical, Inc. Model AG-4-UGPC

Furnish each reference cell with a #14 AWG wire having sufficient length to reach the junction box at the rebar connection location.

01240.11 Reference Cell Grout - Furnish non-epoxy grout from the QPL or an approved mix design provided by the reference cell manufacturer.

01240.12 Eyebolts and Anchors - Furnish 1/4"-20 threaded eyebolts designated for lifting constructed from Type 316 stainless steel. Provide a minimum eye diameter of 3/4" and a minimum vertical lifting capacity of 450 pounds.

Furnish 1/4"-20 female threaded concrete anchors constructed from Type 316 stainless steel with a minimum pull-out and shear capacity of 450 pounds tested in 4,000 psi concrete.

Equipment

01240.20 Resistivity Meter – Use one of the following resistivity meters:

- Fluke 1623 or 1625 GEO Earth Ground Tester
- Tinker & Rastor Model SR-2 Soil Resistivity Meter
- Miller 400A Analog Resistance Meter.

Construction

01240.40 Location Requirements - Identify two permanent reference cell locations in each cathodic protection zone. Install a Silver/Silver Chloride (Ag/AgCl) permanent reference cell at a location in each zone with the most negative potential. Install a second Ag/AgCl permanent reference cell at the maximum distance from the anode terminal plate but within 30 mV of most negative potential location. Locate each reference cell adjacent to a reinforcing bar.

Do not install the two permanent reference cells within 10 feet of each other measured along the surface of the Structure or within three feet of any galvanized steel in contact with the concrete. If the location with the most negative potential is also the most distant from the anode terminal plate, install the second Ag/AgCl cell at the location with the second most negative potential.

Identify a location for future linear polarization testing block outs adjacent to each reference cell location. Do not place the block out within 3 feet of a reference cell or negative connection excavation or within 10 feet of each other. Where possible, place the block out over the same reinforcing bar being read by the adjacent reference cell. Place at the most negative potential location possible while maintaining specified spacing from the reference cell excavations.

In each cathodic protection zone, conduct a corrosion potential survey with 36-inch grid spacing ("large-scale" survey) according to ASTM C876, "Standard Test Method for Half Cell Potentials of Reinforcing Steel in Concrete". Use a wetting solution of water and 0.2 percent sodium chloride by weight or 1.6 percent sodium chloride by volume.

Select prospective reference cell locations based on the most negative results of the large-scale corrosion potential survey. Perform a survey with 12-inch grid spacing ("small-scale" survey) of these locations directly over and following the reinforcing bar of the large-scale survey. Mark the precise location for the reference cell following the procedure described above in the first paragraph of this subsection.

Select final reference cell locations based on the most negative results of small-scale corrosion potential survey.

01240.41 Concrete Excavation Requirements - Excavate concrete for reference cell installation by carefully sawcutting or drilling to the rebar depth and then chipping out the concrete as specified in Section 01235 and as shown. Avoid disturbing the concrete around the adjacent reinforcing bar. In the event the concrete is disturbed, select a new location from the alternate sites.

Excavate concrete for rebar connections according to Section 01235 and as shown. Remove only as much material as necessary to weld a rebar terminal stub. Avoid contacting the rebar directly and de-bonding concrete surrounding the excavation. Install rebar terminals according to Section 01245.

Provide a 2-inch-diameter access hole for taking potential measurements with a portable Cu/CuSO₄ or Ag/AgCl reference cell, located opposite the rebar from the permanent reference cell and the same distance from the rebar. Make the access hole with a core drill to the depth of adjacent rebar. Insert a 1 1/2-inch diameter PVC plastic pipe inside the access hole and secure with reference cell grout. Extend the pipe two inches outside the concrete. If the access hole is located on a vertical surface, slope downward at approximately five degrees below horizontal. Install the pipe perpendicular to the surface on overhead, horizontal surfaces. Furnish a removable threaded PVC or rubber cap to protect the hole from debris.

01240.42 Reference Cell Installation - Condition the reference cells as recommended by the manufacturer. Take potential readings in the conditioning solution compared to a calomel, Ag/AgCl, or Cu/CuSO₄ with a salt bridge. Clearly label each cell for identification along with

Insert Project Name Here

its potential reading for future reference after installation. Provide a written description included in reference cell reports that indicates the location of each installed reference cell. Measure cell potentials.

Install each cell as soon as possible after removal from the conditioning solution to prevent its drying out. Wrap the reference cells in a suitable container to hold the moisture and protect the cell from contamination. Do not place the reference cell in contact with metallic dust.

Follow the manufacturer's instructions regarding any special backfill Materials required around the reference cell.

Place a layer of reference cell grout on all sides of reference cell before installing the cell in the excavation. Do not allow the reference cell to contact the rebar or other cathodic protection system components. Fill the excavation flush with the existing concrete surface by hand packing. Ensure that no air pockets remain. Take care to avoid damage to lead wires. Make bends in the lead wire with a radius no less than six times the lead wire diameter. Where the reference cell is to be placed along a non-horizontal bar, install with the lead wire end down.

Take reference cell-to-rebar resistance measurements after wet curing of the reference cell grout is complete, in the Engineer's presence, using a resistance meter according to 01240.20.

Acceptable resistance values between reference cell and reinforcing bar are 5000 ohms or less. Reference cell installations with resistance measurements outside this limit may be rejected.

Take installed reference cell voltage readings using a voltmeter with an input impedance of at least one megohm. Take these readings between the permanent reference cell and the rebar and compare with the voltage between a portable Cu/CuSO₄ or Ag/AgCl reference cell in the access hole adjacent to the permanent cell and the rebar. Take these measurements in the Engineer's presence, within one hour of each other, after 7-Day wet curing of the reference cell grout is complete, and before any connection is made between the anode and cathode. Acceptable reference cell-to-rebar potential voltage reading is 75 ± 25 millivolts more positive than a Cu/CuSO₄ portable reference cell-to-rebar potential voltage measurement and ± 25 millivolts when using an Ag/AgCl portable reference cell. Reference cell installations with voltage measurements outside these tolerances may be rejected.

Support and protect wiring and rebar terminals from mechanical damage and corrosion during conduit installation and other construction until permanently enclosed in concrete, conduit, or junction boxes.

Mask future testing block out areas as shown. Install female threaded anchors on opposite sides of the block out areas, 180 degrees apart. Locate reinforcing bars and rotate anchors to avoid the bars. Install anchors according to manufacturer's recommendations using a rotary hammer and an approved insertion tool. Screw eyebolts 1/4 turn past hand tight and mask as shown.

Measurement

Insert Project Name Here

01240.80 Measurement - The quantities of reference cells will be measured on the unit basis.

Payment

01240.90 Payment - The accepted quantities of reference cells will be paid for at the Contract unit price, per each, for the item "Reference Cells".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for corrosion potential surveys, submittals, future testing blockouts or eyebolt installation.

SP01245 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 03-27-26

This Section requires SP01201.)

SECTION 01245 - ELIMINATE ELECTRICAL DISCONTINUITIES IN REINFORCING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01245 is not a Standard Specification and is included in this Project by Special Provision.

Description

01245.00 Scope - In addition to the requirements of Section 01201, Section 01210, Section 01235, Section 01240, and Section 01270, locate areas where sufficient electrical continuity between reinforcement elements is not provided by direct contact, provide electrical continuity between all reinforcing steel in each CP zone except the top deck mat, and install rebar terminals for king bar connections to CP power supplies. The majority of reinforcing bars in the Bridge are expected to be sufficiently interconnected by direct contact.

01245.01 Timing - Check continuity of embedded steel after all excavations and rebar replacements have been made, and before replacing damaged concrete.

Inspect each rebar terminal installation and do not begin encapsulation until the installation is approved.

Insert Project Name Here

01245.02 Submittals - Submit descriptions of proposed Materials according to 00150.37. Identify all relevant constituents and properties of each Material and the Specifications with which it complies. Data published by the manufacturer is acceptable except when certifications of Materials' characteristics are required by the Specifications.

Submit detailed procedures for performing this Work according to 00150.37 at least 21 Calendar Days before Work is scheduled to start. Include the manufacturer's specifications, operating instructions, and calibration certifications for all Equipment and:

- Welder certifications according to AWS D1.4.
- Pre-approved Welding Procedure Specification (WPS) or Procedure Qualification Record / Welding Procedure Specification (PQR/WPS).
- Detailed procedure for electrode control measures.
- Detailed procedure for achieving, maintaining and monitoring pre-heat and inter-pass temperatures.
- A map in an approved electronic format detailing the locations of all continuity repairs and rebar terminals within plus or minus 3 inches according to 00150.37.

Submit a complete rebar terminal specimen according to 00150.37.

01245.03 Installation Acceptance Criteria - The Work performed under this Section is acceptable if the resistance between each individual reinforcing bar and the king bar is less than 6.0 ohms.

Welds are acceptable if they meet the requirements of AWS D1.4 criteria.

Materials

01245.10 Patching Material - Furnish hand patching Material conforming to 01201.10.

01245.11 Welding Materials - Use weld Materials according to the current version of AWS D1.4, "Structural Welding code - Reinforcing Steel". When using shielded metal arc welding (SMAW), use low-hydrogen electrodes.

01245.12 Brazing - Furnish brazing filler designed for fabrication applications on steel and copper alloys according to AWS A5.8 RCuZn-C with the manufacturer's recommended flux. Remove flux residue by the method recommended by manufacturer.

01245.13 Brass Threaded Rod - Furnish 1/4-inch diameter brass threaded rod according to ASTM F468, UNS number C27000, C46200 or C46400, or approved equal.

01245.14 Non-Conductive Resin - Provide non-conductive resin according to 01201.11.

Labor

01245.30 Welders - Provide an AWS Certified Welding Inspector (CWI).

Construction

01245.40 Basic Continuity Check - Perform a basic continuity check on exposed reinforcing bars and 50 covered bars in each zone.

Measure the resistance using a resistivity meter according to 01240.20.

Start continuity checks with longitudinal bars that contact multiple stirrups, hoops, or transverse bars. Complete the electrical connection of longitudinal bars before any testing on stirrup and hoop bars.

Test continuity of concrete-covered bars at locations selected by the Engineer. Find these bars using the provided original construction drawings and a rebar locator. Use a rotary impact drill with a maximum 1-inch diameter bit to access the rebar.

Clearly label bars having more than 6.0 ohms resistance relative to the king bar, with their resistance, and mark them for connection to the nearest bar that is continuous with the king bar.

Classify as continuous any group of two or more bars in a zone with resistance values greater than 6.0 ohm with respect to the king bar but less than 6.0 ohm with respect to one bar in the group. Mark only one bar of a continuous group for connection to a bar that is continuous with the king bar.

Verify resistance after welding and provide results to the Engineer according to 01245.02.

01245.41 Additional Continuity Checks - Perform additional continuity checks as directed if the basic continuity check finds non-continuous reinforcing bars in a zone. Follow procedures outlined in 01245.40 for exposing reinforcing bars and testing continuity.

01245.42 Select King Bar - Select the king bar connection locations in each zone to minimize the length of conduit runs. Select a major reinforcing bar as the king bar, not a stirrup or hoop. If practical, select an existing spall or excavation. The connection location can be excavated to accommodate the rebar stub and allow the rebar weld.

01245.43 Electrical Connection - Electrically connect all steel components that have been marked as non-continuous to a component that is electrically continuous with the king bar.

Provide electrical connection of steel components by welding two adjacent or crossing bars together according to the current version of AWS D1.4 "Structural Welding Code - Reinforcing Steel". Since carbon content of existing reinforcement is unknown, assume that preheating is required under ANSI/AWS D1.4. Limit the temperature of reinforcing bar at concrete interface to 500 °F or less, verified using an infrared thermometer.

Remove slag from all completed welds and clean the weld and adjacent rebar by brushing or other approved means. Visually inspect all weld connections at least 48 hours after welding. Do not patch over weld connections until they have been inspected and accepted by the Engineer.

Repair excavations made for connections using hand patching Material according to 01201.10. Follow all manufacturer's recommendations for placement. Hand patching Material may not be used for connections in areas marked as damaged concrete under 01235.41.

Insert Project Name Here

In zones with multiple king bars, install a rebar terminal on each king bar and furnish connecting jumpers between king bars according to Section 01270.

Demonstrate to the Engineer continuity checks according to 01245.40 for completed continuity welds when required by the Engineer.

01245.44 Rebar Terminal - Furnish a rebar terminal at each king bar connection and adjacent to each reference cell installation.

The rebar terminal consists of a 1/4-inch-diameter brass threaded rod that is brazed to an eight-inch No. 4 rebar stub. After excavating sufficient concrete for access to the king bar at the selected area for the system negative connection, clean the king bar to bright metal and weld the rebar stub to the king bar as shown.

Inspect each rebar terminal installation by visual examination.

Verify resistance after welding and provide results to the Engineer according to 01245.02.

Completely encapsulate the brazed joint and the portion of threaded rod below the concrete surface with non-conductive resin.

Allow non-conductive resin to completely cure according to the manufacturer's recommended schedule. Backfill the excavation with repair mortar according to 01235.10 and according to 01235.44.

Measurement

01245.80 Measurement - No measurement of quantities will be made for basic continuity checks.

The quantities of additional continuity checks, excavate for continuity welds, establishing continuity, and rebar terminals will be measured on the unit basis.

Payment

01245.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Basic Continuity Check	Lump Sum
(b) Additional Continuity Check	Each
(c) Excavate for Continuity Welds	Each
(d) Establish Continuity	Each
(e) Rebar Terminals	Each

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

Insert Project Name Here

Item (a) includes basic continuity checks on exposed reinforcing bars and 50 covered bars in each zone.

Item (b) includes payment for additional continuity checks resulting from finding non-continuous reinforcing bars during basic continuity checks. Additional continuity checks in excess of those specified in 01245.40 will only be paid for if directed by the Engineer.

In items (c) and (d) no separate or additional payment will be made for additional excavation required in delaminated areas to establish continuity.

SP01260 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 03-27-26

This Section requires SP00253

& SP01201.)

SECTION 01260 - PREPARE SURFACES AND APPLY ZINC ANODES

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01260 is not a Standard Specification and is included in this Project by Special Provision.

Description

01260.00 Scope - In addition to the requirements of Section 01201, Section 01210, Section 01215, Section 01220, Section 01235, and Section 01240, this Work consists of the following:

- Initial abrasive blasting of the entire surface in the Work area.
- Installing anode terminal plates at the locations shown.
- Abrasive blasting and cleaning concrete surfaces receiving zinc anodes.
- Thermally spraying coatings of zinc to the concrete surfaces, and masking to separate the zones.

01260.01 Timing - Install anode terminal plates before preparing concrete surfaces and after replacing damaged concrete according to Section 01235.

Begin abrasive blasting operations in each Work area only after containment has been installed according to Section 00253 in that area.

Insert Project Name Here

(When removing an existing anode or coating system use (Wet abrasive). For all other Projects use (Abrasive). Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

(Abrasive)(Wet abrasive) blast entire surface within each Work area before beginning the Work of Sections 01215, 01220, 01235, and 01240.

Prepare zinc anode surfaces by abrasive blasting and cleaning the entire surface within each Work area after completing the Work of Section 01215, 01220, 01235, and 01240.

(When removing an existing anode or coating system use (Dry or wet abrasive). For all other projects use (Abrasive). Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

(Abrasive)(Dry or wet abrasive) blast patched concrete areas and anode terminal plates after repair mortar and the resin used to install the anode terminal plates or buildup on shallow rebar in areas of high visual impact has cured as recommended by the manufacturer.

(When removing an existing anode or coating system use (dry). Delete the language in purple parentheses that does not apply and delete all purple parentheses.)

Do not conduct (dry)abrasive blasting operations on surfaces that are wet or damp or if the surfaces are less than 6 degrees Fahrenheit above the dew point.

Thoroughly clean concrete surfaces with a 50-psi air blowgun within 15 minutes before zinc spraying. Remove any oil, grease, Soil, water, or other foreign matter that is deposited on the surface after the surface preparation has been completed and before the zinc is applied.

Apply the zinc coatings within 24 hours after completing preparation of zinc anode surfaces.

Test electrical continuity between the primary anode terminal plates and the zinc anodes after installing zinc anodes.

Perform touch-up and patching of zinc coating at Work platform and containment Structure attachment points after removing platforms and containment.

01260.02 Submittals - Submit descriptions of Materials to be used according to 00150.37. Identify all relevant components and properties of each Material and the Specifications with where it complies. Data published by the manufacturer is acceptable, unless otherwise specified.

Submit detailed procedures for performing this Work according to 00150.37, at least 21 Calendar Days Work begins. Include the manufacturer's specifications and operating instructions for all Equipment.

Submit a mill certificate according to 00165.35 verifying compliance with the requirements of ASTM B36 for brass plates.

Insert Project Name Here

Submit Material certifications according to 00165.35 verifying compliance with the requirements of ASTM B833 for each lot of zinc.

01260.03 Acceptance Criteria - Anode terminal plates are acceptable if they are attached securely enough that the Engineer is unable to dislodge selected plates and all installations have electrical continuity between the threaded section of the anode terminal plate and the zinc anode.

Furnish acceptable coatings that have a uniform appearance, follow the form of the concrete surface, and do not contain any lumps, blisters, coarse texture, loosely adhering particles, cracks, pinholes, or chips that expose the concrete substrate.

Minimum acceptable adhesion strength is 50 psi.

Acceptable coating thickness is between 0.015 and 0.020 inch. In narrow areas of thermal spray overlap or difficult access such as behind piping, a coating thickness between 0.010 and 0.035 inch may be allowed.

Materials

01260.10 Anode Terminal Plates - Furnish 2 1/2-inch-diameter, 1/8-inch-thick brass plates according to ASTM B36, UNS number C26000, C21000 or C22000.

Furnish 1/4-inch diameter by one-inch-long brass cap screws or threaded rod conforming to ASTM F468 UNS number C27000, C46200 or C46400.

Furnish #10 x 1" tapered flat head brass screws.

Furnish silver alloy brazing filler Material according to AWS classification Bag.

01260.11 Non-Conductive Resin - Furnish non-conductive resin according to 01201.11.

01260.12 Zinc - Furnish High Grade Zinc (Z15005, 99.9 percent zinc) wire according to ASTM B833.

01260.13 Masking - Furnish nonconductive masking Material.

Do not allow the masking to debond the zinc coating on adjacent surfaces when removed.

Demonstrate the performance and acceptability of masking by preparing a 12 by 12 by one inch or larger concrete test sample. After abrasive blasting and before thermal spraying the test sample, install a four by eight inch piece of masking on the concrete surface. Spray zinc on the test sample according to the Specifications and strip the tape from the sample. Examine the condition of adjacent zinc for evidence of debonding.

01260.14 Abrasives - Furnish clean, dry, non-metallic grit abrasive Material with no mineral constituents that break down and remain on the surface in visible quantity. Furnish hard angular shaped abrasives from 16 – 30 mesh.

01260.15 Compressed Air - Provide compressed air that is clean, oil free, and dry per ASTM D4285 for abrasive blasting and thermal spraying. Provide air line filters and moisture

Insert Project Name Here

separators upstream from the blasting and spraying Equipment. Inspect air line filters and moisture separators daily for cleanliness and correct operation. Immediately correct any malfunctioning Equipment that is indicated by oil or water in the filter or trap.

Equipment

(Use the following subsection .20 when removing an existing anode or coating system.)

01260.20 Abrasive Blasting Equipment - Provide a wet abrasive blaster capable of maintaining a maximum pressure of 80 psi at the blast nozzle. Wet abrasive methods may include water injected air pressure type, abrasive injected pressurized water type, or pressurized slurry (vapor) type.

Provide a conventional, air pressure-type dry abrasive blaster capable of maintaining a maximum pressure of 80 psi at the blast nozzle.

(Use the following subsection .20 when wet abrasive blasting equipment is not required.)

01260.20 Abrasive Blasting Equipment - Provide a conventional, air pressure-type dry abrasive blaster capable of maintaining a maximum pressure of 80 psi at the blast nozzle.

01260.21 Zinc Application Equipment - Provide one of the following electric-arc type spray systems:

- Precision Arc 4.8 CE, manufactured by Thermion Incorporated
- Arcspray 170-CL, manufactured by Metallisation
- Eco Arc 600, manufactured by Sulzer Metco
- Bridgmaster Arc Spray System, manufactured by TMS Metalizing Systems, Ltd

01260.22 Short Circuit Detection Equipment - Comply with 01201.20.

Construction

01260.40 Anode Terminal Plate Location - Locate the anode terminal plates as shown. Furnish at least two anode terminal plates per zone, separated by a minimum of 40 inches and located at least 40 inches from a zone boundary. Locate anode terminal plates for minimum visual impact where they have continuity with conduit runs supplying other zones, a central location in the zone, and ease of future access.

Furnish additional anode terminal plates to provide continuity across expansion joints, bearings, or other features that cause discontinuity of the anode. Furnish a minimum of two anode terminal plates for each discontinuous area.

01260.41 Anode Terminal Plate Installation – Construct anode terminal plates as shown. Braze according to the AWS *Brazing Manual*. Remove flux residue by the method recommended by the manufacturer.

Insert Project Name Here

Install anode terminal plates with the exposed face of the plate flush with the concrete surface and the bottom and edges of the plate coated with resin so that no portion of the brass plate is in direct contact with the concrete. Roughen the brass plate by abrasive blasting and then clean it to enhance adhesion. Mix and install the resin according to the manufacturer's recommendations with viscosity to support the plates in place without the resin running onto adjacent concrete surfaces. Place the resin between all surfaces of plate and the concrete as shown.

Ensure that no resin is allowed to run on to the side of the brass plate where the zinc anode is to be applied. If the concrete-to-brass plate bond is damaged or an anode terminal plate is incorrectly fabricated or installed, install a satisfactory replacement anode terminal plate at the same location at no additional cost to the Agency.

01260.42 Abrasive Blasting and Cleaning - Protect the insulation of all exposed conductors and the threads of all anode terminal plates with tubing that has sufficient abrasion resistance to prevent damage from abrasive blasting operations.

(When removing an existing anode system, add the anode type to the listed surface contaminants in the following paragraph)

Clean concrete surfaces to remove dust, grit, coatings, chalk marks, paints, curing compounds, laitance, and other substances that would inhibit bonding of the anode to the concrete.

Remove soil, cement spatter, and other foreign matter (other than grease and oil) by scraping, chipping, or brushing with stiff fiber or wire brushes. Remove oil and grease by cleaning with detergents or emulsifying agents. Flush the surface with potable water to remove residue.

Abrasive-blast using non-metallic grit and a maximum pressure of 80 psi at blast nozzle, to remove contaminants and provide a surface according to International Concrete Repair Institute (ICRI) *Guideline 03732 surface profile CSP 4*. Do not damage completed portions of Work. Limit operating pressure and stand-off distance on areas of sound concrete to avoid exposing large Aggregate on finished surfaces. Protect exposed conductors and anode terminal plate threads during abrasive blasting. Do not reuse blasting abrasives that have been used to remove oil and grease. Recovered abrasives may be re-used only if they satisfy the purity and mesh requirements of the Specifications.

Abrasive-blast the unprotected exposed surface of anode terminal plates to provide bright metal.

Thoroughly air-blast all abrasive-blasted surfaces using 80 to 100 psi compressed air through a blasting nozzle held approximately two feet from the surface, to remove all traces of residue. Examine the abrasive-blasted surface for traces of oil, grease, and other adhering contaminants. Repeat cleaning procedures until contaminants are completely removed and concrete surface condition conforms to International Concrete Repair Institute (ICRI) *Guideline 03732 surface profile CSP 4*.

Do not allow cleaned surfaces to become re-contaminated, including contamination by the oil left from a hand print.

Insert Project Name Here

01260.43 Masking - Install masking four inches wide between zones. Install masking to provide two inches of uncoated surface between the zinc anode and any exposed metal object.

01260.44 Zinc Anode Application Requirements - Perform coating application, including touch-up and patching, only when the enclosure air temperature and the surfaces to be sprayed are at least 6 °F above the dew point and the surface temperature is 65 °F or higher. Apply coating only to clean, dry, surfaces.

Use a heating and ventilating system to bring surfaces to temperature. It is acceptable to use a portable propane powered weed burner to increase surface temperature in minor areas that do not fully respond to heating and ventilating. If using a weed burner, keep the burner moving at an even pace, heating the concrete surfaces to a maximum temperature of 150 °F. Use an infrared thermometer to verify the surface temperature.

Start zinc anode application in each zone at the anode terminal plate where the short circuit detector is connected. Apply the zinc anode in a continuous coating to facilitate short circuit detection. Adjust machine controls, such as voltage, current, wire feed rate, air pressure, and compressed air flow rate, to provide the most uniform thickness attainable on all accessible surfaces. Carefully monitor spray gun-to-surface distance, rate and path of travel, overlap distance, time between successive overlaps, and number of overlaps to ensure complete coverage and uniform thickness.

Before starting Work on each shift, perform bend tests to verify the proper operation of Equipment, as follows: Spray two separate 2 by 4 inch by 0.05-inch carbon steel coupons with a 0.015-to 0.018-inch-thick coating. Apply the zinc to the coupons using the same techniques and Equipment settings as used for spraying the concrete. Bend the coupons 180 degrees around a 5/8-inch diameter rod with the coating on the tensile side of bend test specimen. Bend test results with minor cracking or no cracking and no lifting or spalling of coating are acceptable. Bend test results with zinc that can be picked off the cracked surface with a knife blade are unacceptable. Adjust Equipment and procedures and repeat bend test until acceptable results are achieved. Do not proceed with production zinc application until approved by the Engineer.

Locate short circuits according to 01201.40.

Eliminate short circuits using a method approved by the Engineer at no additional cost to the Agency.

01260.45 Environmental Monitoring Requirements - Install up to four Agency-furnished temporary run-off monitors at locations designated by the Engineer. Allow the Engineer to collect samples at any time during construction. Repair or replace any components damaged during construction at no additional cost to the Agency.

01260.46 Acceptance Tests - Perform the following tests in the presence of the Engineer, with additional tests as needed to establish the boundary of defective coatings:

(a) **Visual Examination** - Visually inspect anode surfaces using a lens with a magnification of at least 10.

(b) Adhesion Test - Measure adhesion strength according to ASTM D7234. Perform adhesion testing between eight and 24 hours after anode application.

Perform a minimum of 15 adhesion tests per zone in the zinc CP surface. Test locations are to be chosen by the Engineer.

After each adhesion test, recoat adhesion test areas with 0.002 to 0.004 inch of zinc after scraping any loose or delaminated zinc caused by the adhesion test.

(c) Thickness Test - Perform a minimum of ten thickness measurements for each operator in each shift of zinc application. It is acceptable to use a combination of tape tabs left by the operator and the random adhesion dolly tests.

(d) Anode Terminal Plate Continuity Test - Test electrical continuity between threaded section of anode terminal plate and zinc anode with a resistivity meter according to 01240.20.

Anode terminal plate installations with resistance values less than 1.0 ohm are acceptable. Repair installations with resistance greater than 1.0 ohm by abrasive blasting to remove arc-sprayed zinc from anode terminal plate and recoating with zinc. Repeat continuity test until an acceptable result is obtained.

01260.47 Touch-up, Patching, and Repair of Unacceptable Coatings - After removal of Work platforms and containment Structures, prepare and coat all tie-up points and attachment points with zinc according to 01260.11.

Remove Soil, cement spatter, and other foreign matter, except grease and oil, by scraping, chipping, or brushing with stiff fiber or wire brushes. Remove grease and oil by cleaning with detergents or emulsifying agents. Flush the surface with potable water to remove detrimental residue. Air-blast using 80 to 100 psi compressed air through a blasting nozzle held approximately two feet from the surface, to remove all traces of residue. Examine the abrasive blasted surface for traces of oil, grease, and other adhering contaminants. Repeat cleaning procedures until contaminants are completely removed. If wet cleaning methods are used, allow the surface to dry thoroughly before coating.

Feather the edges of adjacent existing zinc coating by grinding for a distance of one to two inches.

Apply the zinc coating using an approved thermal spray process to a thickness of 0.015 to 0.020 inches. Operate the short circuit detection system during zinc application.

Repair damaged surfaces and surfaces not in compliance with the Specifications at no additional cost to the Agency and according to the following:

(a) Unacceptable Visual Examination - Repair or replace unacceptable areas using an approved procedure as directed by the Engineer.

(b) Unacceptable Adhesion Test - Remove zinc in unacceptable areas and recoat with zinc according to the Specifications. Perform remedial surface cleaning and surface preparation if needed to obtain satisfactory adhesion, regardless of prior surface preparation acceptance.

Insert Project Name Here

(c) Insufficient Zinc Thickness - Apply additional zinc by thermal spraying after the surface is completely dry and any visible contamination has been removed. Warm the areas slowly before thermal spray of additional Material to avoid thermal shock.

(d) Excessive Zinc Thickness - Remove and reapply coatings of zinc greater than 0.035 inches according to the Specifications.

Measurement

01260.80 Measurement - No measurement of quantities will be made for preparing anode surfaces or installing zinc anodes.

The quantities of anode terminal plates will be measured on the unit basis.

Payment

01260.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract unit price, per unit of measurement, for the following items:

Pay Item	Unit of Measurement
(a) Install Anode Terminal Plates	Each
(b) Prepare Anode Surfaces.....	Lump Sum
(c) Install Zinc Anodes.....	Lump Sum

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

Item (a) includes acceptance testing performed according to 01260.46(d).

Item (b) includes all masking, blasting, cleaning and roughening of surfaces including brass anode terminal plates.

Item (c) includes acceptance testing performed according to 01260.46(a), (b), and (c).

No separate or additional payment will be made for touch up, patching or repair of unacceptable or damaged coatings.

SP01270 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 03-27-26
This Section requires SP01201.)

SECTION 01270 - INSTALL CATHODIC PROTECTION SYSTEM WIRING

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project,

unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01270 is not a Standard Specification and is included in this Project by Special Provision.

Description

01270.00 Scope - In addition to the requirements of Section 01201 and Section 01210, furnish and install cathodic protection system wiring providing direct current distribution to CP zones, reference cell monitoring, and communication interconnects between CP cabinets.

This Work is to be done in a way that does not degrade the Bridge's visual and architectural character.

01270.01 Timing - Perform installation of conduit, junction boxes, and the associated wiring and miscellaneous Equipment in each zone after the Work required under Section 01260 has been completed in that zone.

01270.02 Submittals - Submit detailed descriptions of all Materials to be used according to 00150.37. Identify all relevant constituents and properties of each Material and the Specifications with which it complies. Data published by the manufacturer is acceptable. Provide conduit cement data clearly indicating the manufacturer's recommended installation temperature range.

Submit detailed procedures for the Work of this Section according to 00150.37 at least 21 Calendar Days before the scheduled start of the Work. Include the manufacturer's specifications and operating instructions for all Equipment and a plan for installing and testing electrical conductors. Do not start this Work until written approval is received from the Engineer.

Submit unstamped wiring drawings according to 00150.35 that show the identification and labeling scheme for all wires and conduits.

Submit a conduit and wire installation plan according to 00150.37 at least 21 Calendar Days before the start of installation, showing how the Work is coordinated with scheduled movements of the Work containment system.

Submit unstamped as-built drawings according to 00150.37, showing the location, wiring details, and labeling of all power distribution, permanent reference cells and conduit runs within 30 Calendar Days of completing the Work.

Materials

01270.10 Electrical Conductors - Comply with 01201.18. Furnish consistent wiring insulation color for all zones with separate, unique colors for anode wiring, rebar wiring, and reference cell wiring.

Insert Project Name Here

Furnish No. 16 AWG shielded, twisted pair instrumentation cable meeting the following requirements:

- Cable rated for 300 volts
- Primary insulation XLPE
- Outer jacket moisture and sunlight resistant 190 °F rated polyvinyl chloride
- Shielding providing 100 percent coverage of twisted pair with aluminum foil-polyester tape with 18 AWG drain wire

Furnish UL labeled, Type XHHW stranded copper wire for all conductors with 600 volt rated insulation rated for 167 °F operation in wet or dry locations.

01270.11 Materials - Furnish Materials meeting the following requirements:

Brass Nuts and Bolts	01201.16(a)
Conduit and Fittings	01201.15
Heat Shrink Tubing, Electrical Tape	01201.13
Labels	01201.17
Non-Conductive Resin	01201.11
Non-Conductive Sealant	01201.12
Ring Connectors, Solder	01201.14
Stainless Steel-Bolting Materials	01201.16(b)

Furnish tin-plated brass, barrier-style, 2-pole terminal blocks rated for 600V and able to accept #16 AWG wire.

Equipment

01270.20 Short Circuit Detection Equipment - Comply with 01201.20.

01270.30 Technician Qualifications - Perform all Work of this Section, except for installation and removal of temporary electrical service, using Oregon licensed electricians holding a Class "A" or Class "B" Limited Energy Technician license, General Journeyman license, or General Supervising license.

01270.31 Supervisor Qualifications - Supervise all Work of this Section using an Oregon licensed electrician holding a General Supervising license.

Construction

01270.40 Conduit and Fittings - Install conduit and fittings according to 01201.41.

01270.41 Connections:

(a) Wire-to-Wire - Make wire-to-wire splice and tap connection only in junction boxes with prior Engineer approval. Insulate all splice and tap connections using heat shrink tubing.

(b) Wire-to-Anode - Crimp and solder the ring connector to the anode end of the DC power distribution wire. Attach the ring connector between two brass nuts to the bolt on the anode terminal plate assembly. Tighten the first brass nut on the bolt to a hand tight

condition with a non-adjustable wrench. Place the ring connector over the bolt and tighten a second brass nut against the ring connector to a hand tight condition with a non-adjustable wrench. Tighten a third brass nut, with a wrench, to a hand-tight condition against the second nut.

(c) Wire-to-Rebar Terminal - Crimp and solder the ring connector to the rebar terminal end of the DC power distribution wire. Attach the wire lug between two brass nuts to the threaded rod on the rebar terminal. Run the first brass nut onto the threaded rod. Place the wire lug over the threaded rod and tighten a second brass nut to a hand tight condition with a non-adjustable wrench against the first nut. Tighten a third brass nut with a wrench to a hand tight condition against the second nut.

(d) Wire-to-Zone Rectifier - Connect DC power wiring from the anode terminal plates and rebar terminals to the corresponding zone power supply terminal strips in the CP cabinets.

(e) Wire-to-Binding Post (System Negative at King Bar) - Furnish a test wire lug connected to a brass binding post in the side of the junction box at each king bar terminal. Construct this connection with XHHW wire, brass nuts, brass bolts or all-thread, and copper ring connectors.

(f) Reference Cell-to-Instrumentation Cable - Mount a 2-pole, barrier style terminal block inside the king bar junction box using stainless steel or brass nuts and bolts. Connect the reference cell lead and the king bar lead to the terminals. Connect the instrumentation cable wire to the other side of the terminal. Torque terminals to manufacturer's recommendations. Do not connect shield wire at this terminal block.

(g) Instrumentation Cable-to-CP Cabinet - Run the cable without splicing from the terminal block to the monitoring terminal strips in the CP cabinet. Torque terminals to manufacturer's recommendations

01270.42 Labeling - Secure labels to both ends of conductors with clear heat-shrink tubing according to 01201.13. Label both connections at all splice points. Designate the zone number for all DC power wiring according to the following example:

D 10 P

Where D = DC Power
 10 = Zone Number
 P = Positive lead to anode (N = Negative lead to rebar)

Designate the zone number for all remote monitoring system wiring according to the following example:

R 02 A

Where R = Reference cell circuit
 02 = Zone Number
 A = First reference cell installed in zone (B = second)

Insert Project Name Here

01270.43 Short Circuit Detection - Locate and eliminate short circuits according to 01201.40.

Eliminate short circuits using a method approved by the Engineer at no additional cost to the Agency.

Measurement

01270.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

01270.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract Lump Sum amount for the item "Install Cathodic Protection System Wiring".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

SP01280 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 03-27-26

This Section requires SP01201.)

SECTION 01280 - INSTALL POWER AND COMMUNICATIONS

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01280 is not a Standard Specification and is included in this Project by Special Provision.

Description

01280.00 Scope - In addition to the requirements of Section 01201 and Section 01210, this Work consists of providing power and communications to the cathodic protection (CP) cabinets:

01280.02 Submittals - Submit descriptions of Materials to be used according to 00150.37. Identify all relevant constituents and properties of each Material and the Specifications with where it complies. Data published by the manufacturer is acceptable.

Insert Project Name Here

Submit detailed procedures for the Work of this Section according to 00150.37 at least 21 Calendar Days before the scheduled start of the Work. Include the manufacturer's specifications and operating instructions for all Equipment. Do not start this Work until written approval is received from the Engineer.

Submit stamped drawings detailing the electrical and telephone service according to 00150.35 at least 21 Days before installation.

Submit unstamped wiring as-built drawings according to 00150.37, showing the identification and labeling scheme for all wires and conduits within 30 Calendar Days of completing the Work.

Submit results of resistance-to-ground measurements at all ground rods according to 00150.37 within 7 Calendar Days of driving ground rods.

Materials

01280.10 Materials - Furnish Materials meeting the following requirements:

Conduit and Fittings	01201.15
Electrical Conductors	01201.18
Heat Shrink Tubing.....	01201.13

01280.11 AC Power Cabinets - Furnish electrical cabinets fabricated from 14-gauge Type 316 stainless steel, with hardware fabricated from Type 316 stainless steel. Furnish in each cabinet a dead-front panel installed with slots cut for operating handles. Mount electrical Equipment on a false back. Ensure internal wiring of cabinets is performed by a UL listed facility. Supply mounting brackets and a padlock hasp with each cabinet.

Label the outside face of AC power cabinet doors with a permanent metallic sign reading "120/240 VOLT, CATHODIC PROTECTION" in letters 3/8 inch tall.

01280.12 Circuit Breakers - Furnish molded case, bolt-on type circuit breakers of ratings shown. Furnish main service panel breakers that are UL listed for the minimum interrupting rating shown. Permanently label all circuit breakers to indicate the circuit that the breaker controls.

01280.13 Cabinet Mounting Bolts - Furnish bolts according to ASTM F593 Group 2 Condition CW and nuts conforming to ASTM F594 Group 2 Condition CW.

01280.14 Meter Bases - Furnish NEMA 4X meter bases fabricated from 14-gauge Type 316 stainless steel, or enclose the meter base in a Type 316 stainless steel NEMA 4X cabinet. Furnish meter socket according to requirements of the electric Utility.

01280.15 Stainless Steel Screws - Furnish Type 316 stainless steel screws according to ASTM A193, Grade B8M, B8MA, B8M2, or B8M3, Class 1, 1A, 1D, or 2.

01280.16 Marking Tape - Furnish marking tape made of red polyethylene six inches wide and a minimum of four mils thick, continuously imprinted with the message "CAUTION BURIED ELECTRIC LINE".

Insert Project Name Here

01280.17 Grounding Electrodes - Furnish copper coated ground rods according to the NEC.

Furnish bare stranded copper wire according to ASTM B8, of gauge(s) shown.

Labor

01280.31 Supervisor Qualifications - Supervise all Work included in this Section, except for excavation Work and pole installation, using an Oregon licensed electrician holding a General Supervising license.

Construction

(If using an existing electrical service, replace “electric Utility” with the electrician(s) who maintain the current service.)

01280.40 Electric Service - Provide electric service in the location shown. Coordinate the electric service installation with the electric Utility.

Install the meter according to the requirements of the electric Utility.

Any existing metered service belonging to the Agency is not available for the Contractor's use during construction.

01280.41 Excavation for Conduit - Provide trenches in the locations shown. Comply with Section 00290 and all regulations affecting the Regulated Work Area.

Perform all trench excavation, bedding and back-filling, according to Section 00405. Restore the surface according to Section 00495.

Permanently mark all underground conduit runs by placing a continuous run of underground marking tape six inches below the ground surface directly over the conduit between junction box and AC power cabinet locations.

Dispose of all waste materials according to 00290.20.

01280.42 Conduit and Fittings - Install conduit and fittings according to 01201.41.

01280.43 Grounding and Bonding - Furnish two grounding electrodes at each AC power cabinet installation, unless shown otherwise. Connect the grounding electrodes together and to the electrical system using bare copper conductors. Ground all metal cabinets by connecting to the Equipment ground wire (green insulation). Do not connect the system neutral (white insulation) to the cabinet. Do not ground the negative terminal of the rectifier, the negative terminals of the remote monitoring system, or the rebar.

Drive ground rods perpendicular to the ground until the top of rod is six inches below finished grade. Verify that the resistance-to-ground of the ground rod complies with NEC requirements.

01280.44 Conductor Insulation Testing - Perform insulation integrity checks of all conductors, after installation of the conductor and before connecting each end. Use

Insert Project Name Here

a 500-volt DC megger insulation tester to measure between conductors and to the grounded shield or ground. The installation is acceptable if the insulation resistance of each conductor within a conduit is five megohms or greater. Remove and replace all conductors in any conduit where an insulation resistance of less than five megohms is found.

Maintenance

01280.60 Electric and Communication Contacts -

(Provide the electric Utility name, contact name, telephone number, and location of nearest existing service)

The electric Utility is _____, contact name _____, telephone number _____. The nearest existing electric Utility service is located _____.

(For land line telephone service, list the communications Utility name, contact name, telephone number, and location of nearest existing service.)

The communications Utility is _____, contact name _____, telephone number _____. The nearest existing communications service is located _____.

Contact information for ODOT electricians is available from the Engineer.

(Delete "(and communications)" when cellular communications are used for the CP System. Delete all orange parentheses.)

The Agency will provide a service address and billing address for the permanent electric (and communications)service.

Measurement

01280.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

01280.90 Payment - The accepted quantities of Work performed under this Section will be paid for at the Contract Lump Sum amount for the item "Install Power and Communications".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

No separate or additional payment will be made for:

- Trench excavation, bedding, and backfill
- Surface restoration
- Waste disposal

SECTION 01285 - CP CABINETS, RISERS, AND WEATHER EQUIPMENT

(Follow all instructions and make all edits with "Track Changes" turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 01285 is not a Standard Specification and is included in this Project by Special Provision.

Description

01285.00 Scope - In addition to the requirements of Section 01201 and Section 01210, furnish and install custom-built CP cabinets, risers, and weather Equipment as shown and as directed.

01285.01 Timing - Notify the Engineer 21 Calendar Days prior to scheduling shipping, to allow for quality assurance testing at the manufacturing facility.

Prepare mounting surfaces for CP cabinets prior to their delivery to the Project Site.

Provide Agency access for quality assurance testing and CP system testing during installation.

Do not power up any portion of the CP system.

01285.02 Submittals - Submit descriptions of Materials to be used according to 00150.37. Data published by manufacturers is acceptable. Submit shop drawings and electronic design schematics according to 00150.37 at least 21 Calendar Days before fabrication begins. Redlined Plans are acceptable.

Submit detailed procedures for this Work according to 00150.37 at least 21 Calendar Days before the scheduled start of Work under this Section.

Submit as-built cabinet drawings according to 00150.37 upon delivery of the cabinets.

Materials

01285.10 Materials - Furnish Materials meeting the following requirements:

Conduit and Fittings01201.12

Insert Project Name Here

Non-Conductive Resin and Spray	01201.11
Non-Conductive Sealant	01201.12

Furnish an expanding spray foam.

Use Class 3300 structural concrete meeting the requirements of Section 02001 and the requirements of Table 02001-1.

Use reinforcement complying with Section 00530 and Section 02510.

01285.11 General - Furnish all similar products from the same manufacturer and of the same quality. Verify that all Equipment is permanently marked with the manufacturer's name and the appropriate Equipment ratings. Correct faulty workmanship and Materials immediately upon discovery.

Ensure that all items conform to NFPA 70 (NEC) requirements.

Protect all Materials from damage and corrosion during shipping and storage.

01285.12 Stainless Steel Fasteners - Furnish stainless steel fasteners and mechanical anchors according to ASTM F593 Group 2 Condition CW and nuts according to ASTM F594 Group 2 Condition CW.

Equipment

01285.20 General - Store all electronic Equipment in a dry, clean location protected from condensation. Protect all Equipment from physical damage and contaminants such as moisture, dust, fingerprints, and dirt.

01285.21 Cabinet and Risers - Furnish cabinets with a NEMA 250-4X rating constructed from 12-gauge, Type 316 stainless steel. Do not drill holes in cabinets for any purpose other than mounting the cabinets. Furnish cabinets that include:

- A heavy-duty 3-point door latch with external locking rings on the handle. Include continuous hinges on the cabinet doors. Use Type 316 stainless steel for all external metal hardware (e.g.; padlock hasp, hinges, latches). Include a continuous lip around the door opening to provide a tight seal against a gasket approved for use in a NEMA 250-4X enclosure. Perform all welding according to AWS D1.6.
- Mechanisms that hold each cabinet door in place when in the open position. This item may be constructed from any industry standard Material.
- One 15-watt (maximum), 700 lumen (minimum) light fixture mounted to the cabinet ceiling. Include two door interlock switches wired in parallel to activate the light when either door is opened. The switches may be of any industry standard construction.

Furnish risers constructed from 12-gauge Type 316 stainless steel. Furnish riser access covers constructed from 6-gauge Type 316 stainless steel. Weld locking hasps, lock eyes, and stiffeners according to AWS D1.6.

01285.22 Equipment Rack - Furnish four-post, 19-inch Equipment racks with 17-inch (± 1 inch) depth according to CEA-310-E specifications. Include:

Insert Project Name Here

- Five shelves with a minimum 50-pound capacity, placed at the spacing shown
- A 12-gauge aluminum AC power distribution panel attached to the lower rear of the rack
- A 12-gauge aluminum control panel above the AC panel hinged on the rack to open in the same direction as the adjacent door. Include a door stop that does not allow Equipment to contact the adjacent door when the panel is opened. Include three latching points to secure the door closed without the use of tools other than a standard screwdriver.
- Mounts for diodes constructed of a thermally conductive Material. Utilize shelves or the control panel as a heat sink for the diodes.
- A documentation drawer designed to work with the 19-inch Equipment rack, no larger than 2 inches in height and 17 inches deep. Include a hinged cover providing a writing surface when the drawer is extended.

01285.23 Zone Power Supplies, Diodes, and Shunts:

(a) Power Supplies - Provide one of the following variable output DC power supplies:

- Instek SPS3610
- Sorensen XPD33-16
- TDK Lambda Zup20-10/u

(b) Diodes – Furnish 1N3881 diodes,

(c) Shunts - Furnish one of the following measurement shunts:

- Crompton Instruments FN-10-100
- Empro Shunts HA-10-100
- Murata Power Solutions 3020-01107-0

01285.24 Circuit Protection:

(a) Surge Protectors - Provide one of the following surge protectors:

- Allen Bradley 4983-DH300-25 (requires 3 units per cabinet)
- Schneider Electric PMP3XS-B
- Sola Heavy-Duty STV 100K-10S

(b) Circuit Breakers - Provide one of the following circuit breakers:

- Allen Bradley 1489-A2D 200
- Altech 2DU20UL

01285.25 Terminal Blocks and Conductors - Furnish barrier type, standard screw terminals for the incoming 240/120VAC single phase electrical service, meeting the following requirements:

Insert Project Name Here

- Four feed-thru terminals
- An insulating protective cover that is clear to allow for visual inspection
- Compatible with #4-#12 AWG wire
- Rated for at least 600 volts

Furnish control panels and AC Bus terminal blocks, including fused blocks, meeting the following requirements:

- IEC 60715 dimensions
- Din rail mounting
- Compatible with #8-#16 AWG wire
- Rated for 600 volts
- Compatible with 1 1/4-inch automotive fuses (fused blocks only). Include 5A fuses.

Use #16 AWG stranded copper conductors according to UL 1015 standards.

Use slotted PVC wire ducts to organize wiring.

Use printed labels according to 01201.17.

01285.26 Campbell Scientific Equipment - Provide the following Equipment from Campbell Scientific with appropriate connectors, as applicable, indicated in the electronic Equipment schedule in the Plans:

- CR 1000 Datalogger
- PS100 Power supply w/battery backup
- AM16/32B Multiplexer
- MD485 Network interface module
- COM220 Telephone modem (analog line)
- 3315 Type T Thermocouple
- VDIV10:1 Voltage Divider

01285.27 Weather Equipment - Provide HMP155-L Relative humidity/temperature sensor with pigtail terminations. Determine proper lead length from the Plans. Include a 14-gill radiation shield.

01285.28 Additional Panel Mounted Equipment - Provide the following:

- A ground fault interrupting (GFI) duplex receptacle rated for 20 A that conforms to UL 514C standards
- One of the following high-efficiency 12VDC switching type power supplies:
 - Allen Bradley 1606-XLP30B
 - Rhino PSP12-024S
 - Sola Heavy-Duty SCP30S12-DN

Insert Project Name Here

- One of the following cabinet heaters:
 - Hammond ELHT200A230
 - Hoffman DAH2002a
 - Rittal 3105.180 (requires 3110.000 thermostat)

01285.29 Manual Override Control Box - Furnish a custom-built manual override control box that will mount on the control panel. This may be constructed of any standard enclosure Material with a removable face/cover. Do not exceed a 9 by 7-inch device footprint, 4 inches deep. Include a rubber-lined entry/exit hole for wires. Include the following devices, as applicable:

- A standard single-pole, double-throw (SPDT), panel mounted, toggle switch rated for 5 amps or greater
- A standard double-pole, double-throw (DPDT), panel mounted, toggle switch rated for 5 amps or greater
- 1N4004 diode
- 1N4937 diode
- 5 mm to 10 mm diameter light emitting diode (LED) of the color shown. Bias the diodes with properly sized resistors or provide units with proper integral resistors. Identify diodes and resistors in shop drawings.
- One of the following solid state relays:
 - Crydom D1D07
 - NTE Electronics, Inc. RS3-1D12-41M
 - Omron Electronic Components G3NA-D210B-DC5-24

6-pole, double-throw (6PDT) relays (R1 and R2 as shown in the Plans) are only required on zone power supplies that utilize a contact closure to activate the remote output disable function. If this function requires a TTL level input, the output of the solid state relay may be wired in parallel to these inputs. Include this design with submittals to be approved by the Engineer. If applicable, provide one of the following:

- Magnecraft & Struthers-Dunn W67RCSX-12
- NTE Electronics, Inc. R16-23D5-12
- Tyco Electronics/Potter & Brumfield

Labor

01285.30 Panel Shop Qualifications - Perform all Work included in this Section using a panel shop certified by the Underwriters Laboratories (UL), or have the final product certified by means of UL inspection.

01285.31 Electricians - Perform all DC wiring, reference cell wiring, and telecommunications wiring Work using Oregon licensed electricians holding a Class "A" or

Insert Project Name Here

Class "B" Limited Energy Technician license, a General Journeyman License, or a General Supervising license.

Perform all AC power wiring using electricians complying with 01201.30.

01285.32 Supervisor Qualifications - Supervise all Work of this Section using an Oregon licensed electrician holding a General Supervising license.

Construction

01285.40 Pads For CP Cabinets - Construct pads as shown. Remove debris from pads prior to cabinet installation.

01285.41 Mount Risers and CP Cabinets - Mount risers and CP cabinets in the locations shown, using stainless steel fasteners. Apply non-conductive sealant between washers and cabinet and tighten fasteners while sealant is wet.

01285.42 Conduits - Terminate conduit runs from the Work of Sections 01265, 01270, and 01280 in the sides of the cabinet riser where they do not interfere with the hatch of the riser. Route conduits so that conduits containing AC conductors enter the riser in separate locations from conduits containing DC, monitoring, and communications conductors.

01285.43 Wiring:

(a) General - Arrange all wiring neatly in the cabinet. Handle conductors carefully to avoid kinking the wire or damaging insulation during installation. Remove and replace all kinked or damaged wire. Terminate all wiring connections at wire terminals. Follow the terminal block manufacturer's specifications for the number of wires per terminal. Tighten the terminal screw to the terminal block manufacturer's recommended torque.

(b) AC Wiring - Provide a hole in the bottom of the CP cabinet(s) large enough to accommodate the branch circuit conductors located as close to the AC barrier terminals as possible. Install a PVC fitting using non-conductive sealant as shown for this entry after removing any sharp edges.

Pull branch conductors from the Work of Section 01280 through this hole and terminate them at the appropriate terminals. Verify proper voltage at the terminal with the cabinet main disconnect in the off position.

Seal the hole as shown with expanding spray foam and non-conductive resin after voltage has been verified.

Energize cabinet heaters and set to 60 °F.

(c) DC, Monitoring, and Communications Wiring - Provide a hole in the bottom of the CP cabinet(s) large enough to accommodate all DC, monitoring, and communications wiring, located as far from the AC wiring as possible. Install a PVC fitting using non-conductive sealant as shown for this entry after removing any sharp edges.

Insert Project Name Here

Pull DC, monitoring, and communications wiring installed under Sections 01265 and 01270 through this hole, routing away from AC circuits, and terminate at the appropriate terminals on the control panel.

Seal the hole with expanding spray foam and non-conductive resin after the Engineer has performed quality assurance testing of the system.

01285.44 CP Cabinet Layout - Arrange Equipment within the CP cabinet in a logical and orderly manner following and as shown. Provide as much separation as possible between 120/240 VAC Equipment and sensor and DC wiring. Secure all electrical components to shelves or electrical panels. Secure the Equipment rack to the cabinet using welds or threaded fasteners that do not protrude beneath the cabinet.

01285.45 Weather Equipment Wiring - Wire Equipment in accordance with the Campbell Scientific product manuals and the wiring schedule shown. Use Campbell Scientific cables whenever a multi-pin connector is specified in the product manuals.

Furnish grounding for shielded cable drain wires at one end of the cable only.

01285.46 Labeling - Attach permanent labels to all wires. Use a labeling designation scheme that indicates the adjacent termination name at each end of the wire.

Label each power supply to indicate the zone with lettering a minimum of 3/16 inches high.

01285.47 Temperature/Relative Humidity Sensor - Mount the sensor as shown.

01285.48 Testing - Provide access for the Engineer to perform quality assurance testing before shipping the cabinets to the Project Site.

01285.49 Documentation - Provide a copy of as-built drawings in the documentation drawer of each cabinet. Provide a copy of the technical data sheet along with installation instructions for each unique electronic component in the documentation drawer of each cabinet.

Measurement

01285.80 Measurement - No measurement of quantities will be made for Work performed under this Section.

Payment

01285.90 Payment - The accepted quantities of CP cabinets, risers, and weather Equipment will be paid for at the Contract Lump Sum amount for the item "Provide CP Cabinets, Risers, and Weather Equipment".

Payment will be payment in full for furnishing and placing all Materials, and for providing all Equipment, labor and Incidentals necessary to complete the Work as specified.

No additional payment will be made for as-built drawings, datasheets, or operations manuals.

SECTION 02001 - CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02001 of the Standard Specifications modified as follows:

02001.15 Concrete Mix Design - Replace the paragraph that begins "Submit current or new mix ..." with the following paragraph:

Submit current or new mix designs, prepared by a CCT, with the information listed in 02001.15(c), for each required class of concrete to the Engineer for review. Allow 21 Calendar Days for the review. Design mixes by the volumetric method in ACI 211.1 to achieve the properties of 02001.20 and 02001.30 when tested according to 02001.15(b). Provide a design that is workable, placeable and finishable given the specific conditions for the Project and Structure. Do not proceed with concrete placement until the Engineer has determined that the mix design complies with the Specifications. Review of concrete mix designs does not relieve the Contractor of the responsibility to provide concrete meeting the Specification and Project Site requirements.

02001.15(a) Current Mix Design - Replace this subsection, except for the subsection number and title, with the following:

Mix designs that meet the requirements for the specified class of concrete and are currently being used or have been used within the past 24 months on any project, public or private may be submitted for review. Provide individual tests results that comprise the average if more than one data point exists. Provide flexural strength testing for paving designs from within the last two years. Provide length change and permeability tests for HPC designs from within the last two years.

02001.15(b) New Mix Designs - Replace this subsection, except for the subsection number and title, with the following:

Make at least one trial batch for each concrete mix design. Notify the Engineer at least 48 hours before making each trial batch. The Engineer may witness preparation and testing. Prepare and test trial batches using the same Materials, at the same proportions, and having the same plastic properties of concrete that are used in the Project. Simulate haul time, batching sequence and mixing conditions to ensure the trial batch is representative of the mixture that is delivered to the Project. Furnish all Materials, Equipment, testing and Work required for designing the mixes at no additional cost to the Agency.

02001.15(b)(1) Trial Batch Plastic Properties - Replace the test method that begins "AASHTO T 23..." with the following test method:

Insert Project Name Here

AASHTO R 100 or R 39 ³

02001.15(b)(2)(a) Compressive Strength Tests - Replace this subsection, except for the subsection number and title, with the following:

For each trial batch, cast and cure at least three test cylinders according to AASHTO R 100 or AASHTO R 39, in 6-inch by 12-inch or 4-inch by 8-inch single use plastic molds. The use of unbonded caps according to ASTM C1231 is permitted. Test at 28 Days according to AASHTO T 22.

02001.15(b)(2)(b) Flexural Strength Tests - Replace this subsection, except for the subsection number and title, with the following:

For each paving concrete trial batch, cast and cure at least three flexural beams according to AASHTO R 100 or AASHTO R 39. Test flexural beams at 28 Days according to AASHTO T 97.

02001.15(b)(2)(c) Length Change Tests - Replace this subsection, except for the subsection number and title, with the following:

For all HPC mix designs, except for precast or prestressed elements, make at least three specimens from the trial batch for length change testing. Provide sample prisms having a square, 4-inch by 4-inch Cross Section. Wet cure the samples until they have reached an age of 28 Days, including the period in the molds. Following the wet cure, air store and measure samples according to AASHTO T 160, Section 11.1.2 for 28 Days. Report length change results at total specimen age of 56 Days.

02001.15(b)(2)(d) Permeability Tests - Replace this subsection, except for the subsection number and title, with the following:

For alternate HPC mix designs, select from the following options:

- Make at least three specimens from the trial batch for permeability testing. Prepare, cure, dry and test according to AASHTO T 277. Report permeability in coulombs at 90 Days.
- Make at least two specimens from the trial batch for resistivity testing. Prepare, cure and test according to AASHTO T358 using the sealed conditioning method. Report resistivity in k Ω ·cm at 56 Days.

02001.15(c) Required Submittals for Mix Designs - Replace the title of this subsection with "**Submittals for Mix Designs**"

02001.20 Concrete properties, Tolerances, and Limits - Replace the paragraph that begins "Provide concrete that is..." with the following paragraph:

Furnish concrete that is workable, placeable, uniform in composition and consistency, and having the following properties:

02001.20(a) Strength - Replace the paragraph that begins "Provide concrete meeting ..." with the following paragraph:

Furnish concrete meeting the required classes shown in the Contract Documents. The class of concrete designates the minimum required compressive strength, f'_c at 28 Days.

02001.20(b) Air Entrainment - Replace the paragraph that begins "Provide all concrete..." with the following paragraph:

Furnish all concrete, except PPCM with cast-in-place decks, seal concrete, and drilled shaft concrete with entrained air in the amounts shown in Table 02001-2. Provide field measured entrained air content within ± 1.5 percent of target air entrainment values.

02001.20(c) Slump - Replace the paragraph that begins "Provide concrete..." with the following paragraph:

Furnish concrete at the appropriate slump shown in Table 02001-3. Take corrective action to maintain a consistent slump at the point of discharge from the delivery vehicle.

02001.20(d) Temperature - Replace the paragraph that begins "Provide concrete..." with the following paragraph:

Provide concrete, at time of placement, at a temperature between a minimum of 50 °F and a maximum of 90 °F, except the maximum bridge deck concrete temperature is 80 °F.

02001.20(e) Durability - Replace this subsection, except for the subsection number and title, with the following:

For HPC designs the following additional requirements apply:

Test	Test Method	Acceptance Value
Length Change	AASHTO T 160	-0.045% ¹
Permeability	AASHTO T 277	1,000 Coulombs (max.) at 90 Days ²

¹ Not required for precast or prestressed elements.

² Only required for alternate HPC designs. See 02001.30(b)(2). A minimum resistivity of 37.0 k Ω ·cm at 56 Days for 4x8 inch cylinders and 29 k Ω ·cm at 56 Days for 6x12 inch cylinders are accepted as equal when tested according to AASHTO T 358 using the sealed conditioning method.

(Use the following lead-in paragraph and subsection .20(f) when IC is specified.)

Add the following subsection:

02001.20(f) Internal Curing - For HPC(IC) concrete, internally cure the mixture according to the following:

- Substitute 350 lbs (SSD) LWFA for standard Fine Aggregate.

Insert Project Name Here

(Use the following lead-in paragraph and subsection .20(g) when lightweight concrete is required. Contact the Statewide Structural Materials Engineer who will provide densities to be used to fill in the blanks.)

Add the following subsection:

02001.20(g) Unit Weight - Furnish high performance lightweight concrete with a maximum plastic density of _____ pounds per cubic foot at time of placement and a maximum calculated approximate equilibrium density of _____ pounds per cubic foot.

02001.30(a) Portland Cement - Replace this subsection, except for the subsection number and title, with the following:

For structural or paving concrete applications use cement according to 02010.10 or 02010.20, excluding Type III. Use Type III cement for precast prestressed concrete.

02001.30(b)(1) General Limits - Replace the paragraph that begins "**Fly ash + other..." with the following paragraph:

*Furnish fly ash + other Pozzolans at a rate no more than 25% and silica fume at a rate no more than 5% of the total weight of Cementitious Materials.

02001.30(b)(2) HPC Cementitious Composition - Replace this subsection, except for the subsection number and title, with the following:

Cement with SCM proportioned according to 02001.30(b)(1) and with trial batches performed to demonstrate that the proposed alternate mix design provides a maximum of 1,000 coulombs at 90 Days when tested according to AASHTO T 277 or a minimum resistivity of 37.0 kΩ·cm at 56 Days for 4x8 inch cylinders and 29 kΩ·cm at 56 Days for 6x12 inch cylinders are accepted as equal when tested according to AASHTO T358 using the sealed conditioning method.

02001.30(f) Synthetic Fiber Reinforcing for Concrete - Replace this subsection, except for the subsection number and title, with the following:

Except for precast or prestressed elements, use synthetic fiber reinforcing from the QPL and according to Section 02045 in all HPC. Use synthetic fiber reinforcing according to the manufacturer's recommendations at the rate designated on the QPL. Fiber packaging is not allowed in the mixed concrete.

02001.40 Concrete Production - Replace the paragraph that begins "¹ When haul time or ..." with the following paragraph:

¹ When haul time or placement conditions warrant exceeding the time of discharge, submit a detailed breakdown of the estimated time needed from batching to discharge of a load along with the measures that are taken to ensure slump, temperature and uniformity is maintained. Submit this request in advance and may establish a new time limit at the Engineer's discretion.

02001.40(a) Delivery Tickets - Replace the paragraph that begins "Send a concrete delivery ..." with the following paragraph:

Insert Project Name Here

Send a concrete delivery ticket with each load of concrete supplied to the Project. Include the following information on each delivery ticket:

02001.40(b) Adjusting Concrete Proportions - Replace the bullet that begins "Large admixture dosage changes..." with the following bullet:

- Large admixture dosage changes, excluding adjustments for air entraining agents and Type A or D water reducers (± 25 oz/cubic yard).

02001.50 Quality Control - Replace the bullet that begins "The Contractor shall..." with the following bullet:

- Designate a person responsible for accepting and rejecting concrete on-site.

02001.50(c) Concrete Control Technician (CCT) - Replace the bullet that begins "Make adjustments to loads ..." with the following bullet:

- Make adjustments to loads that fail to meet the air content or slump criteria of the Specifications prior to the 90-minute time limit. Make adjustments complying with the provisions of ASTM C94.

02001.60 Acceptance of Concrete - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of concrete is according to Section 00165 and the following:

(a) Aggregate - Acceptance of Aggregate is according to 02690.12.

(b) Plastic Concrete - Acceptance of plastic concrete is based on tests performed by the Contractor's QCT, according to the tolerances and limits of 02001.20, when discharged within the time allotted in 02001.40.

(c) Hardened Concrete - Cast and cure test specimens according to AASHTO R 100 in 6-inch x 12-inch or 4-inch x 8-inch, single-use plastic molds and test at 28 Days according to AASHTO T 22.

(1) General - For all classes of concrete, acceptance of hardened concrete is based on an analysis of compressive strength tests of cylinders cast by the QCT. Test cylinders at an Agency certified laboratory.

(2) Acceptance - Hardened concrete with an ASTV meeting or exceeding the specified design strength, f'_c is accepted for strength. If the ASTV is less than f'_c but at least 85 percent of f'_c , the Engineer may review the results to determine if the concrete represented by the cylinders is suitable for the intended purpose. Remove concrete that has an ASTV less than 85 percent of f'_c unless otherwise authorized, in writing, by the Engineer. If the concrete is removed, the cost of removal, replacement and all related Work is the Contractor's responsibility. If the Engineer determines that the concrete is suitable for the intended purpose, the concrete may be allowed to remain in place, subject to a price adjustment according to 00150.25. If an ASTV falls below f'_c , the Contractor may submit a written plan outlining a proposed alternate method of

Insert Project Name Here

evaluating compressive strength. Submit the plan for review by the Engineer within 3 Days of the test. Provide evidence that a reasonable f'_{cr} (over-design) was maintained and that there is credible evidence (besides low strength) that warrants consideration of this option. The Engineer may allow an alternate method of acceptance if the compressive strength test results are determined to be suspect from definable external factors.

SP02005 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26
Last updated: 04-29-26)

SECTION 02005 - EVALUATION OF EARLY-AGE CONCRETE

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 02005 is not a Standard Specification and is included in this Project by Special Provision.

Description

02005.00 General - This Section includes the requirements of using sensors and other alternative means to take temperature and strength measurements of placed portland cement concrete or high-early strength concrete throughout this Specification referred to as structural concrete, Commercial Grade Concrete, or concrete.

02005.01 Definitions:

Early-Age - A length of time shorter than the timeframe specified in the specific specification for $f'c$ acceptance.

02005.02 Submittals - Submit reports from AASHTO T 325 when using maturity meters. Include the Equipment used to establish the maturity index and the Equipment to be used during field measurements.

Equipment

02005.20 In-Place Concrete Sensors - Provide maturity meters meeting the requirements of ASTM C1074 (AASHTO T325) and from the QPL.

Construction

02005.40 General - Early-Age readings of concrete strength, f'_c , can be used for subsequent loading and return-to-traffic strength measurement. The Early-Age readings are not part of acceptance according to Section 00165. Early-Age readings can be completed by one of the following methods:

(a) Early-Age Concrete Cylinders - Cast and cure at least 2 test cylinders according to AASHTO R 100 in 6-inch by 12-inch or 4-inch by 8-inch single use plastic molds. Test at an Early-Age according to AASHTO T 22. Test at the same frequency and from the same sample as acceptance tests.

(b) Strength-Maturity Relationship - Establish a strength-maturity relationship for concrete mix designs according to AASHTO T 276 and AASHTO T 325 during the mix design phase. Test at ages of 24 hours and 3, 7, 14, and 28 Days. For high-early strength concrete, test at ages of 1, 3, 5, 8, and 24 hours. Alternative testing ages may be submitted with a minimum of 5 test ages, with intervals at approximately equal strength increments. Each reading requires averaging the two maturity cylinders and breaking two compressive strength specimens.

02005.41 In-Place Concrete Strength Measurements - Use sensors meeting the requirements of 02005.20 to measure in-place strength of concrete.

(a) Field Measurements - Prior to concrete placement, securely attach sensors to the reinforcement at equivalent spacing throughout the placement area. Install a minimum of two sensors per placement, maintaining a minimum density of two sensors for every 100 cubic yards of concrete. If the strength measurements are used to authorize subsequent loading or return-to-traffic, place the sensors in the latest portion of the pour. For standard concrete, calculate Early-Age strength after 72 hours. For high-early strength concrete, Early-Age strength may be calculated at any time after the final set. The time of final set is determined by field observation when the concrete has stiffened sufficiently to resist the penetration of a weighted test device.

(b) Regression Analysis - When estimating strength for a future date, perform a regression analysis according to AASHTO T 276.

(c) Early-Age Strength - For subsequent loading or return-to-traffic strength, calculate the strength of concrete based on the maturity index readings according to AASHTO T 325.

02005.45 Temperature Monitoring - Use sensors meeting the requirements of 02005.20 to monitor the temperature of concrete, as required. Monitor temperature on all mass concrete placements.

SP02010 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02010 – PORTLAND CEMENT

Insert Project Name Here

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02010 of the Standard Specifications modified as follows:

02010.10(b) Specifications - Replace this subsection except for the subsection number and title with the following:

Furnish portland cement according to AASHTO M 85 or ASTM C150 for low alkali cement except as follows:

- Cement having a total alkali content (sodium and potassium oxide calculated as $\text{Na}_2\text{O} + 0.658 \text{ K}_2\text{O}$) not exceeding 0.60 percent.
- All cement types contain a maximum of 8 percent tricalcium aluminate (C_3A).
- The time-of-setting tests are by either the Gillmore test or the Vicat test.
- Types I and II maximum fineness (specific surface) as determined by AASHTO T 153 air permeability test is 430 m^2/kg . If $\text{C}_3\text{S} + 4.75 \text{ C}_3\text{A}$ is less than or equal to 90, the fineness criteria does not apply.

02010.10(c) Acceptance - Replace this subsection except for the subsection number and title with the following:

Furnish portland cement from the QPL.

02010.20 Blended Hydraulic Cement - Replace this subsection except for the subsection number and title with the following:

Furnish blended hydraulic cement that is either Type IS-portland blast-furnace slag cement, Type IP-portland-pozzolan cement, Type IL-portland-limestone cement, or Type IT-ternary blended cement according to AASHTO M 240.

Furnish blended hydraulic cement from the QPL.

SP02011 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02011 – RAPID HARDENING HYDRAULIC CEMENT

(Follow all instructions and make all edits with “Track Changes” turned on. This Section is not published in the Oregon Standard. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project, unless the item(s) that are included in the subsection, paragraph, sentence, or bullet are not required on the Project and then they should be deleted. In general do not re-number or re-letter subsections when item(s) are deleted. Delete all purple text before

preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Section 02011 is not a Standard Specification and is included in this Project by Special Provision.

Description

02011.00 Scope - This Section includes the requirements for rapid hardening hydraulic cement.

Materials

02011.10 Rapid Hardening Hydraulic Cement - Furnish Type VRH rapid hardening hydraulic cement from the QPL and meeting the requirements of ASTM C1600. Do not mix or alternately use differing brands or types of cement.

SP02020 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated:04-23-26)**

SECTION 02020 – WATER

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02020 of the Standard Specifications modified as follows:

02020.10(a) General - Replace this subsection except for the subsection number and title with the following:

Use water in mixing or curing concrete, mortar, grout, and in mixing cement-treated Base that is reasonably clean, and free of oil, sugar, organic matter, or other substances injurious to the finished product.

02010.20(c) Non-Potable, Unknown Quality, or Suspected Quality - Replace this subsection except for the subsection number and title with the following:

Test non-potable, unknown quality, or suspected quality water at no additional cost to the Agency. Test according to ASTM C114 and ASTM C1603. Water from concrete production operations is considered unknown quality. Provide test results that comply with the limits and ranges of ASTM C1602. Make test results available for review upon request.

SP02030 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26)

SECTION 02030 – SUPPLEMENTARY CEMENTITIOUS MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02030 of the Standard Specifications modified as follows:

02030.10 Fly Ash - Replace this subsection, except for the subsection number and title, with the following:

Furnish Class C and Class F fly ash from the QPL and according to AASHTO M 295 (ASTM C618).

002030.15 Natural Pozzolans - Replace this subsection, except for the subsection number and title, with the following:

Furnish Class N natural pozzolans from the QPL and according to AASHTO M 295 or ASTM C1945.

02030.20 Silica Fume - Replace this subsection, except for the subsection number and title, with the following:

Furnish silica fume from the QPL and according to the following:

(a) Types - Furnish the silica fume as a slurry containing silica fume, water, and a high range water reducer, or as a densified powder. Ensure the silica fume portion conforms to AASHTO M 307. Allowed total alkalis, as equivalent Sodium Oxide (Na_2O), is 1.5 percent maximum.

(b) Acceptance - Silica fume is accepted for immediate use if accompanied by a test results certificate according to 00165.35. If the silica fume is supplied as a slurry, indicate on the certificate the silica fume content of the slurry as a percent by weight. If the silica fume is supplied as a densified powder, do not allow the packaging to enter the concrete mixture.

002030.40 Ground Granulated Blast Furnace Slag (GGBFS) - Replace this subsection, except for the subsection number and title, with the following:

Furnish GGBFS from the QPL and according to AASHTO M 302.

002030.50 High Reactivity Pozzolans - Replace this subsection, except for the subsection number and title, with the following:

Furnish high-reactivity pozzolans from the QPL and according to AASHTO M 321.

Insert Project Name Here

Add the following subsection:

02030.55 Ground Glass Pozzolan - Furnish ground glass pozzolans meeting the requirements of ASTM C1866 Type GS.

SP02035 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated:04-23-26)**

SECTION 02035 – CONCRETE MODIFIERS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02035 of the Standard Specifications modified as follows:

02035.10 Styrene-Butadiene Latex - Replace the paragraph that begins "Furnish latex concrete ..." with the following paragraph:

Furnish latex concrete modifiers from the QPL that are a nontoxic, film-forming, polymeric emulsion in water where all stabilizers have been added at the point of manufacture. Furnish latex modifiers that are homogeneous and uniform in composition, and meet the following requirements:

SP02045 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated:04-23-26)**

SECTION 02045 – SYNTHETIC FIBER REINFORCING FOR CONCRETE

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02045 of the Standard Specifications modified as follows:

02045.80 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of synthetic fiber reinforcing is according to 00165.35(b) when accompanied by a quality compliance certificate.

SP02050 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26
Last updated: 04-23-26)

SECTION 02050 – CURING MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02050 of the Standard Specifications modified as follows:

02050.10 Liquid Compounds - Replace this subsection, except for the subsection number and title, with the following:

Furnish liquid membrane-forming curing compounds from the QPL and meeting the requirements of ASTM C309. Before use, submit two, one-quart samples from each lot for testing. Samples are tested according to ODOT TM 721. Samples are not required for curing compounds used on Commercial Grade Concrete.

Furnish Type 1-D, Type 2, Class A or B compounds.

Only Type 2, Class B resins are allowed for the following concrete Pavement applications:

- Plain concrete Pavement.
- Continuously reinforced concrete Pavement.
- Plain concrete Pavement repair.
- Reinforced concrete Pavement repair.

SP02080 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26
Last updated: 04-23-26)

SECTION 02080 – GROUT

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02080 of the Standard Specifications modified as follows:

Insert Project Name Here

02080.40 Portland Cement Grout - Replace this subsection, except for the subsection number and title, with the following:

Furnish portland cement grout consisting of one-part portland cement and three parts Sand by weight, thoroughly mixed with a minimum amount of water to produce a thick, creamy consistency. Furnish Sand meeting the requirements of 02690.30. Furnish cement meeting the requirements of Section 02010.

Add the following subsection:

02080.80 Rock and Ground Anchor Grout - Furnish rock and ground anchor grout from the QPL.

SP02110 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

SECTION 02110 – POSTS, BLOCKS, AND BRACES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02110 of the Standard Specifications modified as follows:

02110.10(a) General - Replace this subsection, except for the subsection number and title, with the following:

Furnish posts for guardrail and median barrier of the size shown, manufactured from Douglas fir, Hem-fir, or Southern Yellow Pine. A minimum extreme fiber bending stress (F_b) of 1,200 psi is required for wood posts. Only treated posts from approved Suppliers that are listed in the *Nonfield-Tested Materials Acceptance Guide* are allowed.

02110.10(b) Grading - Replace the paragraph that begins "Grading of posts shall..." with the following paragraph:

Furnish posts with grading meeting the following:

02110.10(c) Certificates - Replace this subsection, except for the subsection number and title, with the following:

Provide certificates of lumber inspection by a recognized inspection agency.

02110.10(f) Seasoning and Checking - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish preservative treated post that show evidence of reasonable amount of seasoning or conditioning having occurred prior to treatment, so that further shrinkage of treated posts will not create checking that would expose untreated wood.

At the time of inspection at the plant and at the time of installation each treated post is subject to inspection for evidence of seasoning having occurred. The presence of checking on the surface of the post will not be cause for rejection unless the width of the widest check, shake, or split exceeds 1/2 inch (surface measurement).

If an otherwise acceptable treated post has a through check, shake, or end split in the same slope of grain or plane as the bolt hole and extending from the top of the post to within 3 inches of the bolt hole, the post is rejected unless it is provided with a tight fastening across the separation, centered on the post, and 2 inches below the top. Fasten with a 1/2-inch diameter galvanized bolt and nut with a galvanized washer under the bolt head and under the nut after final curing of post is achieved. Treat holes for fastenings according to 00570.40.

02110.10(g) Inspection, Rejection and Marking at Plant - Replace this subsection, except for the subsection number and title, with the following:

Posts are subject to inspection at the treating plant at any time before, during or after treatment. Normally, inspection of treated posts is made by the Agency's Inspector not later than 10 Calendar Days after treatment, provided the Inspector is notified of the time that treating is to be done.

Inspection of treated posts for compliance with the requirements of 02110.10(e) is according to applicable AWP standards, except as follows:

- The Inspector will choose the number of treated posts from any one charge of the treating cylinder for determining penetration of treatment.
- Each post selected for testing is representative as a basis of acceptance or rejection of a pro rata number of posts in the charge.
- If 20 percent of the posts randomly selected for testing fail to conform to requirements, all of the posts in the entire charge from where they are selected may be classed as unacceptable.

At the Inspector's discretion, each treated post or a representative random selection of treated posts may be inspected for compliance with the requirements of 02110.10(f) "Seasoning and Checking".

Posts that fail to conform to requirements of this Subsection are subject to rejection at the treating plant singly, by partial lots, or by whole lots. (A "lot" comprises the posts in any charge of the treating cylinder.)

Apply a permanent mark or metal tag to each treated post that identifies the Supplier and year of treatment, placed by the Supplier either:

- On the top of the post, or
- On the back of the post, 8 inches to 10 inches below the bolt hole.

02110.10(h) Field Inspection, Acceptance and Rejection - Replace the paragraph that begins "Posts that show a check ..." with the following paragraph:

Posts that show a check, shake, or split exceeding 1/2 inch in width (surface measurement) on any surface are rejected.

Replace the paragraph that begins "Acceptance of Material..." with the following paragraph:

Acceptance of Material is according to 00165.35, 02110.10(g), and the Specifications.

02110.20 Guardrail Blocks - Replace this subsection, except for the subsection number and title, with the following:

(a) General - Furnish wood guardrail blocks of the dimensions shown. Furnish blocks either Douglas fir or Hem-fir meeting the requirements of 02110.10, or pine or Southern Yellow Pine meeting the requirements of 02110.20(b) and 02110.10 except for 02110.10(b). The requirements of marking and branding the treated blocks, according to the last paragraph of 02110.10(g), is waived provided that the Supplier of the treated blocks provides certification with each shipment stating that the blocks conform to Specifications and that the preservative treating was done under the inspection and with the approval of the Engineer.

(b) Grading - Furnish pine guardrail blocks according to the requirements of paragraph 80.11 of the current WWPA Grading Rules. Furnish Southern Yellow Pine guardrail blocks according to the requirements for No. 1 timber as specified in section 402 of the current SPIB Grading Rules.

(c) Recycled Plastic - Recycled plastic guardrail blocks from the QPL may be used.

(d) Acceptance - Acceptance of Material is according to 00165.35 and this Section.

02110.30 Fence Posts and Braces - Replace this subsection, except for the subsection number and title, with the following:

Furnish fence posts and brace rails of the sizes and dimensions shown and of sound Douglas fir, western hemlock, or western pine free from decay, end splits, and multiple crooks. Seasoning checks of not more than 5/16-inch width (surface measurement) is allowed. Allowable crooks may be in one plane only. Do not allow a line drawn between the centers of the butt and tip of each post and brace rail to fall outside of the actual longitudinal centerline of the post or rail by more than 1.67 percent of its length, with an allowable maximum of 2 inches.

Posts and brace rails may be square, rough, or dressed lumber, or may be peeled round posts, as the Contractor elects. Furnish round members free from bark, protruding knots and irregularities detrimental to a pleasing appearance.

Fabricate posts and brace rails before pressure treatment. Where field boring or field cutting of a treated member is required, field-treat the exposed untreated surface of the member according to 00570.40. Do not allow the size of holes after treatment to exceed the size of the dowels or bolts to be inserted by more than 1/16 inch.

Insert Project Name Here

Posts intended to be driven may be machine-pointed on either the small end or the large end, before pressure treatment.

Pressure treat the posts and brace rails according to Section 02190.

Acceptance of Material is according to 00165.35 and the Specifications.

02110.40(a) Grading - Replace the paragraph that begins "Grading requirements..." with the following paragraph:

Furnish wood signposts with grading according to the applicable paragraphs of either the current WCLIB Grading Rules or the current WWPAA Grading Rules, as follows:

02110.40(b)(1) Length - Replace the paragraph that begins "The length of the posts..." with the following paragraph:

Furnish posts of the length as shown or, where not shown, a sufficient length to provide proper sign mounting, a proper mounting height and the required foundation depth.

02110.40(b)(4) Cuts and Abrasions - Replace this subsection, except for the subsection number and title, with the following:

Treat cuts, abrasions and bolt-holes, prior to shipping, with the same preservative as originally used to treat the post, except that if the post was originally treated with pentachlorophenol - volatile petroleum solvent (LPG) solution, treat cuts, abrasions and bolt-holes with pentachlorophenol - mineral spirits solvent solution according to AWWA Standard M4.

02110.40(c) Cuts and Abrasions - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of Material is according to 00165.35 and this Section.

SP02120 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

SECTION 02120 – POLES

Replace this Section except for the Section number and title with the following:

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Description

Insert Project Name Here

02120.00 Scope - This Section includes the requirements for wood poles for use in illumination and signal installations, and timber piling for Structures.

Materials

02120.10 Wood Poles - Furnish all wood poles meeting the current edition of ANSI O5.1, Specifications and Dimensions (for Wood Poles), for Class 4 machine shaved Douglas fir, and treated meeting the requirements of Section 02190. Furnish poles that are round, sound, well-proportioned from butt to tip, and without short kinks or crooks.

02120.40 Acceptance - Acceptance of poles is according to 00165.35 and this Section.

SP02130 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

SECTION 02130 – TIMBER AND LUMBER

Replace this Section except for the Section number and title with the following:

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Description

02130.00 Scope - This Section includes the requirements for timber and lumber.

Materials

02130.10 Timber and Lumber - Furnish S4S Douglas fir for all lumber and timber unless otherwise shown or specified. The grading requirements are included in the Special Provisions.

Grade-stamp or provide a mill certification by an American Lumber Standards certified inspection agency for all lumber.

02130.20 Acceptance - Acceptance of Material is according to 00165.35 and this Section.

SP02140 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

Insert Project Name Here

SECTION 02140 – GLUED LAMINATED TIMBER MEMBERS

Replace this Section except for the Section number and title with the following:

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Description

02140.00 Scope - This Section includes the requirements for glued laminated timber members.

Materials

02140.10 General - Furnish all structural glued laminated lumber as shown and specified.

Manufacture structural glued laminated work according to the manufacturing requirements of the current ANSI/AITC A190.1 *American National Standard, Structural Glued Laminated Timber*.

Provide quality control according to the AITC 200 *Inspection Manual for Glued Laminated Timber*.

Furnish lumber that is Douglas fir, southern pine, western larch, or other species, as shown or specified. Use lumber of a stress grade to provide glued laminated members with the minimum stress values in bending and tension shown or specified.

Use adhesives meeting the requirements of the glued laminated lumber standards and be waterproof.

Unless otherwise specified, provide architectural grade appearance of members as defined in AITC 110 *Standard Appearance Grades for Structural Glued Laminated Timber*.

Seal surfaces of members with penetrating sealer and apply a coat of end sealer to the ends of all members as soon as practicable after end trimming, according to *AITC Standard for Preservative Treatment of Structural Glued Laminated Timber*. Use a clear sealer compatible with the preservative treatment used according to Section 02210.

Bundle wrap members according to *AITC Recommended Practice for Protection of Structural Glued Laminated Timber During Transit, Storage and Erection*.

Provide shop details from the fabricator and obtain approval before commencing the Work. Furnish details according to the current AITC Typical Construction Details.

02140.20 Acceptance - Glued laminated timber members are accepted according to 00165.35 and this Section.

SECTION 02150 – LUMBER AND TIMBER CONNECTORS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02150 of the Standard Specifications modified as follows:

02150.10(b) Split Ring Connectors - Replace this subsection, except for the subsection number and title, with the following:

Furnish 2 5/8 inch and 4 inch inside diameter split rings manufactured from steel according to ASTM A830, Grade Number 1010 (AISI C1010, SAE 1010). Furnish rings that form a closed true circle with the principal axis of the Cross Section of the ring metal parallel to the geometric axis of the ring. Bevel the metal section from the central portion toward the edges to a thickness less than the mid-section. Cut through the ring in one place in its circumference to form a tongue and slot.

Cut connector grooves in timber concentric with the bolt hole and conforming to the cross-sectional shape of the rings, to provide a snug fit. Cut the inside diameter of the groove larger than nominal ring diameter so that the ring can expand slightly during installation.

02150.10(c) Shear Plate Connectors - Replace this subsection, except for the subsection number and title, with the following:

(1) Pressed Steel Type - Furnish 2 5/8-inch diameter pressed steel shear plates manufactured from steel according to ASTM A830, Grade Number 1010 (AISI C1010, SAE 1010). Furnish plates that are a true circle with a flange around the edge, extending from one face of the plate only and at right angles to the face. Ensure the plate portion has a central bolt hole and two small perforations on opposite sides of the hole and midway between the center and circumference.

(2) Malleable Iron Type - Furnish 4-inch diameter malleable iron shear plates manufactured according to ASTM A47, Grade No. 32510, for malleable iron castings. Furnish each casting consisting of a perforated round plate with a flange around the edge projecting from one face of the plate only and at right angles to the face. Ensure the plate portion has a central bolt hole reamed to size with an integral hub concentric with the bolt hole and extending from the same face as the flange. Galvanize malleable iron type connectors according to AASHTO M 232 (ASTM A153).

02150.10(d) Bolts, Nuts, Nails, and Miscellaneous Hardware - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish machine bolts and drift bolts according to ASTM A307 or ASTM A36. Washers may be cast ogee or malleable castings or cut from steel plate.

Galvanize bolts, nuts, washers, lag screws, and wood screws, according to ASTM F2329. Furnish bolts, nuts, washers, lag screws, and wood screws in standard type and make, unless otherwise shown.

02150.10(e) Lightweight Metal Connectors - Replace this subsection, except for the subsection number and title, with the following:

Lightweight metal connectors are mass produced plate or sheet steel connectors with a maximum thickness of 1/4 inch, used to connect wood members to wood, concrete or masonry. Furnish lightweight metal connectors as shown with the required minimum capacities as specified in 00570.15 of the Special Provisions. Provide copies of the test reports from the *International Code Council* (ICC-ES) showing that the supplied connectors meet the minimum capacities listed in the Special Provisions. Furnish lightweight metal connectors that are Type 304 or Type 316 stainless steel according to ASTM A480, or galvanized according to ASTM A23 or ASTM A653, coating designation G185.

02150.10(f) Nails and Miscellaneous Hardware - Replace this subsection, except for the subsection number and title, with the following:

Furnish dowels according to ASTM A307 or ASTM A36.

Galvanize rough hardware, drift pins, dowels, clamps, anchors, joist hangers, and nails according to AASHTO M 232 (ASTM A153).

Furnish rough hardware, drift pins, dowels, clamps, anchors, joist hangers, and nails in standard type and make, unless otherwise shown.

02150.20 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Lumber and timber connectors are accepted according to 00165.35 and this Section.

SP02190 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

SECTION 02190 – PRESERVATIVE TREATMENT OF TIMBER

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02190 of the Standard Specifications modified as follows:

02190.10 General - Replace the paragraph that begins "All preservative treatment..." with the following paragraph:

Provide all preservative treatment according to AASHTO M 133 and its referenced AWPAs Standards, except use the following according to the AWPAs Standard:

02190.20 Drying After Treatment - Replace the paragraph that begins " The maximum moisture..." with the following paragraph:

The maximum moisture content is 19 percent prior to installation.

SP02210 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26)

SECTION 02210 – COATING MATERIALS FOR TIMBER AND CONCRETE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02210 of the Standard Specifications modified as follows:

02210.10(a) Manufacturing - Replace the bullet that begins "All coats in..." with the following bullet:

- Use the same manufacturer for all coats in the coating system.

Replace the bullet that begins "Multi-component coating Materials..." with the following bullet:

- Furnish manufacturer proportioned multi-component coating Materials with each component in its correct proportion and furnished in separate containers ready for field mixing.

SP02320 (Special Provisions for the 2024 Book)

(Bidding on or after: 08-01-26

Last updated: 04-24-26)

SECTION 02320 - GEOSYNTHETICS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02320 of the Standard Specifications modified as follows:

02320.10(a)(1) Geotextiles - Replace the bullet that begins "Fibers used in manufacture of..." with the following bullet:

- Use fibers and threads consisting of long-chain synthetic polymers, composed of at least 95 percent by weight of polyolefins or polyesters in the manufacture and joining of geotextiles. Form geotextiles into a stable network such that the filaments or yarns retain their dimensional stability to each other, including selvages.

(Use the following subsection .10(a)(3) when geomembranes are required.)

Add the following subsection:

02320.10(a)(3) Geomembranes - Furnish geomembranes that meet or exceed the properties specified in 02320.30 for the applicable resin type and thickness.

02320.10(b) Identification - Replace the paragraph that begins "Allow the Engineer to..." with the following paragraph:

Allow the Engineer to visually verify geosynthetic products before installation. Open packaged geosynthetics before use in the presence of the Engineer to confirm the correct product. Geotextile rolls without the product name printed on the geotextile or the product label affixed to the geotextile or roll core by the Manufacturer are rejected. Any other geosynthetics that are unwrapped, missing original packaging or previously opened may not be used unless approved by the Engineer.

02320.10(c) Manufacturer's Test Certification - Replace the paragraph that begins "Furnish test result..." with the following paragraph:

Provide test result certificates according to 00165.35 from the geosynthetic manufacturer, and the following:

02320.10(c)(1) Geotextiles - Replace the bullet that begins "Product name printed..." with the following bullet:

- Product name printed directly on the geotextile by the Manufacturer. For geotextiles that are not marked with a product name, furnish geotextile with product label attached to the geotextile or original packaging by the Manufacturer.

(Use the following subsection .10(c)(3) when geomembranes are required.)

Add the following subsection:

02320.10(c)(3) Geomembranes - Include the following:

- Average roll values for each of the specified properties from the same production run as the delivered material.
- Production run number, production plant name, and location.
- Manufacturer's name and address.
- Full product name and information.
- Identify the resin type and location for use referencing the Plans drawing number.

02320.10(d) Manufacturer's Sampling/Testing - Replace this subsection, except for the subsection number and title, with the following:

Provide manufacturer's reported property values based on the following sampling and testing requirements:

(1) Sampling - Sample all geosynthetics according to ASTM D4354. Use a roll or sheet for the production unit used for sampling.

(2) Geotextile Testing - Perform the specified tests to determine geotextile properties for the intended applications. Test the tensile strength requirements in both machine and cross-machine directions.

(3) Geogrid Testing - For mechanically stabilized earth retaining wall geogrid, provide laboratory test results that demonstrate the average roll value for each geogrid product is greater than or equal to the geogrid ultimate wide width tensile strength reported for the initial geogrid product evaluation and approval on the QPL. Determine the ultimate wide width tensile strength (T_{ult}) according to ASTM D6637. If the average roll value for each geogrid reinforcement product is less than the geogrid ultimate wide width tensile strength identified on the QPL, the entire production run is rejected.

(Use the following subsection (4) when geomembranes are required.)

(4) Geomembrane Testing - Perform the specified tests to determine the geomembrane properties for the type and thickness of membrane.

(Use the following subsection .11 when geomembranes are required.)

02320.11 Seam Testing and Acceptance - Replace this subsection with the following subsection:

02320.11 Geotextile Seam Testing and Acceptance:

(a) Factory Seams - Where factory seams are made, furnish sheets of geotextile that:

- Are sewn together using a lock type stitch Type 301 or 401 as shown.
- Are sewn with polymeric thread that is at least 95 percent, by weight, polyolefin or polyester, and as resistant to deterioration as the geotextile being sewn.
- Have test results showing that the seams meet or exceed 90 percent of the specified tensile strength minimum values for the intended application.
- Are not sewn with nylon thread.

Insert Project Name Here

(b) Field Seams - Where field sewn seams are used, provide:

- The manufacturer's test result certificate, according to 00165.35, that includes wide strip, tensile strength test results and verifies that seam tensile strength and seam grab tensile strength meet or exceed 90 percent of the minimum specified tensile strength values for the geotextile.
- A field-stitched seam test sample.

(Use the following subsection .12 when geomembranes are required.)

Add the following subsection:

02320.12 Geomembrane Seam Testing and Acceptance:

(a) Geomembrane Factory Seams - Factory seams are not allowed in HDPE and LLDPE geomembrane; furnish HDPE and LLDPE geomembrane as continuous sheets in rolls. Furnish PVC geomembrane with factory seams in the panels to reduce field seaming and testing.

(b) Geomembrane Field Seams - Perform geomembrane field seam testing according to 00350.43.

(Use the following subsection .20 when sediment fence is required.)

02320.20 Geotextile Property Values – Replace Table 02320-3 with the following table:

Table 02320-3 Geotextile Property Values for Sediment Fence ¹

Geotextile Property	ASTM Test Method	Unit	Geotextile Property Requirements Woven and Nonwoven
Grab Tensile Strength (minimum) Machine and Cross Machine Directions	D 4632	lb	120 100
Apparent Opening Size (AOS) (maximum) U.S. Standard Sieve	D 4751	—	30
Permittivity (minimum)	D 4491	sec ⁻¹	0.05
Ultraviolet Stability Retained Strength (minimum)	D 4355 (at 500 hours)	%	70

¹ All geotextile properties are Minimum Average Roll Values (MARV). The test results for any sampled roll in a lot shall meet or exceed the values shown in the table.

(Use the following subsection .30 and tables when geomembranes are required.)

Add the following subsection:

02320.30 Geomembrane Property Values:

Table 02320-7a Property Values for High Density Polyethylene (HDPE) Geomembrane – Textured

Insert Project Name Here

Properties	ASTM Test Method	Test Value			
		30 mils	40 mils	50 mils	60 mils
Thickness mils (min. ave.) - mils	D5994	nom. - 5%	nom. - 5%	nom. - 5%	nom. - 5%
Formulated Density (min. ave.) - g/cc	D1505/D792	0.94	0.94	0.94	0.94
Tensile Properties (min. ave.)	D 6693				
• yield strength - lb/in.	Type IV	63	84	105	126
• break strength - lb/in.		45	60	75	90
• yield elongation - %		12	12	12	12
• break elongation - %		100	100	100	100
Tear Resistance (min. ave.) - lb	D1004	21	28	35	42
Puncture Resistance (min. ave.) - lb	D4833	45	60	75	90
Stress Crack Resistance - hr.	D5397 (App)	500	500	500	500
Carbon Black Content (range) - %	D4218	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0

Table 02320-7b Property Values for Linear Low Density Polyethylene (LLDPE) Geomembrane – Textured

Properties	ASTM Test Method	Test Value			
		30 mils	40 mils	50 mils	60 mils
Thickness mils (min. ave.) - mils	D5994	nom. - 5%	nom. - 5%	nom. - 5%	nom. - 5%
Formulated Density (max) - g/cc	D1505/D792	0.94	0.94	0.94	0.94
Tensile Properties (min. ave.)	D 6693				
• break strength - lb/in.	Type IV	30	45	60	75
• break elongation - %		250	250	250	250
2% Modulus - lb/in - (max)	D5323	1200	1800	2400	3000
Tear Resistance (min. ave.) - lb	D1004	11	16	22	27
Puncture Resistance (min. ave.) - lb	D 4833	22	33	44	55
Axi-Symmetric Break resistance Strain (min) - %	D5617	30	30	30	30
Carbon Black Content (range) - %	D4218	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0

Table 02320-7c Property Values for Non-Reinforced Polyvinyl Chloride (PVC) Geomembrane Used in Buried Applications

Insert Project Name Here

Properties	ASTM Test Method	Test Value			
		30 mils	40 mils	50 mils	60 mils
Thickness mils (min. ave.) - mils	D5994	nom. - 5%	nom. - 5%	nom. - 5%	nom. - 5%
Tensile Properties (min.)	D982				
• break strength - lb/in.		73	97	116	137
• break elongation - %		380	430	430	450
• Modulus at 100% - lb/in		30	40	50	60
Tear Strength (min.) - lb	D1004	8	10	13	15
Dimensional Stability (max change) - %	D1204	3	3	3	3
Low Temperature Impact Pass (°F)	D1790	-20	-20	-20	-20
Specific Gravity (min)	D790	1.2	1.2	1.2	1.2
Water Extraction (max loss) - %	D1239	0.15	0.20	0.20	0.20
Volatile Loss (max loss) - %	D1203	0.70	0.50	0.50	0.50
Soil Burial (max change) - %	G160				
Break Strength		5	5	5	5
Elongation		20	20	20	20
Modulus at 100%		20	20	20	20
Hydrostatic Resistance (min.) - psi	D751	100	120	150	180
Minimum Average Molecular Weight	D8133	400	400	400	400

SP02340 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

SECTION 02340 – ROCK GABION BASKETS

Replace this Section except for the Section number and title with the following:

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Description

02340.00 Scope - This Section includes the requirements for Rock gabion baskets of twisted or welded wire mesh.

Materials

Insert Project Name Here

02340.10 General - Furnish wire mesh free of breaks in the wire, free of breaks at weld points or other deficiencies. Furnish wires of either twisted or welded wire mesh meeting the following minimum requirements:

Galvanizing 0.80 oz. per sq. ft. minimum
Tensile strength * 60,000 psi minimum
Wire diameter tolerance limit ± 0.004 "

* Tensile area includes galvanizing

Furnish welded wire according to AASHTO M 55 (ASTM A185) except with minimum weld shears of 600 pounds for 11-gauge, and 800 pounds for 9-gauge wires. All wire sizes are after galvanizing.

Furnish tie wires and internal connecting wires that are galvanized and no smaller than 13-1/2 gauge. Spiral binders may be used as an alternate to tie wire for basket assembly and basket-to-basket connections. Furnish spiral binders that are 9-gauge, galvanized, and have a 3-inch pitch. High tensile fasteners of the locking spring steel clip or clamp-on ring type may be used as alternates to tie wire for basket assembly only. Fabricate high tensile fasteners from 11-gauge steel wire with a minimum tensile strength of 240,000 psi. Furnish a Class 3 zinc coating according to ASTM A764. Furnish high tensile fasteners with a closed position tensile strength of 600 pounds.

Furnish galvanized wire according to ASTM A641.

02340.12 Twisted Wire Mesh Gabion Baskets - Furnish gabion panels of the twisted mesh style manufactured from 11-gauge with 9-gauge selvage wires and a uniform hexagonal pattern and formed with a non-raveling twist. Furnish hexagonal openings such that the major axis (maximum line dimensions) does not exceed 4.75 inches and the area of the hexagonal opening, approximately 3.2 inches by 4.5 inches, does not exceed 9.5 square inches.

02340.20 Welded Wire Mesh Gabion Baskets - Furnish gabion panels of the welded mesh style manufactured from 11-gauge or 9-gauge wire, a nominal 3-inch by 3-inch grid pattern and according to AASHTO M 55 (ASTM A185). Furnish panels with maximum line dimensions of any opening that does not exceed 4.75 inches. Furnish 12-inch and 18-inch high mattresses made from 11-gauge panels. Gabions of square Cross Section (cubical-celled units) may be made with either 9-gauge or 11-gauge panels, except that within the same unit, panels of dissimilar wire sizes may not be mixed.

Galvanized 9-gauge stiffeners, placed diagonally in the baskets at the vertical one-third points, as shown or as recommended by the manufacturer, may be used instead of perpendicular cross ties.

02340.30 PVC Coated Wire Mesh Gabion Baskets - Furnish either twisted wire mesh or welded wire mesh wire type used for PVC coated wire mesh gabions according to 02340.00 and 02340.12 or 02340.20.

Furnish PVC coating for twisted wire mesh gabions extruded onto the wire core before weaving the coated wire into a double twisted hexagonal mesh. The use and minimum diameter of the various wires is as follows:

Insert Project Name Here

- Gabion Panel wire core manufactured from galvanized 12-gauge wire core with an overall minimum diameter of the galvanized wire core plus PVC coating of 0.136 inch.
- Selvage and reinforcing wire of heavily galvanized 10-gauge wire core coated with PVC and having an overall minimum diameter (galvanized wire core plus PVC coating) of 0.165 inch.
- Lacing and connecting wire of heavily galvanized 13 1/2-gauge wire core coated with PVC and having an overall minimum diameter (galvanized wire core plus PVC coating) of 0.120 inch.

02340.40 Fabrication - Fabricate gabions so that the sides, ends, lid and diaphragms can be assembled at the construction site into rectangular baskets of the specified sizes. Dimensions for heights, lengths and widths of gabion baskets are as shown with a tolerance of plus or minus 3 percent. Furnish gabions of single unit construction. Either connect the base, lid, ends and sides into a single unit or connect one edge of these members to the base section of the gabion in such a manner that strength and flexibility at the point of connection are at least equal to those of the mesh.

If the length of the gabion exceeds its horizontal width, equally divide the gabion by diaphragms into cells whose length does not exceed the horizontal width. Furnish the diaphragm Material of the same mesh and size as the body of the gabions. Furnish the gabion with the necessary diaphragms secured in proper position on the base in such manner that no additional tying at this juncture is necessary.

Assemble the wire mesh panels (base, ends, sides, diaphragms and lid) so strength and flexibility at connections are at least equal to those of a single panel.

02340.50 Acceptance - Provide a quality compliance certificate for gabion baskets according to 00165.35.

SP02350 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-24-26)**

SECTION 02350 – METAL BIN RETAINING WALLS

Replace this Section except for the Section number and title with the following:

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Description

02350.00 Scope - This Section includes the requirements for galvanized steel sheets and hardware for the assembly of metal bin retaining walls.

Materials

02350.10 Base Metal, Galvanizing, and Thickness - Design all members, fittings and appurtenances as integral units or parts of the whole assembly. Furnish galvanized sheets used in fabricating the members according to the requirements of AASHTO M 218. Galvanize or otherwise protect with approved coatings all bolts, nuts and miscellaneous hardware of sizes and shapes suitable for use with the members furnished.

Fabricate the members from the specified base metal of the thickness shown. In the absence of given thickness or dimensions for any member, fitting or appurtenance, provide a thickness of metal or dimensions of the member as required to fully develop the strength of the members whose thickness and dimensions are given, and that are used in structural combination.

02350.20 Fabrication - Fabricate all members so members of the same nominal size are fully interchangeable. Fabricate and punch the members so no drilling, punching or drifting to correct defects in manufacture are required during field assembly. Any members having improperly punched holes are rejected. Replace with a member with properly punched holes.

SP02410 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 03-31-26)

SECTION 02410 - CONCRETE PIPE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02410 of the Standard Specifications modified as follows:

02410.10(e) Concrete Pipe Plant Air Test - Replace this subsection, except for the subsection number and title, with the following:

The Engineer may require that each length of concrete pipe 12 inches in diameter and smaller be given an individual air test at the point of manufacture. Use test Equipment approved by the Engineer and a test pressure of at least of 10 psi. Ensure each length shows no appreciable loss of air after 5 seconds.

When individual air testing is performed, no field or shop permeability tests are required.

02410.10(f) Nonreinforced Concrete Pipe - Replace this subsection, except for the subsection number and title, with the following:

Furnish nonreinforced or plain circular concrete pipe and special sections according to the requirements of AASHTO M 86 (ASTM C14) or ASTM C985 and this Section.

Insert Project Name Here

02410.10(g) Reinforced Concrete Pipe - Replace this subsection, except for the subsection number and title, with the following:

Furnish reinforced concrete pipe and special sections according to the requirements of AASHTO M 170 (ASTM C76) and this Section, except as follows.

(1) Special Sections - Furnish special sections such as elbows, wyes, tees, crosses, bends and reducers as shown, specified or directed. In the absence of any design or Specifications, furnish special sections of the design recommended by the manufacturer for the intended use and according to the requirements specified for the pipe where it is used.

Fabricate special sections with components from tested and approved lots. Maintain production dates of components.

(2) Load Strength - Reinforced concrete pipe having the same D-load strengths as those specified to be furnished under AASHTO M 170 (ASTM C76) may be furnished according to AASHTO M 242 (ASTM C655).

(3) Acceptance - The basis of acceptance for reinforced concrete pipe manufactured according to AASHTO M 170 (ASTM C76), and AASHTO M 242 (ASTM C655) is Paragraph 5.1.1 of AASHTO M 170.

02410.10(h) Concrete Drain Pipe - Replace this subsection, except for the subsection number and title, with the following:

Use circular, nonreinforced perforated concrete pipe and special sections for subsurface drainage according to the requirements of AASHTO M 175 (ASTM C444), Type 1, all applicable requirements of AASHTO M 86 (ASTM C14), except indent the markings required by AASHTO M 86 (ASTM C14) in the outside surface of each section of pipe.

02410.10(i) Concrete Drain Tile - Replace this subsection, except for the subsection number and title, with the following:

Furnish concrete drain tile according to the requirements of AASHTO M 178 (ASTM C412).

02410.80 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Except as provided in 02410.10(g)(3), acceptance of nonreinforced concrete pipe, reinforced concrete pipe, concrete drain pipe, concrete drain tile, and hardware is according to 00165.35 and this Section.

SP02415 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-01-26)**

SECTION 02415 - PLASTIC PIPE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02415 of the Standard Specifications modified as follows:

02415.20 Solid-Wall Polyethylene Pipe – Replace the bullet that begins "Production code from which ..." with the following bullet:

- Production code where the date and place of manufacture can be determined

02415.30 Steel Reinforced Polyethylene Pipe – Replace the paragraph that begins "For Steel Reinforced Polyethylene..." with the following paragraph:

For Steel Reinforced Polyethylene Pipe, furnish either factory installed gaskets on the couplings or manufacturer installed gaskets on the pipes. Furnish at least silt tight joints for culvert pipe and water tight joints for storm sewer pipe. Furnish watertight joints from the QPL and meeting the requirements of ASTM D3212.

02415.40 Polypropylene Pipe - Replace this subsection, except for the subsection number and title, with the following:

Furnish polypropylene pipe and fittings as follows:

(a) Non-Pressure Storm Sewers and Culverts - Furnish polypropylene pipe and fittings for non-pressure storm sewers and culverts from the QPL and meeting the following requirements:

Dual Wall Pipe ASTM F2764, ASTM F2881,
or AASHTO M 330 Type S
Triple Wall Pipe ASTM F2764 or AASHTO M 330 Type D
Watertight Joints..... ASTM D3212

(b) Non-Pressure Sanitary Sewers - Furnish polypropylene pipe and fittings for non-pressure sanitary sewers from the QPL and meeting the following requirements:

Dual Wall Pipe ASTM F2764
Triple Wall Pipe ASTM F2764
Watertight Joints..... ASTM D3212

02415.50 Polyvinyl Chloride Pipe - Replace the paragraph that begins "Furnish PVC sanitary, storm..." with the following paragraph:

Furnish PVC sanitary, storm, culvert, siphon, and irrigation pipe and fittings with 2 feet or more cover that have a minimum pipe stiffness of 46 psi or a minimum SDR of 35 and meet the requirements of sewer pipe ASTM D3034 or ASTM F794.

Insert Project Name Here

02415.80 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of Polyethylene Pipe, polypropylene pipe, polyvinyl chloride pipe and hardware is according to 00165.35 and this Section.

SP02420 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-31-26)**

SECTION 02420 - METAL PIPE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02420 of the Standard Specifications modified as follows:

02420.10(a) Shapes - Replace the paragraph that begins "Provide either full-circle..." with the following paragraph:

Furnish either full-circle or elliptical pipe, as the Contractor may elect, unless otherwise shown or specified. The shapes of pipe fabricated and furnished may include any of the following:

Replace the bullet that begins "**Nestable Pipe** - Fabricate ..." with the following bullet:

- **Nestable Pipe** - Fabricate in two separate half sections designed to fit and fasten together to form a full-circle Cross Section of specified diameter. Fasten the two half sections together by approved means, providing at least 90 percent of the strength of a standard riveted longitudinal seam.

02420.10(b) Connecting Bands - Replace this subsection, except for the subsection number and title, with the following:

Use connecting bands according to the details as shown to make field joints for pipes and pipe arches not requiring watertight joints.

02420.10(c) Special Sections - Replace the paragraph that begins "Generally, special sections shall..." with the following paragraph:

Generally, furnish special sections according to the requirements specified for the pipe where they are used. Connect special sections to the pipe or to each other with connecting bands specified for use with the pipe where they are connected.

02420.10(d) Repair of Damaged Coating - Replace the paragraph that begins "In addition to the methods ..." with the following paragraph:

In addition to the methods given in AASHTO M 36 (ASTM A760) the Contractor may repair damaged zinc or aluminum coating by removing all loose or cracked coating, removing all welding flux, wire brushing the damaged area, and applying two coats (minimum 2 mils total thickness) of a high zinc dust content paint according to the general requirements of ASTM A780.

02420.10(e) Irrigation Pipe - Replace the paragraph that begins "In irrigation pipe installations..." with the following paragraph:

In irrigation pipe installations, where Type D coating (AASHTO M 190) is not specified, the Contractor is allowed to furnish pipe with Type D coating.

02420.10(e)(2) Field Joints - Replace this subsection, except for the subsection number and title, with the following:

Use connecting bands according to the details shown and make the field joints watertight.

02420.10(f) Siphon Pipe - Replace the paragraph that begins "Field joints shall provide..." with the following paragraph:

Furnish circumferential and longitudinal strength field joints to preserve the pipe alignment, prevent separation of pipe sections and provide a watertight joint. Attach the connecting bands so they lap a nearly equal portion of each pipe section to be connected.

02420.11 Ductile Iron - Replace this subsection, except for the subsection number and title, with the following:

Furnish ductile iron pipe according to the requirements of AWWA C151. Use Pressure Class 150 - 350 or Special Thickness Class 50 - 56, as directed.

02420.20(a) Bituminous Protective Coatings - Replace this subsection, except for the subsection number and title, with the following:

Furnish corrugated metal pipe and connecting bands with bituminous coatings according to the requirements of AASHTO M 190 and the following:

- Before immersion, ensure the metal is free of grease, dirt, dust, moisture or other contaminants.
- Apply the initial bituminous coating by one of the processes under 02420.20(a)(1) or 02420.20(a)(2).
- If a second dip is required to meet the coating thickness requirements of AASHTO M 190, the time and temperature requirements of 02420.20(a)(1) or 02420.20(a)(2) need not be followed for the second dip.
- Fill the corrugations for at least 40 percent of the circumference of the pipe to form the paved invert for both Type B and Type C coatings on either circular or arch type pipe.

02420.20(a)(1) Pipe Not Preheated - Replace the paragraph that begins "The temperature of the asphalt..." with the following paragraph:

Insert Project Name Here

Furnish asphalt at the time of pipe immersion at a temperature of $400^{\circ}\text{F} \pm 5^{\circ}\text{F}$. Provide an immersion duration meeting the following schedule:

02420.20(2) Pipe Preheated - Replace this subsection, except for the subsection number and title, with the following:

Furnish asphalt at the time of pipe immersion at a temperature of $380^{\circ}\text{F} \pm 5^{\circ}\text{F}$ and the pipe preheated to a temperature 300°F to 350°F .

02420.20(b) Type D, Fully-Bituminous Coated, Fully-Lined - Replace this subsection, except for the subsection number and title, with the following:

Furnish a fully-bituminous coated, fully-lined interior lining that is smooth, uniform and free from sags and runs. Slight residual corrugations due to cooling and shrinkage of the lining will not be cause for rejection. At the three-sheet lap an interior nonuniformity equal to the thickness of the sheet is allowed. Maintain the thickness of the lining to the ends of the pipe.

02420.20(c) Optional Paved Invert - Replace this subsection, except for the subsection number and title, with the following:

If an asphalt coated pipe with a paved invert (Type C coating) is shown or specified, a centrifugally-applied interior lining according to Type D coating may be furnished as an alternate, providing the minimum thickness of bituminous coating over the crests of the corrugations is not less than 1/4 inch.

02420.30 Corrugated Steel Pipe for Underdrains - Replace this subsection, except for the subsection number and title, with the following:

Furnish corrugated steel pipe for underdrains according to the requirements of AASHTO M 36 (ASTM A760) Type III - Underdrain Pipes, except as modified in 02420.10(c) and 02420.10(d), and as follows:

(a) **Class IV** - Semicircular pipe may be used only as an alternate with the 6-inch size of perforated full-circle drain pipe.

(b) **Connecting Bands** - Furnish connecting bands for underdrain pipe field joints meeting the designs shown.

02420.40 Corrugated Aluminum Alloy Pipe - Replace this subsection, except for the subsection number and title, with the following:

Furnish corrugated aluminum alloy pipe, helical rib pipe, pipe arches and special sections according to the requirements of AASHTO M 196 (ASTM B745), Types I, II and III, except as follows:

(a) **Shapes** - The shapes of the pipes to be furnished may include any of the shapes described in 02420.10(a).

(b) Connecting Bands - Use connecting bands according to the requirements of AASHTO M 196 (ASTM B745) and the details shown to make field joints for pipes and pipe arches not requiring watertight joints.

(c) Special Sections - Furnish special sections such as elbows, wyes, tees, crosses, bends, reducers and flared inlets as shown or as directed.

Generally, furnish special sections according to the requirements specified for the pipe where they are used. Connect special sections to the pipe or to each other with connecting bands specified for use with the pipe where they are connected.

For elbows of 30 degrees or greater total angle, use a three-piece section of approximately equal length and equal-angle segments or pieces.

(d) Irrigation Pipe - In irrigation pipe installations where Type D coating is not shown or specified, the Contractor is allowed to furnish pipe with Type D coating.

If pipes are not furnished with Type D coating, ensure all riveted seams meet the applicable provisions of 02420.10(e)(1).

Use connecting bands according to AASHTO M 196 (ASTM B745) and the details shown, and make the field joints watertight for pipe installations used in irrigation.

(e) Siphon Pipe - Fabricate corrugated aluminum alloy pipe used in siphons with watertight seams.

Provide field joints with circumferential and longitudinal strength to preserve the pipe alignment, prevent separation of pipe sections and provide a watertight joint. Fabricate the connecting bands from aluminum alloy according to AASHTO M 196 (ASTM B745). Attach the connecting bands so they lap a nearly equal portion of each pipe section to be connected.

(f) Sloped or Skewed Ends - If the ends of pipe culverts require sloped ends, skewed ends or both, fabricate the ends in a manner that provides good workmanship and a smooth finish. Repair bituminous protective coatings and linings when specified.

02420.50 Corrugated Aluminum Alloy Pipe for Underdrains - Replace this subsection, except for the subsection number and title, with the following:

Furnish corrugated aluminum alloy pipe for underdrains according to the requirements of AASHTO M 196 (ASTM B745) Type III, except as follows:

(a) Special Sections - The provisions of 02420.40(c) apply.

(b) Connecting Bands - Furnish connecting bands for field joints meeting the requirements of AASHTO M 196 (ASTM B745) and the details shown.

02420.60 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Acceptance of pipes, underdrains, and protective coatings is according to 00165.35 and this Section.

SP02430 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26)

Last updated: 04-02-26)

SECTION 02430 – STRUCTURAL PLATE PIPE

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02430 of the Standard Specifications except for the Section number and title with the following:

Descriptions

02430.00 Scope - This Section includes the requirements for steel and aluminum alloy plates and hardware for structural plate pipe.

Materials

02430.10 Galvanized Steel Plates:

(a) General - Furnish galvanized steel plates for structural plate pipe according to the requirements of AASHTO M 167 (ASTM A761).

(b) Plates for Pipe Arches - Form an arc between 180 and 155 degrees with the top plates. Form an arc between 50 and 10 degrees with the bottom plates. Join the top plates at each end to the bottom plates with corner plates to form an arc with a radius between 16 inches and 21 inches or between 29 inches and 34 inches, as applicable, and forming an arc between 87.5 and 75 degrees.

(c) Forming and Punching Plates - Form plates to provide lap joints. Punch the bolt holes so that all plates with the same dimensions, curvature, thickness, and number of bolts per foot of seam are interchangeable. Curve each plate to the proper radius so that the cross-sectional dimensions of the finished Structure is as shown or as specified.

Fabricate bolt holes according to AASHTO M 167. Provide additional bolt holes for special conditions of installation when specified or shown.

(d) Sloped and Skewed Ends - Cut plates for forming sloped ends, skewed ends or both, to give the angle of Slope or skew shown. Furnish edges free from oxide and burrs when burnt. Legibly identify each cut plate to designate its proper position in the finished Structure.

Insert Project Name Here

02430.20 Aluminum Alloy Plates - Furnish aluminum alloy plates for structural plate pipe according to the requirements of AASHTO M 219 (ASTM B746). Fabricate according to 02430.10(b) through 02430.10(d).

02430.90 Bolts, Nuts, and Washers - Furnish bolts, nuts, and washers for use with galvanized steel structural plate pipe according to the requirements of AASHTO M 167 (ASTM A761) and galvanized according to AASHTO M 232 (ASTM A153).

Furnish bolts, nuts, and washers for use with aluminum alloy structural plate pipe according to the requirements of AASHTO M 219 (ASTM B746) and galvanized according to AASHTO M 232 (ASTM A153).

02430.95 Acceptance - Acceptance of structural plate pipe and hardware is according to 00165.35 and this Section.

SP02440 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 05-01-26)**

SECTION 02440 – JOINT MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02440 of the Standard Specifications modified as follows:

02440.10 Preformed Joint Fillers for Concrete - Replace this subsection, except for the subsection number and title, with the following:

Furnish preformed joint fillers for concrete from the QPL according to the requirements of AASHTO M 153 or AASHTO M 213.

02440.15 Lubricant/Adhesive - Replace this subsection, except for the subsection number and title, with the following:

Furnish a lubricant/adhesive according to ASTM D4070 and according to the recommendations of the seal manufacturer.

02440.20 Strip Seals - Replace this subsection, except for the subsection number and title, with the following:

Furnish strip seals from the QPL and according to ASTM D5973.

02440.22 Preformed Compression Joint Seal - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish preformed compression joint seals from the QPL and according to the requirements of AASHTO M 297.

02440.40(a) Preformed Flexible Joint Sealant - Replace this subsection, except for the subsection number and title, with the following:

Furnish Materials for tongue and groove or key lock manhole joints according to the requirements of ASTM C990.

02440.40(b) Rubber Gaskets - Replace this subsection, except for the subsection number and title, with the following:

Furnish Materials for O-ring manhole and concrete pipe joints according to ASTM C443.

02440.50 Joint Materials for Concrete Precast Manhole Section Joints - Replace this subsection, except for the subsection number and title, with the following:

(a) Mortar - Furnish mortar according to the requirements of ASTM C387, or proportioned one part Type II portland cement to two parts clean, well-graded Sand passing a No. 6 screen. Admixtures may be used not exceeding the following percentages by weight of cement:

Hydrated lime	10%
Diatomaceous earth or other inert materials	5%

Furnish mortar with the consistency such that it will readily adhere to the precast concrete if using the standard tongue-and-groove type joint.

(b) Non-Epoxy (Non-Shrink) Grout - Furnish a non-epoxy (non-shrink) grout according to 02080.20. Place or pack non-epoxy (non-shrink) grouts only with the use of a non-epoxy bonding agent according to 02070.20, applied to all cured concrete surfaces being grouted. Use a bonding agent compatible with the grout used.

02440.60 Plastic Compound for Precast Manhole Section Joints - Replace the bullet that begins "Is pliable at temperatures ..." with the following bullet:

- Is pliable at temperatures between 32 °F and 135 °F. Ensure a specimen at 77 °F and 1/2-inch square in Cross Section stretches at least 1 1/2 inches before rupture when tested with the apparatus described in ASTM D113.

02440.70(a) Plastic - Replace the paragraph that begins "Polyvinyl chloride water stop ..." with the following paragraph:

Manufacture polyvinyl chloride water stop from virgin polyvinyl chloride (PVC) compound. Reclaimed PVC is not allowed. Furnish the water stop having the following properties:

02440.70(b) Rubber - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish rubber water stops to the dimension shown and according to the requirements of ASTM C923, ASTM C1478, or ASTM F2510 as appropriate for the specific Structure and pipe types.

02440.80 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of joint Materials is according to 00165.35 and this Section.

SP02450 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02450 – MANHOLE AND INLET MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02450 of the Standard Specifications except for the Section number and title with the following:

Descriptions

02450.00 Scope - This Section includes the requirements for precast manhole sump sections, metal frames, covers, grates, and manhole steps.

Materials

02450.10 Precast Concrete Manhole Sections - Furnish precast risers, cones, and cover slabs for precast concrete manholes according to the requirements of AASHTO M 199 (ASTM C478).

02450.15 Precast Concrete Catch Basins and Inlets - Furnish precast concrete catch basins and inlet according to the requirements of ASTM C913.

02450.20 Precast Concrete Sump Sections - Furnish precast rings and lids for precast concrete sumps of portland cement concrete according to AASHTO M 199 (ASTM C478).

02450.30 Metal Frames, Covers, Grates, and Steps - Comply with the following:

Projects on State Highways		
Item	AASHTO (ASTM) Designation	Grade
Manhole frames and covers	M 306	Class 35 B
Inlet frames and grates	M 306	Class 35 B

Insert Project Name Here

M 227 (A663)	65
M 270 (A709) (A36)	36
M 103 (A27)	65 - 35

All Other Projects

Item	AASHTO (ASTM) Designation	Grade
Manhole frames and covers	M 105	Class 30 B
Inlet frames and grates	M 227 (A663)	65
	M 270 (A709) (A36)	36
	M 103 (A27)	65 - 35

Furnish steps for manholes that are steel-reinforced plastic according to AASHTO M 199 (ASTM C478) and AASHTO T 280 (ASTM C497). Use deformed reinforcing bar according to AASHTO M 31 (ASTM A615) Grade 60, No. 4 minimum. Use plastic material that is injection molded, with a textured, non-slip surface and a minimum thickness over the steel of 1/16 inch. Voids in the plastic are cause for rejection of the step.

Provide welding according to AWS D1.1. Furnish frames, covers and grates for use one with another with even and uniform bearings. Furnish miscellaneous metal items and hardware according to the appropriate requirements of Section 00560.

Galvanize inlet frames and grates that are fabricated out of steel according to the appropriate requirements of Section 02530.

02450.40 Damaged Zinc or Aluminum Coating - Repair damaged zinc or aluminum coating according to 02420.10(d).

02450.50 Acceptance - Acceptance of manholes and inlets is according to 00165.35 and this Section.

SP02470 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02470 – POTABLE WATER PIPE MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02470 of the Standard Specifications except for the Section number and title with the following:

Description

02470.00 Scope - This Section includes the requirements for ductile iron, steel, and polyvinyl chloride (PVC) pipe 16 inches in diameter and smaller, for potable water systems.

Materials

02470.10 General - Clearly mark all pipe with the type, class, thickness, and manufacturer's name, as applicable. Use lettering that is legible and permanent under normal conditions of handling and storage. Ensure all Materials in contact with potable water conform to ANSI/NSF Standard 61, Drinking Water System Components - Health Effects, or equivalent, and ANSI/NSF Standard 372, Drinking Water System Components - Lead Content.

02470.20 Ductile Iron Pipe:

(a) **General** - Use centrifugally cast ductile iron pipe meeting the requirements of AWWA C151. Furnish ductile iron pipe having a cement-mortar lining and seal coating meeting the requirements of AWWA C104. Furnish Special Thickness Class 53 ductile iron pipe where joined using bolted flanged joints. Furnish Special Thickness Class 50 for all other ductile iron pipe, unless otherwise shown or specified.

(b) **Nonrestrained Joints** - Furnish nonrestrained joints that are rubber gasket, push-on type, or mechanical type meeting the requirements of AWWA C111.

(c) **Restrained Joints** - Furnish restrained joints according to 02475.50.

02470.31 High Density Polyethylene (HDPE) Pipe - Use HDPE pipe meeting the requirements of NSF/ANSI 61 and ANSI/AWWA C906, Standard Code Designation of PE4701, minimum cell classification PE 345464 C, D or E, and oxidative resistance classification CC3 according to ASTM D3350. Furnish all pipe with a minimum dimension ratio (DR) of 9 unless otherwise shown or specified. Furnish pipe that is iron pipe size (IPS) outside diameter or ductile iron pipe size (DIPS) outside diameter. Furnish pipe with color coding according to the APWA Uniform Color Code. Join pipe using thermal butt fusion method that meets the requirements of ASTM D3261.

02470.40 Polyvinyl Chloride (PVC) Pipe 4 Inches and Larger:

(a) **PVC Pipe Smaller than 14-inch Diameter** - Furnish PVC pipe 4 inches in diameter up to but not including 14 inches in diameter meeting the requirements of AWWA C900, have the same outside dimensions as ductile iron pipe, and having a minimum dimension ratio (DR) of 18 or as specified or indicated.

(b) **Large Diameter PVC Pipe** - Furnish PVC pipe 14 inches in diameter to 16 inches in diameter meeting the requirements of AWWA C905, having the same outside dimensions as ductile iron pipe, and having a minimum dimension ratio (DR) of 18 or as specified or indicated.

(c) **Joints** - Furnish joints meeting the requirements of ASTM D3139 using a restrained rubber gasket according to ASTM F477. Solvent-welded pipe joints are not allowed.

02470.45 Polyvinyl Chloride (PVC) Pipe Under 4 Inches - Furnish polyvinyl chloride (PVC) under 4 inches in diameter meeting the requirements of ASTM D2241. Furnish pipe Material that is PVC 1120, PVC 1220, or PVC 2120, and having a minimum wall thickness

Insert Project Name Here

equal to or greater than a standard dimension ratio (SDR) of 21, or as specified or indicated. Furnish joints meeting the requirements of ASTM D3139 using a restrained rubber gasket meeting the requirements of ASTM F477. Solvent welded pipe joints will only be allowed when specified or indicated.

02470.50 Polyethylene Encasement - Ensure polyethylene encasement conforms to AWWA C105.

02470.60 Marking Tape and Wire:

(a) Marking Tape - Furnish marking tape consisting of inert polyethylene plastic impervious to all known alkalis, acids, chemical reagents and solvents likely to be encountered in the Soil. Furnish tape width as recommended by the manufacturer for the depth of installation. Furnish blue tape that is imprinted continuously over its entire length in permanent black ink with the words "Caution - Water".

(b) Detectable Marking Wire - Furnish detectable marking wire with blue colored insulation and according to 00445.11. Furnish splice kits according to 00445.48.

02470.70 Acceptance - Ductile iron, HDPE, and PVC pipe is accepted according to 00165.35 and this Section.

SP02475 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-02-26)

SECTION 02475 – POTABLE WATER FITTING MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02475 of the Standard Specifications except for the Section number and title with the following:

Description

02475.00 Scope - This Section includes the requirements for fittings, restrained joints, and couplings for ductile iron pipe, high density polyethylene (HDPE) pipe, and polyvinyl chloride (PVC) pipe for potable water systems.

Materials

02475.10 General - Furnish bolts, nuts and washers used for securing fittings that are of similar Materials. For steel bolts meet the requirements of ASTM A307 for carbon steel, or ASTM F593 for stainless steel. For nuts meet the requirements of ASTM A563 for carbon steel and ASTM F594 for stainless steel. For iron bolts and nuts meet the requirements of

Insert Project Name Here

ASTM A536, grade 65-45-12. Galvanize carbon steel bolts, nuts and washers according to 02560.40.

For all Materials in contact with potable water, meet the requirements of ANSI/NSF Standard 61, Drinking Water System Components - Health Effects or equivalent, and ANSI/NSF Standard 372, Drinking Water System Components - Lead Content.

02475.20 Ductile Iron Pipe Fittings - Furnish ductile iron pipe fittings meeting the requirements of AWWA C110 or AWWA C153, and having a minimum working pressure rating of 250 psi. Meet the requirements of AWWA C111 for joints. Furnish cement mortar lined and seal coated fittings, meeting the requirements of AWWA C104. Furnish gaskets for ductile iron flanged joints that are composed of synthetic rubber, full faced, 1/8-inch thick, and conform to ANSI/AWWA C111/A21.11. Ring gaskets are permitted only where specified or shown. Furnish bolts and nuts with an identification mark indicating the manufacturer, type and material.

02475.31 High Density Polyethylene (HDPE) Pipe Fittings - Use HDPE pipe fittings meeting the requirements of ANSI/AWWA C906, Standard Code Designation of PE3408. Furnish all pipe fittings with a minimum dimension ratio (DR) of 17. Join pipe and fittings using a thermal butt fusion method that meets the requirements of ASTM D3261. Furnish fittings that are of the same class as the HDPE pipe.

02475.40 Fittings for Polyvinyl Chloride Pipe 4 Inches and Larger - Furnish fittings for PVC pipe 4 inches in diameter and larger that are the same as specified for ductile iron pipe.

02475.45 Fittings for Polyvinyl Chloride Pipe Under 4 Inches - Meet the requirements of ASTM D2466 for PVC pipe fittings under 4 inches in diameter.

02475.50 Restrained Joints - Restrain pipe, fittings, and valves by using an approved bolted or boltless system. Design the restraint system to operate at a working pressure that is greater than the hydrostatic test pressure identified in 01140.51(a), unless otherwise shown. No device utilizing round point set screws is allowed. Furnish restraint systems for pipe bells certified for use by the pipe manufacturer.

02475.60 Bolted, Sleeve-Type Couplings for Plain-End Pipe - Meet the requirements of AWWA C219 for bolted, sleeve type couplings, reducing or transition couplings, and flanged coupling adapters used to join plain end pipe. Furnish ductile iron buried couplings for connecting ductile iron, gray cast iron, or PVC pipe.

02475.70 Acceptance - Acceptance of fittings, restrained joints and couplings are according to 00165.35 and this Section.

SP02480 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26)**

SECTION 02480 – POTABLE WATER VALVE MATERIALS

Insert Project Name Here

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02480 of the Standard Specifications except for the Section number and title with the following:

Description

02480.00 Scope - This Section includes the requirements for gate valves, butterfly valves, valve boxes, valve stem extensions, tapping sleeve and valve assemblies, check valves, combination air release/air vacuum valves, and backflow prevention devices for potable water systems.

Materials

02480.10 General - Furnish valves with operating nuts or hand wheels as specified or shown. Furnish a standard 2-inch operating nut. Ensure all Materials in contact with potable water conform to ANSI/NSF Standard 61, Drinking Water System Components - Health Effects, or equivalent. When indicated, coat all interior and exterior ferrous surfaces of valves with a protective epoxy coating meeting the requirements of AWWA C550.

02480.20 Gate Valves:

(a) Minimum Pressure - Furnish gate valves that meet the requirements of AWWA C500, AWWA C509, or AWWA C515. The minimum design working pressure is 200 psi for pipe 2 inches to 12 inches in diameter, and 150 psi for pipe 14 inches to 16 inches in diameter.

(b) Arrangement - For 16-inch diameter pipe, arrange gate valves for operation with gear case in the horizontal position. Equip valves with bypasses and gate valves of the sizes adopted in the AWWA Standards. Equip bypass gate valves with standard 2-inch operating nuts.

(c) Valves - Furnish gate valves that are resilient seat, non-rising stem type, open counterclockwise, and are equipped with an O-ring stuffing box.

02480.22 Butterfly Valves:

(a) Seats and Seals - Furnish butterfly valves that are rubber seated and meet the requirements of AWWA C504, Class 150B. Furnish shaft seals that are standard O-ring seals, designed for replacement under line pressure.

(b) Valve Operators - Furnish valve operators of the traveling nut or worm gear type and that are sealed, gasketed, and permanently lubricated for buried service. Construct valve operators to the standard of the valve manufacturer to withstand all anticipated operating torques, and design to resist submergence in groundwater.

(c) Valves - Furnish butterfly valves that are resilient seat, open counterclockwise, and are equipped with an O ring stuffing box.

02480.25 Valve Boxes - Install valve boxes on all buried valves. Furnish boxes that are cast iron, two-piece, slip type standard design, with a base corresponding to the size of the valve. Cast the word "WATER" in the cover.

02480.26 Valve Stem Extensions - Furnish a valve stem extension on valves with an operating nut more than 3 feet below grade to raise the operating nut to within 3 feet of the ground surface. Ensure valve stem extensions have a 2-inch square operating nut and self-centering rockplate support.

02480.30 Tapping Sleeve and Valve Assemblies:

(a) **Valve Assemblies** - Furnish tapping valves with flanged inlet end connections with the outlet ends conforming to dimensions in the AWWA Standards for mechanical joint connections or flange connections, except that the outside of the end connection has a large flange for attaching a drilling machine. Ensure the seat opening of the valve permits a diameter cut no less than 1/2 inch smaller than the valve size. Valves specifically designed for tapping meeting the requirements of AWWA C500, and valves meeting the requirements of AWWA C509, are allowed. Furnish tapping valves of the same type as other valves on the Project.

(b) **Sleeves** - Furnish tapping sleeves that are cast iron, ductile iron, stainless steel, epoxy coated steel or other approved Material.

02480.40 Check Valves - Furnish check valves meeting the following:

(a) **Swing Check Valve** - Furnish swing check valves meeting the requirements of AWWA C508, with rubber seat materials mating with metal seating surfaces. Furnish valves with a design working pressure of 175 psi for check valves with diameters of 12 inches and smaller, and 150 psi for check valves with diameters of 14 inches and 16 inches. Furnish non-assisted check valves unless otherwise indicated.

(b) **Spring-Loaded Plug or Disc Check Valves** - Furnish spring-loaded plug or disc check valves that are bronze mounted with bronze, cast or ductile iron body, bronze plug or disc, stainless steel spring, and resilient seating suitable for potable water service. Furnish drop-tight sealing valves and plugs or discs that are easily replaceable. The minimum design working pressure of the valves is 150 psi.

02480.60 Combination Air Release/Air Vacuum Valves - Furnish combination air release/air vacuum valves that meet the requirements of AWWA C512. The minimum design working pressure of the valve body is 300 psi. Furnish a cast iron body and cover according to ASTM A48, Class 30. Furnish stainless steel floats according to ASTM A240 and designed to withstand 1,000 psi. Furnish Buna-N rubber seats. Furnish internal parts that are stainless steel or bronze.

02480.70 Backflow Prevention Devices - Furnish backflow prevention devices that are capable of withstanding a minimum design working pressure of 150 psi, and meet the following:

(a) **Reduced Pressure Backflow Prevention Assembly** - Furnish reduced pressure backflow prevention assemblies consisting of a mechanical, independently operating,

Insert Project Name Here

hydraulically dependent relief valve located between two independently operating, spring loaded check valves that are located between two tightly closing resilient seated shutoff valves, with four resilient seated test cocks, all meeting the requirements of AWWA C511 and the Oregon State Health Division.

(b) Double Detector Check Valve Backflow Prevention Assembly - Furnish double detector check valve backflow prevention assemblies consisting of two spring loaded, independently operating check valves, located between two tightly closing resilient seated shutoff valves, with four resilient seated test cocks, all meeting the requirements of AWWA C510 and the Oregon State Health Division.

02480.80 Acceptance - Valves and appurtenances are accepted according to 00165.35 and this Section.

SP02485 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02485 – HYDRANT AND APPURTENANCE MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02485 of the Standard Specifications except for the Section number and title with the following:

Description

02485.00 Scope - This Section includes the requirements for hydrants and hydrant appurtenances for potable water systems.

Materials

02485.10 Hydrants - Furnish hydrants that are dry-barrel according to AWWA C502, of standard manufacture and of a pattern approved by the Agency. Furnish hydrants designed for a minimum working pressure of 150 psi.

Ensure all Materials in contact with potable water conform to ANSI/NSF Standard 61, Drinking Water System Components - Health Effects, or equivalent.

02485.20 End Connections - Furnish the end connections that are mechanical joint or flanged, meeting the requirements of AWWA C110 and AWWA C111.

02485.30 Hydrant Dimensions and Nozzle Features:

Insert Project Name Here

(a) Hydrant Dimensions - Furnish barrels that have a 7-inch minimum inside diameter. Hydrant length, measured from the bottom of the hydrant to the sidewalk ring, to provide proper cover at each installed location. Furnish valve openings with a minimum diameter of 5 1/4 inches.

(b) Nozzle Features - Furnish hydrants having two 2 1/2-inch diameter hose nozzles and one pumper nozzle to match the Agency's connection requirements.

Fit nozzles with cast iron threaded caps with operating nuts of the same design and proportions as the hydrant stem nuts. Thread caps to fit the corresponding nozzles and fit with suitable neoprene gaskets of positive water tightness under test pressures. Furnish a counterclockwise direction of opening that is clearly marked on the operating nut or hydrant top. Furnish hydrants that have O-ring stem seals. Ensure interior and exterior painting of the hydrant conforms to AWWA C502.

02485.40 Hydrant Extensions - Furnish hydrant extensions that are gray cast iron or ductile iron with an inside diameter of at least 6 inches, and conform to the AWWA Standards for such castings. Match the drillings of the connecting flanges on the extensions to the drillings of the flanges on the hydrant.

Include the necessary hydrant operating stem extensions with hydrant extensions.

02485.50 Traffic Flange - Furnish hydrants with a traffic flange. Equip hydrants with breaking devices at the traffic flange that allow the hydrant barrel to separate at this point with a minimum breakage of hydrant parts in case of damage. Also provide, at this point, a safety stem coupling on the operating stem that will shear upon impact.

02485.60 Tie Rods - Furnish tie rods that are 3/4-inch diameter with threaded ends, galvanized according to 02560.40 and 02560.30.

02485.80 Acceptance - Acceptance of hydrants and hydrant appurtenances is according to 00165.35 and this Section.

SP02490 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 05-01-26)**

SECTION 02490 - PORTABLE WATER SERVICE CONNECTION MATERIALS, 2 INCH AND SMALLER

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02490 of the Standard Specifications except for the Section number and title with the following:

Description

02490.00 Scope - This Section includes the requirements for potable water service connections 2 inches in diameter and smaller, and sampling stations.

Materials

02490.10 General - Furnish service line materials meeting the requirements of AWWA C800 and these Specifications. Furnish service line materials that are designed for a working pressure of 100 psi. Where high pressure service materials are specified or shown, furnish materials that are designed for a working pressure of 150 psi. Use high pressure service materials when service line is hydrostatically tested concurrent with the water main. Furnish all Materials in contact with potable water according to ANSI/NSF Standard 61, Drinking Water System Components - Health Effects, or equivalent.

02490.20 Saddles - Furnish ductile iron, bronze or stainless steel saddles. For 3/4-inch and 1-inch services, use single strap saddles that have either AWWA tapered thread or female iron pipe thread outlet. For 1-1/2 inch and 2-inch services, use double strap saddles with female iron pipe thread outlet. Ensure saddles used on asbestos cement or on PVC pipe are formed for the pipe and have flat, stainless steel straps.

02490.30 Service Connection Valves:

(a) Corporation Stops - Furnish corporation stops constructed of bronze alloy. Furnish corporation stops for direct tapping having AWWA tapered thread inlet and outlet connections compatible with either copper or polyethylene tubing.

(1) Less Than or Equal to 1 Inch - Furnish corporation stops used with 3/4-inch and 1-inch outlet saddles having either AWWA tapered thread or male iron pipe thread inlets and outlet connections compatible with either copper or polyethylene tubing. Ensure the thread patterns for the saddle outlet and corporation stop inlet are the same.

(2) Greater Than 1 Inch - Furnish corporation stops used with 1-1/2 inch and 2-inch outlet saddles having male iron pipe thread inlets and outlet connections compatible with connecting service pipes, or have male iron pipe thread outlets.

(b) Angle Meter Valves - Furnish angle meter valves meeting the requirements of ASTM B62 and having a lock wing.

(c) Customer Service Valves - Furnish customer service valves that are bronze straight gate valves or angled gate valves on all services smaller than 2-inch and have non-rising stem, solid disc type with screwed or union bonnet, threaded ends, and a have brass handle. Furnish ASTM B62 bronze body, bonnet, operating handle, and disc. Furnish stems that are copper silicon alloy, nickel plated steel, or other approved corrosion resistant materials with equal characteristics of strength and durability. Ensure the disc clears the port area completely in the fully opened position. Furnish threaded ends meeting the requirements of ANSI B2.1.

02490.40 Service Pipe and Fittings:

(a) Copper Tubing Service Pipe - Furnish copper tubing service pipe that is annealed, seamless tubing according to the requirements of ASTM B88, Type K.

(b) Polyethylene Tubing Service Pipe - Furnish polyethylene tubing service pipe meeting the requirements of AWWA C901. Furnish high molecular mass tubing with a 200-psi rating. For 3/4-inch and 1-inch tubing, use either SDR 7 (iron pipe size) or SDR 9 (copper tube size). For 1 1/2 inch and 2-inch tubing, use SDR 9 (copper tube size).

(c) Service Fittings - Make fittings used for service connections of bronze alloy. Use fittings for copper tubing that are either compression or flare type, insulated or noninsulated.

Use fittings for polyethylene tubing that are either compression or stab type. Use stab type fittings with an internal grip ring and O-ring seal. Use stainless steel liners when utilizing compression fittings on polyethylene tubing.

02490.50 Meter Setters - Furnish meter setters manufactured and tested according to all applicable parts of AWWA C800. Furnish meter setters 12 inches in height and having an angle meter stop with drilled padlock wing, an angle check valve, and inlet and outlet threads compatible with fittings connecting to service pipes.

For 5/8-inch by 3/4-inch, 3/4-inch, and 1-inch services, furnish meter setters having meter saddle nuts for installation and removal of the meter. Furnish meter setters for 1-1/2 inch and 2-inch services equipped with a locking bypass.

02490.60 Bronze Nipples and Fittings - Furnish bronze threaded nipples and fittings meeting the requirements of ANSI B16.15, ASA 125-pound class.

02490.70 Meter Boxes:

(a) Nontraffic Areas - Construct meter boxes and covers located in the nontraffic areas of either reinforced concrete or high density polyethylene. Furnish high density polyethylene meter boxes and covers having a tensile strength according to ASTM D638. Include a reading lid on meter box covers.

(b) Traffic Areas - Construct meter boxes located in traffic areas of either reinforced concrete, cast iron or ductile iron. Construct traffic covers of aluminum, steel, cast iron or ductile iron. Furnish meter boxes and covers designed for continuous H-20 traffic loading.

02490.80 Sampling Stations - Furnish sampling stations having a 3/4-inch inlet with the depth of bury indicated, and a 3/4-inch unthreaded nozzle. Enclose the sampling station in a lockable, non-removable, cast aluminum housing. When opened, ensure the station does not require a key for operation, and the water flows in an all-brass waterway. Furnish all working parts of brass and be removable from above ground with no digging. Furnish brass exterior piping. Include at each station a copper vent tube with a ball valve to enable the station to be pumped free of standing water to prevent freezing.

02490.90 Acceptance - Materials for potable water service connections are accepted according to 00165.35 and this Section.

SP02510 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 04-02-26)

SECTION 02510 - REINFORCEMENT

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All

Insert Project Name Here

other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02510 of the Standard Specifications except for the Section number and title with the following:

Description

02510.00 Scope - This Section includes the requirements for bars, dowels, and strand reinforcement and tendon ducts.

Materials

02510.10 Deformed Bar Reinforcement - Furnish deformed bar reinforcement from the QPL and according to the requirements of ASTM A706, AASHTO M 31 (ASTM A615), AASHTO M 334, or ASTM A1035. Unless otherwise specified or shown, furnish Grade 60 reinforcing bars.

02510.11 Epoxy Coated Reinforcement:

(a) **Plant Certification** - Apply epoxy coating in a coating plant certified by the Concrete Reinforcing Steel Institute (CRSI).

(b) **Handling** - Provide systems for handling coated bars having padded contact areas for the bars wherever feasible. Pad all bundling bands. Lift all bundles with strong-backs, multiple supports, or platform bridges so as to prevent bar-to-bar abrasion from sags in the bar bundle.

02510.20 Mechanical Splices - Furnish mechanical splices from the QPL. Where bars of different sizes or strengths are connected, the strength of the smaller or weaker bar governs. Measure the total slip displacement after loading in tension to 30.0 ksi and relaxing to 3.0 ksi. The maximum allowed displacement for bars up to No. 14 is 0.01 inches. and is 0.03 inches for No. 18 bar.

- **Type 1 Mechanical Splices** - Furnish Type 1 Mechanical Splices that develop at least 125 percent of the specified minimum yield strength of the reinforcing bars. Type 1 Mechanical Splices are not allowed for column bars.
- **Type 2 Mechanical Splices** - Furnish Type 2 Mechanical Splices that develop at least 125 percent of the specified minimum yield strength of the reinforcing bars and 100 percent of the specified tensile strength of the reinforcing bars.

02510.25 Headed Bar Reinforcement - Furnish Class HA headed steel bar from the QPL for concrete reinforcement. Ensure the headed steel bar develops the specified minimum tensile strength of the reinforcing bars, according to ASTM A970. Ferrous-filler coupling sleeves and welded headed steel bars are not allowed for concrete reinforcement.

02510.30 Galvanized Reinforcement:

(a) **General** - Furnish galvanized reinforcement meeting the requirements of ASTM A767, Class II, including Supplementary Requirement S3, and ASTM A143.

Insert Project Name Here

(b) Fabrication - The bars may be fabricated before or after galvanizing. If the bars are fabricated after galvanizing, Supplementary Requirements S1 and S2 of ASTM A767 apply.

(c) Handling - Handle galvanized bars according to 02510.11(c).

02510.40 Welded Wire Reinforcement - Furnish welded wire reinforcement and deformed welded wire reinforcement meeting the requirements of ASTM A1064.

02510.50 Dowels - Furnish dowels meeting to the requirements of AASHTO M 31 (ASTM A615), for Grades 40 and 60, or AASHTO M 227 (ASTM A663) for Grades 70, 75, and 80.

02510.60 Ties and Supports - Furnish tie wire and supports according to CRSI Manual of Standard Practice.

(a) Coated Reinforcement Ties and Supports - Furnish nonmetallic coated ties and supports for coated reinforcement, including ties for coated-to-uncoated reinforcement connections.

(b) Uncoated Reinforcement Ties and Supports - Tie all mats of galvanized steel bars with galvanized ties. Furnish precast concrete blocks with galvanized ties that support galvanized reinforcement.

02510.70 Acceptance - Acceptance of reinforcement is according to 00165.35 and this Section.

SP02513 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26)**

SECTION 02513 – STAINLESS STEEL REINFORCEMENT

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02513 of the Standard Specifications except for the Section number and title with the following:

Description

02513.00 Scope - This Section includes the requirements for stainless steel reinforcement bars, mechanical splices, chairs and supports, inserts, dowels, and tie wire.

Materials

Insert Project Name Here

02513.10 Deformed Bar Reinforcement - Furnish deformed bar reinforcement meeting the requirements of ASTM A955 except for Section 6, Chemical Composition and Section 15, Finish. Acceptable alloys are listed by Uniform Numbering System for Metals and Alloys (UNS) designation in Table 02513-1 and Table 02513-2. Finish the surface according to Table 02513-1 and the requirements of ASTM A380.

**Table 02513-1
Allowable Stainless Steel Alloys for Reinforcing Bars and Dowels**

UNS Designation	S31653	S31803	S20910	S24100	S32304
AISI Type	316LN	2205	XM-19	XM-28	2304
Common or Trade Name	Type 316 Low Carbon Nitrogen Added	Type 2205 Duplex	Nitronic 50	Nitronic 32 Enduramet 32 18-Cr-2Ni-12Mn	Type 2304 Duplex SAF 2304 Fe-23Cr-4Ni-0.1N
Required Condition	As rolled	As rolled	As rolled	As rolled	As rolled
Required Finish	Descaled and white pickled	Descaled and white pickled	Descaled and white pickled	Descaled and white pickled	Descaled and white pickled

**Table 02513-1
Stainless Steel Alloys Mechanical Properties**

Grade and UNS Designation	S31653 GR 60	S31653 GR 70	S31803 GR 60	S31803 GR 75	S20910 GR 60	S20910 GR 75	S24100 GR 60	S24100 GR 75	S32304 GR 60	S32304 GR 75
Minimum Tensile Strength (ksi)	90	95	90	95	90	95	90	95	90	95
Minimum Yield Strength (ksi)	60	75	60	75	60	75	60	75	60	75
Minimum Elongation in 2 inches (%)	25	20	25	20	25	20	25	20	25	20

02513.20 Mechanical Splices - Mechanical splices for reinforcing bars are systems that connect the bars without raising their temperature above 1,300 °F.

Insert Project Name Here

- Furnish mechanical splices that develop at least 90 percent of the specified minimum ultimate strength of the reinforcing bars in compression and in tension. Where bars of different sizes or strengths are connected, match the strength of the smaller or weaker bar.
- Do not allow the spliced reinforcing bars to slip more than 0.040 inch, measured between gauge points clear of the splice sleeve, when the reinforcing bars are loaded in tension to 67 percent of the specified minimum yield strength of the reinforcing bar.
- Fabricate the splice sleeve and connection hardware from an alloy listed in Table 02513-1. Finish the surface according to Table 02513-1 and the requirements of ASTM A380.

02513.35 Concrete Inserts - Furnish concrete inserts fabricated from an alloy listed in Table 02513-1. Finish the surface according to Table 02513-1 and the requirements of ASTM A380. Furnish concrete inserts with closed-back ferrule threaded to receive UNC threaded bolts or rods of the size shown. Furnish concrete inserts with the following minimum lengths and safe working loads:

Bolt or Rod Diameter (Inches)	Insert Length (Inches)	Safe Working Load in Shear or Tension (Pounds)
3/4	4 1/2	4,000
1	5 1/2	6,000
1 1/4	7 1/2	10,000
1 1/2	9 1/2	16,000

02513.50 Dowels - Furnish dowels meeting the requirements of ASTM A955 except for Section 6, Chemical Composition and Section 15, Finish. Acceptable alloys are listed by Uniform Numbering System for Metals and Alloys (UNS) designation in Table 02513-1. Finish the surface according to Table 02513-1 and the requirements of ASTM A380.

02513.60 Ties and Supports - Furnish 16-gauge tie wire and supports from Type 304 or Type 316 stainless steel according to *CRSI Manual of Standard Practice*.

02513.70 Acceptance - Stainless steel reinforcement is accepted according to 00165.35 and this Section.

SP02515 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 04-02-26)

SECTION 02515 – PRESTRESSING REINFORCEMENT

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02515 of the Standard Specifications except for the Section number and title with the following:

Insert Project Name Here

Description

02515.00 Scope - This Section includes the requirements for seven-wire strand, high tensile strength wire, high tensile strength steel alloy bars, tendon duct and couplings.

Materials

02515.10 Seven-Wire Strand - Furnish seven-wire strand (bright wire) meeting the requirements of AASHTO M 203 (ASTM A416), Grade 270, supplement 1 (low relaxation strand), minimum ultimate strength, 270,000 psi.

02515.20 Wire, High Tensile Strength - Furnish high tensile strength wire meeting the requirements of AASHTO M 204 (ASTM A421).

02515.30 Bars, High Tensile Strength - Furnish high strength steel bars meeting the requirements of AASHTO M 275 (ASTM A722).

02515.40 Seven-Wire Strand Epoxy Coated Reinforcement - Furnish epoxy coated reinforcement meeting the requirements of ASTM A882.

02515.50 Tendon Duct - Furnish rigid galvanized steel ducts meeting the requirements of ASTM A653 with a coating weight of G90 for post-tensioned Structures. Transition couplings connecting rigid ducts in anchoring devices need not be galvanized.

Rigid ducts may be fabricated with either welded or interlocking seams. Galvanizing of the welded seam is not required. Furnish ducts with sufficient strength to maintain their correct alignment during placing of concrete and resist denting during construction.

The minimum wall thickness of ducts is 26 gauge for 2 5/8-inch diameter and smaller ducts, and 24 gauge for ducts that are larger than 2 5/8-inch diameter.

02515.60 Couplings - Furnish couplings that develop at least 95 percent of the minimum specified ultimate strength of the prestressing steel without exceeding anticipated set. Ensure the coupling of tendons does not reduce the elongation at rupture below the requirements of the tendon itself.

02515.70 Shipping Protection - Package prestressing steel to protect the steel against physical damage and corrosion. Place a corrosion inhibitor that prevents rust or other results of corrosion in the package, or use a corrosion inhibitor type packaging material, or when allowed, apply directly to the steel. Provide a corrosion inhibitor that has no deleterious effect on the steel or concrete or bond strength of steel to concrete. Immediately replace or restore damaged packaging.

Mark the shipping package with the type of corrosion inhibitor used, and the date packaged.

02515.80 Acceptance - Acceptance of pre-stressing reinforcement is according to 00165.35 and this Section.

SP02520 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26)**

SECTION 02520 – STEEL PILES

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02520 of the Standard Specifications except for the Section number and title with the following:

Description

02520.00 Scope - This Section includes the requirements for steel pipe, steel H-beams, and steel sheets used for piling.

Materials

02520.10 Steel Piles:

(a) General - Furnish all steel piles, except steel pipe piles, meeting the requirements for Camber and sweep specified in AASHTO M 160 (ASTM A6).

(b) Steel Pipe Piles - Furnish either spirally welded or longitudinally welded steel pipe piles that are constant in section. Furnish steel piles meeting the requirements of ASTM A252 or API 5L and the grade shown.

(c) Steel H-Piles - Furnish steel H-piles that are rolled steel pile sections of the size and weight shown. Furnish steel H-piles meeting the requirements of ASTM A36 or ASTM A572. The manufacturer's name, brand or trademark may be shown by die stamping in the web at intervals not exceeding 20 feet along the length of the pile.

(d) Steel Sheet Piles - Furnish steel sheet piles meeting the requirements of AASHTO M 202 (ASTM A328).

(e) Reinforced Pile Tips - Steel pile tip reinforcement includes H-pile points, pipe pile shoes or points or any other proprietary steel pile tip reinforcement. Legibly mark or tag each cast steel point or shoe delivered to the Project Site with the heat or lot number. Submit certified mill test reports showing the physical and chemical properties of each heat or lot number. If the heat or lot number cannot be read on the point or if the mark or tag is missing, the point or shoe will be rejected.

Furnish reinforced tips for steel H-piles from the QPL. In addition, furnish all cast steel points or shoes meeting the following:

ASTM A27, Grade 65 - 35
ASTM A27, Grade 70 - 36
ASTM A27, Grade 70 - 40
ASTM A148, all grades

For steel H-piles provide no less than a 5/16-inch fillet weld full width of each flange.

(f) Sampling and Field Testing Pile Tips - The Engineer may randomly sample from each heat or lot number, at least one pile tip or up to 10 percent of the tips for larger projects, of the pile tips delivered for incorporation into the Project.

Test the selected tips as follows:

- Grind five smooth spots on each randomly selected tip. The Engineer will test each smooth spot on each tip with a portable hardness tester or in a laboratory. If three or more of the five spots tested have a reading below 74 on the "B" scale, the tested tip and the entire lot is rejected.
- For steel H-piles, determine the weight of the tips. Furnish cast steel H-pile point having a weight not less than 30 percent of the weight of a 1-foot section of the H-pile where it is attached. If any of the tested tips fail to pass the minimum weight criteria the entire lot is rejected.

Pile tips that are supplied unattached to the pile may be selected for nondestructive testing as described above. Pile tips passing the field test may be incorporated into the Project. Pile tips selected for testing that are supplied already attached to the pile are destructively tested as determined by the Engineer. Provide replacement tips for the tips that are destructively tested at no cost to the Agency. Replace rejected tips with new tips and rejected lots with new lots at no additional cost to the Agency. No time extension or other compensation is granted for Materials or Work required in testing pile tips, replacing rejected pile tips or for replacing tips that are destructively tested. New tips and new lots may also be tested.

02520.30 Acceptance - Material for piles is accepted according to 00165.35 and this Section.

SP02530 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02530 – STRUCTURAL STEEL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02530 of the Standard Specifications modified as follows:

02530.10 Structural Steel for Bridges - Replace the paragraph that begins “Structural steel for Bridges...” with the following:

Furnish structural steel for Bridges meeting the following, as shown or specified:

02530.20 Structural Steel for Non-Bridge Structures - Replace the paragraph that begins “Structural steel for metal...” with the following:

Insert Project Name Here

Structural steel for metal sign Structures and other non-Bridge Structures meeting the following, or as shown or specified:

Replace the paragraph that begins “Notch toughness...” with the following:

Ensure notch toughness of all structural steel members and plates greater than 1/2 inch thick in load carrying members of sign Bridges and cantilever sign supports meets Zone 2 requirements of AASHTO M 270.

02530.50 Universal Mill Plate - Replace the paragraph that begins “Universal mill plate...” with the following:

Universal mill plate is not allowed.

02530.70 Galvanizing - Replace this subsection, except for the subsection number and title, with the following:

Hot-dip galvanize according to the following, as applicable:

- AASHTO M 111 (ASTM A123)
- AASHTO M 232 (ASTM A153)

Furnish steel that is finished by hot-dip galvanizing for use as sign bridges, illumination poles, traffic signal poles, sign supports, bridge rail and items designated on the Plans as "Galvanize - Control Silicon" having controlled silicon content of either 0 - 0.06 percent or 0.13 percent - 0.25 percent. Before galvanizing, submit mill test certificates verifying silicon content to the Engineer and the galvanizer.

02530.80 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of structural steel is according to 00165.35 and this Section.

SP02540 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-02-26

**Requires SP02470, SP02475,
SP02480, and SP02490)**

SECTION 02540 – FORGINGS, SHAFTING, CASTINGS, and NONFERROUS MATERIALS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Insert Project Name Here

Replace Section 02540 of the Standard Specifications except for the Section number and title with the following:

Description

02540.00 Scope - This Section includes the requirements for forgings, shafting, castings, and nonferrous materials except those used in potable water systems. For potable water system requirements, see Sections 02470, 02475, 02480, and 02490.

Materials

02540.10 Steel Forgings - Furnish steel forgings meeting the following:

Carbon steel forgings..... AASHTO M 102 (ASTM A668), Class C
Alloy steel forgings..... AASHTO M 102 (ASTM A668), Class G

02540.20 Steel Shafting - Furnish cold-finished steel shafting meeting the requirements of AASHTO M 169 (ASTM A108), Grades 1016 - 1030, inclusive.

02540.30 Steel Castings - Furnish steel castings meeting the following:

Carbon steel castings AASHTO M 103 (ASTM A27), Grade 70-36
Alloy steel castings AASHTO M 163 (ASTM A743), Grade CA-15

Furnish castings true to pattern in form and dimensions, free from pouring faults, sponginess, cracks, blow holes and other defects in positions affecting their strength and value for the service intended. Allowance is made in dimensions for reasonable pattern draft.

Furnish castings boldly filleted at angles and the arises are sharp and perfect.

Sandblast castings or otherwise effectively clean of scale and sand to present a smooth, clean and uniform surface.

02540.40 Iron Castings - Furnish iron castings meeting the following:

- **Gray Iron Castings** - AASHTO M 306.
- **Ductile Iron Castings** - AASHTO M 306. In addition to the specified test coupons, for castings weighing over 1,000 pounds, test specimens from parts integral with the castings, such as risers.
- **Malleable Iron Castings** - ASTM A47, Grade 32510.

Finish iron castings according to 02540.30.

Clean iron castings according to 02540.30.

02540.50 Nonferrous Materials - Furnish nonferrous Materials meeting the following:

Bronze castings AASHTO M 107 (ASTM B22) Copper Alloy UNS No. C91100
Copper alloy plates AASHTO M 108 (ASTM B100) Copper Alloy UNS No. C51000

02540.60 Acceptance - Acceptance of forgings, shafting, castings, and nonferrous Materials is according to 00165.35 and this Section.

SP02560 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02560 - FASTENERS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02560 of the Standard Specifications modified as follows:

02560.05 Geometry - Replace this subsection, except for the subsection number and title, with the following:

Use a bolt or rod length such that the end of the bolt or rod extends beyond or is at least flush with the outer face of the nut when properly installed.

02560.10(a) Bolts - Replace this subsection, except for the subsection number and title, with the following:

Furnish carbon steel bolts meeting the requirements of ASTM A307, Grade A or B.

02560.10(b) Nuts - Replace the paragraph that begins “Nuts for carbon steel bolts...” with the following:

Furnish nuts for carbon steel bolts meeting the requirements of the following, or equivalent:

02560.20(a) Bolts - Replace the paragraph that begins “High-strength bolts used in...” with the following:

Use Type 3 high-strength bolts in noncoated weathering steel connections. Furnish high-strength bolts meeting the requirements of the following:

02560.20(b) Nuts - Replace the paragraph that begins “Nuts for high-strength bolts...” with the following:

Furnish nuts for high-strength bolts meeting the following requirements, or equivalent:

02560.20(c) Washers - Replace this subsection, except for the subsection number and title, with the following:

Furnish washers for high-strength bolts meeting the requirements of ASTM F436. Use Type 3 washers with Type 3 bolts.

02560.20(d) Direct Tension Indicators - Replace this subsection, except for the subsection number and title, with the following:

Furnish direct tension indicators that are the compressible-washer type, mechanically galvanized, according to ASTM F959. Adjust bolt lengths to accommodate both direct tension indicators and hardened washers.

Insert Project Name Here

02560.20(e) Markings - Replace this subsection, except for the subsection number and title, with the following:

Mark all bolts, nuts, washers and direct tension indicators according to the appropriate AASHTO/ASTM specifications and with a symbol identifying the manufacturer.

02560.30(a) Steel Tie Rods, Anchor Bolts, and Anchor Rods - Replace this subsection, except for the subsection number and title, with the following:

Furnish steel tie rods, anchor bolts, and anchor rods meeting the requirements of AASHTO M 314, Grade 36 or 55; ASTM F1554, Grade 36 or 55.

02560.30(b) High-Strength Tie Rods, Anchor Bolts, and Anchor Rods - Replace this subsection, except for the subsection number and title, with the following:

Furnish high-strength tie rods, anchor bolts, and anchor rods meeting the requirements of AASHTO M 314, Grade 105; ASTM F1554, Grade 105; or ASTM A449, Type 1.

End stamp all ASTM F1554, Grade 105 according to ASTM F1554 Supplementary Requirements S2 and S3. If the end of the bolt is to be embedded in concrete, mark the projecting end from the concrete.

02560.30(c) Nuts - Replace the paragraph that begins “Nuts for tie rods...” with the following:

Furnish nuts for tie rods, anchor bolts, and anchor rods meeting the following requirements, or equivalent:

02560.30(d) Washers - Replace this subsection, except for the subsection number and title, with the following:

Furnish washers for anchor bolts meeting the requirements of ASTM F436, Type 1.

02560.60(a) Rotational Capacity Test - Replace the paragraph that begins “Test each combination of bolt...” with the following:

Test each combination of bolt production lot, nut lot and washer lot as an assembly. Assign a rotational capacity lot number to each combination of lots tested. The minimum frequency of testing is two assemblies per rotational capacity lot. Test according to one of the following requirements:

02560.60(a)(1) Method 1 - Replace the paragraph that begins “the above measured torque...” with the following:

Do not allow the above measured torque to exceed the torque value calculated by the following equation:

Replace the paragraph that begins “Continue to tighten the nut until...” with the following:

Continue to tighten the nut until the nut has turned twice the rotation shown in Table 00560-3 of Section 00560 from its snug-tight position mark for bolt lengths up to 8D (for greater than 8D up to 12D bolt lengths tighten to 1 1/6 turn from snug-tight).

02560.60(a)(2) Method 2 - Replace this subsection, except for the subsection number and title, with the following:

Test bolts that are too short to be tested in a direct bolt tension indicating device in a steel joint.

Place the lubricated fastener including a washer in one or more flat structural steel plates. The total thickness including the washer is such that three to five full threads of the bolt are located between the bearing surfaces of the bolt head and the nut. Provide the hole in the joint at the same nominal diameter as the hole in the washer. Using a calibrated torque wrench, tighten the nut to a snug-tight condition to produce an initial torque in the bolt equal to approximately 10 percent of the torque calculated using the equation given in Method 1 above where P is the minimum tension in the bolt according to Table 00560-1 of Section 00560. Mark the nut's position relative to the fixed bolt for this snug tight position.

Using the calibrated torque wrench, further tighten the nut until the nut has turned the rotation shown in Table 00560-3 of Section 00560 from its snug-tight position mark. Prevent the bolt head from turning during the tightening process. Record the measured torque with the nut in motion. The measured torque is not to exceed 1.15 times the torque value calculated in the preceding step of Method 2. Reject assemblies with torque values exceeding the calculated value.

Tighten the nut further until the nut has turned twice the rotation shown in Table 00560-3 from its snug-tight position mark. Reject assemblies that fail this rotation either by stripping or fracture.

Loosen and remove the nut. Examine the threads on the nut and bolt. Reject assemblies showing evidence of thread shear failure, stripping or torsional failure of the bolt.

02560.60(b) Other Test Requirements - Replace the paragraph that begins "Provide three high-strength bolt ..." with the following:

Furnish three high-strength bolt assemblies per size per lot for check testing.

Replace the paragraph that begins "Provide one high-strength tie rod..." with the following:

Furnish one high-strength tie rod, one high-strength anchor bolt, and one high-strength anchor rod assembly per size per lot for check testing.

02560.70 Lubricating Fasteners - Replace the paragraph that begins "Furnish all galvanized and coated..." with the following:

Furnish all galvanized and coated fasteners with a factory applied commercial water-soluble wax that contains a visible dye of a color that contrasts with the color of galvanizing or coating. Furnish black fasteners that are "oily" to the touch when installed.

02560.80 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of fasteners are according to 00165.35 and this Section.

SP02570 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26

Last updated: 04-02-26

Requires SP02530, SP02560)

SECTION 02570 – COMPOSITE BEARINGS

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02570 of the Standard Specifications modified as follows:

02570.10 Elastomeric Compound - Replace the paragraph that begins "Provide Materials meeting..." with the following paragraph:

Furnish Materials meeting the following requirements:

Replace the paragraph that begins "**Elastomer** - Elastomer for elastomeric ..." with the following paragraph:

Elastomer - Furnish elastomer for elastomeric discs of pot bearings that are 100 percent virgin natural polyisoprene (natural rubber) or 100 percent virgin chloroprene (neoprene) meeting the following requirements:

Replace the paragraph that begins "When test specimens are cut..." with the following paragraph:

When test specimens are cut from the finished product a 10 percent variation in physical properties is allowed.

Replace the paragraph that begins "**Polyether Urethane** - The properties of polyether..." with the following paragraph:

Polyether Urethane - Ensure the properties of polyether urethane for polyether urethane discs of disc bearings meet the values of the following tests:

Replace the paragraph and bullets that begins "**Fabric Pads**..." with the following paragraph and bullets:

Fabric Pads - Make preformed fabric pads for fabric pad bearings of multiple layers of duck, impregnated and bound with high quality oil resistant synthetic rubber compressed into resilient pads of uniform thickness according to the following:

- Cotton duck reinforcement is either a two-ply cotton yarn or a single-ply 50-50 blend cotton polyester with a minimum of 8 ounces per square yard.
- The fabric has a minimum tensile strength of 150 pounds per inch width when tested by the grab method.
- The filling count of the duck is 40 ± 2 threads per inch.
- The warp count of the duck is 50 ± 1 threads per inch.
- The number of plies produce the specified thickness after compression and vulcanizing.
- Furnish the finished pads that withstand compression loads perpendicular to the plane of the laminations of not less than 10,000 psi without any sign of distress after the load is removed. The tested pad is required to have a shape factor greater than 2.5. Furnish preformed fabric pads with a Shore A hardness of 90 ± 5 .

02570.20(a) Clearance Test - Replace this subsection, except for the subsection number and title, with the following:

Move the components of the bearing through their design displacements or rotations to verify that the required clearances exist. If the test is conducted on a rotational component that is not under simultaneous full vertical load, make allowance for the displacements that would be caused by that load.

02570.20(b) Long-Term Deterioration Test - Replace this subsection, except for the subsection number and title, with the following:

Conduct test on one full scale bearing per lot. Load the bearing in compression to a stress corresponding to 100 percent of the maximum dead plus live service load while subjected to plus and minus the design rotational displacement amplitude for 5,000 cycles. Test flat sliding systems by displacement through at least 1,000 cycles with an amplitude of at least ± 1.0 inch (2.0-inch peak to peak). The sliding may take place at up to 10.0 inch per minute, except when readings of the coefficient of friction are taken, when the sliding speed is 2.5 inches per minute.

Bearings are rejected when:

- There are visible cracks, splits, or excessive wear on disassembly of the bearing.
- The coefficient of friction exceeds two-thirds the value used in design.

02570.20(c) Friction Test - Replace this subsection, except for the subsection number and title, with the following:

Conduct test on one full scale bearing per lot. Ensure the coefficient of friction between the sliding surfaces is not greater than 0.06 when the maximum working stress for the polytetrafluoroethylene (PTFE) surface is 2,000 psi and is not greater than 0.045 when the maximum working stress for the PTFE surface is above 3,000 psi. Determine the coefficient of friction at 68 °F according to the requirements of section 18.3.4.3.2 of the *AASHTO LRFD Bridge Construction Specifications*.

Insert Project Name Here

02570.30(d)(1) Vertical Proof Load Test - Replace this subsection, except for the subsection number and title, with the following:

Apply a vertical load equal to 150 percent of the vertical design capacity of the tested bearing for 5 minutes, unload, then reapply for an additional 5 minutes. Place the bearing in a rotated position during the test. Ensure rotation is 0.015 radians or the design rotation, whichever is greater. An acceptable test bearing does not show indication of failure or other defects such as weld cracking, plate distortion, extrusion of the elastomer or bearing material, or displacement of the elastomer seal while under load or subsequently upon disassembly and inspection.

The successful test of a bearing with a vertical design capacity of 50 Tons or less is accepted as qualification for all bearings of a similar design with a lesser design capacity.

02570.30(d)(2) Horizontal Proof Load Test - Replace the paragraph that begins "A horizontal proof load test..." with the following paragraph:

A horizontal proof load test is required when the design horizontal capacity exceeds 10 percent of the design vertical capacity and no engineer's calculations are submitted. Apply a horizontal load equal to 100 percent of the horizontal design capacity while also applying a vertical load equal to 100 percent of the dead load for a period of 2 minutes. The bearing does not need to be in the rotated position. An acceptable bearing does not show indication of failure or other defects such as weld cracking, plate distortion, extrusion of the elastomer or bearing material, or displacement of the elastomer seal while under load or subsequently upon disassembly and inspection.

SP02571 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02571 – ELASTOMERIC BEARING PADS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02571 of the Standard Specifications modified as follows:

02571.10 Elastomeric Compound - Replace the paragraph that begins "The elastomer portion of the elastomeric..." with the following paragraph:

Ensure the elastomer portion of the elastomeric compound is 100 percent virgin polychloroprene (Neoprene) or natural rubber (polyisoprene) meeting the requirements of section 18 of the *AASHTO LRFD Bridge Construction Specifications* including the properties from the following table:

02571.15 Metal Reinforcement - Replace this subsection, except for the subsection number and title, with the following:

Furnish metal reinforcement that is rolled, mild steel sheets 14 gauge thick and according to ASTM A1011, Grade 36 Type 1, or ASTM A1008, Grade 40.

02571.20(a) Pads - Replace this subsection, except for the subsection number and title, with the following:

Furnish pads 1/2 inch thick that are all elastomer. Furnish pads over 1/2-inch-thick consisting of alternate laminations of elastomer and metal.

In metal reinforced pads, the top and bottom layers are elastomer 1/4 inch thick, and interior elastomer layers are 1/2 inch thick. The nominal thickness of the bearing shown reflects the thickness of the elastomer only. It does not include the steel laminates.

02571.20(b) Laminations - Replace this subsection, except for the subsection number and title, with the following:

Furnish laminations of elastomer in uniform thickness and in no case allow the thickness of an individual lamination to exceed 5/8 inch. Do not allow variations in thickness of an individual elastomer lamination to exceed 1/8 inch and the variation in thickness of all elastomer laminations within a pad such that each metal lamination does not vary by more than 1/8 inch from a plane parallel to the top or bottom surface of the pad.

02571.20(c) Laminated Pads - Replace the paragraph that begins "Laminated pads shall be..." with the following paragraph:

Furnish laminated pads that are molded individually to the sizes required. No shearing to size or drilling of holes is allowed. Cover all edges of metal laminations with a minimum of 1/8 inch, and a maximum of 1/4 inch, of elastomer except at laminate restraining devices and around holes that are entirely closed when the pad is in place on the Structure.

Replace the paragraph that begins "Pads 1/2 inch in thickness may ..." with the following paragraph:

Pads 1/2 inch in thickness may be sheared. Ensure the shearing does not heat the material and produces a smooth finish to 250 microinches with no tears or jagged areas.

02571.30(a) General - Replace the paragraph that begins "Independently test all completed bearings..." with the following paragraph:

Independently test all completed bearings by compressive visual inspection according to 02571.30(b). Failure of individual bearings to pass the compressive visual inspection is cause for rejection of those individual bearings.

Replace the paragraph that begins "Independently test five standard test..." with the following paragraph:

Independently test five standard test specimens of laminated pads according to 02571.30(c). Failure of any individual specimen to meet the peel strength test requirements is cause for rejection of the entire bearing production lot. A lot is defined as 50 or less bearings that are

Insert Project Name Here

manufactured in a reasonably continuous manner from the same batch of elastomer, cured under the same conditions, and are all the same size and type.

02571.30(b) Short-Duration Compression Test - Replace this subsection, except for the subsection number and title, with the following:

Bring all bearings to a temperature of 73 °F ± 10 °F and proof load for a compressive loaded to 1.5 times the maximum design load. Hold the load for 5 minutes, remove, then reapply for a second period of 5 minutes. Maintain the load constant while the bearing is inspected for visual faults. The following is cause for rejection:

- A bulging pattern or patterns implying lack of bond between the elastomer and the laminate or bulging patterns that imply improper laminate placement.
- Three separate surface cracks that are greater than 5/64 inch wide and 5/64 inch deep, or a single crack 3/16 inch deep or wider than 1/4 inch.

02571.30(c) Peel Strength Test - Replace this subsection, except for the subsection number and title, with the following:

Perform a peel strength test according to ASTM D429 Method B, with the exception that the specimens are taken randomly and cut from a production bearing submitted for the Project. Ensure the bond between the elastomer and steel laminate in each specimen is not less than 40 pounds per inch.

SP02610 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02610 – SPECIAL FILTER MATERIAL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02610 of the Standard Specifications modified as follows:

02610.10(a) Grading - Replace the paragraph that begins "Sieve analysis shall be determined ..." with the following paragraph:

Perform sieve analysis according to AASHTO T 27. Furnish special filter material meeting the following gradation requirements:

02610.10(b) Fracture of Rounded Rock - Replace the paragraph that begins "Special filter material..." with the following paragraph:

Test special filter material according to AASHTO T 176 and ensure a Sand equivalent of not less than 25.

SECTION 02630 – BASE AGGREGATE

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02630 of the Standard Specifications modified as follows:

02630.10(a) Grading - Replace the paragraph that begins "Dense-graded base Aggregate..." with the following paragraph:

Furnish dense-graded base Aggregate consisting of crushed Rock, including Sand. Uniformly grade the Aggregates from coarse to fine. Perform sieve analysis according to AASHTO T 27. Furnish Aggregates according to one of the grading requirements of Table 02630-1 as identified in the Special Provisions or indicated by the Pay Items in the Contract Schedule of Items.

Replace the paragraph that begins "² Of the fraction passing the..." with the following paragraph:

² Of the fraction passing the 1/4-inch sieve, 40 percent to 60 percent is required to pass the No. 10 sieve

02630.10(b) Fracture of Rounded Rock - Replace the paragraph that begins "Fracture of rounded Rock..." with the following paragraph:

Determine fracture of rounded Rock according to AASHTO T 335. Provide at least one fractured face based on the following percentage of particles retained on the 1/4-inch sieve for the designated size:

02630.10(c) Durability - Replace the paragraph that begins "Dense-graded Aggregate ..." with the following paragraph:

Furnish dense-graded Aggregate meeting the following durability requirements:

02630.10(d) Sand Equivalent - Replace the paragraph that begins "Dense-graded Aggregate ..." with the following paragraph:

Test dense-graded Aggregate according to AASHTO T 176 and ensure a Sand equivalent of not less than 30.

Insert Project Name Here

02630.11(a) Grading – Replace this subsection, except for the subsection number and title, with the following:

Furnish open-graded Aggregate meeting the following grading requirements:

Table 02630-2
Aggregate Gradation for Open-Graded Aggregate

Sieve Size	Percent Passing (by Weight)
1"	100
3/4"	80 - 98
1/2"	60 - 85
3/8"	30 - 45
No. 100	0 - 6 (Dry Sieve)

02630.11(b) Fracture of Rounded Rock - Replace this subsection, except for the subsection number and title, with the following:

Determine fracture of rounded Rock according to AASHTO T 335. Provide Open-graded Aggregate meeting the following fracture requirements:

Percentage of Fracture (by Weight)

Material Retained on 3/4", 1/2", and 1/4" Sieves (two fractured faces) 90

SP02640 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 04-02-26)**

SECTION 02640 – SHOULDER AGGREGATE

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02640 of the Standard Specifications except for the Section number and title with the following:

Description

02640.00 Scope - This Section includes the requirements for shoulder Aggregate.

Materials

02640.10 Aggregate:

(a) Grading - Furnish shoulder Aggregate consisting of crushed Rock, including Sand. Determine sieve analysis according to AASHTO T 27. Uniformly grade the Aggregates from coarse to fine. Furnish Aggregates according to one of the grading requirements of Table 02640-1 as identified in the Special Provisions or indicated by the Pay Item in the Contract Schedule of Items.

Table 02640-1		
Grading Requirements - Shoulder Aggregates		
Sieve Size	Separated Sizes	
	1" - 0	3/4" - 0
	Percent Passing (by Weight)	
1 1/2"	100	
1"	90 - 100	100
3/4"	—	90 - 100
1/4"	40 - 55	40 - 60

(b) Fracture of Rounded Rock - Determine the fracture of rounded Rock according to AASHTO T 335. Provide at least one fractured face based on the following percentage of particles retained on the 1/4-inch sieve for the designated size:

Minimum Percent of Fractured Particles (by Weight of Material)	
Designated Size	Retained on 1/4" Sieve
1 1/2" - 0 and larger	50
Smaller than 1 1/2" - 0	50

(c) Durability - Furnish Aggregates meeting the following requirements:

Test	Test Method	Requirements
Abrasion	AASHTO T 96	35.0% maximum
Degradation (Coarse Aggregate)		
Passing No. 20 sieve	ODOT TM 208	30.0% maximum
Sediment Height	ODOT TM 208	3.0" maximum

(d) Sand Equivalent - Test shoulder Aggregate according to AASHTO T 176, and ensure a Sand equivalent of not less than 25.

SP02690 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26
Last updated: 03-30-26)

SECTION 02690 – PCC AGGREGATES

Insert Project Name Here

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02690 of the Standard Specifications modified as follows:

02690.10 Materials - Replace this subsection, except for the subsection number and title, with the following:

Furnish PCC Aggregates consisting of natural or crushed Rock that is hard, strong, durable and free from adherent Coatings or other Detrimental Materials.

Produce, handle and store the Aggregates in a way that will maintain passing material properties and avoid introducing deleterious materials or segregation prior to its use in portland cement concrete.

02690.11 Alternate Grading - Replace this subsection, except for the subsection number and title, with the following:

The Contractor may request approval to produce Coarse and Fine Aggregates in sizes other than those stated in 02690.20 and 02690.30. Submit the request in writing and state the proposed target value and specified tolerances for each of the individual sieve sizes of the materials the Contractor proposes to produce.

02690.12 Acceptance of Aggregate - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of Aggregate is according to Section 00165 and based on the Contractor's quality control testing, if verified, according to Section 00165.

(a) Aggregate Gradation - A stockpile contains specification Aggregate gradation when the quality level for each sieve size calculated according to 00165.40 is equal to or greater than the quality level in Table 00165-2 for a PF of 1.00. Each required sample represents a subplot. When the quality level in Table 00165-2 yields a PF of less than 1.00 for any constituent, the material is non-specification.

(b) Non-specification Aggregate Gradation - Stockpiled Aggregates that contain non specification Aggregate gradation is rejected by the Engineer unless non specification material is removed from the stockpile. Do not add additional material to the stockpile until enough non specification material is removed so that the quality level for each constituent is equal to or greater than the quality level in Table 00165-2 for a 1.00 PF.

Reprocessing of non-conforming material and the testing required for acceptance is at no additional cost to the Agency. Acceptance of reprocessed material is based on passing test results or accepted visually by the Engineer.

02690.20 Coarse Aggregate - Replace this subsection, except for the subsection number and title, with the following:

(a) **Harmful Substances** - Do not exceed the following harmful substances limits:

Test	Test Method		Percent (by Weight)
	ODOT	AASHTO	
Lightweight Pieces	—	T 113	1.0
Material passing No. 200 sieve	—	T 27 / T 11	1.0
Wood Particles	TM 225	—	0.05

(b) **Soundness** - Test Coarse Aggregates for concrete for soundness using sodium sulfate salt, according to AASHTO T 104. Do not exceed the weighted percentage loss of 12 percent by weight.

(c) **Durability** - Furnish Coarse Aggregates meeting the following durability requirements:

Test	Test Method		Requirements
	ODOT	AASHTO	
Abrasion	—	T 96	30.0% Max.
Oregon Air Aggregate Degradation:			
Passing No. 20 sieve	TM 208	—	30.0% Max.
Sediment Height	TM 208	—	3.0" Max.

(d) **PCC Paving Aggregate** - In addition to requirements above, comply with the following:

(1) **Fracture** - Furnish Aggregate with at least two fractured faces on at least 50 percent of the particles retained on the 3/8-inch, 1/2-inch, 3/4-inch, 1-inch, and 1 1/2-inch sieves, as determined by AASHTO T 335.

(2) **Elongated Pieces** - Furnish Aggregate with elongated pieces not exceeding 10 percent by weight of the material retained on the No. 4 sieve when tested according to ODOT TM 229 with the proportional caliper device set at a ratio of 5:1.

(e) **Grading and Separation by Sizes** - Sample according to AASHTO R 90. Perform sieve analysis according to AASHTO T 27 and AASHTO T 11. Furnish Aggregates meeting the gradation requirements of Table 02690-1 for structural concrete. Provide a CAgT to perform sampling and testing when required.

(Use the following lead-in paragraph and subsection .40 when lightweight coarse aggregate is specified.)

Add the following subsection:

02690.40 Lightweight Coarse Aggregate - Provide lightweight coarse aggregate from the QPL.

(Use the following lead-in paragraph and subsection .50 when lightweight fine aggregate is specified.)

Insert Project Name Here

Add the following subsection:

02690.50 Lightweight Fine Aggregate - Provide lightweight fine aggregate (LWFA) from the QPL. Maintain LWFA at or above saturated surface dry (SSD) condition by uniformly saturating and allowing drain down prior to batching and verify moisture condition by sampling and testing according to ODOT TM 249. Maintain the SSD condition during all batching operations.

SP02810 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02810 – BRIDGE RAIL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02810 of the Standard Specifications except for the Section number and title with the following:

Description

02810.00 Scope - This Section includes the requirements for the steel in railings for Bridges.

Materials

02810.10 Shapes, Plates, and Bars - Furnish shapes, plates and bars meeting the following, or as shown or specified:

- ASTM A36
- ASTM A572 Grade 50
- ASTM F1554 Grade 105

Provide the silicon content of all exposed shapes, plates and bars that are called out on drawings as "Galvanize - Control Silicon", according to 02530.70.

02810.15 Anchor Adhesive - Use one of the following epoxy adhesives from the QPL:

- Hilti HIT-HY200-A
- Hilti HIT-RE 500v3, Red Head C6+
- Ultrabond HS-1CC

02810.20 Structural Steel Tubing - Furnish structural steel rail members complying with ASTM A500, Grade B, or ASTM A501. Steel meeting the requirements of ASTM A513 or ASTM A618 may be substituted for ASTM A500 tubing subject to the following limitations:

Insert Project Name Here

- Provide chemical and tensile properties test results.
- Provide silicon content according to 02530.70.
- Strength and elongation requirements of ASTM A513 tubing meets the requirements of ASTM A500 tubing.

02810.30 Steel Pipe - Furnish metal parapet rail members that are standard steel pipe complying with ASTM A53, Grade B or ASTM A500, Grade B.

02810.40 Cast Steel Posts - Furnish cast steel posts that are carbon steel castings complying with AASHTO M 103 (ASTM A27), Grade 65-35.

02810.50 Metal Thrie Beam Rail - Galvanize steel thrie beam rail according to AASHTO M 180, Class A rail, Type II coating after fabrication and subject to the single spot test. Backup plates are accepted with ungalvanized edges and bolt holes, provided these areas are field-coated with an approved galvanizing substitute according to 02530.71. Provide metal posts and hardware meeting the requirements of 02820.20 and 02820.30.

02810.60 Incidentals - Furnish plates, caps and miscellaneous pieces necessary to complete the rail as shown or specified.

02810.70 Acceptance - Bridge rail Materials are accepted according to 00165.35 and this Section.

SP02820 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02820 – METAL GUARDRAIL

Replace this Section except for the Section number and title with the following:

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Description

02820.00 Scope - This Section includes the requirements for forming galvanized steel sheets into metal beam rail, and the manufacture of guardrail hardware.

Materials

02820.10 Metal Beam Rail - Form metal beam rail from galvanized steel. Furnish galvanized steel beam rail meeting the requirements of AASHTO M 180, Class A. Furnish

Insert Project Name Here

zinc coating meeting the requirements of AASHTO M 180, Type II, applied after fabrication and subject to the single spot test. Backup plates are accepted with ungalvanized edges and bolt holes, provided these areas are field coated with an approved galvanizing substitute.

02820.20 Metal Guardrail and Median Barrier Posts - Furnish metal posts that are structural steel meeting the requirements of ASTM A36 and galvanized according to AASHTO M 111 (ASTM A123).

02820.30 Guardrail Hardware - Furnish all bolts, nuts, washers and other fittings for beam type guardrail that are galvanized steel meeting the requirements of AASHTO M 180.

Furnish all bolts, nuts, and washers as detailed, with nuts tapped oversize not to exceed 1/32 inch.

02820.40 Guardrail Anchor Hardware - Furnish cable and fittings for guardrail anchors according to the requirements of AASHTO M 30, Class A, for Type II cable. Galvanize all fittings according to AASHTO M 111 (ASTM A123).

For steel anchors, furnish steel tubing meeting the requirements of ASTM A500, Grade B, ASTM A501 or ASTM A618. Furnish a Soil plate meeting the requirements of ASTM A36. After fabrication galvanize tubing and plate according to AASHTO M 111 (ASTM A123).

02820.50 Acceptance of Materials - Acceptance of metal guardrail Materials is according to Section 00165.35.

SP02830 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02830 – METAL HANDRAIL

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

02830.10 Shapes, Plates, and Bars - Replace this subsection, except for the subsection number and title, with the following:

Furnish shapes, plates, and bars meeting the requirements of ASTM A36.

Punch anchor plate bolt holes at the locations shown before fabrication.

02830.20 Steel Pipe - Replace this subsection, except for the subsection number and title, with the following:

Furnish steel pipe meeting the requirements of ASTM A500, seamless, Grade B.

Insert Project Name Here

02830.21 Steel Tube - Replace this subsection, except for the subsection number and title, with the following:

Furnish steel tube meeting the requirements of ASTM A500, seamless, Grade B.

02830.22 Fasteners - Replace this subsection, except for the subsection number and title, with the following:

Furnish fasteners meeting the requirements of Section 02560. For machine screws, furnish SAE 18 8 stainless steel.

02830.40 Incidentals - Replace this subsection, except for the subsection number and title, with the following:

Furnish plates, caps, and miscellaneous pieces necessary to complete the rail as shown.

02830.50 Acceptance - Replace this subsection, except for the subsection number and title, with the following:

Acceptance of handrail Materials is according to 00165.35 and this Section.

SP02831 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 02831 – PEDESTRIAN FENCE

(Follow all instructions and make all edits with “Track Changes” turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

02831.10 Aluminum Parts - Replace the paragraph that begins "Posts, post caps, post..." with the following paragraph:

Furnish 6061-T6 aluminum posts, post caps, post bases, rails, and spindles. Punch post base bolt holes at the locations shown before fabrication.

02831.20 Fasteners - Replace the paragraph that begins "Fasteners shall meet..." with the following paragraph:

Furnish fasteners meeting the following requirements:

02831.40 Fasteners - Replace the paragraph that begins "Acceptance of pedestrian rail..." with the following paragraph:

Acceptance of pedestrian rail Materials is according to 00165.35 and this Section.

SP02910 (Special Provisions for the 2024 Book)

(Bidding on or after: 07-01-26)

SECTION 02910 - SIGN MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 02910 of the Standard Specifications modified as follows:

02910.10 Aluminum - Replace the paragraph that begins "The aluminum Materials shall..." with the following paragraph:

Furnish new aluminum Materials meeting the following requirements:

Replace the paragraph that begins "Aluminum to be color coated shall..." with the following paragraph:

Furnish aluminum to be color coated consisting of an alloy that is compatible with the coating and the application process. Furnish color-coated aluminum having a temper that, after coating and aging, provides an ultimate strength of 30,000 psi and a yield strength of 25,000 psi.

Replace the paragraph that begins "Fabricate sheet aluminum signs ..." with the following paragraph:

Fabricate sheet aluminum signs from aluminum alloy 6061-T6, 5052-H38, 5154-H38, or approved equal. Give a chromate treatment according to ASTM B449, Class 2 or a titanium-based coating according to ASTM B921. Provide certified test reports for all heats of aluminum products furnished to the Agency. Furnish signs with a thickness shown in Table 02910-1 unless otherwise indicated.

02910.11 Plywood - Replace this subsection, except for the subsection number and title, with the following:

(a) General - Construct all plywood signs for permanent signing from 3/4-inch high-density overlay plywood. Construct plywood signs for temporary signs from either 3/4-inch high-density overlay plywood or 3/4-inch medium-density overlay plywood. Furnish Douglas fir plywood, Grade B-B exterior or better, according to *Product Standard PS-1 for Douglas Fir Plywood* published by the U. S. Department of Commerce.

(b) Overlay - Furnish black or buff high-density and medium-density overlay unless otherwise shown or specified. Furnish high-density and medium-density overlays that meet the *Product Standard PS-1 for Douglas Fir Plywood*.

(c) Plywood Sealer - Fill all voids in top or sides of panel with caulking compound after cutting plywood to size. Apply an approved plywood edge sealer tinted to match the color of the panel overlay material. Use a medium oil alkyd primer sealer.

02910.20 Retroreflective Sheeting - Replace this subsection, except for the subsection number and title, with the following:

(a) General - Use retroreflective sheeting from the QPL and the following:

(1) Perforation - If required for application, the sheeting may be pre-perforated with holes not greater than 0.02 inch in diameter. Perforate the holes approximately 0.4 inch apart in rows approximately 1.5 inches apart.

(2) Surface - Furnish sheeting and adhesive compatible with non-reflective permanent cut-out legend.

(b) Acceptance - Provide a quality compliance certification according to 00165.35, certifying that the reflective sheeting furnished meets the above requirements.

02910.21 Nonreflective Sheeting for Sign Background: Replace this subsection, except for the subsection number and title, with the following:

(a) General - Furnish nonreflective sheeting that is durable, weather resistant, gloss plastic film, and has a protected, precoated adhesive backing.

(b) Color - Use color for the nonreflective sheeting according to 00940.10. Submit for testing a 4-inch by 4-inch sample of the background color for each color of nonreflective sheeting shown.

(c) Adhesive - Adhere the nonreflective sheeting by a mildew and vandal resistant precoated adhesive that has no staining effect on the sheeting.

(d) Film:

(1) General - Furnish nonreflective sheeting that is flexible and easily cut to shape. The minimum tensile strength of the sheeting is 5 pounds per inch width.

(2) Surface - Clean according to the manufacturer's recommendations. Furnish a smooth and flat sheeting surface that:

- Facilitates cleaning and wet performance.
- Is readily processed.
- Is compatible with recommended transparent and opaque process inks.
- Permits cutting and color processing at minimum temperatures of 60 °F.
- Is heat resistant and permits force curing of applied sheeting at temperatures up to 150 °F.
- Is solvent resistant.

(e) Durability - For non-reflective sheeting for a sign background, process and apply according to the manufacturer's recommendations. Furnish weather resistant Material that

Insert Project Name Here

shows no discoloration, cracking, crazing, blistering or dimensional change following cleaning.

Furnish a sheeting surface capable of being readily refurbished when cleaned and clear over-coated according to the manufacturer's recommendations.

(f) Acceptance - Provide a quality compliance certificate according to 00165.35, certifying that the nonreflective sheeting furnished meets all the above requirements.

Add the following subsection:

02910.23 Digital Printing -

(a) Digitally Printed Ink Systems - Provide digitally printed ink systems from the QPL that meet the following requirements:

- Produce traffic signs using components, and processes that comply with the retroreflective sheeting manufacturer's recommendations.
- Meet and comply with daytime and nighttime chromaticity (color standards) as recognized in ASTM D4956 *Standard Specification for Retroreflective Sheeting for Traffic Control*.
- Meet 70% for type XI standards of the initial retroreflectivity specifications of each respective reflective film color as found in ASTM D4956.

(b) Retroreflective Sheeting - Furnish retroreflective sheeting that:

- Consists of white or colored sheeting having a smooth outer surface and that has the property of a retroreflector over its entire surface.
- Conform to all requirements of the current version of ASTM D4956. Designate the retroreflective sheeting as type XI ASTM D4956 classification.
- Has a Class 1 pressure-sensitive adhesive, as defined by ASTM D4956, protected by an easily removable liner. Fabricate finished traffic signs and traffic sign faces using retroreflective sheeting of Type XI ASTM D4956 classification.

(c) Protective Overlay Film – Fabricate permanent traffic signs printed with digital ink systems with a full sign protective overlay film designed to provide a smooth surface needed for retroreflectivity, and to protect the sign from fading and UV degradation. Comply with the retroreflective sheeting manufacturer's recommendations for the overlamine to ensure proper adhesion and transparency. Meet the reflective film durability as identified in the warranty requirements.

02910.32 Retroreflective Removable Legend - Replace this subsection, except for the subsection number and title, with the following:

(a) General - Furnish letters and numerals for all removable legend according to the design of the FHWA *Standard Rounded Capital Letter Alphabets*. Furnish letters and numerals for removable legend for all freeway and expressway signs according to the design of Series "E" modified from the FHWA *Standard Rounded Capital Letter Alphabets*.

Provide mounting holes within the frames to permit the use of the mounting hardware specified in the Specifications. Provide a sufficient number of mounting holes to ensure a

firm attachment of the frames to the sign and meet the requirements of 00940.45(b). This requires a minimum of four mounting holes at each joint in the border.

(b) Retroreflective Sheeting Legend - Fabricate removable legend with sheeting according to 02910.20 that is permanently adhered to a flat aluminum frame.

Furnish letters, numerals, symbols and borders a minimum of 0.032-inch-thick aluminum according to ASTM B209, alloy 3003-H14. Degrease and etch the aluminum, or treat with a light, tight amorphous chromate type coating.

Apply the reflective sheeting to the prepared aluminum according to the sheeting manufacturer's recommendations.

Furnish letters, numerals, symbols and borders that are clean-cut and sharp, and have a nearly plane surface.

(c) Acceptance - Acceptance of retroreflective removable legend is based on a mill test certificate from the aluminum manufacturer attesting to the correct alloy, temper, and material thickness of the metal supplied. The Engineer may reject damaged or non-specification materials regardless of the test certification provided.

02910.33 Permanent Legends - Replace this subsection, except for the subsection number and title, with the following:

(a) General – Permanent legends consist of white retroreflective screened, red retroreflective screened, black screened or cut-out white retroreflective sheeting. Meet the design of the FHWA Standard Rounded Capital Letter Alphabets for the letters and numerals of all permanent legends.

(b) Retroreflective White Screened Legend - Use transparent paste materials for the reverse screening of retroreflective white legends and for the screening of retroreflective red legends according to the recommendations of the manufacturer of the reflective sheeting.

(c) Retroreflective Cut-out Legend - Use Material for retroreflective cut-out legend according to the requirements of 02910.20.

(d) Nonreflective Black Screened Legend - Furnish Material for nonreflective black screened legends that is compatible with the sign sheeting, as recommended by the sign sheeting manufacturer.

(e) Nonreflective Black Cut-out Legend - Use Material for nonreflective cut-out legend according to 02910.21.

(f) Digitally Printed Sign - Use processes and Materials for digitally printed signs according to the requirements of 02910.23.

02910.40 Hardware - Replace this subsection, except for the subsection number and title, with the following:

Insert Project Name Here

Furnish aluminum alloy, stainless steel, or hot-dip galvanized steel bolts, nuts, and washers to fabricate and erect signs. Furnish aluminum for bolts and nuts according to ASTM B211, alloys 2024-T4 or 6061-T6 as the Contractor elects. Furnish aluminum washers according to ASTM B209, alloy Alclad 2024-T4. Furnish stainless steel for bolts, nuts, and washers that are Type 304 or Type 316. Furnish galvanized steel bolts, nuts, and washers that are medium carbon steel. Galvanize steel hardware according to AASHTO M 232 (ASTM A153).

Use nylon washers supplied by the sheeting manufacturer as shown or directed.

Furnish mounting hardware of the design and type shown, or if not shown of such sizes and kinds as approved by the Engineer.

Furnish 1/8-inch diameter, 1/4-inch head diameter, domed head, aluminum alloy according to ASTM B316. Aluminum alloys 5052 and 5056 are acceptable alloys. Furnish anodized blind rivets that are the same color as the sign background that are used to attach sign panels to closure strips or wind beams.

02910.60(a) General - Replace this subsection, except for the subsection number and title, with the following:

Furnish electronically cuttable films consisting of durable, transparent, colored films coated with a transparent pressure sensitive adhesive protected by a removable liner. Furnish films designed to be cut on knife-over-roll (sprocket fed or friction fed) and flat bed electronic cutting machines. Furnish films available in standard traffic colors, be dimensionally stable, and be designed to optimally cut, weed, lift and transfer. Use electronically cuttable films from the QPL.

(Use subsection .70 when sign panels require anti-graffiti coating.)

Add the following subsection:

02910.70 Anti-Graffiti Coating for Signs:

(a) General - Use anti-graffiti coating from the QPL. Apply anti-graffiti coating over both the background and legend sheeting, per the manufacturer's recommendation.

(b) Acceptance - Provide a quality compliance certificate according to 00165.35, certifying that the anti-graffiti coating used is an acceptable product on the QPL.

02910.75 Manufacturer Warranty - Replace the paragraph that begins "Furnish a manufacturer warranty ..." with the following paragraph:

Provide a manufacturer warranty that unconditionally warrants to the Agency the retroreflective sheeting products, sheeting with applied electronic cuttable film products, and installation under this Section against failure, according to this Subsection and 00170.85(c)(1). Use Agency-supplied warranty forms, available from the Engineer.

SP02926 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 02926 - HIGHWAY ILLUMINATION MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 02926 of the Standard Specifications except for the Section number and title with the following:

Description

02926.00 Scope - In addition to all applicable portions of AASHTO *Roadway Lighting Design Guide* (2018) and *Recommended Practice for Lighting Roadway and Parking Facilities* (ANSI/IES, RP - 8, 2025), this Section includes the requirements for Highway illumination installations.

Materials

02926.01 Materials - Furnish and install hardware with hot-dip galvanized or Type 304 or 316 stainless steel screws, bolts, nuts and washers. Furnish bolts and screws with square or hex heads. Allen head fasteners are not allowed.

Cabinets and Control Devices

02926.40 Cabinets - Construct all cabinets from 12-gauge Type 304 stainless steel, or 10-gauge sheet steel and hot-dip galvanize after fabrication according to 02530.70. Furnish weatherproof post mount cabinets, rated as NEMA type 3R, and constructed as shown.

With 3 phase electrical system or main circuit breaker of 200 amp or higher, install pad-mount cabinet as shown. Furnish a NEMA type 3R, with hinged double door, 3-point lockable vault handles and stainless steel hardware. Cabinet size is 48 inches x 63 inches x 18 inches deep, or as shown.

Complete the internal wiring of cabinets by a UL listed facility. Furnish cabinets according to one or more of the following standards where appropriate:

- UL 50, Cabinets and Boxes
- UL 67, Panelboards
- UL 869A, Service Equipment

Use a welded conduit hub to make conduit entrances into cabinets. Furnish hubs of the size required and securely weld to the cabinet before galvanizing. Malleable iron screw on hubs may be used as approved.

Furnish power service cabinets with live parts exposed having a dead-front panel installed with cutouts for operating handles. Furnish a minimum of two holding latches on each dead-front panel to maintain rigidity of the panel.

Insert Project Name Here

Construct the dead-front panels of stainless steel or code-gauge galvanized steel and treat all cut galvanized steel edges with zinc-rich paint. Prime galvanized steel dead-front panels with vinyl wash primer and finish with exterior polyurethane enamel. The finish color of galvanized steel is aluminum.

In all outdoor locations, mounting pans are required when circuit breakers, contactors, relays, switches, transformers or other types of electrical Equipment are to be mounted inside the cabinet.

Label circuit breakers and Equipment with an engraved permanent label on the dead-front panel to indicate the circuit controlled.

Furnish each cabinet with a latching device for a standard Agency padlock.

Make the meter base from 16-gauge galvanized sheet steel (G90), and powder coated inside and out after fabrication, or from 16-gauge Type 304 stainless steel sheet.

02926.41 Circuit Control Devices:

(a) General - Install circuit breakers, the copper neutral block, and contactors as shown.

(b) Circuit Breakers - Furnish circuit breakers having the voltage rating and number of poles shown or specified with an interrupting rating meeting or exceeding short circuit rating of the specified electrical system.

Furnish circuit breakers that are UL 489 conformed, thermal magnetic molded case circuit breakers and bolt on type with individually insulated and protected terminals, suitable for surface mounting in the cabinet on a false back or bracket.

Furnish 100 A frame breakers that are Class 13a for single pole breakers and Class 18a for multiple pole breakers. Furnish 225 A frame breakers that are Class 20a in Federal Specification W-C-375B, table "Classification of ratings".

Install overcurrent protection and relay Equipment, as shown or specified, with Materials and installation according to the NEC.

(c) Multiple Light Contactors - Furnish contactors that are lighting type specifically rated for high intensity discharge type lamp loads, electrically held and have a 600 V rating. Furnish multiple light contactors that are unenclosed single phase, two- or three-pole, open type lighting contactors of the rating shown or specified. Construct contactors for surface mounting on a false back or bracket within a weatherproof cabinet. Ensure the contactor coil operates on 120 V for 240 V circuits and 240 V, 208 V, and 277 V for 480 V circuits.

(d) Test Switch - Furnish and install a 277 V AC rated test switch in the control cabinets if shown. Furnish a heavy-duty single pole switch or circuit breaker rated at 15 A. Install the test switch in the control cabinet as a Roadway lighting test switch. Wire the switch to shunt the photoelectric relay power contactor and energize the lighting circuit contactors.

(e) Photoelectric Relay - Attach the photoelectric relay to a three-pole locking receptacle by a twisting motion.

Furnish a photoelectric relay with a built-in surge protective device for protection from induced high voltage and follow through currents. Furnish a relay meeting or exceeding the requirements of ANSI C136.10. Furnish factory set turn-on lights that are 1.4 footcandle $\pm$ 0.2 footcandle at 120 V AC. When operated at 240 V AC, turn-on is not allowed to change more than plus or minus 0.3 footcandle from the 120 V value. Maximum off to on ratio is 1.5:1.

Furnish a cadmium-sulfide photocell encapsulated for humidity protection, or a silicon junction type photo-transistor for the photoelectric relay.

Normal operation is for dual voltage operation of 105 V - 285 V, 60 Hz.

The allowed power consumption of the relay is less than 1 W. At the designated voltage, ensure the photoelectric relay is capable of controlling a minimum HID or LED luminaire load of 1000 W. Minimum operating temperature range is from -40 °F to 150 °F.

Prevent false turn-offs by transient light conditions by furnishing a time-delay control circuit. Provide a fail safe circuit for the lighting load to remain on or become energized if any functional failure of the photoelectric control circuit occurs.

(f) Electrical Splice Materials - Furnish electrical splice materials meeting the following requirements:

- **Split bolt** - Made of silicon bronze to securely join the wires both mechanically and electrically.
- **Heat-shrink tubing** - Split-resistant and adhesive-lined tube made of polyolefin complying with UL 224 or UL 486D, temperature range -67 °F to 230 °F, with 600 V rated inner melting wall or liner to provide void-free encapsulated insulation.
- **Insulating rubber tape** - Electrical grade, nondrying, rubber based, elastic type complying with ASTM D4388.
- **Insulating vinyl plastic tape** - Low temperature (0 °F) resistant, vinyl chloride plastic, electrical insulating tape with pressure-sensitive adhesive. Comply with ASTM D3005.

Lamps, Ballasts, and Luminaires

02926.50 Illumination Lamps - Furnish all high-pressure sodium lamps according to ANSI standards. Furnish all lamps of the same size and type, on a single project, from the same manufacturer's lot number.

Furnish all lamp bases having a brass mogul base mounting with dating system.

Furnish lamps that have an average minimum initial lumen rating (after 100 burning hours) and an average minimum lamp life (based on 10 hours per start) as follows:

Lamp Watts	ANSI Code	Minimum Initial Vertical	Lamp Lumens Horizontal	Minimum Average Lamp Life
---------------	-----------	--------------------------------	------------------------------	---------------------------------

Insert Project Name Here

High-Pressure Sodium - Clear

70	S62ME-70	6,300	6,300	24,000
100	S54SB-100	9,500	9,500	24,000
250	S50VA-250/S	29,000	29,000	24,000
400	S51WA-400	50,000	50,000	24,000
1,000	S52XB-1000	140,000	140,000	24,000

02926.52 Ballasts - Furnish high-pressure sodium ballasts that are magnetic regulator (lag type regulator) with primary and secondary windings electrically isolated from each other.

Unless otherwise shown or specified, the ballast is an integral part of the luminaire unit. Furnish prewired, built-in type mounted in the luminaire.

Provide a manufacturer's nameplate on the ballast housing. Include the manufacturer's name, model number, serial number, hook-up diagram, power supply data, lamp type and operating wattage on the nameplate.

Furnish ballast that operate the lamp within the limits specified below throughout the rated life of the lamp:

- Does not vary the lamp wattage more than the allowable range shown in the table below over the line voltage variation shown.
- Does not vary the lamp wattage more than plus or minus 5 percent of nominal when the lamp is at its rated nominal voltage (high-pressure sodium lamps only).
- The minimum efficiency of the ballast (nominal lamp watts/line watts) is not less than shown below.
- The ballast does not allow the lamp arc to extinguish when a line voltage dip as shown below occurs for several seconds.
- The power factor does not drop below 90 percent for the line voltage variation shown below.
- The line starting current does not exceed normal line operating current.
- The ballast starts and operates the lamp in ambient temperatures down to -20 °F.
- The lamp current crest factor does not exceed 1.8 for line voltage variation shown below.
- The ballast conforms to all ANSI Standards.
- The ballast has capacity to operate dual-arc tube lamps as well as standard lamps without modification of the luminaire.

Submit for review ballast electrical data and lamp operating volt-watt traces for nominal and ± 10 percent rated line voltage for each type of high-pressure sodium lamp ballast.

Lamp Type	Lamp Wattage Range	Line Voltage Variation	Allowable Lamp Watt Variation	Minimum Efficiency	Allowable Line Voltage Dip
HPS	70 - 100	$\pm 10\%$	$\pm 10\%$	70%	40 - 50%

Insert Project Name Here

HPS	150 - 400	± 10%	± 10%	78%	40 - 50%
HPS	1,000	± 10%	± 10%	92%	40 - 50%

Unless otherwise shown or specified, operate ballasts on 240 V or 480 V. When 120 V operation is specified, furnish a multi-voltage type ballast with taps to allow the ballast to be connected to 120 V, 208 V, 240 V, or 277 V.

02926.53 High-Intensity Discharge Luminaires:

(a) General - Furnish conventional Roadway luminaires for horizontal slip fitter end mounting.

Furnish luminaires with a cast-aluminum housing and attach to 2-inch pipe tenons on mast arms. Ensure the luminaire attachment fitting provides for a minimum of plus or minus 3-degree adjustment of the luminaire in the vertical direction. Furnish reflectors for all luminaires that are snap-on or easily removed design manufactured of polished aluminum or molded from prismatically formed borosilicate glass. Mount the refractor in a door frame assembly hinged to the luminaire and secured in the closed position by means of an automatic latch or a draw latch. The refractor and doorframe assembly, when closed, exert pressure against a gasket. Furnish gaskets composed of material capable of withstanding the temperatures encountered and that are securely held in place. Furnish glassware that is of the refractor type with prisms.

Stamp or label reflectors and refractors provided with the luminaire with a part number. Indicate the reflector and refractor part number used on the luminaire photometric submittal (isocandela diagrams).

Secure luminaire components to the luminaire frame with corrosion-resistant mounting hardware. Furnish a weather tight housing, complete with integral ballast.

If sand-cast, leave the aluminum housing in its natural finish. If die-cast, give the housing a coat of aluminum paint.

Form refractors from heat-resistant, high-impact, molded borosilicate glass.

Furnish lamp sockets that are adjustable to obtain the light distribution shown or specified.

Seal socket opening with a heat-resistant filter or filtering gasket to prevent the entry of dirt, insects or moisture into the optical system.

Furnish a sufficiently rigid socket mounting mechanism that upon application of a 2-pound load in any direction on the light source center, the light source center does not deflect more than 1/16 inch.

(b) Classification of Luminaire Light Distribution - Furnish the following distribution types as shown or specified. Ensure the classifications listed conform to ANSI definitions.

(1) Vertical Light Distributions - Divide vertical light distributions into three groups: short (S), medium (M), and long (L). Classification of the three groups depends on the maximum candle power point within a grid area according to the ANSI/IES RP-8 (2018) publication.

(2) Lateral Light Distributions - Lateral light distribution patterns have the following designations:

Type I
Type II
Type III
Type IV
Type V

Ensure the type designations listed above conform to ANSI definitions.

(3) Distribution Above Maximum Candle Power - Use this classification to control the candle power in the upper portion of the beam above the maximum candle power. Use the following three classifications:

Cutoff
Semi cutoff
Noncutoff

Ensure the classifications listed above conform to ANSI definitions.

02926.54 LED Luminaires:

(a) General Performance Requirements:

(1) General - Furnish each LED luminaire as a complete lighting unit manufactured according to ANSI C136.37 2011 and utilizing high power LEDs as the light source.

Assemble and pre-wire all internal components using modular electrical connections. Install wiring, grounding, and terminal blocks according to ANSI C136.37. Furnish luminaires that accept a designated voltage range of 50 to 60 Hz and operate normally with an input voltage that is within 10 percent of the specified voltage.

(2) Finished Surface - Furnish LED luminaires with a gray or silver housing with the surface UL listed for wet locations (UL 1598). After 1000 hours of salt chamber exposure, according to ASTM B117, provide a luminaire surface that exceeds a rating of 6 for rust creepage for scribed specimens according to ASTM D1654.

(3) Thermal Management - Furnish luminaires that start and operate in the ambient temperature range specified. Furnish heat sink fins with a mechanical design that facilitate hose down cleaning and discourage debris accumulation.

Clearly indicate in submittals liquids or moving parts (such as fans), consistent with product testing, and subject to approval by the Engineer.

(4) LED Driver Requirements - Furnish LED driver meeting the following minimum requirements:

- Rated to operate in -40 °C to 40 °C ambient temperature

- Total harmonic distortion (THD) to be less than 20 percent
- Have minimum power factor of 90 percent
- Comply with requirements of UL, CSA, and FCC regulations in 47 CRF Part 15
- Rated for outdoor operation and have an ANSI/IEC rating of IP66

Furnish a dimmable driver for each high-mast, Highway/street lighting luminaire, including ornamental lighting and intersection lighting on signal systems, with two leads to accept standard 0 10 V (DC), except on the luminaires of 100 watts or less. Furnish a dimming control compatible with IEC 60929 with a circuit that defaults to 100 percent power if the control leads are open or the analog control signal is lost. Identify all conductors and terminals.

(5) Electrical Parts and Safety Testing - For each luminaire, except ornamental, underdeck, and wall mount luminaires, furnish an ANSI C136.41 compliant, 7 pin receptacle that is fully prewire for the LED driver's control. For 0 10 V dimmable LED drivers, connect control wires to the receptacle pads as specified in ANSI C136.41.

When the photo control is required, furnish and install a specified photo control unit with the specified driver on each LED luminaire. If the photo control is not required, install a shorting cap on each luminaire, as directed by the Engineer.

Furnish luminaires according to ANSI C136.2 for electrical immunity, using the combination wave test level of 6 kV/3 kA. Furnish luminaires that comply with interference criteria for Class A digital devices according to FCC regulations in 47 CFR Part 15.

(6) Identification and Labeling - Furnish luminaires with internal and external labels according to ANSI C136.15 and ANSI C136.22.

(7) Surge Protection - Furnish a surge protection device (SPD) to protect LED drivers and LED lighting arrays from electrical transients that is recognized according to UL1449 and rated for 10 kV/5 kA combination wave surges according to ANSI/IEEE C62.41.2. Furnish a SPD that complies with FCC regulations in 47 CFR Part 15, Subpart B for the emission of electronic noise.

(8) Maximum Power Consumption - For the control of trespassing light and glare, the following maximum power consumption values are allowed on ODOT standard pole mounting for State Highways:

Mounting Height (ft.)	Maximum Wattage in LED Luminaire
25.0 to < 30.0	100
30.0 to < 35.0, or when replacing 150-watt HPS	120
35.0 to < 40.0, or when replacing 200/250-watt HPS	200
40.0 to 55.0, or when replacing 310/400-watt HPS	300
Each LED luminaire in high mast tower	500

(b) LED Luminaire Types - For each type of LED luminaire shown, furnish luminaires according to the general performance requirements in 02926.54(a) and the following:

(1) LED Luminaires on Traffic Signal Supports - When furnishing an LED luminaire model that is not specified as approved, meet the following general requirements:

Minimum luminaire efficacy: 115 lumens/watt (LPW)
Nominal input power: 110 - 136 watts
Nominal input voltage: 240 volts
Minimum lumen output: 14,000 lumens
Minimum lumen maintenance at 50,000 hrs.: 86% of initial lumens
Nominal CCT (Correlated color temp.): 3000 or 4000 $\pm$ 250 °K
Color Rendering Index (CRI) $\geq$ 70
BUG rating: B3-U0-G3
Nominal type of output pattern: Type 3 Medium
Maximum luminaire weight: 30 lb.
EPA: 0.5 – 0.9 sq. ft.
Mounting method: 2 inch tenon as shown
Vibration: 3G vibration test
Thermal: -40 – 40 °C operation
Photo control receptacle: ANSI C136.41, 7-pin
LED driver: 0-10 V dimmable

(2) LED Luminaires on Freeway Interchange Lighting Systems - When furnishing an LED luminaire model that is not specified as approved, meet the following general requirements:

Minimum luminaire efficacy: 117 lumens/watt (LPW)
Nominal input power: 180 - 214 watts
Nominal input voltage: 240 volts
Minimum lumen output: 24,000 lumens
Minimum lumen maintenance at 50000 hrs.: 86% of initial lumens
Nominal CCT (Correlated color temp.): 3000 or 4000 $\pm$ 250 °K
Color Rendering Index (CRI): $\geq$ 70
BUG rating: B3-U0-G3
Nominal type of output pattern: Type 3 Medium
Maximum luminaire weight: 30 lb.
Maximum EPA: 1.0 sq. ft.
Mounting method: 2 inch tenon, as shown
Vibration: 3G vibration test certified (ANSI C136.31)
Thermal: -40 – 40 °C operation
Photo control receptacle: ANSI C136.41, 7-pin
LED driver: 0-10 V dimmable

(c) Submittals - Before beginning LED luminaire installation, submit the following according to 00150.37 for review by the Engineer:

- Four copies of LED luminaire manufacturer's data sheets, including light source, drivers, surge protection device, and installation instructions.
- For the dimmable LED driver specified, diagrams illustrating light output and input power as a function of control signal.
- IES LM-79 luminaire photometric reports produced by the test laboratory, that satisfy LED Lighting Facts accreditation requirements. Include the name of the laboratory, report number, date, luminaire catalog number, luminaire description, and backlight uplight glare (BUG) ratings.
- Submit lumen maintenance calculations and supporting data according to LED lighting facts guidance. Submit computer generated photometric analysis and calculation of maintained light levels according to IES RP 8, Roadway lighting. use a light loss factor (LLF) of 0.8 or less, according to the individual luminaire test report data. Do not use the Mesopic multipliers of effective luminance factors for calculation.
- IES format electronic file containing luminous intensity data associated with submitted LM 79 reports and used for point-by-point calculations.

Within 21 Calendar Days after receipt of submittals, the Engineer will review the submittals and designate them in writing as "approved", "approved as noted", or "returned for correction". Do not begin LED luminaire installation before receiving written approval of submittals from the Engineer.

SP03010 (Special Provisions for the 2024 Book)

**(Bidding on or after: 08-01-26
Last updated: 04-23-26)**

SECTION 03010 - FENCING MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Replace Section 03010 of the Standard Specifications except for the Section number and title with the following:

Description

03010.00 Scope - This Section includes the requirements for barbed wire, woven wire fabric, chain link fabric, wildlife wire fabric, metal posts, braces, hardware, and gates.

Materials

Insert Project Name Here

03010.10 Barbed Wire - Furnish two-strand and either 12 1/2 gauge or 15 1/2 gauge barbed wire with four-point barbs spaced at 5-inch intervals according to the requirements of AASHTOM 280 (ASTM A121) with Class 3 galvanizing.

Install new or like new barbed wire on the Project and use the same diameter unless otherwise approved.

03010.20 Woven Wire Fabric - Furnish 12 1/2-gauge galvanized steel woven wire fabric according to the requirements of AASHTO M 279 (ASTM A116), Class 3 coating or 11 gauge or 12 1/2-gauge aluminum coated steel wire according to the applicable requirements of ASTM A116. Furnish 12 1/2-gauge aluminum coated steel wire having the same coating thickness required for 11-gauge steel wire in Table 2 of ASTM A116.

03010.21 Wildlife Wire Fabric - Furnish 12 1/2-gauge galvanized steel wire for wildlife wire fabric according to the requirements of ASTM A116, Design Number 2096-6-12 1/2.

03010.30 Chain Link Fabric, Ties, and Tension Wire - Furnish chain link fabric, ties, and tension wire according to the requirements of AASHTO M 181 supplemented and modified as follows:

- Fabric may be zinc-coated steel meeting Type I, Class D coating requirement, aluminum-coated steel, or aluminum alloy. Use only one type on the Project.
- Wire fabric ties, wire ties, and hog rings may be zinc-coated steel wire, aluminum-coated steel, or aluminum alloy as elected, regardless of the type of wire fabric used.
- Use ductile, zinc-coated steel meeting the coating requirements of ASTM A641, Class 1 for wire fabric ties, wire ties, and hog rings. Coat aluminum-coated steel wire fabric ties, wire ties and hog rings with at least 0.30 ounce per square foot.
- Furnish tension wire with a Class 2 coating.
- Furnish 9-gauge wire woven in 3 1/2-inch by 5 1/2-inch diamond mesh for the fence to be installed with pickets. Knuckled finish top and bottom selvage.

03010.31 Pickets - Furnish pickets that are either standard Grade A redwood or cedar pickets, 3/8-inch x 2 1/2-inch x 6 feet, or industry standard metal, or plastic pickets as shown or approved.

03010.40 Vinyl Clad Fabric - Furnish vinyl clad chain link fabric according to AASHTO M 181, Type IV. The color of the PVC coating is either medium or dark green.

03010.50 Metal Fence Posts, Braces, and Appurtenances - Furnish metal fence posts, braces and appurtenances according to the requirements indicated on the Plans and the following:

(a) **Painted Metal Posts** - Furnish the same kind and color of all painted metal posts.

(b) **Posts, Braces, and Appurtenances for Chain Link Fence** - Furnish posts, braces, and appurtenances for chain link fence according to the requirements of AASHTO M 181.

Furnish posts, braces, and appurtenances for bridge protective fence according to the requirements of AASHTO M 181, Grade 1, ASTM F1083 and ASTM F1043, Group IA-2.

(c) Posts, Braces, and Appurtenances for Barbed Wire and Woven Wire Fence:

(1) Tubular Steel Posts - Furnish tubular steel posts, braces and appurtenances according to the requirements of AASHTO M 181. Fit tubular posts with a snug-fitting, galvanized metal cap.

(2) Other Shapes - Furnish metal posts and braces, other than tubular shape, for barbed wire and woven wire fences, according to AASHTO M 281 (ASTM A702), except that galvanizing may conform to the requirements of AASHTO M 111 (ASTM A123). The posts and braces may be either galvanized or painted, as elected. Furnish wire fasteners meeting the coating requirements of ASTM A641, Class 1.

(3) Fence Stays, Brace Guys, and Wire Loops - Furnish metal fence stays, brace guy wires, wire loops for gateways and other miscellaneous wire used in barbed and woven wire fences with Class 1 coating as required by ASTM A641. Either 9 1/2-gauge or 10-gauge wire is acceptable for fence stays.

(d) Concrete In Footings - Furnish concrete for footings according to Section 00440.

(e) Grounding Rod - 5/8 inch by 8 feet, nonrusting, copper covered steel rod with a bronze grounding wire clamp.

(f) Grounding Wire - AWG 4/0 Solid Copper or No. 6 bare aluminum wire with clamps.

(g) Posts, Braces, and Appurtenances for Wildlife Fence - Furnish posts, braces, and appurtenances for wildlife fence according to the requirements of AASHTO M 181.

03010.60 Fence Gates:

(a) General - Furnish tubular steel gate frames according to AASHTO M 181. For fabric in gates used with chain link fence, use chain link of the same gauge and according to applicable requirements of 03010.30. For fabric in gates used with woven wire fence, furnish woven wire fabric according to 03010.20 or chain link fabric according to the applicable requirements of 03010.30, except that the zinc coating may be either Class C or Class D. Use wildlife fence fabric according to 03010.21 for fabric in gates used with wildlife fence.

(b) Hardware - Furnish all fence and gate hardware according to the requirements of AASHTO M 181, except that the thickness of galvanizing is according to AASHTO M 232 (ASTM A153).

03010.75 Protective Fence Materials, On and Off Structures - Provide certification according to 00165.35 that the anchor system selected conforms to requirements as shown.

- **Resin Bonded Anchor System** - Furnish the resin bonded anchor system used to install the fence post anchor rods in the concrete bridge rail from the QPL and install according to the manufacturer's recommendations.

Insert Project Name Here

- **Posts** - Modify posts to attach to the Structure as shown.
- **Steel Plates, Angles, and Bolts** - Furnish steel plates, angles, and bolts meeting the applicable requirements of Section 02530 and galvanized according to 02530.70.
- **Chain Link Fabric, Ties, and Tension Wire** - Furnish chain link fabric, ties, and tension wire according to the requirements of 03010.30.
- **Pickets** - Furnish pickets meeting the requirements of 03010.31.

03010.80 Acceptance - Acceptance of fencing Materials is according to 00165.35 and this Section.

SP03020 (Special Provisions for the 2024 Book)

**(Bidding on or after: 07-01-26
Last updated: 03-30-26)**

SECTION 03020 - EROSION MATERIALS

(Follow all instructions and make all edits with "Track Changes" turned on. If there are no instructions [purple text] above a subsection, paragraph, sentence, or bullet, then include it in the Project. Delete all purple text before preparing the final document. All other modifications to this Section will require ODOT Technical Resource and State Specifications Engineer approval.)

Comply with Section 03020 of the Standard Specifications modified as follows:

03020.90 Acceptance - Replace the paragraph that begins "Acceptance of commercially manufactured..." with the following paragraph:

Acceptance of commercially manufactured compost Material is the following: