Reconstruction Segment

I-5 to Stafford Road

Project Elements

- Construct an auxiliary lane and new shoulder in the median for both NB and SB directions
- Rubblize the existing two lanes of concrete pavement and overlay with asphalt concrete
- Widen the existing outside shoulders to meet current standards
- Potential rehabilitation of Stafford Road ramps
- Replace guard rail and concrete barriers as required
- Provide new signing for the auxiliary lanes and update existing signs and illumination as budget allows
- Widen Prosperity Park Bridges to allow for the third auxiliary lane in each direction
- Rehabilitate the NB and SB ramp bridges in the I-5/I-205 interchange
- Construct storm water treatment facilities to treat new runoff created by added lanes
- Perform noise study and construct sound walls as warranted

TUALATIN

INTERSTATE 5

65TH STREET

PROSPERITY PARK ROAD

SW STAFFORD ROAD

1

2

STAFFORD

Typical Cross Section: *Point 1 to Point 2*

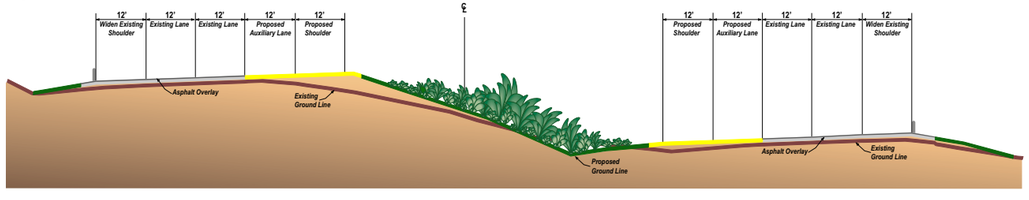

Legend

- Wetland Areas
- Proposed Auxiliary Lanes

Improvement Project
Willamette River to I-5