Corridor Bottleneck Operations Study (CBOS)

I-405 Recurring Bottleneck Locations

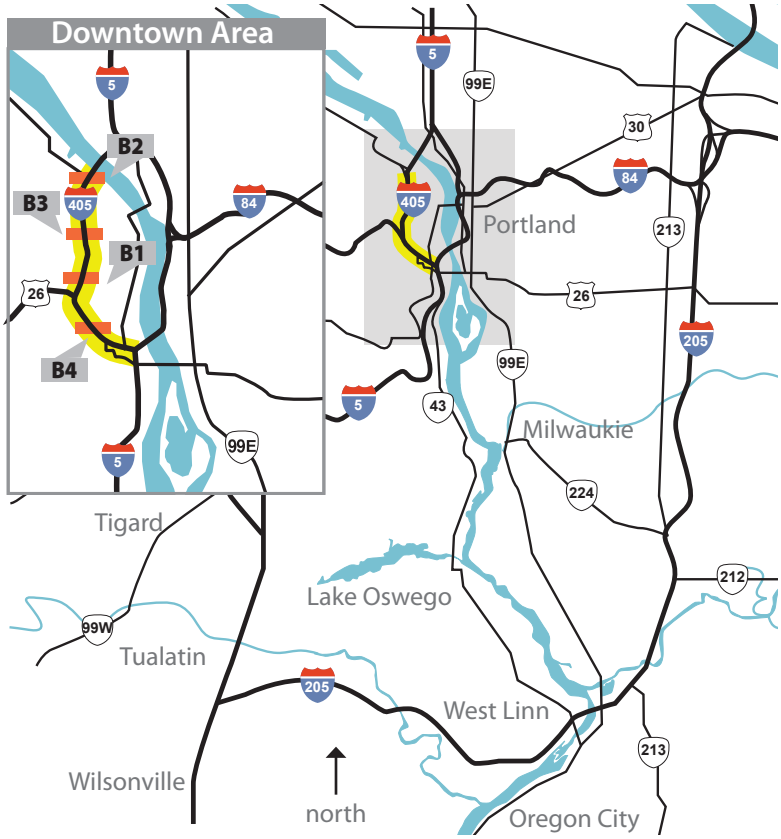

Recurring Bottleneck Location

I-405 Recommended Project Locations

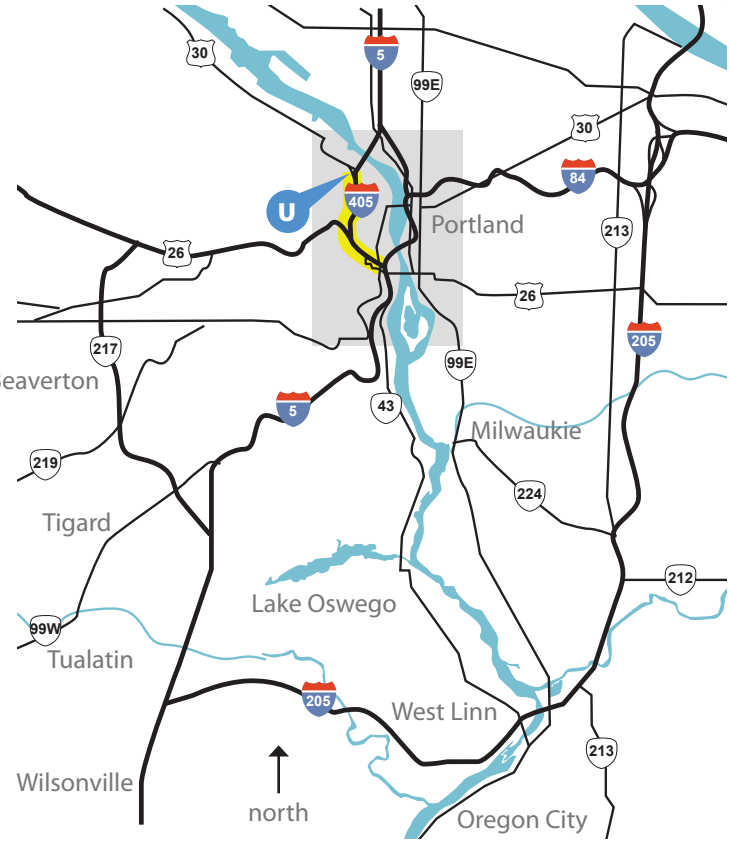

Recommended Project Location
(indicates potential solution recommentation)

Bottleneck ID	Recurring Bottleneck Location	Cause: Decision Point	Cause: Physical Constraint	Congestion Speed (MPH)	Congestion Duration (Hours)
B1	I-405 NB: US 26/12th Ave (PM)	X		5	3
B2	I-405 SB: US 30 Entrance Ramp (PM)	X		5	3
B3	I-405 SB: Everett St. Entrance Ramp to US 26 Exit Ramp Weave (PM)	X		5	3
B4	I-405 SB: US 26 Entrance Ramp to Broadway Exit Ramp Weave (PM)	X		5	3

Map ID	Bottle-neck ID	Potential Solution Identified	Recommended Project	Est. Cost
U	I-405: B2	Yes	I-405 SB/US 30 EB: Entrance Ramp Lane Re-arrangement	$.5M-1M