

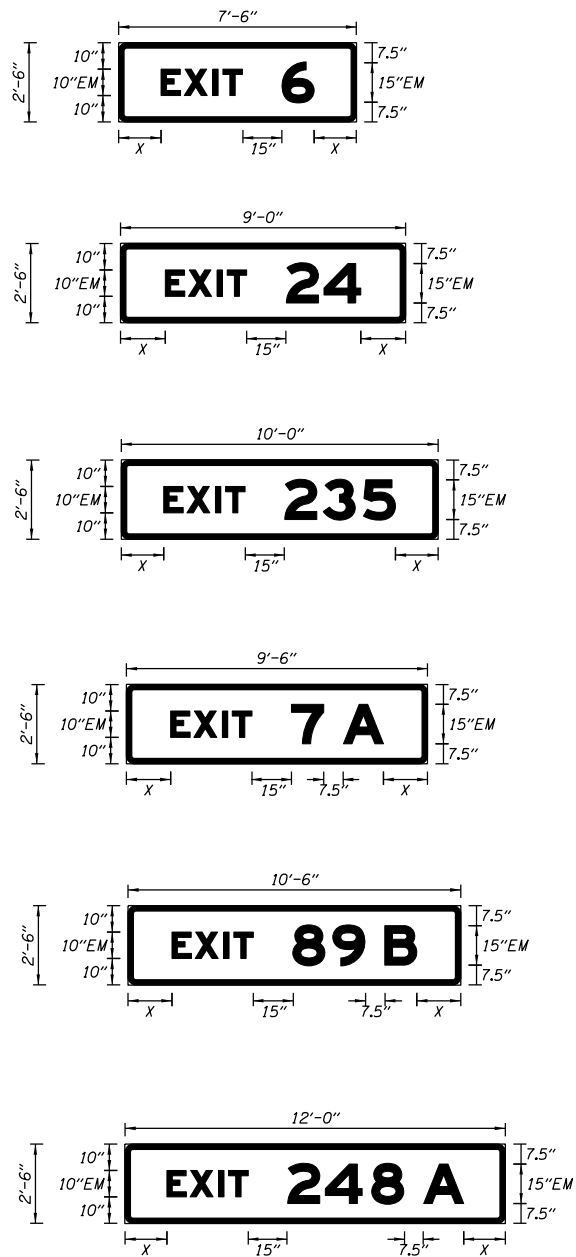


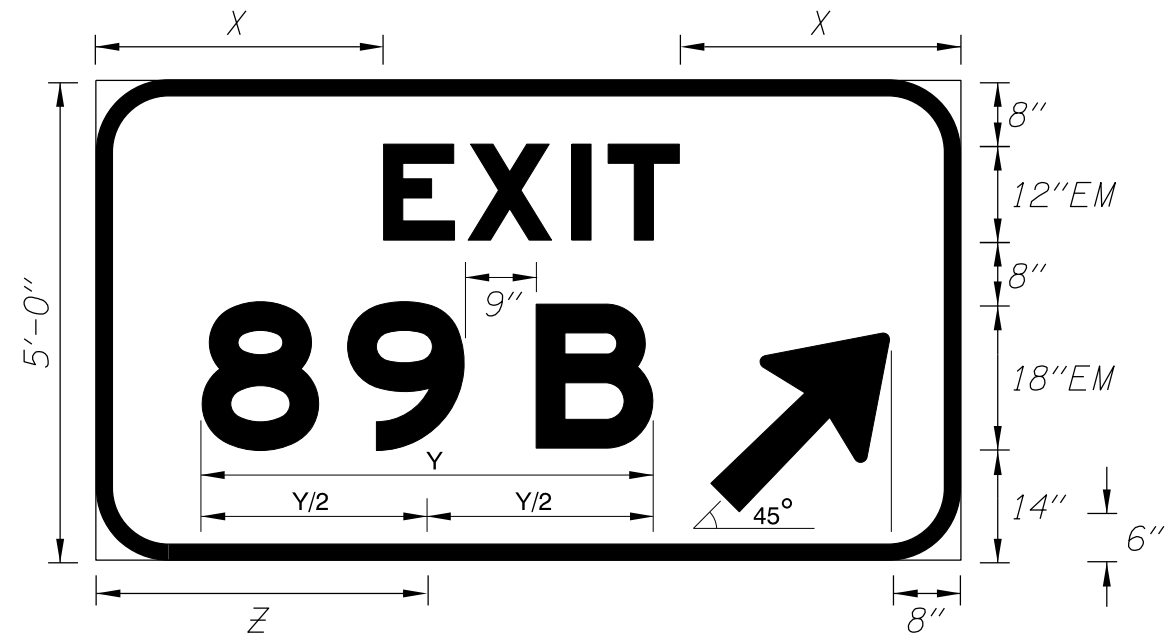

EXIT NUMBER SIGN DETAILS

Note: Use a 2" border with a 3" corner radius on all exit number signs.

Note:
Legends on freeway and expressway guide signs shall be all upper-case, or lower-case with initial upper-case series "E" modified letters as provided in the "Standard Alphabets for Highway Signs and Pavement Markings".

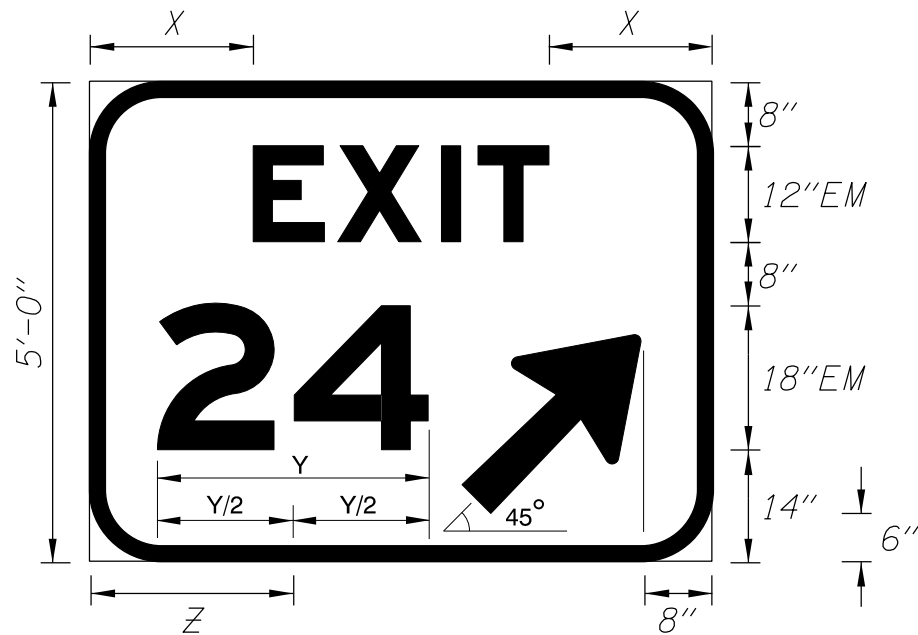

SIGN SPECIFICATIONS			
NO. OF DIGITS	WITH SUFFIX ?	SIGN SIZE	Z
1	No	78" x 60"	26"
1	Yes	90" x 60"	32"
2	No	78" x 60"	26"
2	Yes	108" x 60"	41"
3	No	96" x 60"	35"
3	Yes	126" x 60"	50"

EXIT GORE SIGN DETAILS

Notes: Use a 2" border with a 9" corner radius on all exit gore signs.
Use 18¼" x 29¼" type A-2 arrows on all exit gore signs. See TM233 for details.
The numberless exit gore sign detail has been deleted from this standard drawing.
Use FHWA sign #E5-1 instead.

<i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without first consulting a Registered Professional Engineer.</i>				All materials shall be in accordance with the current Oregon Standard Specifications.			
				OREGON STANDARD DRAWINGS			
				EXIT NUMBER AND GORE SIGNING DETAILS			
				2024			
				DATE	REVISION DESCRIPTION		
				CALC. BOOK NO.	N/A	SDR DATE	01-JUL-2010
				TM225			