Welex

5" = 100'

DUAL INDUCTION GUARD LOG

COMPANY REICHHOLD ENERGY CORPORATION
WELL LONGVIEW FIBER 12-33
FIELD MIST
County COLUMBIA State ORE

COMPANY REICHHOLD ENERGY CORPORATION

WELL LONGVIEW FIBER 12-33

FIELD MIST

COUNTY COLUMBIA STATE OREGON

Location
1763' SOUTH & 705' EAST OF THE NORTHWEST CORNER OF:

Sec. 33 Twp 7N Rge 5W

Other Services:
C/AVL
DIP

Permanent Datum G.L. Elev. 887.97
Log Measured From K.B. OR 11.4 Ft. Above Perm. Datum
Drilling Measured From K.B.

Elev.: K.B. 899.37
D.F.
G.L. 887.97

Date	9-11-81			
Run No.	ONE			
Depth—Driller	2414			
Depth—Welex	2399			
Btm. Log Inter.	2397			
Top Log Inter.	440			
Casing—Driller	7 @441	@	@	@
Casing—Welex	440			
Bit Size	6 1/4			
Type Fluid in Hole	LIGNOSULF.			
Dens. I Visc.	9.3 I 47	I	I	I
pH I Fluid Loss	10.0 I 4.0ml	I ml	I ml	I ml
Source of Sample	CIRCULATED			
R_m @ Meas. Temp.	1.95 @85 °F	@ °F	@ °F	@ °F
R_{mf} @ Meas. Temp.	1.61 @80 °F	@ °F	@ °F	@ °F
R_{mc} @ Meas. Temp.	2.24 @78 °F	@ °F	@ °F	@ °F
Source R_{mf} R_{mc}	MEASURED	I	I	I
R_m @ BHT	1.56 @106 °F	@ °F	@ °F	@ °F
Time Since Circ.	2 HRS.			
Max. Rec. Temp.	106 °F @BHT.	°F @	°F @	°F @
Equip. I Location	8586 I WOODLAND	I	I	I
Recorded By	VORHEES			
Witnessed By	BRUER			

Fold Here

Service Ticket No. N / A Remarks:

Change in Mud Type or Additional Samples

Date | Sample No.	I	I
Depth—Driller		
Type Fluid in Hole		
Dens. | Visc.	I	I
ph | Fluid Loss	I ml	I
Source of Sample		
R_m @ Meas. Temp.	@ °F	@ °F
R_{mf} @ Meas. Temp.	@ °F	@ °F
R_{mc} @ Meas. Temp.	@ °F	@ °F
Source: R_{mf} | R_{mc}	I	I
R_m @ BHT	1.56 @106°F	@ °F
R_{mf} BHT	1.21 @106°F	@ °F
R_{mc} BHT	1.64 @106°F	@ °F

SCALE CHANGES

Type Log	Depth	Scale Up Hole	Scale Down Hole

EQUIPMENT DATA

Run No.	Tool Type and No.	Pad Type	Tool Position	Other
ONE	DIG 6		FREE	6 1/4 BIT

DRAFTED BY - JOHN YAECK

Welex does not guarantee the accuracy of any interpretation of log data, conversion of log data to physical rock parameters, or recommendations which may be given by Welex personnel or which may appear on the log or in any other form. Any user of such data, interpretations, conversions, or recommendations agrees that Welex is not responsible, except where due to gross negligence or wilful misconduct, for any loss, damages, or expenses resulting from the use thereof.

5" = 100'

POTENTIAL MILLIVOLTS

– → 10 ← +

RESISTIVITY OHMS M²/M

DEEP INDUCTION

MEDIUM INDUCTION

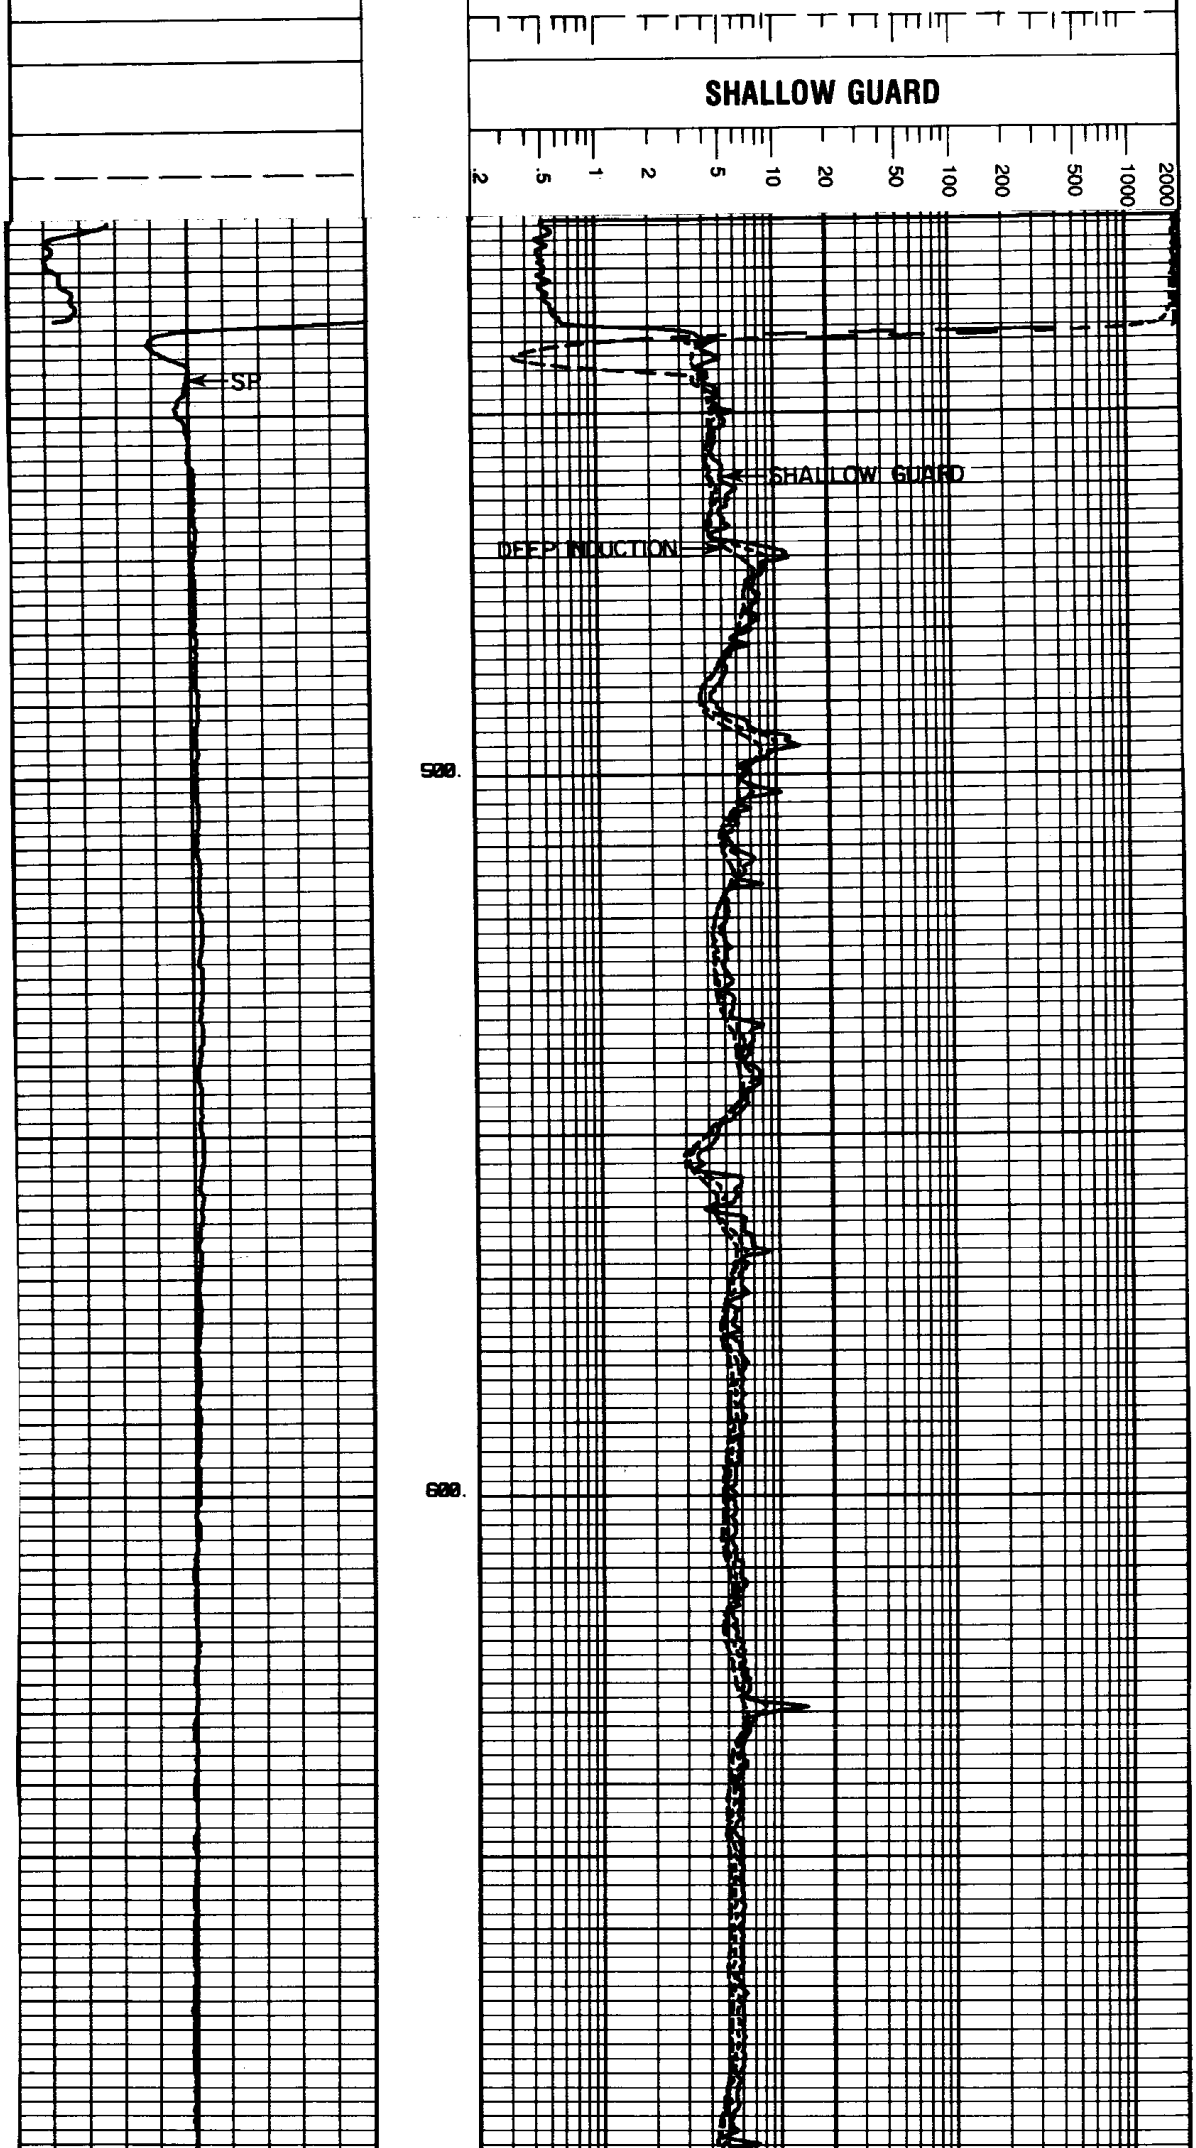

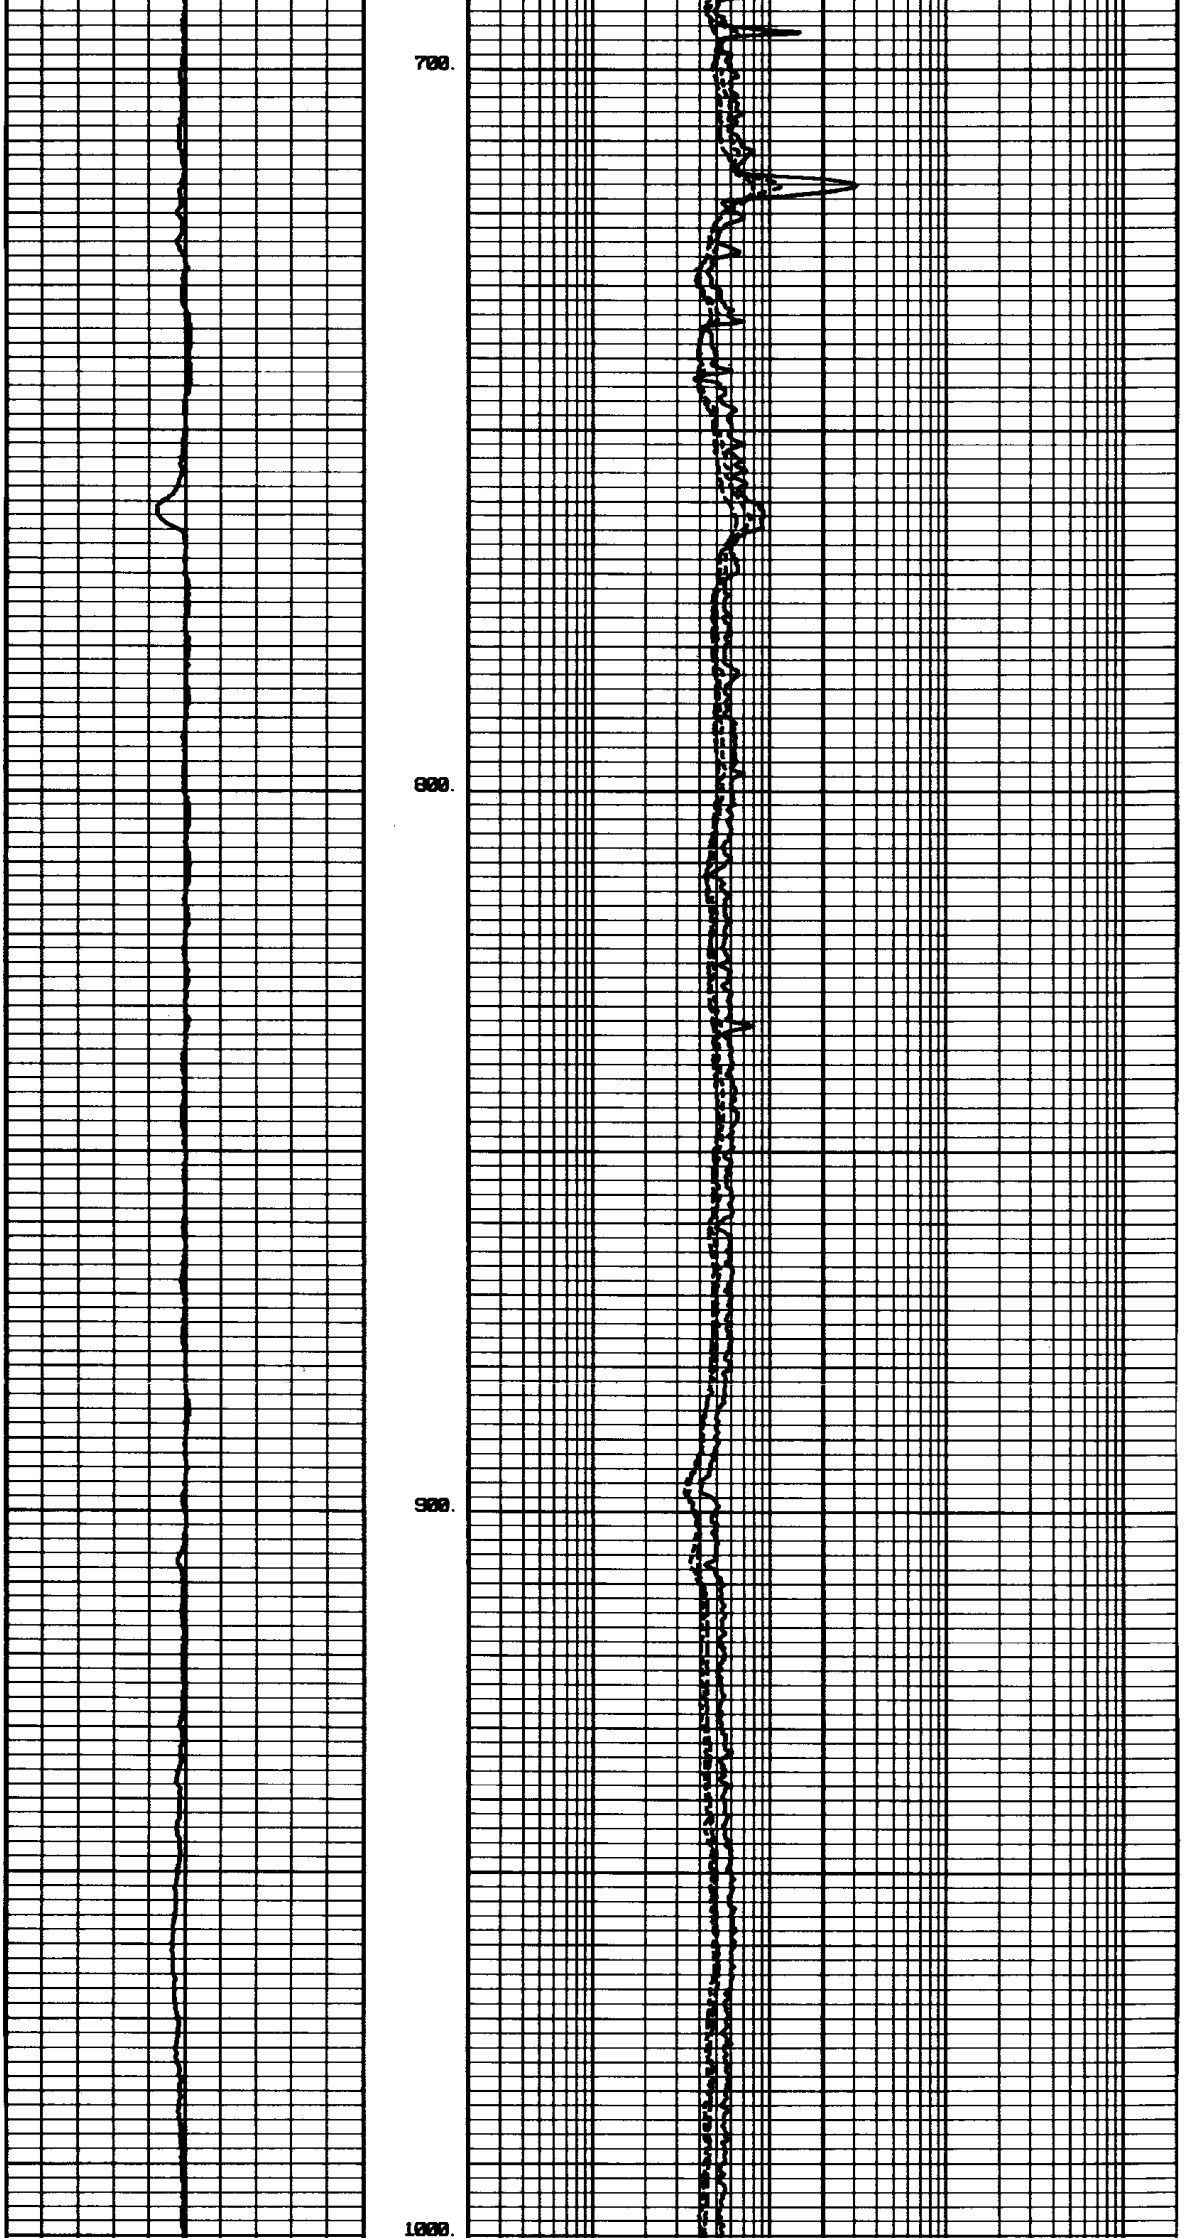

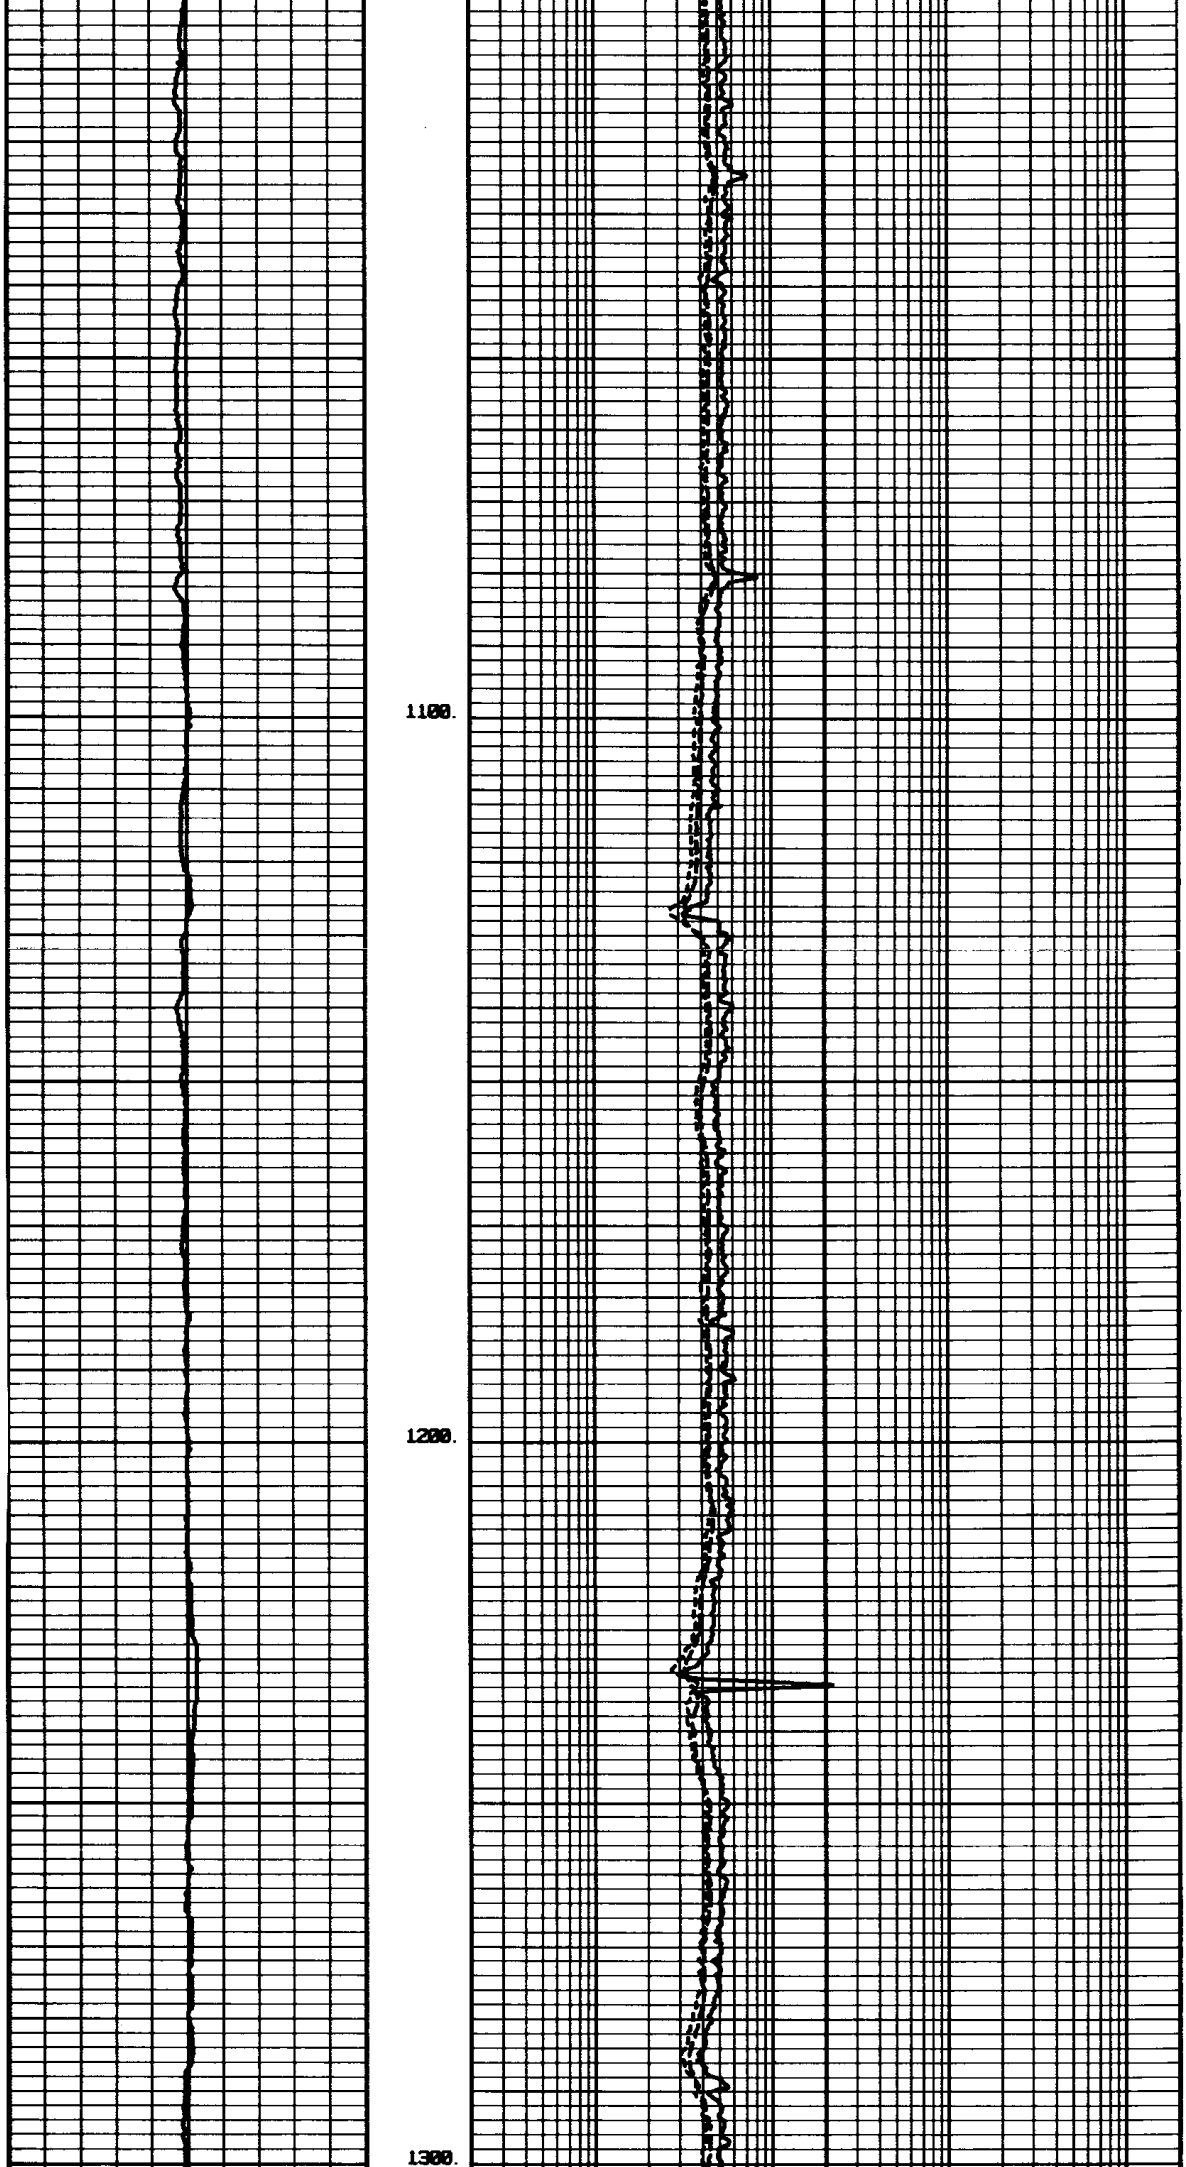

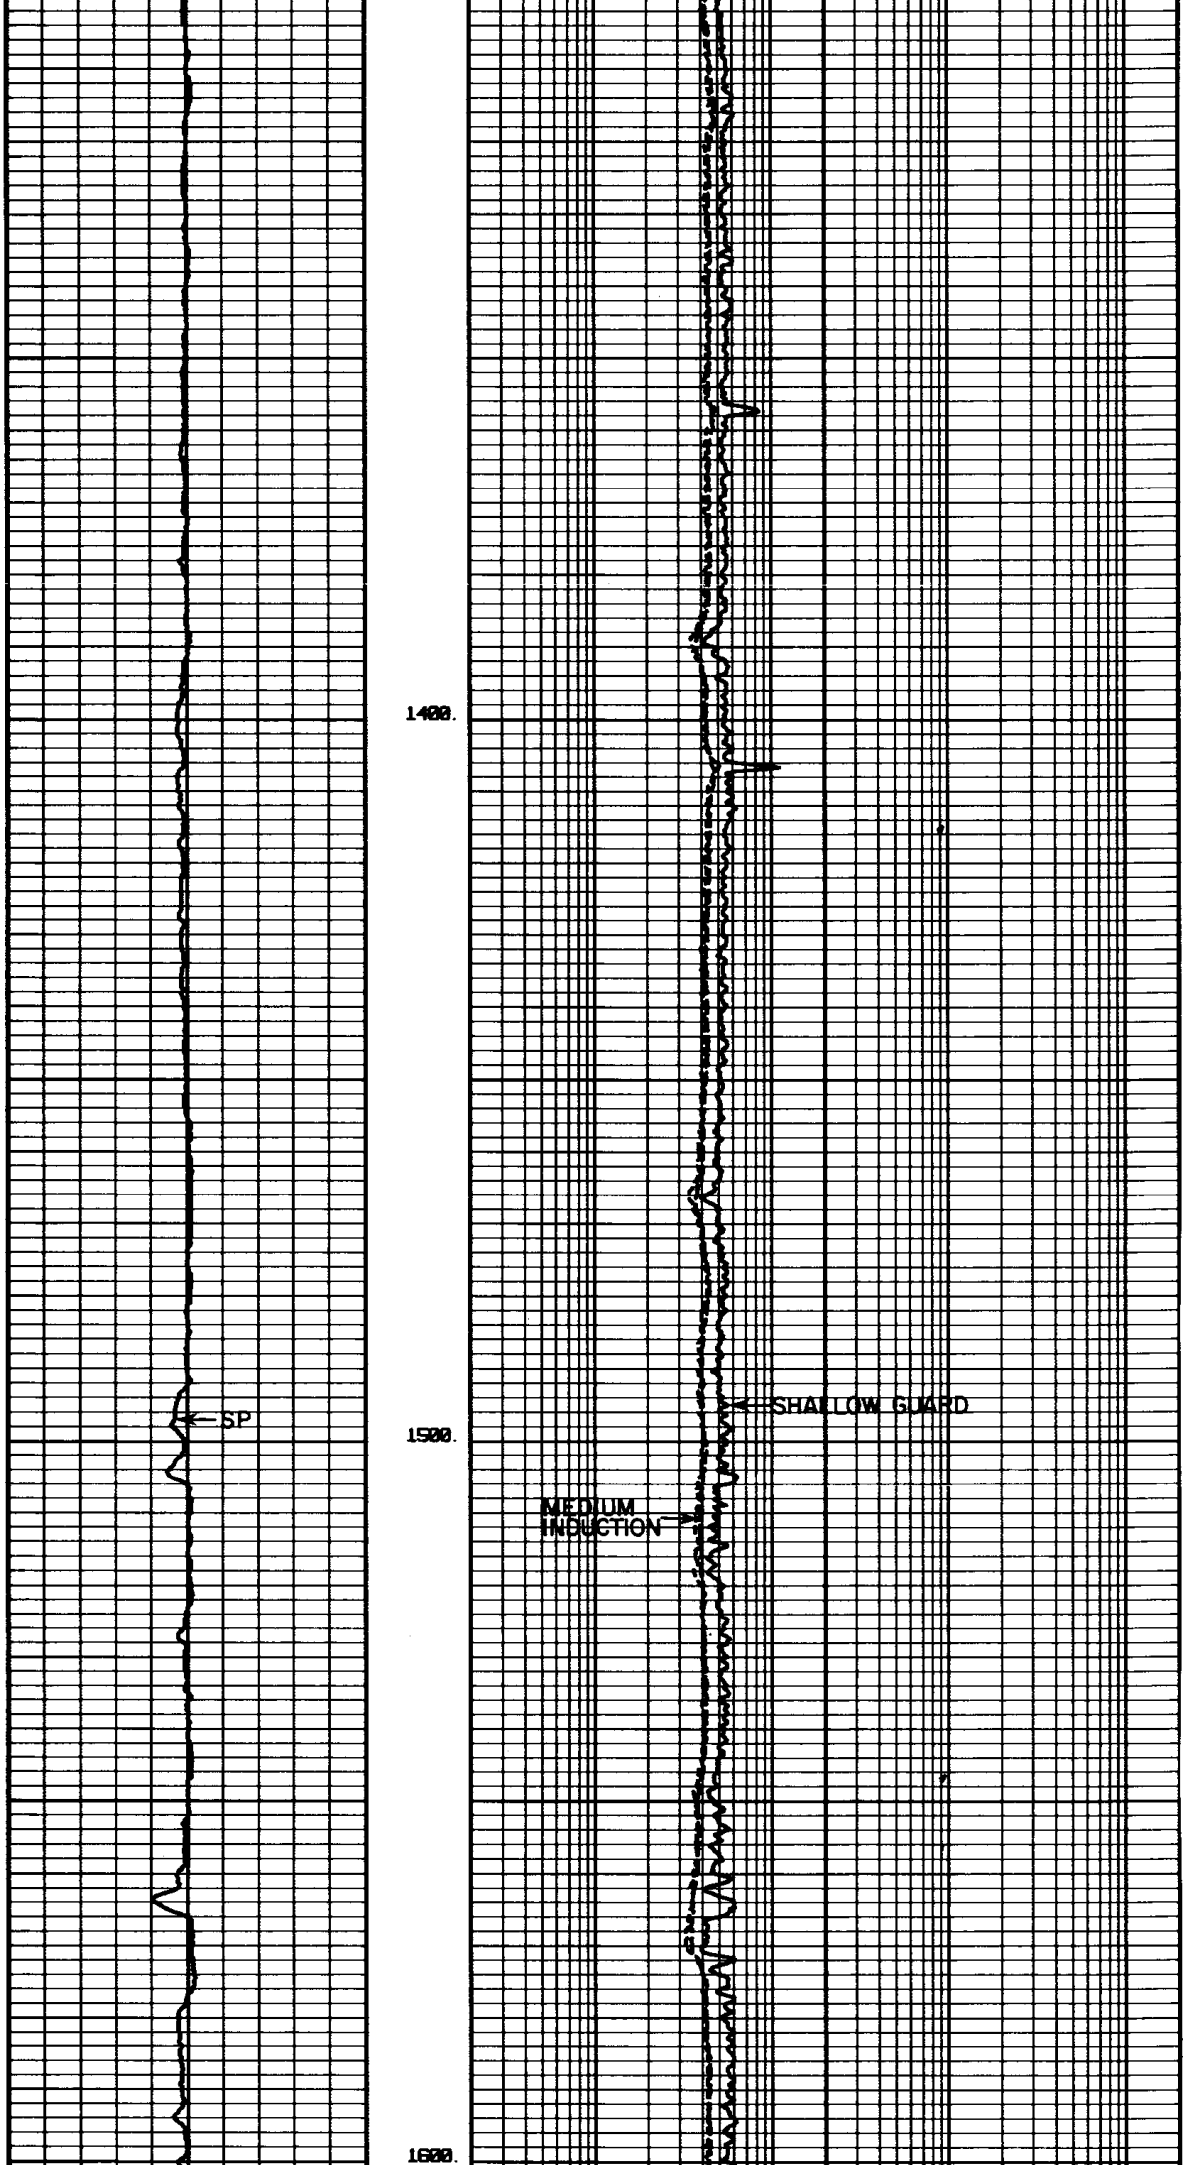

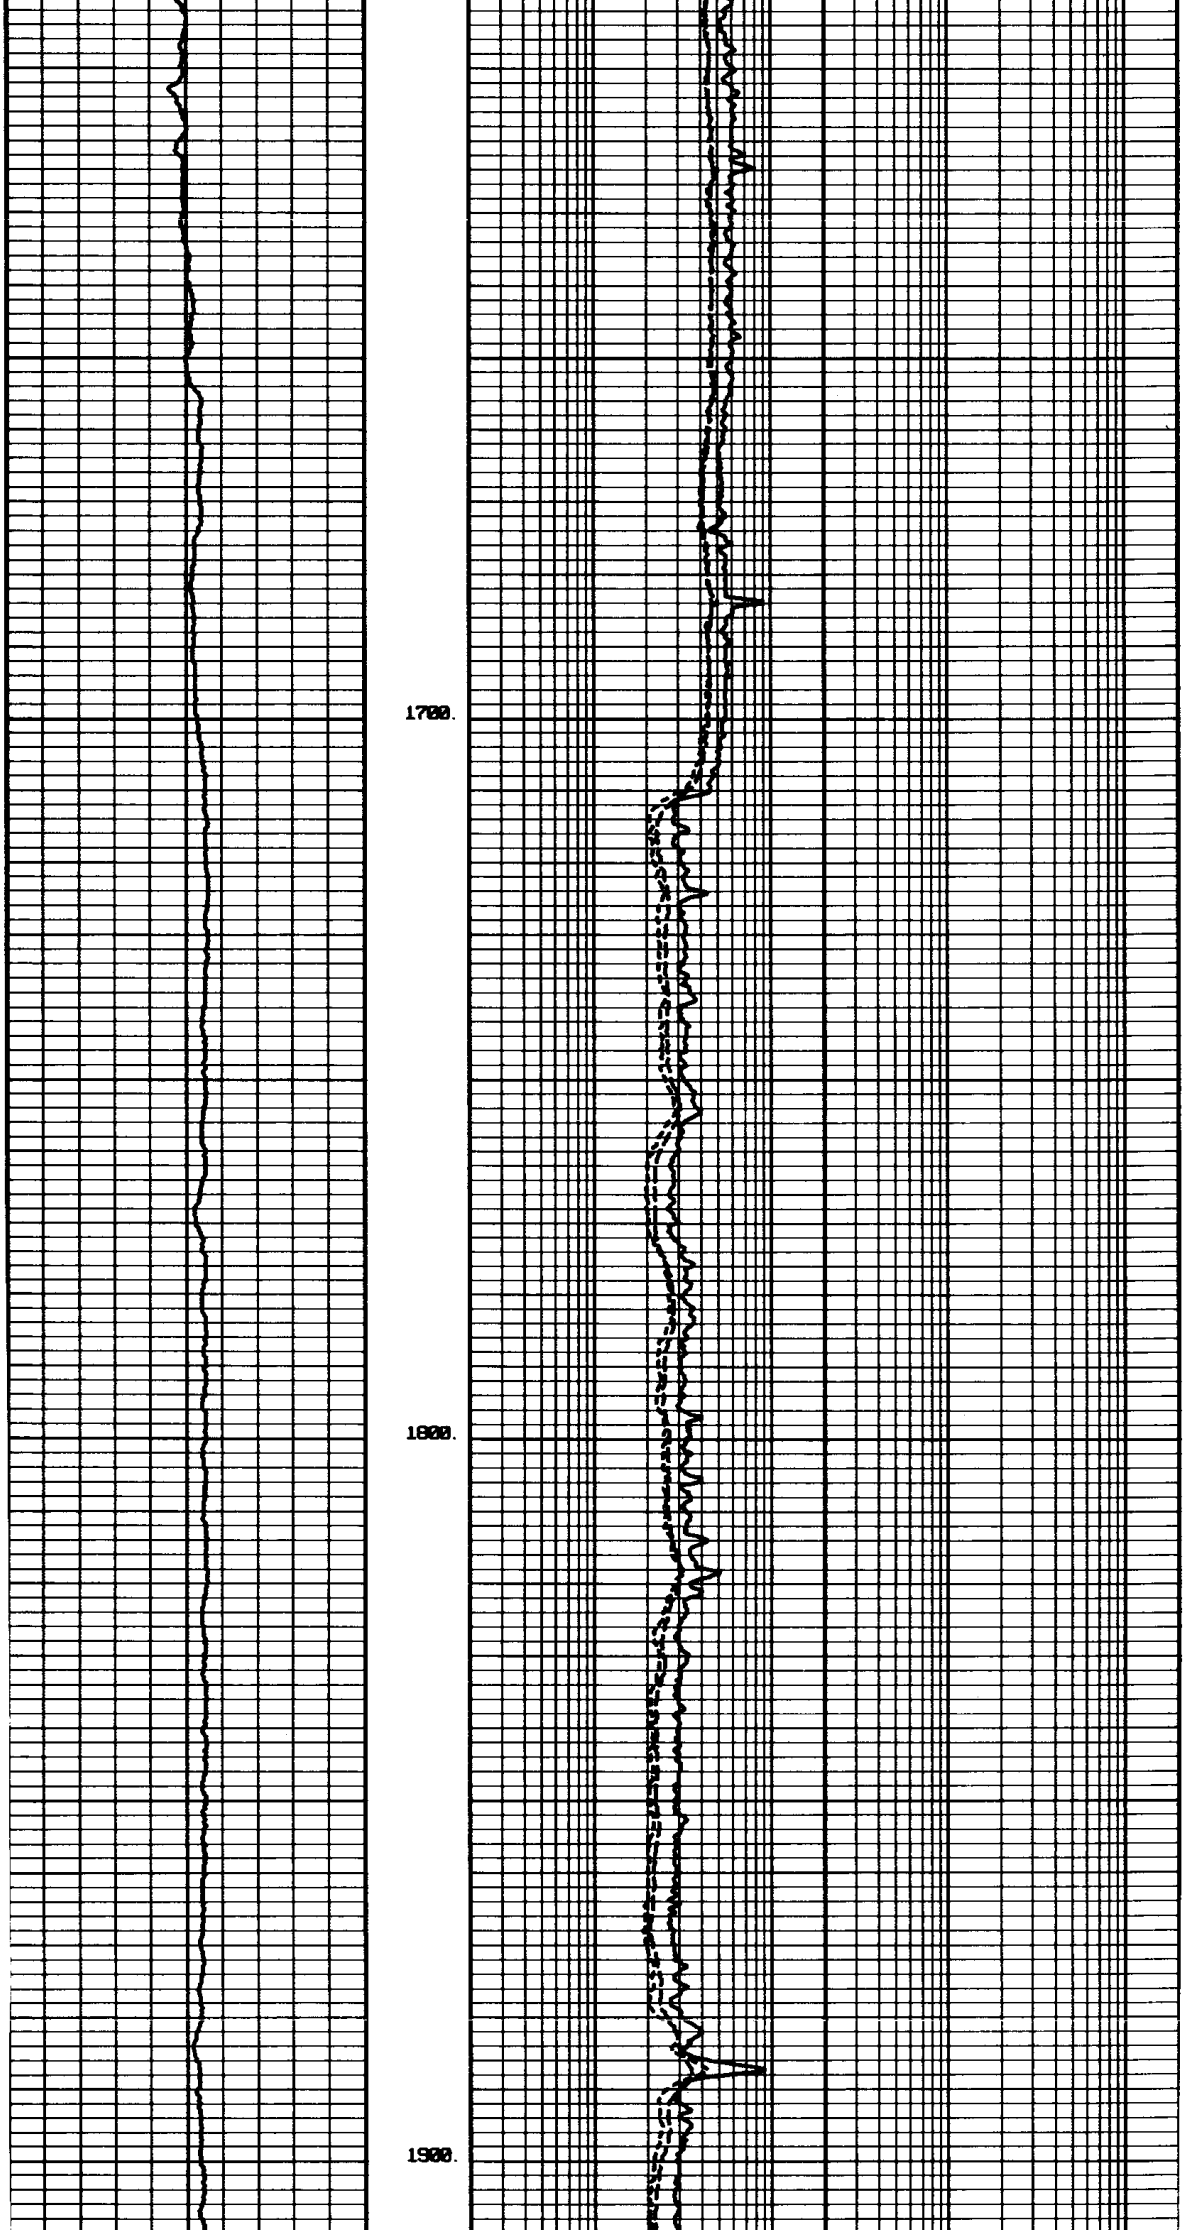

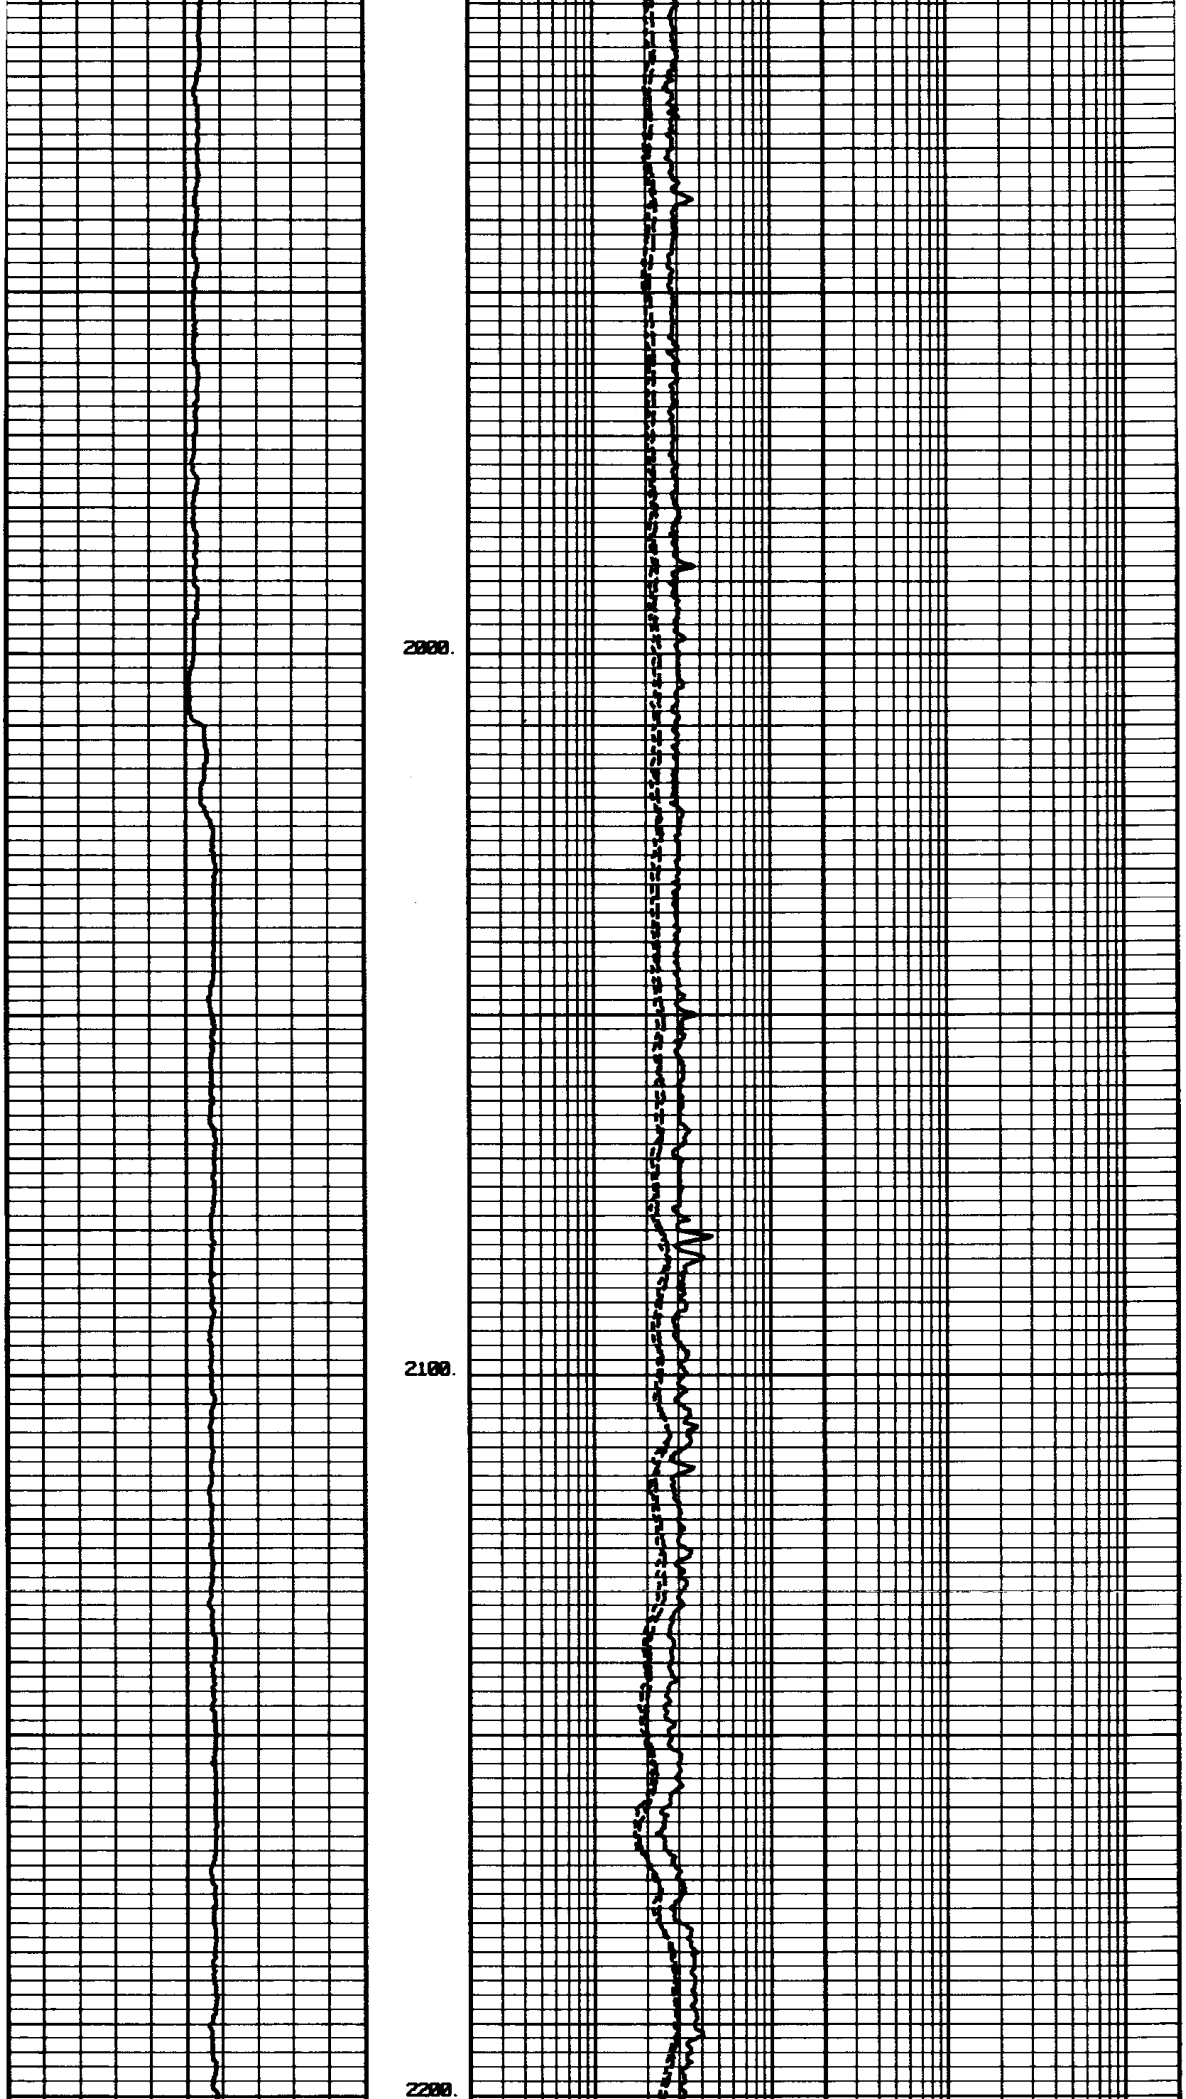

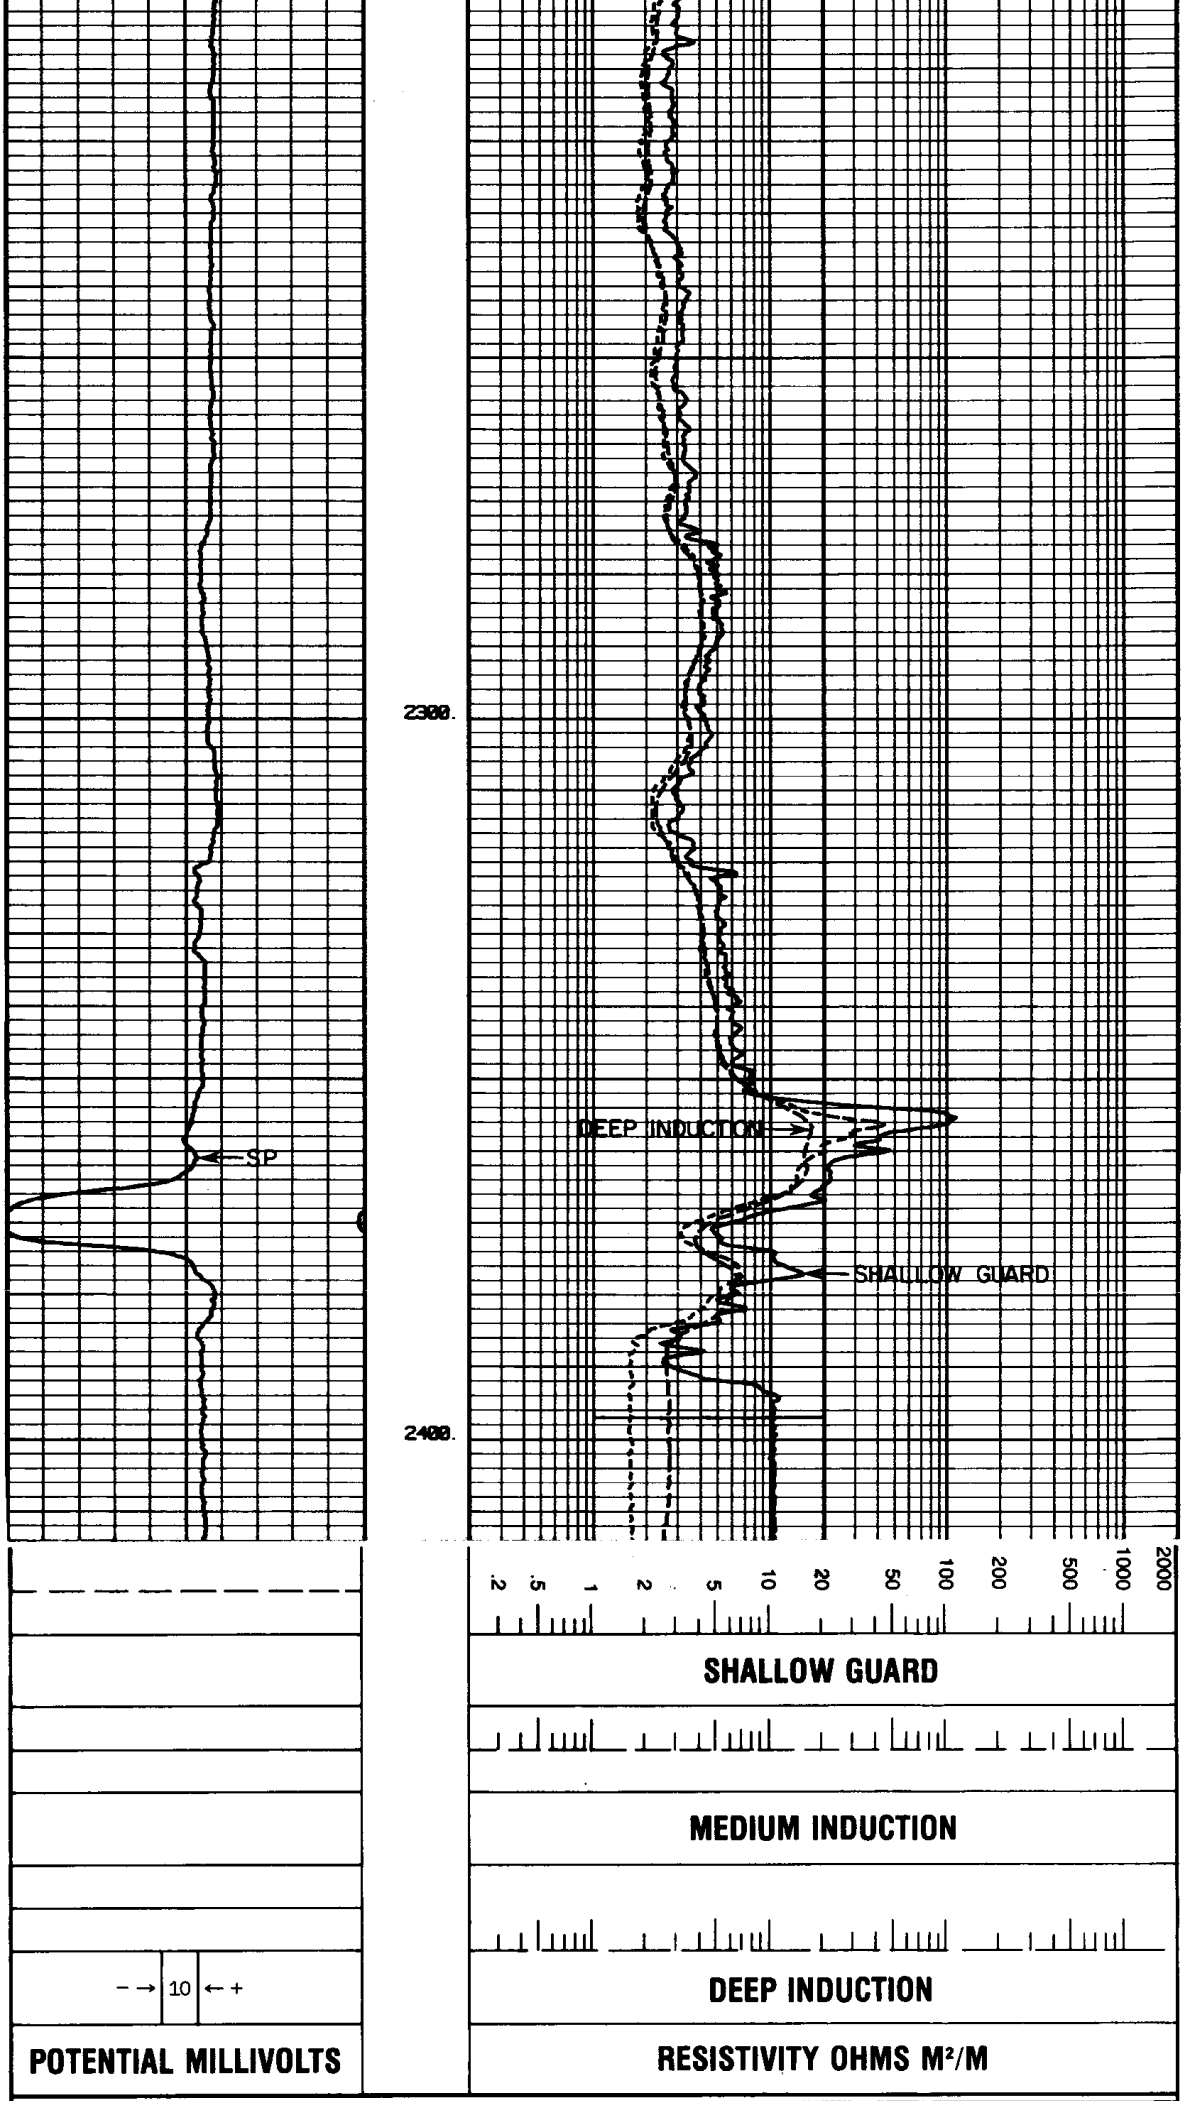

REICHHOLD ENERGY CORPORATION
LONGVIEW FIBER 12-33
MIST
COLUMBIA COUNTY, OREGON

T.D. LOGGED	2397
T.D. DRILLER	2414
T.D. WELEX	2399

ELEV: KB 899.37 GL 887.97

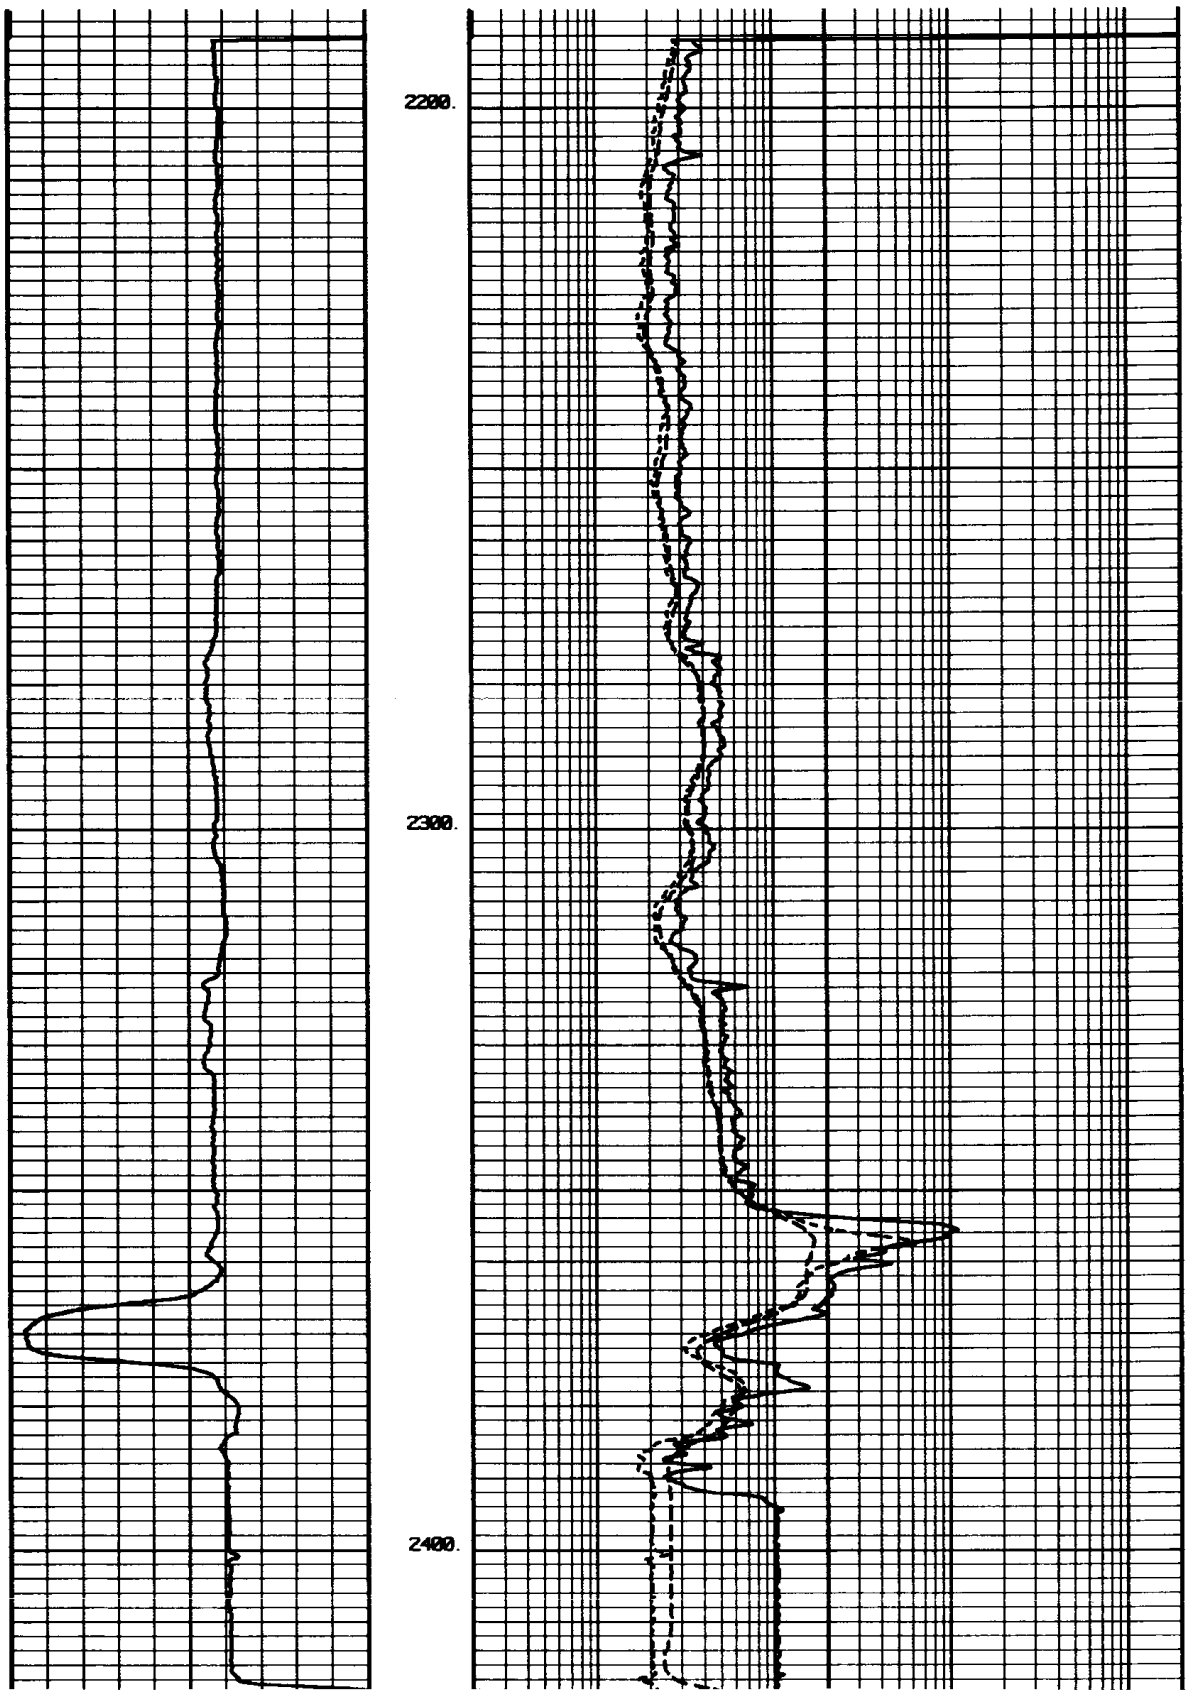REPEAT SECTION