

WELL SUMMARY REPORT

(In compliance with rules and regulations pursuant to ORS 520)

ARCO Oil and Gas Company Banzer 34-16  
 (Company or operator) (Lease) (Well No.)

Sec. 16, T. 6N, R. 5W W.B. & M. Surveyed Coordinates:  
 90.45' North & 1992.18' West of SE Corner, Sec 16, T6N, R5W

Wildcat: N/A (or) Field Name: Mist County: Columbia County  
 Elevation of ground above sea level is 567 feet. All depth measurements are taken from Kelly Bushing, which is 11' above ground.

Date: July 25, 1985 Signature: *Kwang U Park*  
 Position: District Drilling Superintendent


Commenced drilling: 3-27-85 Completed drilling: 4-15-85 P&A: 4-18-85

Total depth: 4914' Redrill depth: N/A

Logs run: DIL/SP, LDT/CNL/NGT, BHC/Sonic, Dipmeter, SWC

CASING RECORD

Size of hole	Size of casing	Wt. in lbs. per ft.	Grade Type	Depth	Amount of cement
--	16"	Line Pipe as conductor		30'	
12-1/4"	9-5/8"	36#	K-55 STC	966'	600 sx

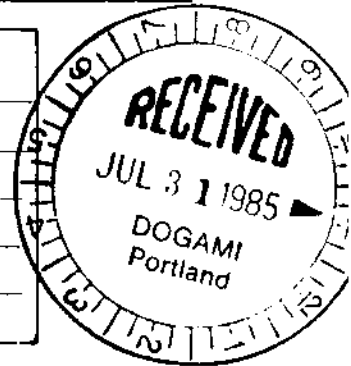

Plugs 10' - 110' (Surface plug) GEOLOGICAL MARKER DEPTH  
 830' - 1070' (Shoe plug) Clark & Wilson 1745'  
 1682' - 1905' (C&W plug)  
 2200' - 2386' (Kick-off plug)

Log Approximately 290' of drill string consisting of an 8-3/4" bit, one 6-1/4" Monel DC, eight 6-1/2" DCs, two 8-3/4" stabilizers. Top of fish at 2408'.

PERFORATIONS OF LINER

Size of casing	From	To	Shots/ft.	Method of Perforating		
				Jet	Bullet	Slotted Liner
	N/A					

INITIAL PRODUCTION

Date	Clean Oil bbl./day	Gravity	Percent Water	Gas MMcf/day	F.T.P.	F.C.P.	S.I.T.P.	S.I.C.P.
	N/A							

*CPB*